


StepAudio 3 Gen Technical Report

StepFun-Audio Team

Abstract

We introduce **StepAudio 3 Gen**, a general-purpose audio generation model that supports zero-shot text-to-speech (TTS), voice design, vocal generation, sound effects, music, vibe speech, and mixtures of multiple audio types within a unified framework. At its core, StepAudio 3 Gen is a **discrete autoregressive** generator that models audio directly over residual vector quantization (**RVQ**) tokens, departing from the diffusion Transformer-based continuous generation paradigm prevalent in recent general audio models. Its StepAudio Tokenizer represents general audio at **12.5 Hz** in a shared 16×2048 residual code space, jointly quantizing semantic and waveform-level acoustic features so that each code layer preserves both types of information. For generation, the backbone predicts the first codebook along the time axis using autoregressive modeling, while a lightweight causal Transformer completes the remaining fifteen codebooks along the codebook axis. Our study further identifies **three key design principles**: (1) **interference-aware progressive pretraining** for acquiring audio capabilities while preserving the textual abilities of the large language model, (2) **RVQ Adaptor** for effectively incorporating multi-codebook acoustic representations, and (3) **discrete autoregressive modeling** over a shared representation across general audio domains. With progressive pretraining, multi-task instruction training, and supervised fine-tuning, StepAudio 3 Gen achieves **state-of-the-art** performance on both **TTS** and **voice design**, while retaining strong generation capabilities across speech, vocals, sound effects, and music. Audio samples are available at <https://stepaudiollm.github.io/step-audio-3-gen/>.

1 Introduction

Audio generation is increasingly expected to cover the full range of sounds that appear in real applications: intelligible and expressive speech, environmental sounds and sound effects, music, and singing. These domains have traditionally progressed along separate tracks. Text-to-speech (TTS) systems optimize linguistic fidelity, speaker similarity, and prosodic control [1–3]; text-to-audio systems synthesize non-speech events and acoustic scenes from captions [4, 5]; and text-to-music and singing systems focus on musical structure, timbre, and long-range coherence [6–8]. Specialization has produced strong models in each domain, but it also leaves applications that need several kinds of audio with incompatible representations, conditioning formats, and generation pipelines.

Recent work has therefore moved toward unified audio generation. One family models audio in a continuous latent space and uses diffusion or flow matching to synthesize speech, sound, music, or their mixtures [9–12]. Another family converts audio into discrete units and applies language-

model-style sequence modeling across tasks and modalities [13–16]. Continuous models offer an effective route to parallel acoustic rendering, whereas discrete models make audio compatible with the vocabulary, causal objective, and interleaved context of a language model. The latter property is especially attractive when the goal is not only to generate several audio domains, but also to place audio understanding, generation, and text intelligence in one model. Most closely related, UniAudio 2.0 combines a text-based large language model (LLM), factorized reasoning and reconstruction tokens, specialized layers, a local autoregressive decoder, and multi-stage training [16]. It separates reasoning from reconstruction and uses a flow-based reconstruction decoder; we study one semantic-acoustic hierarchy based on residual vector quantization (RVQ) with a shared backbone and discrete acoustic prediction.

High-fidelity RVQ represents each frame with multiple codebook IDs. Flattening them along time makes the sequence prohibitively long, while using only a coarse semantic token loses acoustic detail. Two organizations avoid naive flattening. Time-depth models use a temporal Transformer for cross-frame structure and a smaller local Transformer for the codebooks within each frame [14, 17, 18]. Delayed patterns instead shift parallel codebook streams by different temporal offsets, allowing one Transformer to predict all RVQ layers without lengthening the sequence, as in MusicGen [7]. In our setting, however, this would require a multi-stream audio output interface and make the pretrained LLM directly predict every residual layer and receive all acoustic losses. We choose time-depth modeling so the LLM handles the semantically concentrated first codebook and long-range planning, while a small module contains residual acoustic modeling and its gradients.

Even with this decomposition, adding audio tokens to a text LLM is not neutral. The sum of many newly initialized RVQ embeddings need not match the statistics of pretrained text embeddings, and the residual-codebook objective supplies many acoustic predictions for every temporal decision. Joint optimization can force the backbone to absorb both effects before the audio modules become useful, trading inherited language intelligence for audio capability. Prior audio LLMs address related forgetting risks through staged alignment, frozen modules, or text-data rehearsal [16, 18–20]; our design targets these two interference channels explicitly.

In this report, we present a unified audio language model built on StepAudio Tokenizer, a 12.5-Hz residual vector-quantized tokenizer shared by speech, environmental sound, music, and singing. Each frame is represented by 16 codebooks of size 2,048. The tokenizer jointly quantizes semantic and acoustic features, while semantic distillation and quantizer dropout encourage information useful for temporal planning to concentrate in the early codebooks. The first codebook is incorporated into the LLM vocabulary and predicted autoregressively along the time axis. At every generated audio frame, the corresponding LLM hidden state and the first codebook ID condition a four-layer Transformer, which autoregressively predicts the 15 residual codebooks along the depth axis. The complete RVQ frame is then decoded by the neural codec. Thus, text and audio share a causal sequence model, and acoustic detail is generated entirely in the discrete code space without a diffusion or flow-matching acoustic renderer.

We address interference at both the representation and optimization levels. On the input side, the summed embeddings of the complete RVQ frame pass through a token-wise, zero-initialized residual module, termed the RVQ Adaptor, before being added to the ordinary token embedding. The RVQ Adaptor gives audio inputs a modality-specific transformation into the LLM input space without inserting a separate sequence encoder or replacing the shared backbone. On the optimization side, we use a four-stage pretraining curriculum. We first align the audio input under a frozen backbone, then learn audio understanding jointly with replayed text. Generation is introduced while

the conditioning hidden states of the randomly initialized residual-code predictor are detached from the LLM, preventing its 15-codebook loss from immediately reshaping the backbone. Only after the predictor has converged do we restore end-to-end gradients during a low-learning-rate, long-context cool-down. From the second stage onward, text occupies half of each optimizer step. A subsequent multi-task instruction-tuning stage broadens generation from speech and spoken interaction to caption-conditioned sound, music, and singing.

The system is controlled through a unified instruction format that organizes each request into three fields: `ROLE` defines the speaker identity and voice characteristics; `DIRECTOR` describes the acoustic scene and generation intent; and `SCRIPT` arranges speech and sound events along the time axis, prefixing each spoken segment with a speaker tag and optionally a `(description)` marker, while sound effects and music are denoted as `[description]` entries to make the relative ordering of events explicit. This design enables a single instruction to define multiple characters and their relationships, specify timbre, speaking style, emotion, accent, and paralinguistic features such as laughter, breathing, and pauses, while also supporting the generation and temporal arrangement of sound effects, environmental sound, and background music.

Our main contributions are as follows:

- **Interference-aware progressive pretraining.** We develop a four-stage recipe that progressively introduces audio alignment, understanding, generation, and end-to-end acoustic conditioning. Frozen-backbone alignment, 50% text replay, and temporary gradient detachment at the residual code predictor are combined to acquire audio capabilities while retaining the inherited textual capabilities of the LLM.
- **RVQ Adaptor.** We introduce a zero-initialized, token-wise residual adaptor that reconciles multi-codebook audio embeddings with the pretrained token-embedding space. It enables the model to consume the full acoustic representation needed for understanding and continuation while limiting the burden on the shared backbone.
- **Discrete autoregressive modeling across general audio.** We build a shared LLM based generator for speech, singing, music, sound effects, and mixed audio using a single 12.5-Hz, 16-codebook RVQ representation. A time–depth architecture separates temporal prediction from within-frame codebook prediction, generating audio entirely in discrete code space without a diffusion- or flow-based acoustic renderer.

2 Model Architecture

Our model has two components: the StepAudio Tokenizer, which discretizes audio from the supported domains into 12.5 Hz RVQ codes and reconstructs 24 kHz waveforms from them, and an LLM backbone that treats these codes as an extension of its vocabulary and models text and audio in one autoregressive stream. Generation is thus next-token prediction over the joint text–audio sequence, with the tokenizer’s decoder turning the predicted codes back into sound.

2.1 StepAudio Tokenizer

StepAudio Tokenizer is a 12.5 Hz audio tokenizer that discretizes speech, music, and general audio into a single shared multi-codebook space and reconstructs waveforms at 24 kHz. Following the X-Codec line of work [21, 22], we guide the codec toward a balance between semantic and acoustic

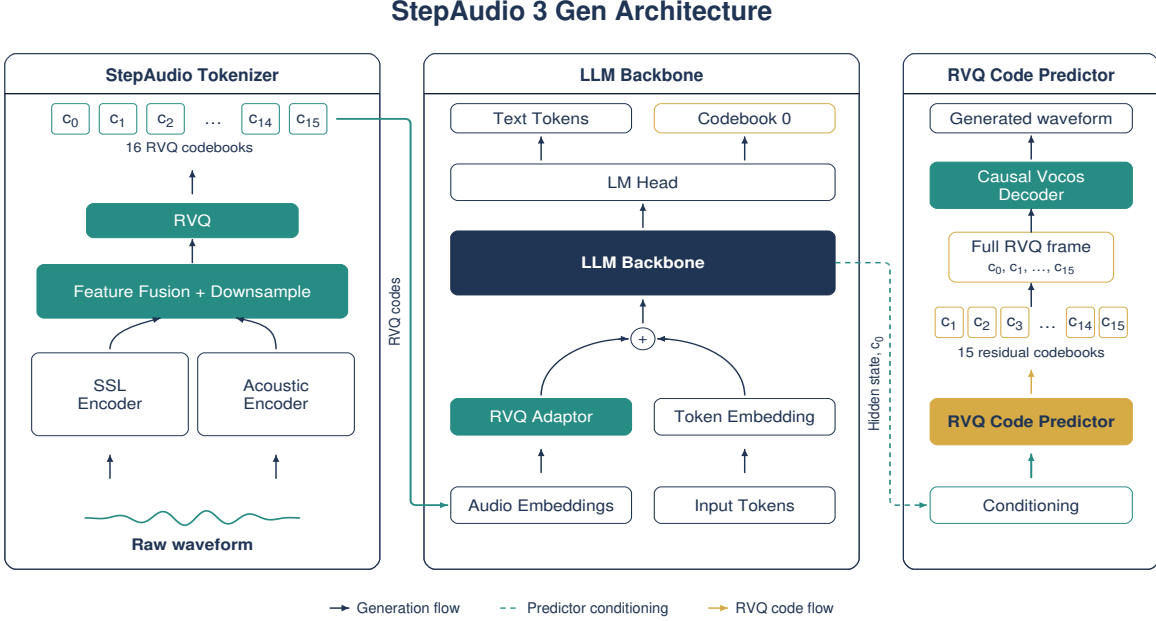


Figure 1: Overview of the StepAudio 3 Gen architecture. At each audio frame, the LLM predicts c_0 , and the RVQ Code Predictor conditions on the LLM hidden state and c_0 to predict $c_1, \dots, c_{15}$. All sixteen codes form the full RVQ frame used for waveform decoding. $\oplus$ denotes element-wise addition: at audio positions, the RVQ Adaptor output is added to the corresponding token embedding (§2.2).

information by quantizing the two jointly: a frozen self-supervised learning (SSL) encoder provides semantic features, while a convolutional encoder with SnakeBeta activations [23] extracts acoustic features directly from the raw waveform at 50 Hz; the two representations are fused along the channel axis, temporally compressed to 12.5 Hz by a strided convolution, and discretized by a single shared quantizer, so that every code layer carries semantic content and acoustic detail at once rather than being dedicated to a single modality. Quantization is performed by a 16×2048 residual vector quantizer — 16 layers with 2048 entries per codebook, using factorized, cosine-similarity codebook lookup [24].

To enable streaming synthesis, the decoder is fully causal: a Vocos-style Transformer backbone [25] with rotary position embeddings (RoPE) and 25-frame sliding-window attention feeds an inverse short-time Fourier transform (ISTFT) head that emits 24 kHz audio, so the waveform is reconstructed incrementally from tokens under a bounded receptive field and without look-ahead, supporting low-latency real-time online services. Training objectives and the two-stage recipe are described in §4.1.

2.2 LLM Backbone

We retain the pretrained decoder-only Transformer architecture while extending its token embeddings and output vocabulary to support audio. Text and audio share a single autoregressive stream: the coarsest RVQ codebook (the 0th codebook) is promoted into the main language-model vocabulary as 2048 contiguous audio tokens, so a single language-model (LM) head predicts natural-language tokens and the top-level audio code alike and the two modalities can be interleaved freely.

On the input side, an audio frame is not read from a single vocabulary embedding. Each of its 16 codebooks (cb0 through cb15) has its own embedding table, and the 16 looked-up vectors are summed into one frame embedding, which then passes through the RVQ Adaptor — a token-wise stack of residual blocks with pre-normalization and Swish-gated linear units (SwiGLU) that maps the summed audio embeddings into the LLM input space. Its output is added element-wise, at audio positions only, to the token embedding of the codebook-0 audio token; codebook 0 is therefore represented twice on the input side — once in the expanded main vocabulary (as the audio token) and once through its own table inside the summed frame. Text positions carry no audio codes, so they receive nothing from this pathway and are left untouched. This position gating confines the added audio pathway to audio positions.

Of the 16 codebooks in an audio frame, the LM head emits only the first; the remaining 15 residual codebooks are produced by the RVQ Code Predictor — a lightweight causal Transformer operating along the codebook axis. It is given two prefixes: the backbone hidden state at the audio position (linearly projected to the predictor width) and codebook 0, the code the main LM has just chosen; from these it autoregressively emits codebooks 1 through 15, feeding each decoded code back as input. A stop-gradient toggle on the hidden-state prefix lets the residual-acoustic objective train the predictor alone during the main generation stage and then propagate into the backbone during the final joint cool-down. For waveform reconstruction, codebook 0 is retained and combined with the fifteen predicted residual codes to form the complete 16-codebook RVQ frame. In Figure 1, c_k abbreviates $c_{t,k}$ for a single frame t .

Writing $c_{t,0}, \dots, c_{t,15}$ for the sixteen codebooks of frame t and $\mathbf{z}_t$ for the backbone hidden state at that position, the generation path factorizes as

$$p(c_{t,0}, \dots, c_{t,15} \mid \mathbf{z}_{<t}, \mathbf{c}_{<t}) = \underbrace{p(c_{t,0} \mid \mathbf{z}_{<t}, \mathbf{c}_{<t})}_{\text{main LM head}} \prod_{k=1}^{15} \underbrace{p(c_{t,k} \mid \mathbf{z}_t, c_{t,0}, \dots, c_{t,k-1})}_{\text{RVQ code predictor}} \quad (1)$$

The factorization is exact rather than an approximation of the joint over one frame, because the earlier codebooks of past frames do not reach the predictor through a separate path: all sixteen looked-up vectors are summed into the frame embedding of §2.2, so $\mathbf{z}_t$ already encodes $\mathbf{c}_{<t}$ through the backbone. What the factorization does give up is the reverse direction — the predictor’s output does not feed back into the backbone — which is why the two halves are trained jointly only once the predictor has converged.

Training optimizes the sum of a token-level term over text and codebook 0 and a term over the fifteen residual codebooks:

$$\mathcal{L} = \mathcal{L}_{\text{tok}} + \lambda \mathcal{L}_{\text{sp}}, \quad \mathcal{L}_{\text{tok}} = - \sum \log p(c_{t,0}, x_t), \quad \mathcal{L}_{\text{sp}} = - \sum_t \sum_{k=1}^{15} \log p(c_{t,k} \mid \cdot), \quad (2)$$

where $\mathcal{L}_{\text{sp}}$ sums rather than averages over depth, and λ is the only weight changed between stages (§4.2). Because codebook 0 occupies the model’s own vocabulary, its loss and accuracy are read off the main LM head and not off the predictor:

$$c_{t,0} \in \{0, \dots, 2047\} \iff \text{id}(c_{t,0}) \in [V, V + 2048), \quad (3)$$

with V the text vocabulary size, which is what lets the two modalities share one softmax.

3 Data

Our training data is organized into two stages: broad-coverage pretraining and task-oriented post-training. Pretraining combines text with diverse speech, vocal, music, and sound data to establish unified audio understanding and generation capabilities, while post-training uses carefully curated, task-specific corpora to further improve generation quality, naturalness, and controllability across different audio domains.

3.1 Pretraining Data

To introduce general-audio generation without eroding the backbone’s textual competence, we build a generation-centric mixture while retaining the text corpus. Its audio sources span speech, singing, music, and environmental sounds, organized into TTS, singing synthesis, lyrics-conditioned music, caption-conditioned sound generation, and speech-to-speech translation. We also include automatic speech recognition (ASR), speech-to-text translation, audio captioning, paralinguistic question answering (QA), accent/dialect identification, and interleaved multi-turn speech dialogue. These understanding tasks anchor RVQ representations in language and expose controllable attributes such as timbre, emotion, and accent. Audio is encoded at 12.5 Hz with 16 RVQ codebooks of 2,048 entries each; generation samples interleave one text token with two audio frames. Across four stages, training consumes approximately 2.7T LLM tokens. From Stage 2 onward, text supplies half of each optimizer step, with the generation stages using a 3 : 1 : 2 mixture of text, TTS, and interleaved dialogue.

3.2 Post-training Data

3.2.1 Speech to Audio

Text to Speech. To bring TTS closer to the way people naturally speak, we place additional emphasis on natural conversational speech in our supervised fine-tuning (SFT) data. While StepAudio 2.5 TTS [26] emphasizes global and inline instruction control, StepAudio 3 Gen focuses more on the tone, rhythm, and spontaneous vocal behaviors found in real conversations. To this end, we employ our StepAudio R1.5 [27] for TTS-oriented audio captioning, describing the recording context, noise level, and speaker characteristics to guide the selection of natural conversational speech. We also introduce an ASR model optimized for recognizing paralinguistic phenomena to transcribe and verify candidate audio while preserving expressive cues such as tone and hesitation. Through this pipeline, we curate 1,500 hours of speech data for SFT to elicit more human-like delivery, helping the model learn natural speaking patterns conditioned on the surrounding text.

Speech to Vocal. To address the scarcity of large-scale paired speech–singing data, we construct pseudo-paired training data for speech2vocal using two complementary approaches, both designed to match speaker timbre across speech and singing. In the first approach, TTS-based voice cloning, we use the StepAudio TTS model to generate speech conditioned on a singing reference, preserving the reference timbre. In the second, singing voice conversion (SVC), we convert singing to the timbre of a target speaker and pair it with that speaker’s speech, expanding the coverage of speakers and timbres. We then filter the resulting pairs using the Production Quality (PQ) and Content Enjoyment (CE) scores from Audiobox Aesthetics [28], singing mean opinion score (MOS) predictions from

SingMOS [29], and the timbre similarity between synthesized and target audio, retaining only samples that meet both audio-quality and timbre-similarity criteria.

3.2.2 Text to Audio

Voice Design. We construct the voice-design SFT corpus from recorded and synthesized speech, covering a wide range of expressive styles and acoustic conditions. The recorded portion includes both natural conversational and performed speech, spanning everyday and spontaneous conversations, character dialogue, and professional voice-over across diverse recording environments. We further incorporate synthesized speech to expand coverage of underrepresented combinations of voice characteristics, speaking styles, and acoustic scenarios, including conversation, narration, and speech–music mixtures.

Vocal data. We first separate full songs, remove tracks that are speech-dominated, contain little singing, have low lyric-alignment coverage, or fail overall quality checks, and extract candidate segments at lyric-line boundaries using multiple gating criteria. We then evaluate the candidate segments produced by the two separation routes using Audiobox Aesthetics PQ/CE scores, SingMOS predictions, loudness, and spectral bandwidth. We cross-check their quality scores and ASR transcriptions and apply joint thresholds to obtain the final vocal dataset.

Music data. For music generation, we construct a text-conditioned instrumental music corpus covering diverse scenarios, moods, genres, instrumentations, rhythmic patterns, and production styles. We use the StepAudio Music Model to generate instrumental tracks from text prompts specifying the target musical content and intended use cases. For each generated track, we then create diverse Chinese and English textual conditions, including concise descriptions, detailed descriptions, and conversational requests. Detailed descriptions emphasize instrumentation, rhythm, and production style, whereas conversational requests focus on user preferences and usage contexts. This multi-form prompt design provides training supervision across different levels of musical description and user intent.

Sound data. To construct large-scale and diverse training data for sound-effect generation, we combine sound-effect recordings obtained from diverse corpora and sound-effect libraries with synthesized speech-sound mixtures. We standardize heterogeneous metadata and enrich the recordings with multi-level annotations covering sound events, sources, acoustic attributes, scenes, and temporal structure. We retain samples with usable source-level descriptions and filter out recordings containing speech, personally identifiable information, or other unsuitable content. For the retained recordings, we preserve source and licensing metadata where available. For speech-sound mixtures, we sample scene skeletons specifying speakers, speech segments, sound effects, and ambience, and use our text-based large language model to complete the speech content, speaking styles, sound descriptions, durations, and temporal relations. Speech and non-speech sounds are then generated as separate stems using dedicated synthesis models. Finally, we remove failed or potentially inaudible sources, normalize and align the remaining stems, and mix them with gains adjusted by source prominence and distance to preserve the intended foreground–background structure.

Table 1: Four-stage pretraining recipe. Batch size is measured in tokens per optimizer step, where one temporal LLM step counts as one token. Thus, audio represented at 12.5 Hz contributes 12.5 tokens per second, although each audio token contains 16 RVQ codebook IDs. LR denotes learning rate.

Stage	Focus	Batch Size (tokens)	LR	LR scheduler
1	modality alignment	4.19M	$2 \times 10^{-4} \rightarrow 2 \times 10^{-5}$	cosine
2	audio understanding	12.58M	2×10^{-5}	constant
3	generation, detached	12.58M	2×10^{-5}	constant
4	long-context cool-down	25.17M	$2 \times 10^{-5} \rightarrow 1.5 \times 10^{-5}$	cosine

4 Training

Training proceeds in two parts. We first train the StepAudio Tokenizer to obtain a compact and semantically grounded discrete representation that preserves both linguistic structure and acoustic detail. We then initialize from a pretrained text LLM and progressively introduce audio understanding and generation through a four-stage pretraining recipe designed to integrate the audio modality while minimizing interference with the backbone’s inherited textual capabilities.

4.1 Tokenizer Training

We train the RVQ with a quantizer dropout [30] of 0.5, which drives the lower layers to encode coarse-grained, semantically aligned information while the deeper layers progressively refine the details left behind; the ratio is deliberately moderate, as a larger dropout further strengthens the coarse layers but slightly degrades full-depth reconstruction. Semantic grounding is enforced by a distillation branch that regresses the SSL encoder teacher features from the quantized latent; since this objective is applied under quantizer dropout, semantically aligned information is concentrated in the earliest codebooks.

Training adopts a generative adversarial network (GAN) framework [30, 31] in which the generator operates end-to-end on raw waveforms to extract, quantize, and resynthesize audio, while a multi-period waveform discriminator [32] and a multi-resolution spectral discriminator improve the naturalness and fidelity of reconstructed audio, complemented by feature-matching, multi-scale mel-spectrogram [24], and residual-quantization commitment losses that enforce time–frequency consistency and stable codebook usage.

The tokenizer is trained in two stages: large-scale pretraining on roughly 700k hours of speech, music, and sound events with a modality-balanced sampler, followed by a decoder-only refinement stage in which the encoder, quantizer, and semantic branch are frozen and only the acoustic decoder and discriminators are updated – improving reconstruction quality while leaving the token space untouched, so models already trained on these tokens remain compatible.

4.2 LLM Pretraining

We initialize from a pretrained text LLM, which serves as the pretraining backbone, and adopt a four-stage paradigm consuming approximately 2.7T tokens. Preserving the textual ability of the backbone is a second objective throughout: Stage 1 trains only the adaptor under a frozen backbone, Stage 3 detaches the RVQ code predictor, and from Stage 2 onward the original text corpus makes up half of every optimizer step.

Stage 1: Modality Alignment. The first stage aligns audio representations with a frozen LLM using ASR and speech-to-text translation data, in which only the textual output is supervised. We train only the input-side audio embedding and adaptor, holding the backbone, the LM head, and the code predictor at zero learning rate, while the token embedding receives a $0.1 \times$ multiplier so that the newly added audio-code rows can adapt. As the down projections of the adaptor are zero-initialized, the module is an exact identity map at initialization; together with the frozen backbone this makes the drift in textual ability strictly zero, so no text replay is needed here.

Stage 2: Audio Understanding. The full model is then unfrozen and trained on audio-understanding tasks mixed one-to-one with the text corpus, still without supervising any audio target. The learning rate drops to a constant 2×10^{-5} , forming a plateau that later stages continue from without re-warming, while the from-scratch modules retain a $10 \times$ multiplier and are excluded from weight decay.

Stage 3: Generation with a Detached Code Predictor. Stage 3 is the main pretraining run and introduces generation, with the mixture set to text : TTS : interleaved dialogue = 3 : 1 : 2 so that the text share stays at 50% and TTS accounts for 1/6 of every micro-batch, or one third of the audio-generation streams. Here the conditioning input of the code predictor is detached from the backbone hidden states: supervision over the 15 residual codebooks is far stronger in magnitude than the token-level objective, yet the predictor is still randomly initialized, so its gradient would reshape the representation built over the previous two stages. Once detached, the residual acoustic part trains the predictor alone while the backbone stays driven by the token-level objective, which decouples learning acoustic detail from learning the semantic and prosodic plan and serves as a second safeguard for textual ability. Stage 3 uses $\lambda = 1.0$. Because $\mathcal{L}_{sp}$ sums rather than averages over the fifteen residual codebooks, the acoustic term can be substantially larger than the token-level term. Detachment prevents it from directly updating the backbone in this stage; after detachment is removed, the same weighting can cause it to dominate backbone updates.

Stage 4: Long-Context Joint Cool-down. The detachment is finally removed, so the residual acoustic part propagates into the backbone and its hidden states are shaped to serve as good acoustic conditioning as well. This is deferred to last because the predictor is by now well converged and because the low cool-down learning rate limits the extent to which its gradients alter the backbone representations. The same run lowers λ from 1.0 to 0.1: with the depth loss now reaching the backbone, the two terms are brought to comparable magnitude rather than leaving the sum over fifteen codebooks an order of magnitude above the token-level objective. We extend the sequence length from 16,384 to 32,768 using context parallelism, which at 12.5 Hz covers roughly 44 minutes of audio and suffices for long-form synthesis and multi-turn dialogue.

4.3 Post-training

Supervised Fine-tuning. Building on the pretrained model, we run full-parameter fine-tuning to further improve its instruction-following and speech-generation abilities. The joint configuration from the end of pretraining is carried over: the detachment stays off and the speech loss, kept at $\lambda = 0.1$, continues to propagate through the code predictor into the backbone. The SFT corpus contains approximately 5,000 hours of audio, spanning music, sound effects, voice design, singing, and speech. The music and text-conditioned singing subsets are generated with StepAudio Music Model. The audio embedding, the adaptor, and the code predictor retain a $10 \times$ learning-rate

multiplier, while the remaining parameters are fine-tuned at the base rate. Training uses a sequence length of 16,384 and a batch size of 64, with a cosine schedule from 1.0×10^{-5} to 1.0×10^{-6} .

Reinforcement Learning. After supervised fine-tuning, we apply Group Relative Policy Optimization (GRPO)[33] to further improve instruction following. The training data follow the same task taxonomy and conditioning formats as the SFT data, covering TTS, Voice Design, vocal, music, and sound generation, as well as speech-and-sound mixtures. Speech-containing examples include an exact transcript in addition to role and style requirements, while the other tasks use concrete descriptions of acoustic events and performance characteristics. Ambiguous or weakly verifiable instructions are removed to reduce reward noise.

For each generated audio y_i , an audio understanding model [27] first produces a caption c_i . A text LLM compares c_i with the original instruction x and returns an instruction-consistency score between 0 and 100. We independently score each instruction–caption pair four times and use the mean $\bar{s}_i$ to reduce evaluation variance. For speech examples with target transcript t , an ASR model produces $\hat{t}_i$, from which we compute either character error rate (CER) or word error rate (WER), denoted by e_i . The reward is

$$R_i = \frac{\bar{s}_i}{100} \begin{cases} \exp(-\tau e_i), & e_i \leq 0.5, \\ 0, & e_i > 0.5, \end{cases} \quad \bar{s}_i = \frac{1}{4} \sum_{k=1}^4 s_i^{(k)}. \quad (4)$$

Here, $\tau = 3$ controls the exponential penalty on the recognition error. For tasks without a target transcript, the ASR term is set to one. This multiplicative reward prevents an output with severely incorrect linguistic content from receiving a high score solely because its acoustic style matches the instruction.

For every instruction, we sample $G = 16$ candidate audio sequences. GRPO uses their group-relative rewards without training a separate value model. Given the group mean μ_R and standard deviation σ_R , the advantage is $\hat{A}_i = (R_i - \mu_R)/(\sigma_R + \eta)$, where η is a small constant for numerical stability. Inspired by the dynamic sampling strategy of DAPO [34], groups with $\sigma_R < \delta$ are discarded, where $\delta = 0.02$ is the minimum within-group reward standard deviation retained for training. Such groups contain little reliable preference signal. The policy is optimized with

$$J_{\text{GRPO}}(\theta) = \mathbb{E} \left[\frac{1}{G} \sum_{i=1}^G \frac{1}{16|y_i|} \sum_t \sum_{\ell=0}^{15} \min(\rho_{i,t,\ell} \hat{A}_i, \text{clip}(\rho_{i,t,\ell}, 1 - \epsilon_{\text{clip}}, 1 + \epsilon_{\text{clip}}) \hat{A}_i) \right] - \beta D_{\text{KL}}(\pi_\theta \| \pi_{\text{ref}}), \quad (5)$$

where t indexes the generated audio positions and $\ell \in \{0, \dots, 15\}$ indexes the RVQ codebook (one base codebook plus 15 residual codebooks). Here $\rho_{i,t,\ell}$ is the token-level importance ratio between the updated policy π_θ and the rollout policy for each codebook token, ϵ_{clip} is the clipping range, and π_{ref} is the SFT reference policy.

We use a small Kullback–Leibler (KL) divergence coefficient β , relying primarily on policy clipping to constrain updates, and train with a learning rate from 10^{-6} to 10^{-7} .

5 Evaluation

Our evaluation is organized around three questions: whether the proposed RVQ Adaptor effectively integrates multi-codebook audio representations into the pretrained LLM, whether the interference-aware progressive pretraining strategy preserves the LLM’s textual capabilities, and whether the

resulting model delivers strong generation quality and controllability. We first evaluate the effectiveness of the RVQ Adaptor and the interference-aware progressive pretraining strategy, and then focus on two core generation capabilities. For TTS, we assess perceived human-likeness through subjective human evaluation; for voice design, we evaluate both instruction-following performance on an objective benchmark and human preference through subjective evaluation.

5.1 RVQ Adaptor

We compare systems with and without the RVQ Adaptor after pretraining to evaluate the effect of aligning audio embeddings with the pretrained LLM’s token embedding space on its audio-language capabilities. The evaluation covers 1) automatic speech recognition (ASR) on the AISHELL-1 test set [35] and the LibriSpeech test-clean set [36], measured by character error rate (CER) and word error rate (WER), respectively; 2) audio understanding and reasoning on MMAU [37], measured by accuracy; 3) bidirectional English–Chinese speech-to-text translation on CoVoST [38], measured by BLEU; and 4) knowledge question answering on SpeechMMLU [39], measured by accuracy in the text-to-speech (T2S) setting. As shown in Table 2, the system equipped with the RVQ Adaptor consistently outperforms its counterpart across all reported metrics, indicating stronger overall audio-language capabilities.

Table 2: Comparison of systems with and without the RVQ Adaptor on audio benchmarks after pretraining.

System	AISHELL-1	LibriSpeech	MMAU	CoVoST BLEU $\uparrow$		SpeechMMLU (T2S)
	CER (%) $\downarrow$	WER (%) $\downarrow$	Acc. (%) $\uparrow$	En $\rightarrow$ Zh	Zh $\rightarrow$ En	Acc. (%) $\uparrow$
w/o RVQ Adaptor	5.25	6.00	40.70	12.05	5.99	12.13
w/ RVQ Adaptor	3.00	3.41	51.70	30.56	18.59	58.76

5.2 Interference-aware progressive pretraining

To evaluate the effectiveness of our interference-aware progressive pretraining strategy in preserving the pretrained LLM’s text-domain capabilities after pretraining, we compare it with a three-stage baseline on text benchmarks. The baseline does not use the RVQ Adaptor and follows three stages: ASR training, audio understanding and generation training, and a final cool-down stage. The evaluation assesses knowledge and reasoning capabilities using FinEval [40], C-Eval [41], MMLU [42], CMMLU [43], MATH [44], GSM8K [45], and BBH [46], together with code generation performance on HumanEval [47]. We report accuracy for FinEval, C-Eval, MMLU, and CMMLU; exact match (EM) for MATH, GSM8K, and BBH; and Pass@1 for HumanEval. As shown in Table 3, our interference-aware progressive pretraining strategy consistently outperforms the baseline across all text benchmarks, indicating better retention of the pretrained LLM’s knowledge and reasoning capabilities.

Table 3: Comparison of the baseline and our interference-aware progressive pretraining on text benchmarks after pretraining.

System	FinEval	C-Eval	MMLU	CMMLU	MATH	GSM8K	BBH	HumanEval
	Acc. (%) $\uparrow$	Acc. (%) $\uparrow$	Acc. (%) $\uparrow$	Acc. (%) $\uparrow$	EM (%) $\uparrow$	EM (%) $\uparrow$	EM (%) $\uparrow$	Pass@1 (%) $\uparrow$
Baseline	65.86	66.34	64.99	66.69	36.62	67.94	59.61	47.56
Interference-aware	71.68	71.92	69.20	71.73	45.07	74.05	67.03	54.27


5.3 TTS

Given our emphasis on human-like delivery in TTS, we specifically evaluate how closely the generated speech resembles real human speech. We conduct an Arena-style pairwise evaluation, where raters judge the overall listening impression and select the sample that sounds more like a real person speaking naturally. This holistic judgment is intended to capture prosody, rhythm, expressiveness, and spontaneous speaking behaviors, with ties allowed when no clear preference exists.

We favor subjective comparison over objective metrics such as character error rate (CER) and speaker similarity (SS), which capture only limited aspects of TTS performance. A model with flat prosody can still achieve a low CER as long as the content is correctly conveyed, while SS primarily reflects speaker identity and timbre rather than expressive delivery. These metrics therefore do not adequately reflect the human-like expressiveness targeted by our model.

We construct a Chinese human-likeness evaluation set from text extracted from real human speech. We use one voice from each competing TTS model for comparison with StepAudio 3 Gen. The six systems are evaluated through Arena-style pairwise comparisons, with 1,500 comparisons in total. Each comparison is recorded as a win, tie, or loss. Based on these outcomes, we report both Elo ratings over the full evaluation pool and direct head-to-head results against five leading commercial TTS systems.

We aggregate the pairwise outcomes using Elo ratings, with higher scores indicating stronger preference within the evaluation pool. Figure 2a shows that StepAudio 3 Gen achieves the highest Elo rating of 1755.33, outperforming five leading commercial TTS systems: Qwen-Audio-3.0-TTS-Plus [48], Doubao-App [49], MiniMax-Speech-2.8-HD [50], Inworld-TTS-2 [51], and StepAudio 2.5 TTS [26].

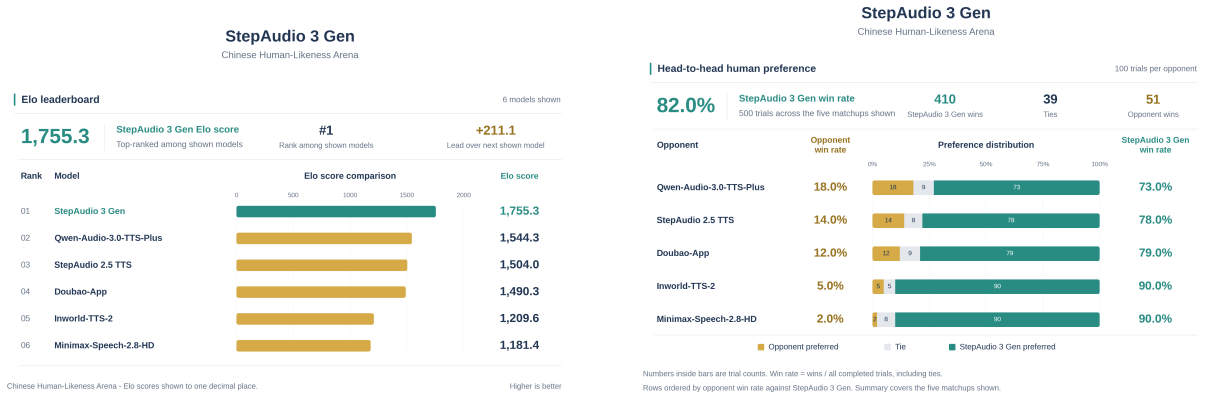

(a) Elo rankings of models on the Chinese human-likeness test set under human evaluation.

(b) Head-to-head results for StepAudio 3 Gen against baseline models on the Chinese human-likeness test set.

Figure 2: Human evaluation on the Chinese human-likeness test set.

Figure 2b further presents direct head-to-head results between StepAudio 3 Gen and five leading commercial TTS systems, with 100 comparisons per opponent. StepAudio 3 Gen achieves an aggregate win rate of 82.0%, with win rates ranging from 73.0% to 90.0% across individual opponents, maintaining a clear majority in every matchup. As preference in this evaluation is

Table 4: StepAudio 3 Gen style-consistency scores on the full InstructTTSEval benchmark (2,000 texts under three conditions, totaling 6,000 generated utterances). Scores are percentages; higher is better. For each language, AVG is the unweighted mean of APS, DSD, and RP.


	InstructTTSEval-EN				InstructTTSEval-ZH			
	APS↑	DSD↑	RP↑	AVG↑	APS↑	DSD↑	RP↑	AVG↑
Qwen3-TTS-12Hz-1.7B-VoiceDesign	74.7	83.8	61.9	73.5	79.0	86.7	56.2	74.0
MOSS-VoiceGenerator	59.5	79.0	56.1	64.9	63.7	78.1	53.4	65.1
Ming-omni-tts-0.5B	71.6	67.7	55.9	65.1	75.2	83.8	54.0	71.0
VoiceSculptor	-	-	-	-	49.2	62.5	45.9	52.5
StepAudio 3 Gen (Ours)	82.4	85.5	65.2	77.7	88.5	91.5	75.5	85.2

defined by the overall perceived human-likeness of the generated speech, these results demonstrate a consistent advantage of StepAudio 3 Gen across all five competing systems.

5.4 Voice Design

InstructTTSEval benchmark. We evaluate style following on the full InstructTTSEval benchmark [52]: 1,000 Chinese and 1,000 English texts, each evaluated under Acoustic-Parameter Specification (APS), Descriptive-Style Directive (DSD), and Role-Play (RP), for a total of 6,000 generated utterances per system. Gemini 3.1 Pro [53] (gemini-3.1-pro-preview) judges each audio against its original benchmark instruction and returns a binary style-consistency decision. Scores are the percentages of valid judgments marked consistent for each condition; AVG is their unweighted mean.

The baseline systems include Qwen3-TTS-12Hz-1.7B-VoiceDesign [54], MOSS-VoiceGenerator [55], Ming-omni-tts-0.5B [56], and VoiceSculptor [57]. Table 4 reports Gemini style-consistency scores on the full benchmark. Among the evaluated systems, StepAudio 3 Gen achieves the best Chinese performance across APS, DSD, and RP, with an average score of 85.2%, and also attains the best English performance with an average score of 77.7%.

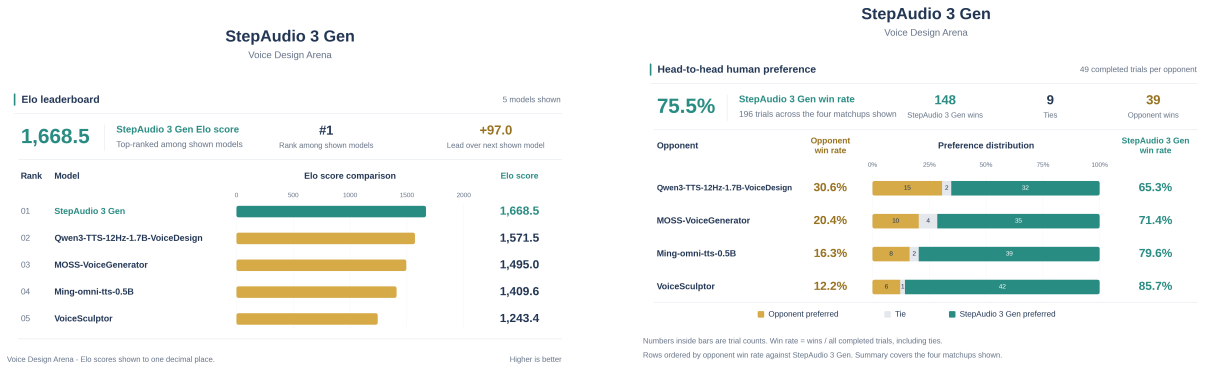

(a) Elo rankings of models on the voice design task under blind human evaluation. (b) Head-to-head results for StepAudio 3 Gen against baseline models on the voice design task.

Figure 3: Human evaluation on the voice design task.

Human Preference Evaluation on Voice Design. We conduct a blind human preference evaluation on the voice design task to assess the models’ instruction-following capability. We employ an Elo-based battle mechanism to evaluate five models with voice design capabilities. A total of

490 head-to-head comparisons covering both Chinese and English were conducted across all models, with Elo scores dynamically calculated based on match outcomes. As shown in Figure 3a, StepAudio 3 Gen ranks first with an Elo score of 1668.5, demonstrating superior human preference performance on the voice design task compared to current mainstream models. Figure 3b further presents direct head-to-head results for StepAudio 3 Gen against baseline models on the voice design task. StepAudio 3 Gen achieves an aggregate win rate of 75.5%, with win rates ranging from 65.3% to 85.7% across individual opponents. As preference in this evaluation is defined by overall listening impression and instruction-following quality, these results demonstrate a consistent advantage of StepAudio 3 Gen on the voice design task.

6 Extensions

StepAudio 3 Gen models speech and general audio within a single shared RVQ token space. The same discrete autoregressive framework supports the TTS and voice design capabilities evaluated above, as well as vocals, music, sound effects, and complex audio scenes presented in this section. All of these capabilities are modeled and generated entirely in the shared discrete code space, without introducing task-specific tokenizers or diffusion- or flow-based acoustic renderers. By jointly training the RVQ representation and generator across diverse audio domains, the model learns semantic and acoustic structures beyond speech and develops solid general-audio generation capabilities. We highlight several representative capabilities below.

Vocal Generation. StepAudio 3 Gen supports both text to vocal and speech to vocal generation. For text to vocal generation, users can specify the target voice, lyrics, musical key, and vocal style through natural language prompts, allowing the model to jointly control vocal identity, linguistic content, pitch characteristics, and expressive delivery. For speech to vocal generation, the input speech serves as a reference for the target voice, while the lyrics, musical key, and singing style are specified separately to generate singing in the reference speaker’s voice.

Music Generation. The model supports long-form instrumental music generation from natural language prompts describing genre, mood, instrumentation, rhythmic characteristics, production style, and intended use. StepAudio 3 Gen can generate coherent musical pieces exceeding 60 seconds while maintaining overall musical structure and stylistic consistency over extended durations.

Sound Generation. StepAudio 3 Gen supports both isolated sound-effect generation and complex acoustic-scene generation. It can synthesize individual sound events from concise descriptions, while also handling more complex prompts involving multiple sound sources, layered events, ambience, and interactions among acoustic events. The model further supports temporal arrangement of sound events, allowing prompts to specify their ordering, relative timing, and co-occurrence within a scene.

Vibe Speech. StepAudio 3 Gen can generate vibe speech within composite acoustic scenes, jointly modeling spoken content, speaking style, atmosphere, background sound, and contextual cues. It also supports multi-speaker dialogue and interactions among multiple speakers and sound sources, enabling the generation of complex conversational scenes with coherent acoustic environments.

7 Conclusion

We present StepAudio 3 Gen as a step toward unified general-purpose audio generation within a discrete autoregressive framework. Rather than relying on separate generation paradigms for different audio domains, our results show that a shared semantic–acoustic representation can support diverse audio generation tasks within a single LLM-based architecture. Our experiments further suggest three practical lessons: audio capabilities should be introduced progressively to mitigate interference with the pretrained LLM, multi-codebook acoustic representations can be effectively integrated through a lightweight RVQ Adaptor, and discrete autoregressive modeling can scale beyond speech to general audio without a continuous acoustic renderer. StepAudio 3 Gen achieves state-of-the-art results on TTS and voice design, while also demonstrating solid generation capabilities in vocals, music, sound, and vibe speech. Taken together, these findings demonstrate that discrete autoregressive modeling provides a practical and scalable alternative to prevailing continuous-generation approaches for building unified audio models.

Contributors

Contributors are listed alphabetically by first name.

Bin Lin	Guanglong Yang	Ruijie Xiong	Yang Yang
Bo Zhao	Jia Peng	Runze Li	Yechang Huang
Boyang Wang	Jiahao Song	Shenghua Hu	Yibo Zhu
Boyang Zhang	Jiamin Fan	Shi Qiu	Yifan Zhang
Boyong Wu	Jiangjie Zhen	Siqi Tu	Yiyang Xu
Chao Yan	Jianzheng Gao	Siyi Zhou	Yu Fu
Chen Geng	Jun Chen	Tianjiao Deng	Yu Luo
Chen Wu	Li Xie	Wanying Lu	Yu Zhou
Cheng Yi	Lifang Zhang	Weiming Niu	Yumang Wang
Chengli Feng	Lingli Ji	Wen Sun	Yunzhou Ju
Chenglin Zhu	Liyang Shi	WenWen Qu	Yuxiang Yang
DanNi Wan	Lun Cai	Xiangyu Zhang	Zekai Liu
Daxin Jiang	Min Xu	Xianwei Zhang	Zengwei Yao
Dongqing Pang	Na Wang	XiaoSu Su	Zhenwei Mou
Fei Tian	Peilin Li	Xing Chen	Zheqi Dai
Feng Tian	Peng Yang	Xinyu Liu	Zhiyue Wu
Future Li	Pengfei Tan	Xuerui Yang	Zichao Zhou
Gang Yu	Qingjian Lin	Yang Li	

References

- [1] Chengyi Wang, Sanyuan Chen, Yu Wu, Ziqiang Zhang, Long Zhou, Shujie Liu, Zhuo Chen, Yanqing Liu, Huaming Wang, Jinyu Li, Lei He, Sheng Zhao, and Furu Wei. VALL-E: Neural codec language models are zero-shot text to speech synthesizers. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 33:705–718, 2025. doi:10.1109/TASLP.2025.3530270.
- [2] Zhifang Guo, Yichong Leng, Yihan Wu, Sheng Zhao, and Xu Tan. Prompttts: Controllable text-to-speech with text descriptions, 2022.
- [3] Dongchao Yang, Songxiang Liu, Rongjie Huang, Chao Weng, and Helen Meng. Instructtts: Modelling expressive tts in discrete latent space with natural language style prompt, 2023.
- [4] Felix Kreuk, Gabriel Synnaeve, Adam Polyak, Uriel Singer, Alexandre Défossez, Jade Copet, Devi Parikh, Yaniv Taigman, and Yossi Adi. AudioGen: Textually guided audio generation. *arXiv preprint arXiv:2209.15352*, 2022.
- [5] Haohe Liu, Zehua Chen, Yi Yuan, Xinhao Mei, Xubo Liu, Danilo Mandic, Wenwu Wang, and Mark D. Plumbley. AudioLDM: Text-to-audio generation with latent diffusion models, 2023. URL <https://arxiv.org/abs/2301.12503>.
- [6] Andrea Agostinelli, Timo I. Denk, Zalán Borsos, Jesse Engel, Mauro Verzetti, Antoine Caillon, Qingqing Huang, Aren Jansen, Adam Roberts, Marco Tagliasacchi, Matt Sharifi, Neil Zeghidour, and Christian Frank. Musiclm: Generating music from text. *arXiv preprint arXiv:2301.11325*, 2023. URL <https://arxiv.org/abs/2301.11325>.
- [7] Jade Copet, Felix Kreuk, Itai Gat, Tal Remez, David Kant, Gabriel Synnaeve, Yossi Adi, and Alexandre Défossez. Simple and controllable music generation. In *Proceedings of the 37th International Conference on Neural Information Processing Systems*, pages 47704–47720, 2023.
- [8] Jinglin Liu, Chengxi Li, Yi Ren, Feiyang Chen, and Zhou Zhao. DiffSinger: Singing voice synthesis via shallow diffusion mechanism. *arXiv preprint arXiv:2105.02446*, 2021.
- [9] Apoorv Vyas, Bowen Shi, Matthew Le, Andros Tjandra, Yi-Chiao Wu, Baishan Guo, Jiemin Zhang, Xinyue Zhang, Robert Adkins, William Ngan, et al. Audiobox: Unified audio generation with natural language prompts. *arXiv preprint arXiv:2312.15821*, 2023.
- [10] Zeyue Tian, Yizhu Jin, Zhaoyang Liu, Ruibin Yuan, Xu Tan, Qifeng Chen, Wei Xue, and Yike Guo. AudioX: Diffusion transformer for anything-to-audio generation. *arXiv preprint arXiv:2503.10522*, 2025.
- [11] Xuenan Xu, Jiahao Mei, Zihao Zheng, Ye Tao, Zeyu Xie, Yaoyun Zhang, Haohe Liu, Yuning Wu, Ming Yan, Wen Wu, et al. UniFlow-Audio: Unified flow matching for audio generation from omni-modalities. *arXiv preprint arXiv:2509.24391*, 2025.
- [12] Junyu Dai, Xiaoyue Duan, Xinyue Fan, Yihan Feng, Jingbei Li, Xiangang Li, Yunjia Li, Lejun Min, Yufei Shi, Xingchen Song, Yiran Wang, Cheng Wen, Menglin Wu, Bajian Xiang, Huaicheng Zhang, Han Zhao, and Ruichen Zheng. Qwen-Audio-3.0-Gen-Preview technical report. *arXiv preprint arXiv:2607.27011*, 2026.

- [13] Zalán Borsos, Raphaël Marinier, Damien Vincent, Eugene Kharitonov, Olivier Pietquin, Matt Sharifi, Dominik Roblek, Olivier Teboul, David Grangier, Marco Tagliasacchi, and Neil Zeghidour. AudioLM: a language modeling approach to audio generation, 2023. URL <https://arxiv.org/abs/2209.03143>.
- [14] Dongchao Yang, Jinchuan Tian, Xu Tan, Rongjie Huang, Songxiang Liu, Xuankai Chang, Jiatong Shi, Sheng Zhao, Jiang Bian, Zhou Zhao, Xixin Wu, and Helen Meng. UniAudio: An audio foundation model toward universal audio generation, 2023. URL <https://arxiv.org/abs/2310.00704>.
- [15] Jun Zhan, Junqi Dai, Jiasheng Ye, Yunhua Zhou, Dong Zhang, Zhigeng Liu, Xin Zhang, Ruibin Yuan, Ge Zhang, Linyang Li, Hang Yan, Jie Fu, Tao Gui, Tianxiang Sun, Yu-Gang Jiang, and Xipeng Qiu. AnyGPT: Unified multimodal LLM with discrete sequence modeling, 2024. URL <https://arxiv.org/abs/2402.12226>.
- [16] Dongchao Yang, Yuanyuan Wang, Dading Chong, Songxiang Liu, Xixin Wu, and Helen Meng. UniAudio 2.0: A unified audio language model with text-aligned factorized audio tokenization, 2026. URL <https://arxiv.org/abs/2602.04683>.
- [17] Doyup Lee, Chiheon Kim, Saehoon Kim, Minsu Cho, and Wook-Shin Han. Autoregressive image generation using residual quantization. *arXiv preprint arXiv:2203.01941*, 2022.
- [18] Alexandre Défossez, Laurent Mazaré, Manu Orsini, Amélie Royer, Patrick Pérez, Hervé Jégou, Edouard Grave, and Neil Zeghidour. Moshi: a speech-text foundation model for real-time dialogue, 2024. URL <https://arxiv.org/abs/2410.00037>.
- [19] Dong Zhang, Shimin Li, Xin Zhang, Jun Zhan, Pengyu Wang, Yaqian Zhou, and Xipeng Qiu. SpeechGPT: Empowering large language models with intrinsic cross-modal conversational abilities, 2023. URL <https://arxiv.org/abs/2305.11000>.
- [20] Xiong Wang, Yangze Li, Chaoyou Fu, Yunhang Shen, Lei Xie, Ke Li, Xing Sun, and Long Ma. Freeze-Omni: A smart and low latency speech-to-speech dialogue model with frozen LLM, 2024. URL <https://arxiv.org/abs/2411.00774>.
- [21] Zhen Ye, Peiwen Sun, Jiahe Lei, Hongzhan Lin, Xu Tan, Zheqi Dai, Qiuqiang Kong, Jianyi Chen, Jiahao Pan, Qifeng Liu, et al. Codec does matter: Exploring the semantic shortcoming of codec for audio language model. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pages 25697–25705, 2025.
- [22] Zhen Ye, Xinfu Zhu, Chi-Min Chan, Xinsheng Wang, Xu Tan, Jiahe Lei, Yi Peng, Haohe Liu, Yizhu Jin, Zheqi Dai, Hongzhan Lin, Jianyi Chen, Xingjian Du, Liumeng Xue, Yunlin Chen, Zhifei Li, Lei Xie, Qiuqiang Kong, Yike Guo, and Wei Xue. Llasa: Scaling train-time and inference-time compute for llama-based speech synthesis, 2025. URL <https://arxiv.org/abs/2502.04128>.
- [23] Sang-gil Lee, Wei Ping, Boris Ginsburg, Bryan Catanzaro, and Sungroh Yoon. Bigvgan: A universal neural vocoder with large-scale training. In *International Conference on Learning Representations (ICLR)*, 2023.
- [24] Rithesh Kumar, Prem Seetharaman, Alejandro Luebs, Ishaan Kumar, and Kundan Kumar. High-fidelity audio compression with improved rvqgan. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.

- [25] Hubert Siuzdak. Vocos: Closing the gap between time-domain and fourier-based neural vocoders for high-quality audio synthesis. In *International Conference on Learning Representations (ICLR)*, 2024.
- [26] Bin Lin, Bo Zhao, Boyong Wu, et al. StepAudio 2.5 technical report. *arXiv preprint arXiv:2605.23463*, 2026. URL <https://arxiv.org/abs/2605.23463>.
- [27] Yuxin Zhang, Xiangyu Tony Zhang, Daijiao Liu, et al. Step-Audio-R1.5 technical report. *arXiv preprint arXiv:2604.25719*, 2026. URL <https://arxiv.org/abs/2604.25719>.
- [28] Andros Tjandra, Yi-Chiao Wu, Baishan Guo, John Hoffman, Brian Ellis, Apoorv Vyas, Bowen Shi, Sanyuan Chen, Matt Le, Nick Zacharov, Carleigh Wood, Ann Lee, and Wei-Ning Hsu. Meta audiobox aesthetics: Unified automatic quality assessment for speech, music, and sound. *arXiv preprint arXiv:2502.05139*, 2025.
- [29] South-Twilight. SingMOS: A MOS predictor for singing. Official GitHub repository, n.d. URL <https://github.com/South-Twilight/SingMOS>. Accessed: 2026-09-11.
- [30] Neil Zeghidour, Alejandro Luebs, Ahmed Omran, Jan Skoglund, and Marco Tagliasacchi. Soundstream: An end-to-end neural audio codec. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 30:495–507, 2022.
- [31] Alexandre Défossez, Jade Copet, Gabriel Synnaeve, and Yossi Adi. High fidelity neural audio compression. *Transactions on Machine Learning Research (TMLR)*, 2023.
- [32] Jungil Kong, Jaehyeon Kim, and Jaekyoung Bae. Hifi-gan: Generative adversarial networks for efficient and high fidelity speech synthesis. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- [33] Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, Y. K. Li, Y. Wu, and Daya Guo. Deepseekmath: Pushing the limits of mathematical reasoning in open language models, 2024. URL <https://arxiv.org/abs/2402.03300>.
- [34] Qiyang Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, Yu Yue, Weinan Dai, Tiantian Fan, Gaohong Liu, Lingjun Liu, Xin Liu, Haibin Lin, Zhiqi Lin, Bole Ma, Guangming Sheng, Yuxuan Tong, Chi Zhang, Mofan Zhang, Wang Zhang, Hang Zhu, Jinhua Zhu, Jiaze Chen, Jiangjie Chen, Chengyi Wang, Hongli Yu, Yuxuan Song, Xiangpeng Wei, Hao Zhou, Jingjing Liu, Wei-Ying Ma, Ya-Qin Zhang, Lin Yan, Mu Qiao, Yonghui Wu, and Mingxuan Wang. Dapo: An open-source llm reinforcement learning system at scale, 2025. URL <https://arxiv.org/abs/2503.14476>.
- [35] Hui Bu, Jiayu Du, Xingyu Na, Bengu Wu, and Hao Zheng. Aishell-1: An open-source mandarin speech corpus and a speech recognition baseline. In *2017 20th conference of the oriental chapter of the international coordinating committee on speech databases and speech I/O systems and assessment (O-COCOSDA)*, pages 1–5. IEEE, 2017.
- [36] Vassil Panayotov, Guoguo Chen, Daniel Povey, and Sanjeev Khudanpur. Librispeech: an asr corpus based on public domain audio books. In *2015 IEEE international conference on acoustics, speech and signal processing (ICASSP)*, pages 5206–5210. IEEE, 2015.

-
- [37] Sakshi Sakshi, Utkarsh Tyagi, Sonal Kumar, Ashish Seth, Ramaneswaran Selvakumar, Oriol Nieto, Ramani Duraiswami, Sreyan Ghosh, and Dinesh Manocha. Mmau: A massive multi-task audio understanding and reasoning benchmark. In *International Conference on Learning Representations*, volume 2025, pages 84929–84964, 2025.
 - [38] Changhan Wang, Anne Wu, Jiatao Gu, and Juan Pino. Covost 2 and massively multilingual speech translation. In *Proc. Interspeech 2021*, pages 2247–2251, 2021.
 - [39] Dong Zhang, Gang Wang, Jinlong Xue, Kai Fang, Liang Zhao, Rui Ma, Shuhuai Ren, Shuo Liu, Tao Guo, Weiji Zhuang, et al. MiMo-Audio: Audio language models are few-shot learners. *arXiv preprint arXiv:2512.23808*, 2025.
 - [40] Xin Guo, Haotian Xia, Zhaowei Liu, Hanyang Cao, Zhi Yang, Zhiqiang Liu, Sizhe Wang, Jinyi Niu, Chuqi Wang, Yanhui Wang, et al. Fineval: A chinese financial domain knowledge evaluation benchmark for large language models. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 6258–6292, 2025.
 - [41] Yuzhen Huang, Yuzhuo Bai, Zhihao Zhu, Junlei Zhang, Jinghan Zhang, Tangjun Su, Junteng Liu, Chuancheng Lv, Yikai Zhang, Yao Fu, et al. C-eval: A multi-level multi-discipline chinese evaluation suite for foundation models. *Advances in neural information processing systems*, 36:62991–63010, 2023.
 - [42] Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. *arXiv preprint arXiv:2009.03300*, 2020.
 - [43] Haonan Li, Yixuan Zhang, Fajri Koto, Yifei Yang, Hai Zhao, Yeyun Gong, Nan Duan, and Timothy Baldwin. Cmmlu: Measuring massive multitask language understanding in chinese. In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 11260–11285, 2024.
 - [44] Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset. *arXiv preprint arXiv:2103.03874*, 2021.
 - [45] Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, et al. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
 - [46] Mirac Suzgun, Nathan Scales, Nathanael Schärli, Sebastian Gehrmann, Yi Tay, Hyung Won Chung, Aakanksha Chowdhery, Quoc Le, Ed H Chi, Denny Zhou, et al. Challenging big-bench tasks and whether chain-of-thought can solve them. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 13003–13051, 2023.
 - [47] Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde De Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*, 2021.
 - [48] Bajian Xiang, Cheng Wen, Han Zhao, Hao Wang, Haoxu Wang, Jiawei Jin, Jiayan Cui, Jie Chen, Mengxi Nie, Tianyu Zhao, Weiqin Li, Xiang Lv, Xiangang Li, Yang Xiang, and Yang Zhou. Qwen-Audio-3.0-TTS: Freely controllable and highly robust speech synthesis with

- multi-stage training paradigm. *arXiv preprint arXiv:2607.23938*, 2026.
- [49] ByteDance. Doubao. Official product overview, n.d. URL https://www.doubao.com/legal/feature_intro. Accessed: 2026-09-10.
 - [50] MiniMax. MiniMax Speech 2.8. Official model documentation, n.d. URL <https://platform.minimax.io/docs/guides/models-intro>. Includes the speech-2.8-hd model. Accessed: 2026-09-10.
 - [51] Inworld AI. Inworld Realtime TTS-2. Official product page, n.d. URL <https://inworld.ai/tts/>. Accessed: 2026-09-10.
 - [52] Kexin Huang, Qian Tu, Liwei Fan, Chenchen Yang, Dong Zhang, Shimin Li, Zhaoye Fei, Qinyuan Cheng, and Xipeng Qiu. Instructttsval: Benchmarking complex natural-language instruction following in text-to-speech systems, 2025.
 - [53] Google. Gemini 3.1 Pro Preview. Gemini API model documentation, 2026. URL <https://ai.google.dev/gemini-api/docs/models/gemini-3.1-pro-preview>. Model identifier: gemini-3.1-pro-preview. Accessed: 2026-09-10.
 - [54] Hangrui Hu, Xinfu Zhu, Ting He, et al. Qwen3-TTS technical report. *arXiv preprint arXiv:2601.15621*, 2026. URL <https://arxiv.org/abs/2601.15621>. Evaluated variant: Qwen3-TTS-12Hz-1.7B-VoiceDesign.
 - [55] Kexin Huang, Liwei Fan, Botian Jiang, et al. MOSS-VoiceGenerator: Create realistic voices with natural language descriptions. *arXiv preprint arXiv:2603.28086*, 2026. URL <https://arxiv.org/abs/2603.28086>.
 - [56] inclusionAI. Ming-omni-tts-0.5B. Official Hugging Face model card, n.d. URL <https://huggingface.co/inclusionAI/Ming-omni-tts-0.5B>. Accessed: 2026-09-11.
 - [57] Jingbin Hu, Huakang Chen, Linhan Ma, et al. VoiceSculptor: Your voice, designed by you. *arXiv preprint arXiv:2601.10629*, 2026. URL <https://arxiv.org/abs/2601.10629>.