


Name:Vidhath

Roll Number:2520030597

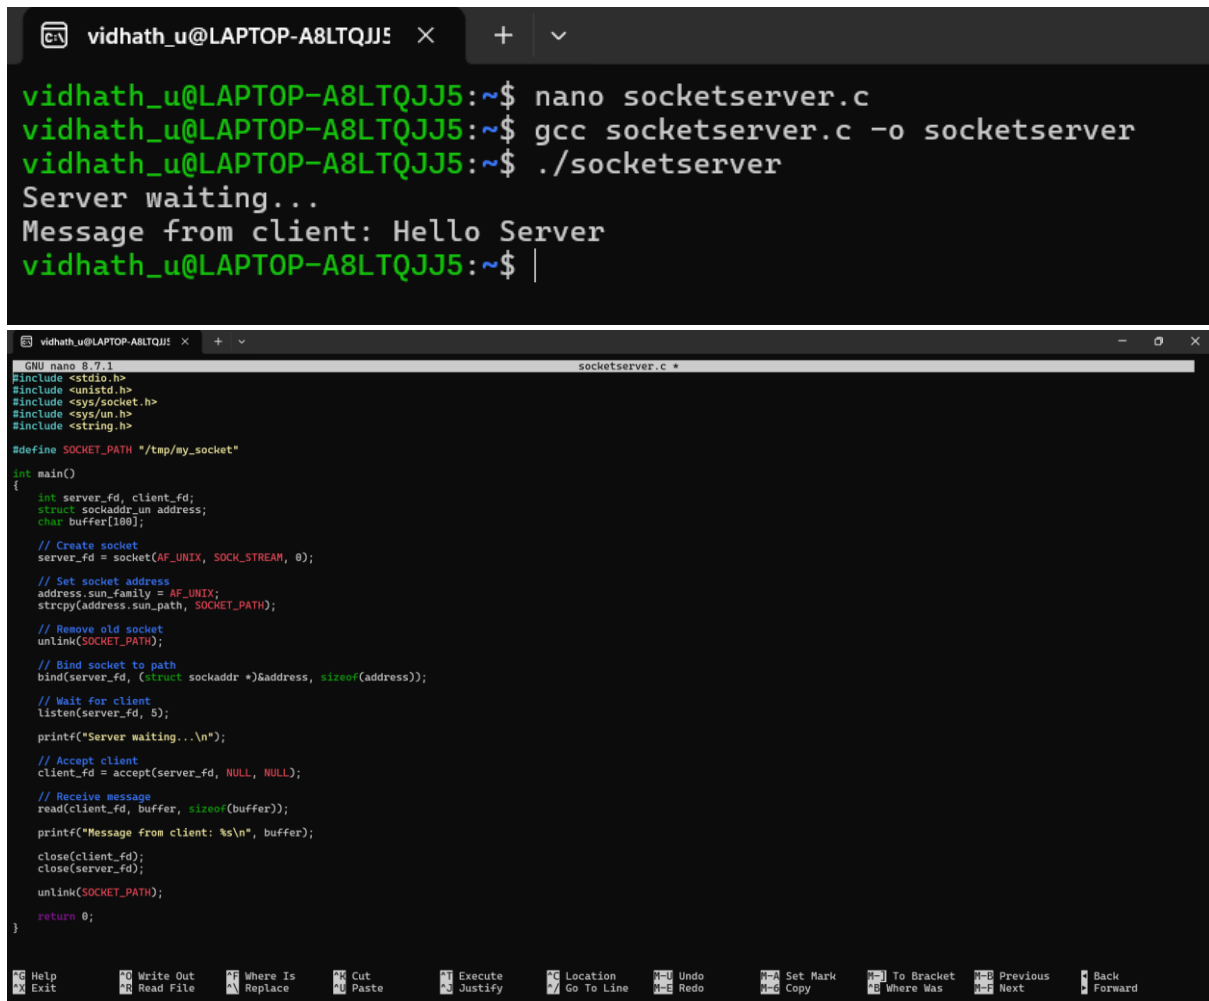

The image shows two overlapping terminal windows. The top window displays the execution of a C program named 'socketserver.c'. The user runs 'nano socketserver.c', then 'gcc socketserver.c -o socketserver', and finally './socketserver'. The program outputs 'Server waiting...' and 'Message from client: Hello Server' before returning to the prompt. The bottom window shows the source code of 'socketserver.c' in the nano editor. The code includes standard headers, defines a socket path, and implements a server that listens on a Unix socket, accepts a client connection, reads a message, and prints it.

```
vidhath_u@LAPTOP-A8LTQJJ5:~$ nano socketserver.c
vidhath_u@LAPTOP-A8LTQJJ5:~$ gcc socketserver.c -o socketserver
vidhath_u@LAPTOP-A8LTQJJ5:~$ ./socketserver
Server waiting...
Message from client: Hello Server
vidhath_u@LAPTOP-A8LTQJJ5:~$ |
```

```
GNU nano 8.7.1 socketserver.c
#include <stdio.h>
#include <unistd.h>
#include <sys/socket.h>
#include <sys/un.h>
#include <string.h>

#define SOCKET_PATH "/tmp/my_socket"

int main()
{
    int server_fd, client_fd;
    struct sockaddr_un address;
    char buffer[100];

    // Create socket
    server_fd = socket(AF_UNIX, SOCK_STREAM, 0);

    // Set socket address
    address.sun_family = AF_UNIX;
    strcpy(address.sun_path, SOCKET_PATH);

    // Remove old socket
    unlink(SOCKET_PATH);

    // Bind socket to path
    bind(server_fd, (struct sockaddr *)&address, sizeof(address));

    // Wait for client
    listen(server_fd, 5);

    printf("Server waiting...\n");

    // Accept client
    client_fd = accept(server_fd, NULL, NULL);

    // Receive message
    read(client_fd, buffer, sizeof(buffer));

    printf("Message from client: %s\n", buffer);

    close(client_fd);
    close(server_fd);

    unlink(SOCKET_PATH);

    return 0;
}
```

Help Exit Write Out Read File Where Is Replace Cut Paste Execute Justify Location Go To Line Undo Redo Set Mark Copy To Bracket Where Was Previous Next Back Forward

```
vidhath_u@LAPTOP-ABLQJJI:~$ nano socketclient.c
vidhath_u@LAPTOP-ABLQJJI:~$ gcc socketclient.c -o socketclient
vidhath_u@LAPTOP-ABLQJJI:~$ ./socketclient
Message sent to server.
vidhath_u@LAPTOP-ABLQJJI:~$ |
```

```
GNU nano 8.7.1 socketclient.c
#include <stdio.h>
#include <unistd.h>
#include <sys/socket.h>
#include <sys/un.h>
#include <string.h>

#define SOCKET_PATH "/tmp/my_socket"

int main()
{
    int client_fd;
    struct sockaddr_un address;

    // Create socket
    client_fd = socket(AF_UNIX, SOCK_STREAM, 0);

    // Set socket address
    address.sun_family = AF_UNIX;
    strcpy(address.sun_path, SOCKET_PATH);

    // Connect to server
    connect(client_fd,
            (struct sockaddr *)&address,
            sizeof(address));

    // Send message
    write(client_fd, "Hello Server", 12);

    printf("Message sent to server.\n");

    close(client_fd);

    return 0;
}
```

[Read 34 lines]

^G Help	^O Write Out	^F Where Is	^K Cut	^T Execute	^C Location	^U Undo	^M Set Mark	^I To Bracket
^X Exit	^R Read File	^N Replace	^U Paste	^J Justify	^_ Go To Line	^E Redo	^G Copy	^B Where Was