

# CSC 211: Object Oriented Programming

## Loops (while, do while) and nested loops

Marco Alvarez

Department of Computer Science and Statistics  
University of Rhode Island

Fall 2019



# the while loop

## Flowchart of while statement

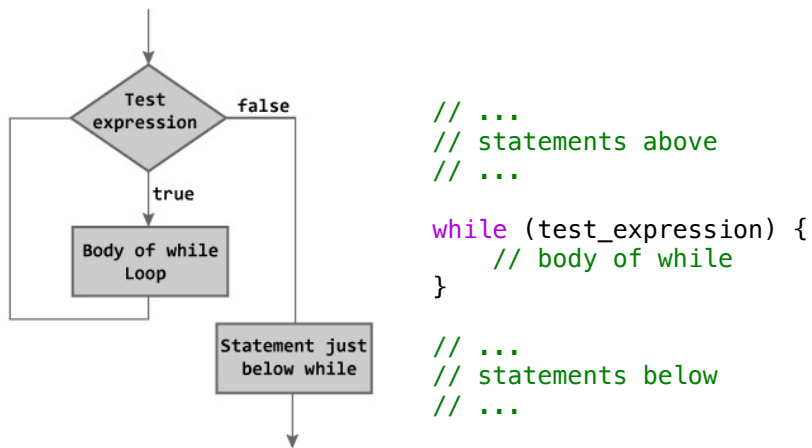


Figure: Flowchart of while Loop

<https://www.programiz.com/cpp-programming/do-while-loop>

3

### A while Statement with a Single Statement Body

```
while (Boolean_Expression)  
    Statement
```

← Body

### A while Statement with a Multistatement Body

```
while (Boolean_Expression)  
{  
    Statement_1  
    Statement_2  
    .  
    .  
    .  
    Statement_Last  
}
```

Body

from: Problem Solving with C++, 10th Edition, Walter Savitch

4

## What is the output?

```
int n = 2019;

while (n > 0) {
    std::cout << n % 10 << std::endl;
    n /= 10;
}
```

5

## Question

- Write a single while loop to print the powers of two from  $2^0$  to  $2^{16}$

6

## What is the output?

```
int main() {
    int n, i = 0;

    std::cin >> n;
    while (i < n)
        std::cout << i << ', ';
    i ++;
}
```

"The truth of the story lies in the details"

7

Any **for** loop can  
be rewritten as  
a **while** loop, and  
vice-versa

8

# do-while, break, continue

## Flowchart of do-while statement

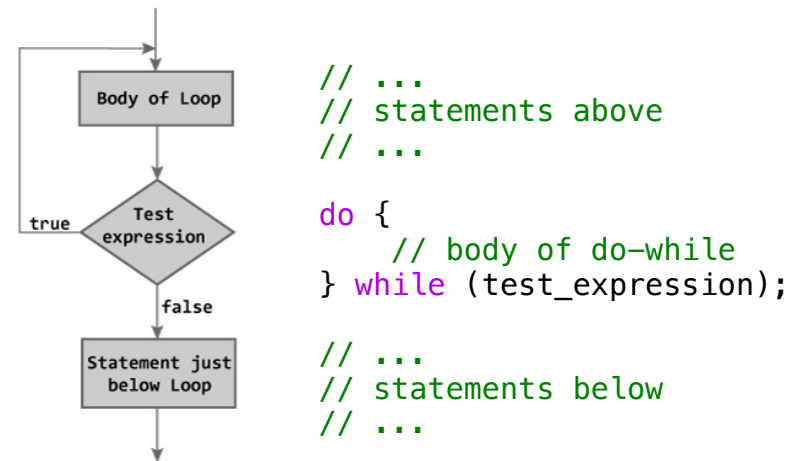


Figure: Flowchart of do...while Loop

<https://www.programiz.com/cpp-programming/do-while-loop>

10


## Example

```
int num;  
  
do {  
    std::cout << "Enter a number: ";  
    std::cin >> num;  
} while (num < 0 || num > 100);  
  
// do something with num  
// ...
```

11

## break statement

- The break statement will cause an **immediate exit**

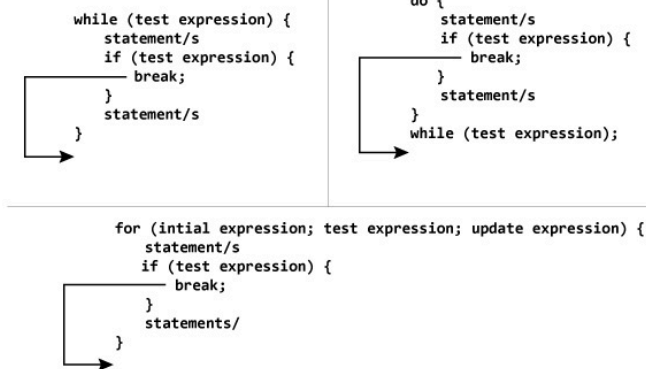


NOTE: The break statement may also be used inside body of else statement.

<https://www.programiz.com/cpp-programming/break-continue>

12

## continue statement

- The continue statement will **interrupt an iteration**

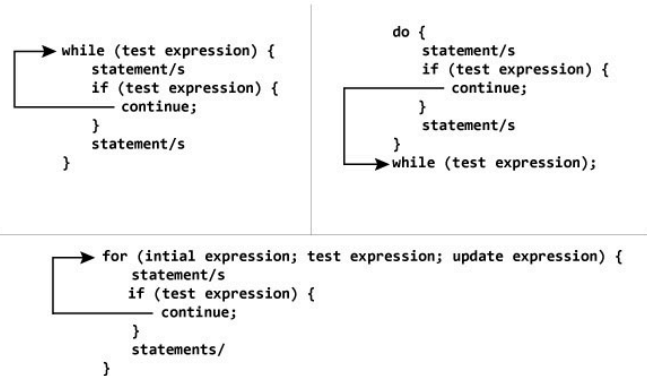

NOTE: The continue statement may also be used inside body of else statement.

<https://www.programiz.com/cpp-programming/break-continue>

13

## What is the output?

```
for (int i = 1 ; i <= 10 ; i++) {
    if (i % 2 == 0) {
        continue;
    } else {
        std::cout << i << " ";
    }
}
```

14

A single repetition  
of the loop body is  
called **Iteration**

15

## Loops everywhere ...



<https://techterms.com/definition/rendering>

16

## Fibonacci sequence

$$F_0 = 0$$

$$F_1 = 1$$

$$F_n = F_{n-1} + F_{n-2}$$



0 1 1 2 3 5 8 13 21 34 ...

The **Fibonacci sequence** first appears in the book **Liber Abaci** (1202) by Fibonacci, using it to calculate the growth of rabbit populations. The sequence had been described by Indian mathematicians as early as the **sixth century**.

from: wikipedia

17

## Question?

- Write a program to print the first 50 terms of the Fibonacci sequence (pick your favorite loop)

18

## Nested loops

## Question

- Output the following pattern using a single loop

```
++++++++  
++++++++  
++++++++  
++++++++  
++++++++
```

20

## Another solution ...

- **Nested loops:** loops inside loops

```
        outer loop
for (int i = 0 ; i < 5 ; i++) {
    for (int j = 0 ; j < 10 ; j++) {
        std::cout << '+'; inner loop
    }
    std::cout << std::endl;
}
```

21

“Simple, elegant solutions are more effective, but they are harder to find than complex ones, and they require more time, which we too often believe to be unaffordable”



Niklaus Wirth, a Swiss computer scientist. In 1984 he won the Turing Award for developing a sequence of innovative computer languages: Euler, Pascal, Modula, etc.

from: wikipedia

22

## What is the output?

```
for (int i = 0 ; i < 5 ; i++) {
    for (int j = 0 ; j < (i + 1) ; j++) {
        std::out << '+';
    }
    std::cout << std::endl;
}
```

23

## Question


- Output the following pattern using nested loops

```
1
1 2
1 2 3
1 2 3 4
1 2 3 4 5
```

24

## Question?

- Write a program to draw a box given **width** and **height**

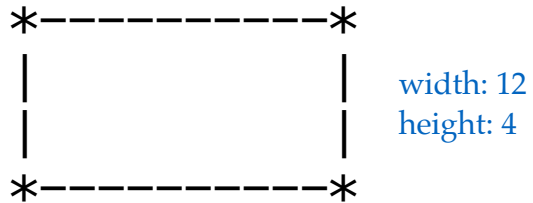

## Question?

- Write a program that outputs all prime numbers from 1 to 100