

# 16.- Feature Selection\_04\_06\_turismo\_gasto\_completo\_v\_01

June 15, 2023

#  
CU55\_Modelo agregado de estimación del gasto medio por turista  
Citizenlab Data Science Methodology > III - Feature Engineering Domain \*\*\* > # 16.- Feature Selection

Feature Selection is the process where you automatically or manually select the most relevant features which contribute most to the correct output of the model.

## 0.1 Tasks

Perform Selection of Categorical-Input/Categorical-Output

- Encoding-Categorical-Features - Chi-Squared-Feature-Selection - Mutual-Information-Feature-Selection - Evaluate-a-Logistic-Regression-model

Perform Selection of Numerical-Input/Categorical-Output

- ANOVA-F-test-Feature-Selection - Mutual-Information-Feature-Selection - Evaluating-a-Logistic-Regression-model - Tuning-the-Number-of-Selected-Features

Perform Selection of Numerical-Input/Numerical-Output

- Correlation-with-the-outcome-Feature-Selection - Mutual-Information-Feature-Selection - Evaluate-a-Lineal-Regression-model - Tuning-the-Number-of-Selected-Features

Perform Selection of Any-data

- RFE-(Recursive-Feature-Elimination) - Tuning-the-Number-of-Selected-Features - Automatically-Select-the-Number-of-Features

Explore the use of diferent algorithms wrapped by RFE

Explore the use od Hybrid feature selection algorithms

## 0.2 Consideraciones casos CitizenLab programados en R

- Algunas de las tareas de este proceso se han realizado en los notebooks del proceso 05 Data Collection porque eran necesarias para las tareas ETL. En esos casos, en este notebook se referencia al notebook del proceso 05 correspondiente
- Otras tareas típicas de este proceso se realizan en los notebooks del dominio IV al ser más eficiente realizarlas en el propio pipeline de modelización.
- Por tanto en los notebooks de este proceso de manera general se incluyen las comprobaciones necesarias, y comentarios si procede
- Las tareas del proceso se van a aplicar solo a los archivos que forman parte del despliegue, ya que hay muchos archivos intermedios que no procede pasar por este proceso
- El nombre de archivo del notebook hace referencia al nombre de archivo del proceso 05 al que se aplica este proceso, por eso pueden no ser correlativa la numeración

- Las comprobaciones se van a realizar teniendo en cuenta que el lenguaje utilizado en el despliegue de este caso es R

### 0.3 File

- Input File: CU\_55\_08\_03\_gasto\_municipio.csv
- Sampled Input File: CU\_45\_07\_03\_gasto\_municipio.csv
- Output File: No aplica

#### 0.3.1 Encoding

Con la siguiente expresión se evitan problemas con el encoding al ejecutar el notebook. Es posible que deba ser eliminada o adaptada a la máquina en la que se ejecute el código.

```
In [1]: Sys.setlocale(category = "LC_ALL", locale = "es_ES.UTF-8")
```

```
'LC_COLLATE=es_ES.UTF-8;LC_CTYPE=es_ES.UTF-8;LC_MONETARY=es_ES.UTF-8;LC_NUMERIC=C;LC_TIME=es_ES.UTF-8'
```

### 0.4 Settings

#### 0.4.1 Libraries to use

```
In [2]: library(caret)
        library(readr)
        library(dplyr)
        library(tidyr)
        library(forcats)
        library(lubridate)
```

Loading required package: ggplot2

Loading required package: lattice

Attaching package: 'dplyr'

The following objects are masked from 'package:stats':

filter, lag

The following objects are masked from 'package:base':

intersect, setdiff, setequal, union

Attaching package: 'lubridate'

The following objects are masked from 'package:base':

date, intersect, setdiff, union

## 0.4.2 Paths

```
In [3]: iPath <- "Data/Input/"
       oPath <- "Data/Output/"
```

## 0.5 Data Load

OPCION A: Seleccionar fichero en ventana para mayor comodidad

Data load using the {tcltk} package. Ucomment the line if using this option

```
In [4]: # file_data <- tcltk::tk_choose.files(multi = FALSE)
```

OPCION B: Especificar el nombre de archivo

```
In [5]: iFile <- "CU_55_08_03_gasto_municipio.csv"
       file_data <- paste0(iPath, iFile)

       if(file.exists(file_data)){
         cat("Se leerán datos del archivo: ", file_data)
       } else{
         warning("Cuidado: el archivo no existe.")
       }
```

Se leerán datos del archivo: Data/Input/CU\_55\_08\_03\_gasto\_municipio.csv

**Data file to dataframe** Usar la función adecuada según el formato de entrada (xlsx, csv, json, ...)

```
In [6]: data <- read_csv(file_data)
```

Rows: 50294 Columns: 10

Column specification

Delimiter: ","

chr (5): mes, pais\_orig\_cod, pais\_orig, mun\_dest, CMUN

dbl (4): mun\_dest\_cod, turistas, gasto, Target

lgl (1): is\_train

Use `spec()` to retrieve the full column specification for this data.

Specify the column types or set `show\_col\_types = FALSE` to quiet this message.

Estructura de los datos:

```
In [7]: data |> glimpse()
```

```
Rows: 50,294
Columns: 10
$ mes          <chr> "2019-08", "2021-07", "2021-07", "2022-01", "2019-08", "
$ pais_orig_cod <chr> "110", "010", "010", "000", "128", "000", "011", "126",
$ pais_orig     <chr> "Francia", "Total Europa", "Total Europa", "Total", "Rum
$ mun_dest_cod  <dbl> 28161, 28176, 28132, 28141, 28130, 28126, 28075, 28005,
$ mun_dest      <chr> "Valdemoro", "Villanueva de la Cañada", "San Martín de l
$ turistas      <dbl> 466, 1375, 465, 54, 135, 30, 285, 768, 31, 1646, 116, 36
$ CMUN         <chr> "161", "176", "132", "141", "130", "126", "075", "005",
$ gasto        <dbl> 76.360, 99.650, 99.650, 107.820, 109.210, 118.230, 118.2
$ Target       <dbl> 76.360, 99.650, 99.650, 107.820, 109.210, 118.230, 118.2
$ is_train      <lgl> TRUE, TRUE, TRUE, TRUE, TRUE, TRUE, TRUE, TRUE, TRUE, TR
```

Muestra de los primeros datos:

```
In [8]: data |> slice_head(n = 5)
```

	mes <chr>	pais_orig_cod <chr>	pais_orig <chr>	mun_dest_cod <dbl>	mun_dest <chr>
A spec_tbl_df: 5 CE 10	2019-08	110	Francia	28161	Valdemoro
	2021-07	010	Total Europa	28176	Villanueva de la Cañada
	2021-07	010	Total Europa	28132	San Martín de la Vega
	2022-01	000	Total	28141	Sevilla la Nueva
	2019-08	128	Rumania	28130	San Fernando de Henares

## 0.6 Selecting Categorical Input / Categorical Output

No aplica ya que el Target no es categórico.

### 0.6.1 Encoding Categorical Features

### 0.6.2 Chi-Squared Feature Selection

### 0.6.3 Mutual Information Feature Selection

### 0.6.4 Evaluating a Logistic Regression model

Select numer of Features to use

```
In [9]: # Select numer of Features to use
```

Operation

## 0.7 Selecting Numerical Input / Categorical Output

No aplica ya que el Target no es categórico.

### 0.7.1 ANOVA F-test Feature Selection

### 0.7.2 Mutual Information Feature Selection

### 0.7.3 Evaluating a Logistic Regression model

Selecting feature to use

```
In [10]: # Select number of Features to use
```

Operation

### 0.7.4 Tuning the Number of Selected Features

Know the best number of features to select

See the relationship between the number of selected features and accuracy

## 0.8 Selecting Numerical Input / Numerical Output

```
In [11]: data <- select(data, -gasto)
```

### 0.8.1 Correlation with the outcome Feature Selection

```
In [12]: # Calculate the correlation between each feature and the outcome variable
correlations <- sapply(select_if(data, is.numeric)[, -which(names(select_if(data, is.nu

# Create a dataframe from the correlations
correlation_df <- data.frame(Feature = names(correlations), Correlation = correlations)

# Sort the dataframe by the absolute values of the correlations in descending order
correlation_df <- correlation_df[order(-abs(correlation_df$Correlation)), ]

# Print the correlation dataframe
print(correlation_df)
```

	Feature	Correlation
mun_dest_cod	mun_dest_cod	-0.015100812
turistas	turistas	-0.002260766

### 0.8.2 Mutual Information Feature Selection

```
In [13]: # install the necessary packages if not already installed
if (!require(FSelectorRcpp)) {
  install.packages('FSelectorRcpp')
}

# Load necessary library
library(FSelectorRcpp)
```

```

# Calculate mutual information between each variable and the target
mi_scores <- information_gain(data[, setdiff(names(data), "Target")], data$Target)

# Convert the top_features object into a dataframe
mi_scores_df <- as.data.frame(mi_scores)

# Rename the columns
names(mi_scores_df) <- c("Feature", "Score")

# Order the dataframe by Score in descending order
mi_scores_df <- mi_scores_df[order(-mi_scores_df$Score),]

# Create a bar plot
ggplot(mi_scores_df, aes(x = reorder(Feature, Score), y = Score)) +
  geom_bar(stat = "identity", fill = "steelblue") +
  coord_flip() +
  xlab("Features") +
  ylab("Mutual Information Score") +
  ggtitle("Top Features by Mutual Information") +
  theme_minimal()

```

Loading required package: FSelectorRcpp


Warning message in library(package, lib.loc = lib.loc, character.only = TRUE, logical.return = TRUE):  
 "there is no package called 'FSelectorRcpp'"  
 Installing package into 'C:/Users/Vicente/AppData/Local/R/win-library/4.3'  
 (as 'lib' is unspecified)

also installing the dependencies 'BH', 'RcppArmadillo'

package 'BH' successfully unpacked and MD5 sums checked  
 package 'RcppArmadillo' successfully unpacked and MD5 sums checked  
 package 'FSelectorRcpp' successfully unpacked and MD5 sums checked

The downloaded binary packages are in  
 C:\Users\Vicente\AppData\Local\Temp\RtmpwBEWVa\downloaded\_packages

Warning message in .information\_gain.data.frame(formula, data, type = type, equal = equal, ...):  
 "Dependent variable is a numeric! It will be converted to factor with simple factor(y). We do not

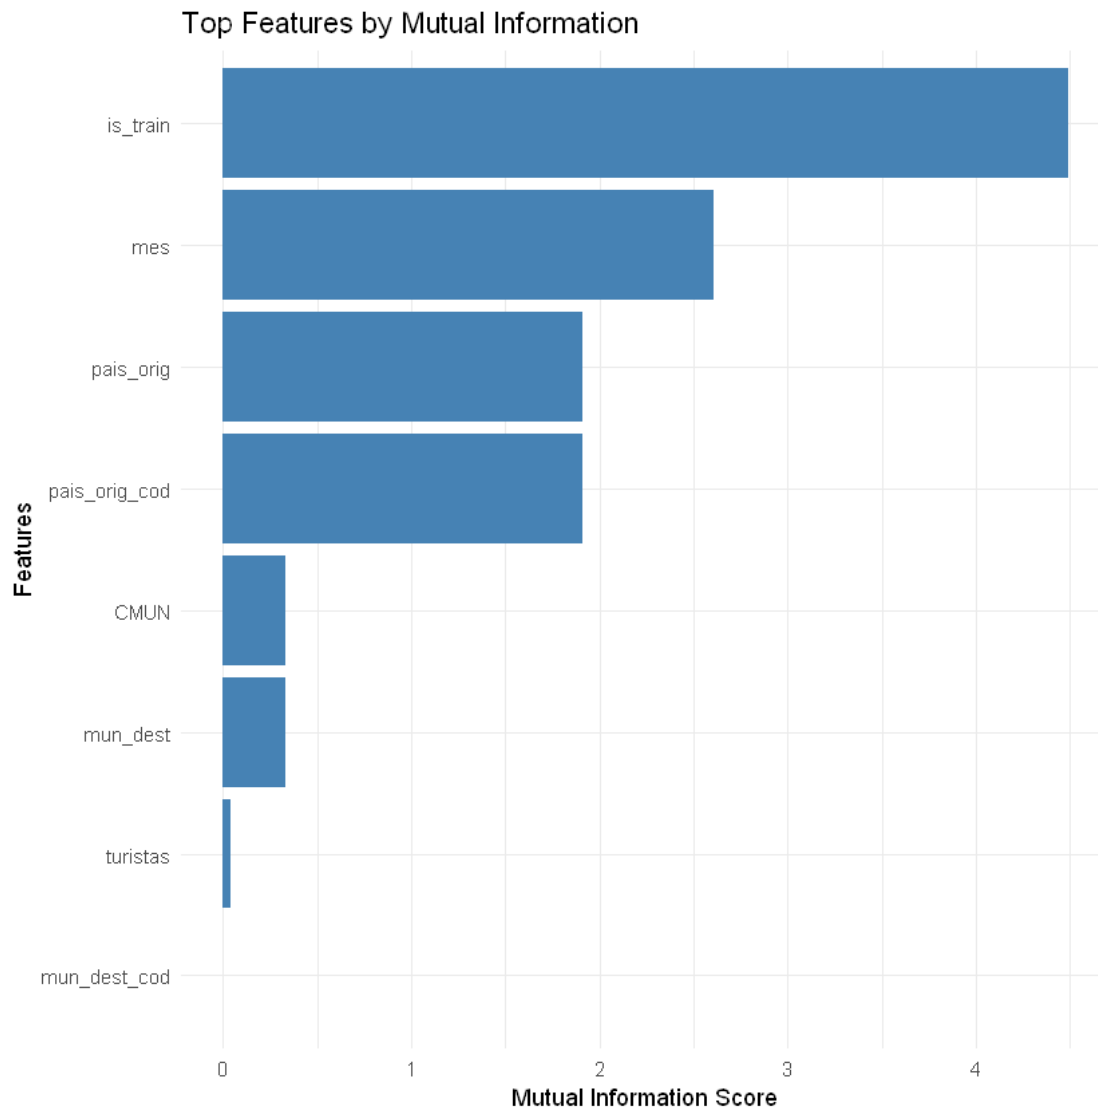

### 0.8.3 Evaluating a Lineal Regression model

Selecting feature to use

```
In [16]: # Select numer of Features to use  
k <- 6
```

Operation

```
In [17]: train_set <- subset(data[data$is_train == TRUE, ], select = -is_train)  
train_set <- select_if(train_set, is.numeric)  
test_set <- subset(data[data$is_train == FALSE, ], select = -is_train)  
test_set <- select_if(test_set, is.numeric)
```

```

# Fit a linear regression model
model_all_features <- lm(Target ~ ., data = train_set)

# Predict on the test set
predictions <- predict(model_all_features, newdata = test_set)

# Evaluate the model
postResample(pred = predictions, obs = test_set$Target)

```

**RMSE** 28.8994066996986 **Rsquared** 0.000183249660655082 **MAE** 16.9653248879882

## 0.9 Any data: RFE (Recursive Feature Elimination)

### 0.9.1 RFE for Classification

No aplica ya que el Target no es categórico.

Selecting feature to use

```
In [18]: # Select numer of Features to use
```

Operation

### 0.9.2 RFE for Regression

Selecting feature to use

```
In [23]: # Select numer of Features to use
k <- 7
```

Operation

```
In [24]: # Define control parameters for rfe function
ctrl <- rfeControl(functions=lmFuncs, method="cv", number=10)

# Determine number of predictors
predictors_number <- ncol(train_set) - 1 # Assuming the last column is the target variable

# Apply the RFE algorithm with cross validation.
result <- rfe(train_set[, !names(train_set) %in% "Target"], train_set$Target, sizes=c(1, 2, 3, 4, 5, 6, 7, 8, 9, 10))

# Print the result
print(result)

# Top ranking variables in the optimal subset size
top_features <- predictors(result, result$optsize)

```

Recursive feature selection

Outer resampling method: Cross-Validated (10 fold)



Resampling performance over subset size:

Variables	RMSE	Rsquared	MAE	RMSESD	RsquaredSD	MAESD	Selected
1	29.69	0.0003503	17.35	1.175	0.0003394	0.2545	
2	29.69	0.0003571	17.35	1.175	0.0003540	0.2547	*

The top 2 variables (out of 2):

mun\_dest\_cod, turistas