

1.(1)

From F we can get :

$F' = \{A \rightarrow B, A \rightarrow C, E \rightarrow A, E \rightarrow D, BD \rightarrow E, CE \rightarrow D, CE \rightarrow H, H \rightarrow G, EI \rightarrow J\}$

For $EI \rightarrow J$

$\{E\}^+ = \{E, A, D\}$, thus $E \rightarrow J$ is not inferred by F'

$\{I\}^+ = \{I\}$, thus $I \rightarrow J$ is not inferred by F'

Hence , only $EI \rightarrow J$ is inferred by F'

So , $C \rightarrow J \notin F^+$

1.(2)

$R = (A, B, C, D, E, G, H, I, J, K)$

$F = \{A \rightarrow BC, E \rightarrow AD, BD \rightarrow E, CE \rightarrow DH, H \rightarrow G, EI \rightarrow J\}$.

Step 1 Reduce Right Side:

$F' = \{A \rightarrow B, A \rightarrow C, E \rightarrow A, E \rightarrow D, BD \rightarrow E, CE \rightarrow D, CE \rightarrow H, H \rightarrow G, EI \rightarrow J\}$

Step 2 Reduce Left Side:

For $BD \rightarrow E$,

$\{B\}^+ = \{B\}$, thus $B \rightarrow E$ is not inferred by F'

$\{D\}^+ = \{D\}$, thus $D \rightarrow E$ is not inferred by F'

For $CE \rightarrow D$,

$\{C\}^+ = \{C\}$, thus $C \rightarrow D$ is not inferred by F'

$\{E\}^+ = \{E, A, B, C, D\}$, Thus $E \rightarrow D$ is inferred by F' .

Hence, $CE \rightarrow D$ is replaced by $E \rightarrow D$.

For $CE \rightarrow H$,

$\{C\}^+ = \{C\}$, thus $C \rightarrow H$ is not inferred by F'

$\{E\}^+ = \{E, A, B, C, D, H\}$, thus $E \rightarrow H$ is inferred by F'

Hence, $CE \rightarrow H$ is replaced by $E \rightarrow H$.

For $EI \rightarrow J$,

$\{E\}^+ = \{E, A, B, C, D\}$, thus $E \rightarrow J$ is not inferred by F'

$\{I\}^+ = \{I\}$, thus $I \rightarrow J$ is not inferred by F'

Thus:

$F'' = \{A \rightarrow B, A \rightarrow C, E \rightarrow A, E \rightarrow D, BD \rightarrow E, E \rightarrow H, H \rightarrow G, EI \rightarrow J\}$

Step 3 Reduce Redundancy:

$A+|_{F'' - \{A \rightarrow B\}} = \{A, C\}$; thus $A \rightarrow B$ is not inferred by $F'' - \{A \rightarrow B\}$. That is, $A \rightarrow B$ is not redundant.

Similarly, we check the rest and find there are all no redundant,

Hence,

$F_m = \{A \rightarrow B, A \rightarrow C, E \rightarrow A, E \rightarrow D, BD \rightarrow E, E \rightarrow H, H \rightarrow G, EI \rightarrow J\}$

1.(3)

For $R = (A, B, C, D, E, G, H, I, J, K)$

$F = \{A \rightarrow BC, E \rightarrow AD, BD \rightarrow E, CE \rightarrow DH, H \rightarrow G, EI \rightarrow J\}$.

$R_1 = \{ABCDE\}$, $R_2 = \{EGH\}$, $R_3 = \{EIJK\}$

Initially, S is

| | A | B | C | D | E | G | H | I | J | K |
|----|-----|-----|-----|-----|----|-----|-----|-----|-----|------|
| R1 | a1 | a2 | a3 | a4 | a5 | b16 | b17 | b18 | b19 | b110 |
| R2 | b21 | b22 | b23 | b24 | a5 | a6 | a7 | b28 | b29 | b210 |
| R3 | b31 | b32 | b33 | b34 | a5 | b36 | b37 | a8 | a9 | a10 |

For each $x \rightarrow y$ in F , change the table blow:

| | A | B | C | D | E | G | H | I | J | K |
|----|----|----|----|----|----|----|----|-----|-----|------|
| R1 | a1 | a2 | a3 | a4 | a5 | a6 | a7 | b18 | b19 | b110 |
| R2 | a1 | a2 | a3 | a4 | a5 | a6 | a7 | b28 | b29 | b210 |
| R3 | a1 | a2 | a3 | a4 | a5 | a6 | a7 | a8 | a9 | a10 |

Now there is row that entirely made up by “a” values.

, So the decomposition is lossless.

1.(4)

$R = (A, B, C, D, E, G, H, I, J, K)$

From F can get:

$F' = \{A \rightarrow B, A \rightarrow C, E \rightarrow A, E \rightarrow D, BD \rightarrow E, CE \rightarrow D, CE \rightarrow H, H \rightarrow G, EI \rightarrow J\}$

From F'

$E \rightarrow A \rightarrow B \ \& \ E \rightarrow D \ \& \ E \rightarrow A \rightarrow C \ \& \ EI \rightarrow J \ \& \ H \rightarrow G$

$\{E, I, K\}^+ = \{A, B, C, D, E, G, H, I, J, K\}$

Hence, superkey can be

$\{E, I, K\}, \{E, C, I, K\}, \{E, I, K, A\}, \{E, I, K, B\}, \{E, I, K, D\}, \{E, I, K, G\}$

1.(5)

According minimal cover, we can get 3NF decomposition.

$F_m = \{A \rightarrow B, A \rightarrow C, E \rightarrow A, E \rightarrow D, BD \rightarrow E, E \rightarrow H, H \rightarrow G, EI \rightarrow J\}$

Regarding F_m , I decompose R into a collection of BCNF relations

Which is :

$R_1 = \{ABC\}$

$R_4 = \{EIJ\}$

$R_2 = \{EADH\}$

$R_5 = \{K\}$

$R_3 = \{HG\}$

Note: K does not have any relation ship between others, so it can be ignored

| | A | B | C | D | E | G | H | I | J |
|------|---|---|---|---|---|---|---|---|---|
| ABC | a | a | a | b | b | b | b | b | b |
| EADH | a | b | b | a | a | b | a | b | b |
| HG | b | b | b | b | b | a | a | b | b |
| EIJ | b | b | b | b | a | b | b | a | a |

| | A | B | C | D | E | G | H | I | J |
|------|---|---|---|---|---|---|---|---|---|
| ABC | a | a | a | b | b | b | b | a | b |
| EADH | a | a | a | a | a | a | a | b | b |
| HG | b | b | b | b | b | a | a | b | b |
| EIJ | a | a | a | a | a | a | a | a | a |

It is lossless join


Functional dependency:

$A^+ = \{A, B, C\}$, $E^+ = \{A, B, C, D, E, H, G\}$, $H^+ = \{H, G\}$, $EI^+ = \{A, B, C, D, E, G, H, I, J\}$, $K^+ = \{K\}$

It loss the relation of $BD \rightarrow E$, so it's not dependency-preserving

So it's not possible to decompose R into a collection of BCNF relations and ensure the decomposition is dependency-preserving and lossless-join.

2.

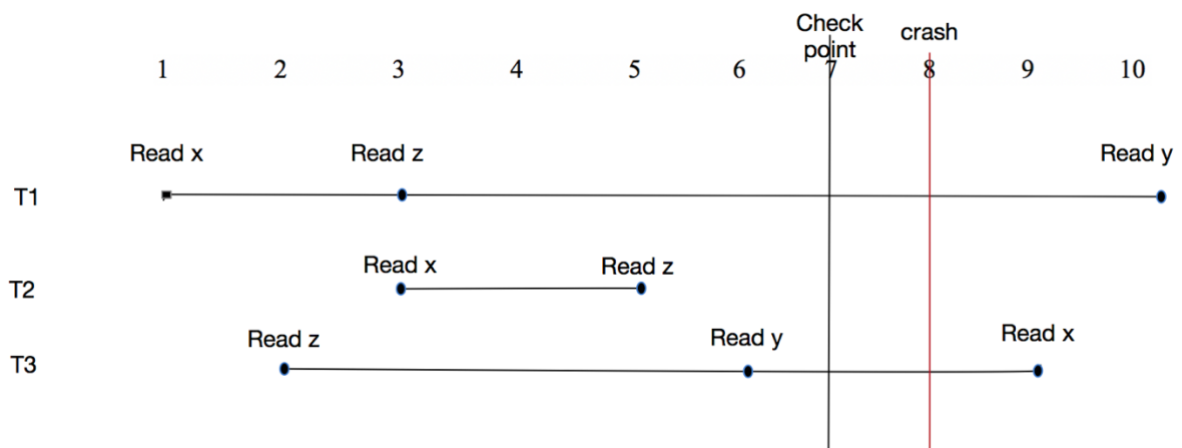

(1) T2:redo

T1,T3:undo

(2) T1,T3:undo

T2,do not do anything

3.(1)

Data pages :P1,P2,P3,P4

Queries

Q1:read P1; Q2:read P2; Q3:read P3; Q4:read P4; Q5:read P3;Q6:read P2;

Buffer:

| | | |
|----|----|----|
| P1 | P2 | P3 |
|----|----|----|

For FIFO, to the Q4,it replace the first buffer(P1),read write and read P4 and in Q5 ,it read P3 directly, in Q6, P2 as well, But for MRU, first ,it replace the third buffer(P3), read write and read P4,and in Q5, it replace the third buffer(P4), read write and read P3,and in Q6,it read P2 directly.so

For FIFO, it only change one time but for MRU it needs to change two times.

3.(2)

Data pages :P1,P2,P3,P4

Queries

Q1:read P1; Q2:read P2; Q3:read P3; Q4:read P2; Q5:read P1;Q6:read P4; Q7:read P3; Q8:read P2;Q9:read P1;

Buffer:

| | | |
|----|----|----|
| P1 | P2 | P3 |
|----|----|----|

For LRU,to the Q6,it replace buffer(P3), read write and read P4 ,to the Q7, it replace buffer(P2), read write and read P3, ,to the Q8, ,it replace buffer(P1), read write and read P2, ,to the Q9 ,it replace buffer(P4), read write and read P1,it change four times

But for FIFO to the Q6, ,it replace buffer(P1), read write and read P4,to theQ9, it replace buffer(P2),,it replace buffer(P2), read write and read P1,it only change two times.