


include/barry/models
/geese/geese-meat-simulate.hpp

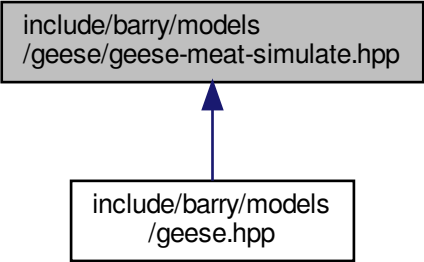

```
graph BT; A["include/barry/models<br/>/geese/geese-meat-simulate.hpp"] --> B["include/barry/models<br/>/geese.hpp"]
```

The diagram illustrates an include relationship between two header files. A grey rectangular box at the top contains the text 'include/barry/models' followed by a line break and '/geese/geese-meat-simulate.hpp'. A blue arrow points upwards from a white rectangular box at the bottom to the grey box. The white box contains the text 'include/barry/models' followed by a line break and '/geese.hpp'.

include/barry/models
/geese.hpp