


Protocol sensitivity of the comparison table — not a ranking (each column keeps its own published native configuration)

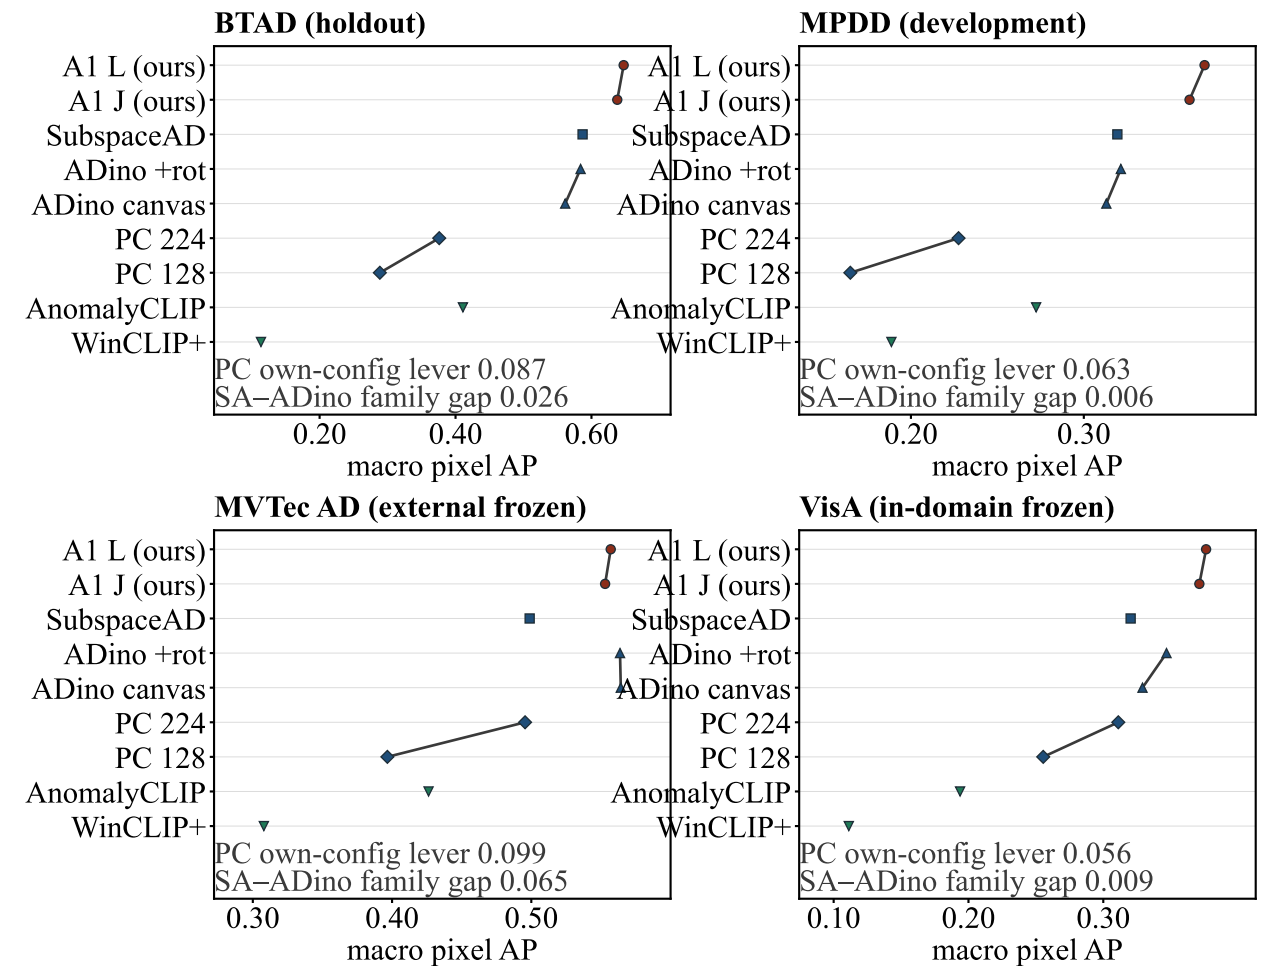

Two dots joined by a line are one method measured under two native configurations (PatchCore: resize/crop geometry; AnomalyDINO: reference rotation; ours: matching rule J vs L), so the connector length is that method's protocol lever.

That lever exceeds the gap between method families: PatchCore's own two configurations differ by 0.100 macro pixel AP on average over 144 units, while SubspaceAD 256 fp16 and AnomalyDINO canvas differ by 0.026 — and switching only PatchCore's configuration flips who is ahead on 48/144 = 33.3% of those units.

Context, not an ordering: this figure draws no interval, runs no significance test and claims no state of the art; harmonised-subset intervals are in 05_baselines_harmonised_20260922/HARMONISED_SUMMARY.json. Source: baseline_common_region_ext.csv (1188 rows, read-only) via analyse_protocol_leverage.py; nothing was recomputed.