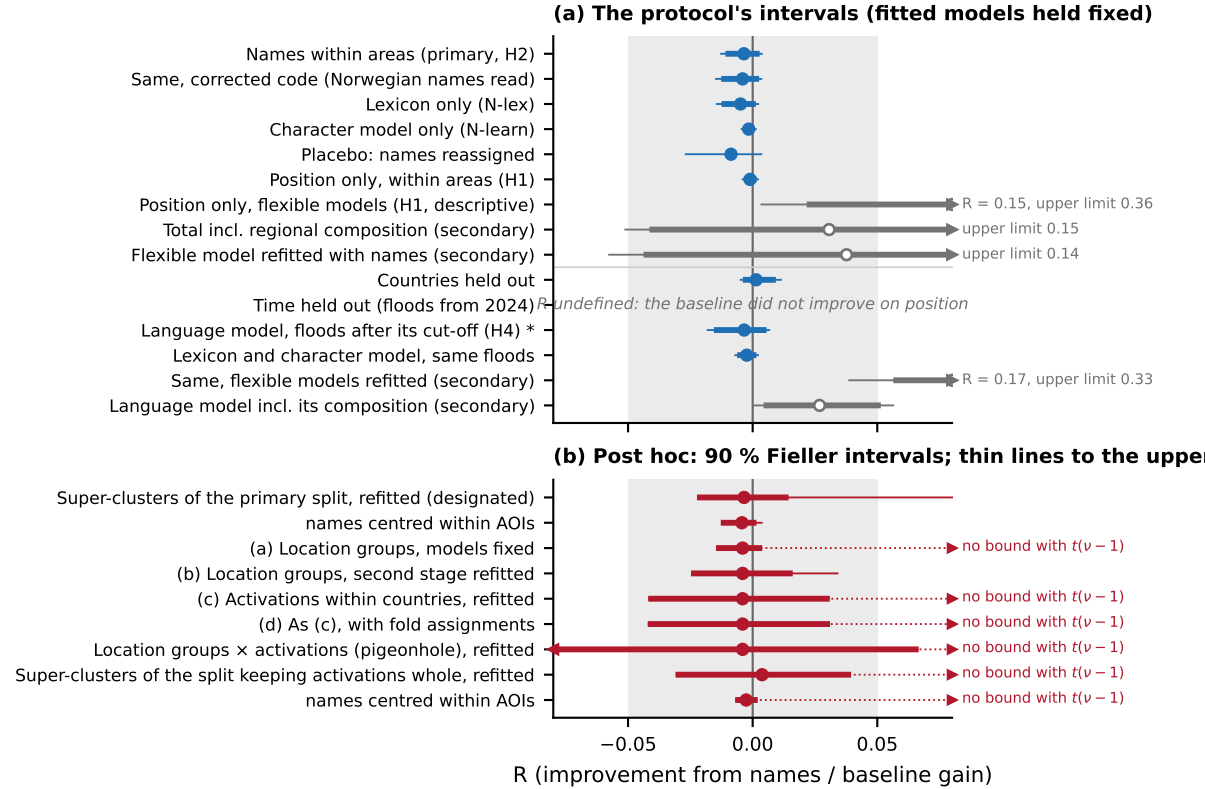
(a) The protocol's intervals (fitted models held fixed)
Names within areas (primary, H2)
Same, corrected code (Norwegian names read)
Lexicon only (N-lex)
Character model only (N-learn)
Placebo: names reassigned
Position only, within areas (H1)
Position only, flexible models (H1, descriptive)
Total incl. regional composition (secondary)
Flexible model refitted with names (secondary)
Countries held out
Time held out (floods from 2024)
Language model, floods after its cut-off (H4) *
Lexicon and character model, same floods
Same, flexible models refitted (secondary)
Language model incl. its composition (secondary)
R = 0.15, upper limit 0.36
upper limit 0.15
upper limit 0.14
R undefined: the baseline did not improve on position
R = 0.17, upper limit 0.33
(b) Post hoc: 90 % Fieller intervals; thin lines to the upper
Super-clusters of the primary split, refitted (designated)
names centred within AOIs
(a) Location groups, models fixed
(b) Location groups, second stage refitted
(c) Activations within countries, refitted
(d) As (c), with fold assignments
Location groups × activations (pigeonhole), refitted
Super-clusters of the split keeping activations whole, refitted
names centred within AOIs
no bound with $t(\nu-1)$
no bound with $t(\nu-1)$
no bound with $t(\nu-1)$
no bound with $t(\nu-1)$
no bound with $t(\nu-1)$
no bound with $t(\nu-1)$
−0.05
0.00
0.05
R (improvement from names / baseline gain)