


Sample Input: I have Used Postman for Api End Point Testing


1. Registration Request to /api/auth/register:

```
{
  "username": "notetaker",
  "password": "SecureNote123!"
}
```

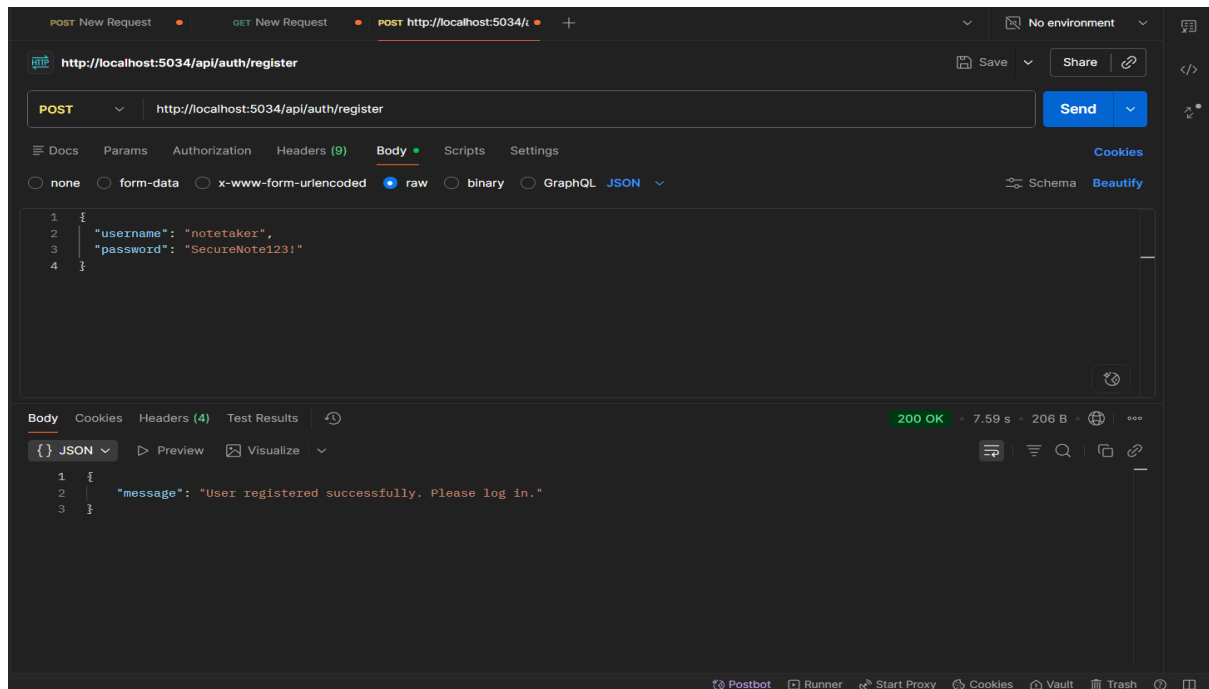

2. Login Request to /api/auth/login:



```
{
  "username": "notetaker",
  "password": "SecureNote123"}
}
```

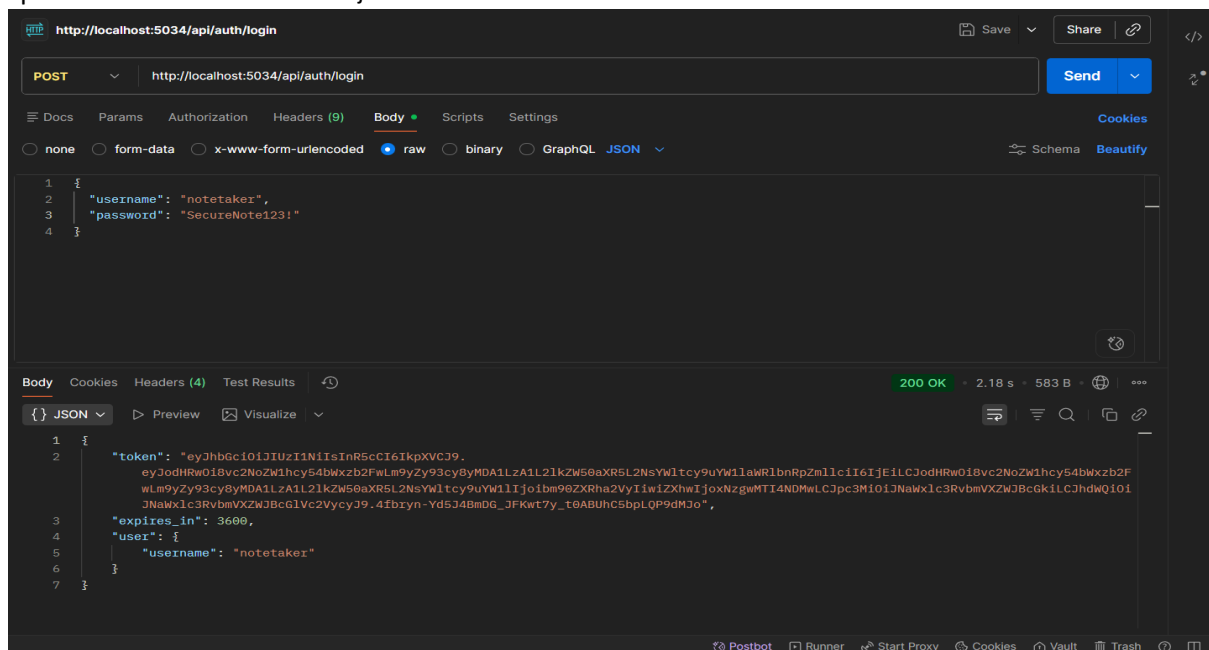


3. Add Note Request to /api/notes (with JWT token in Authorization header):

{ "title": "Grocery List", "content": "Eggs, Milk, Bread" }


Here I Entered the JWT token which I got when I logged in in the response

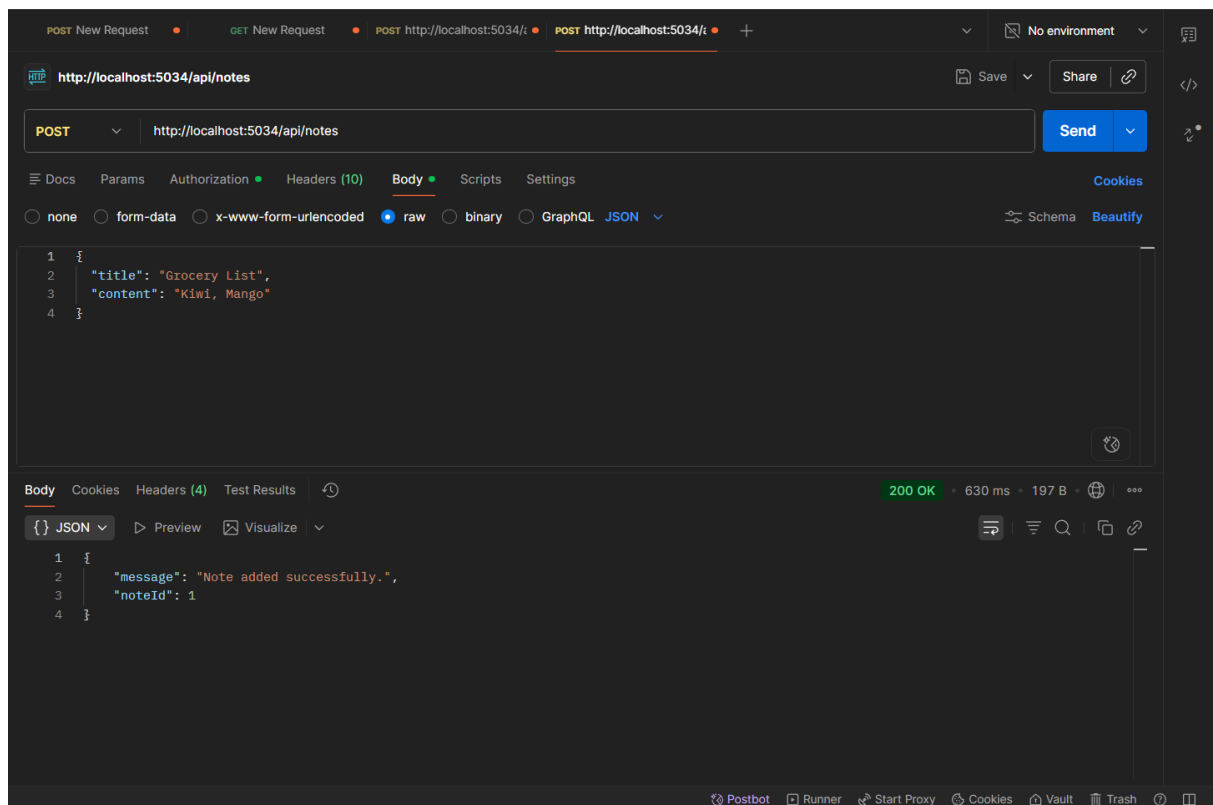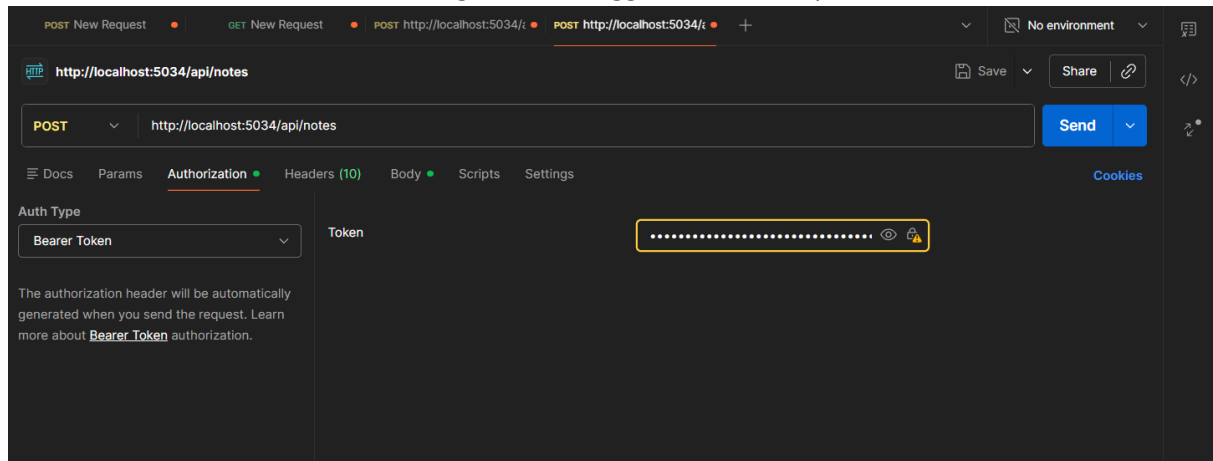

I am Going use PUT for Updating:
Update Using PUT(api/notes/1):

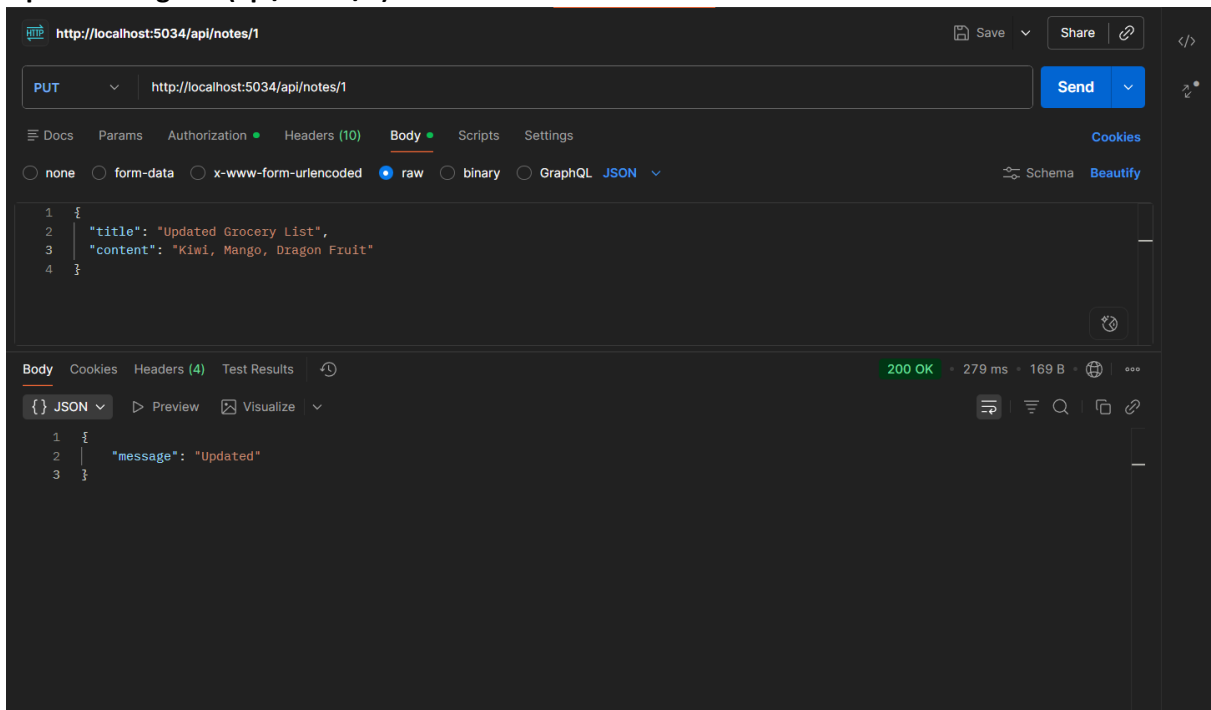

To Verify Whether Updated or not:
GetAll:

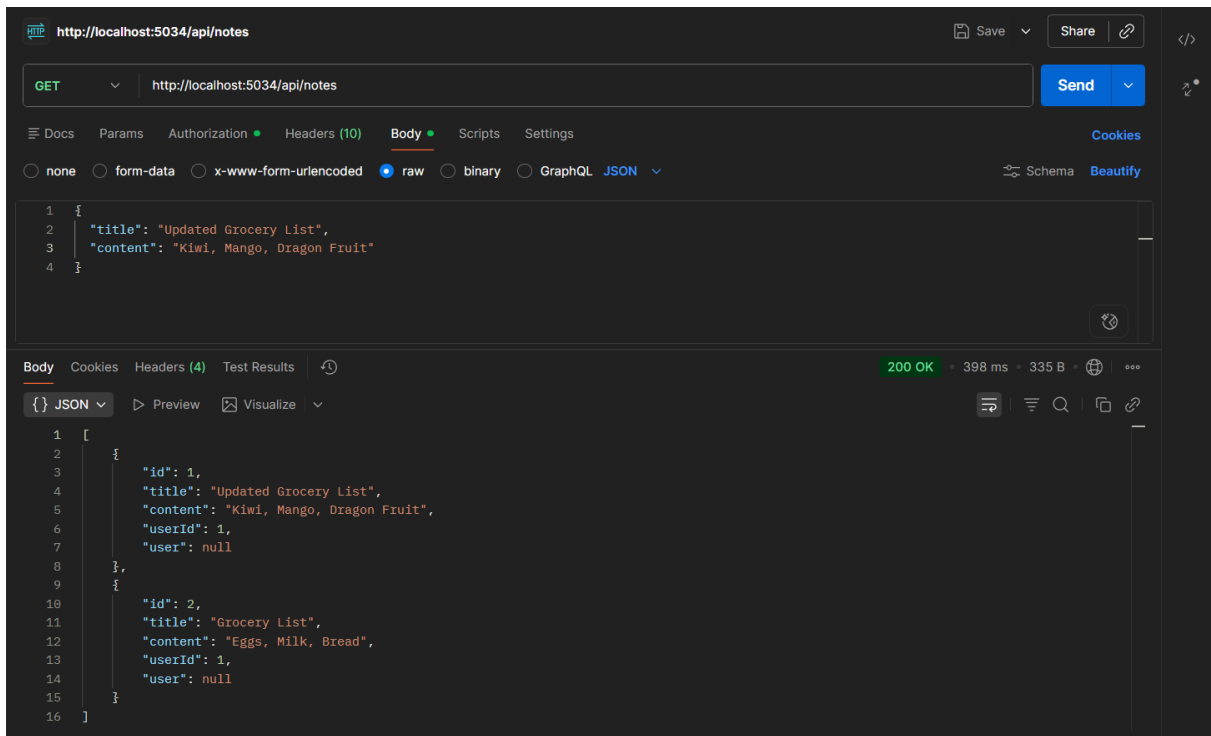

Delete(api/notes/1):

REST client interface showing a DELETE request to `http://localhost:5034/api/notes/1`. The request body is a JSON object:

```
1 {
2   "title": "Updated Grocery List",
3   "content": "Kiwi, Mango, Dragon Fruit"
4 }
```

The response is a 200 OK status with a JSON body:

```
1 {
2   "message": "Deleted"
3 }
```

To Checking Deleted or not:

REST client interface showing a GET request to `http://localhost:5034/api/notes`. The response is a 200 OK status with a JSON array:

```
1 [
2   {
3     "id": 2,
4     "title": "Grocery List",
5     "content": "Eggs, Milk, Bread",
6     "userId": 1,
7     "user": null
8   }
9 ]
```