

Ansible Slaves and Master Creation :


1.Creating the 4 redhat Instances (1 master and 3 slaves)


1 suse as a Slave one with the different os

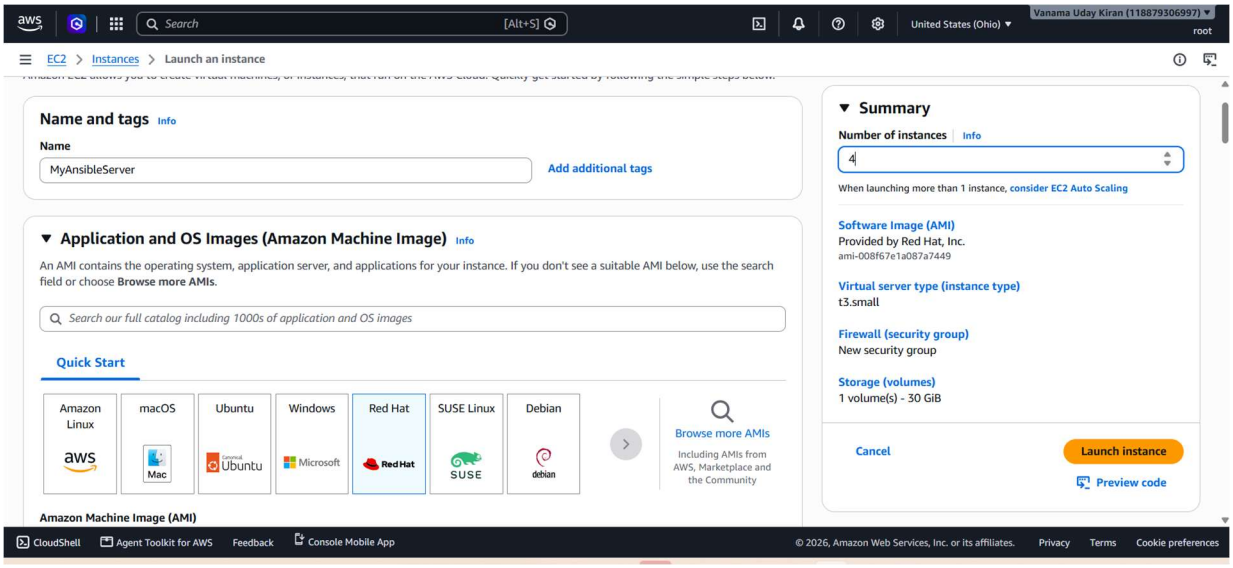


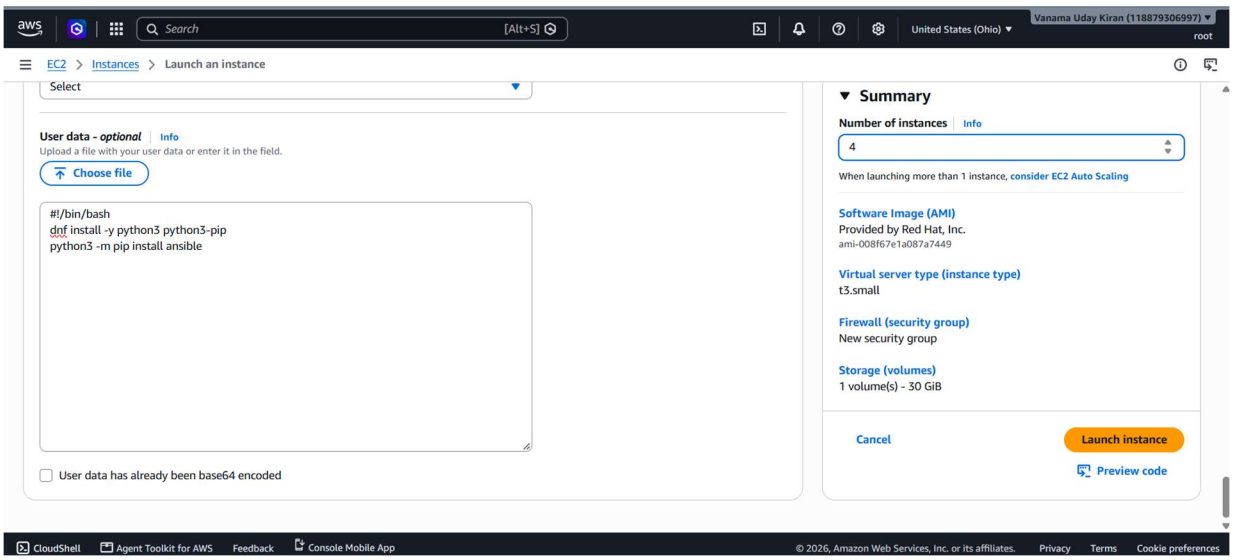


SUSE Slave Server:

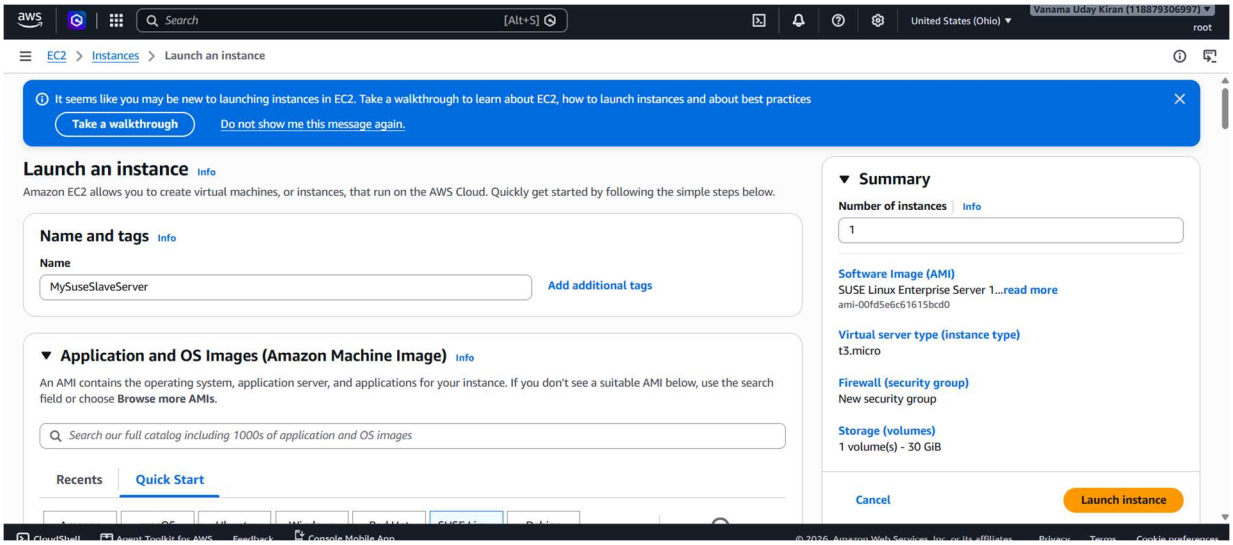

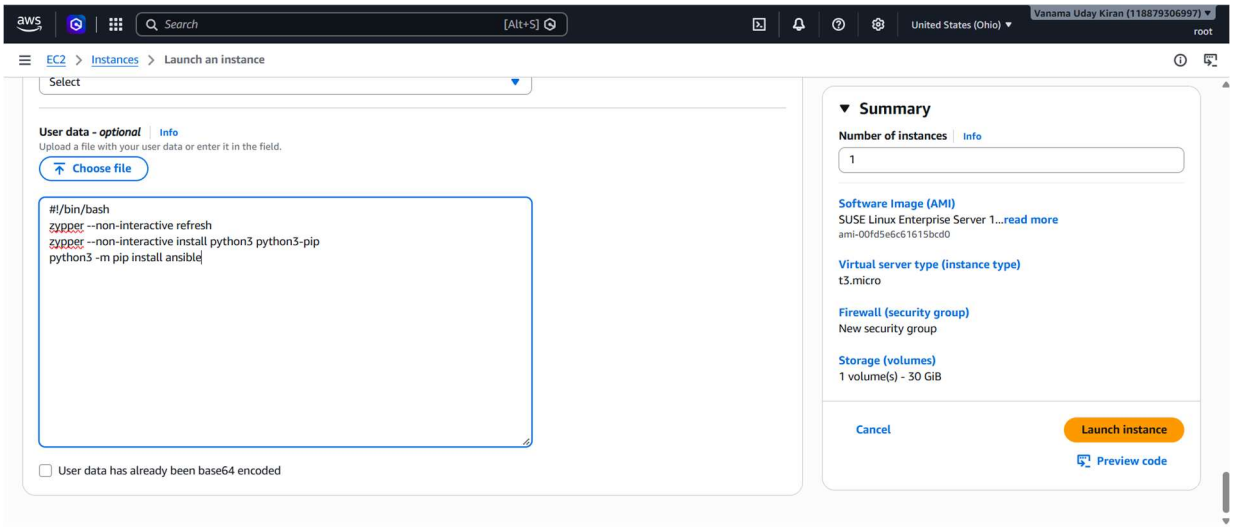


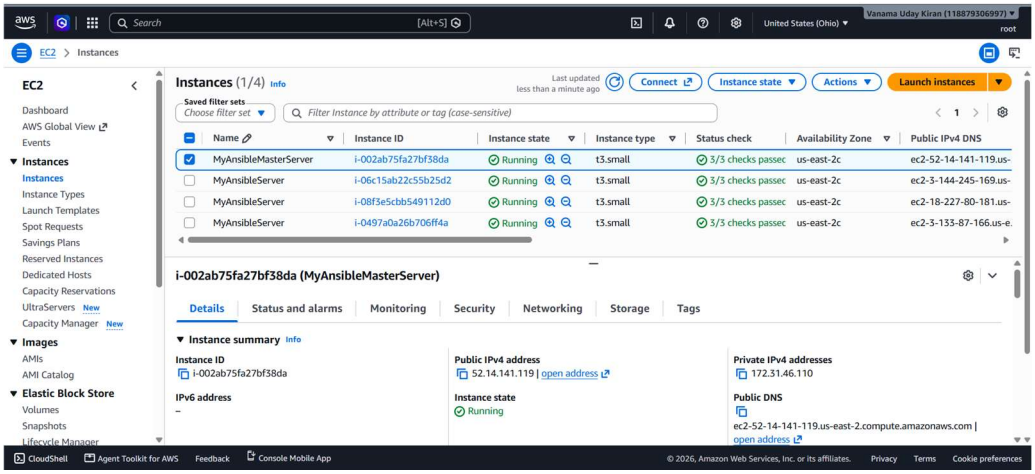


Configuring the Pagent and added the key pair :

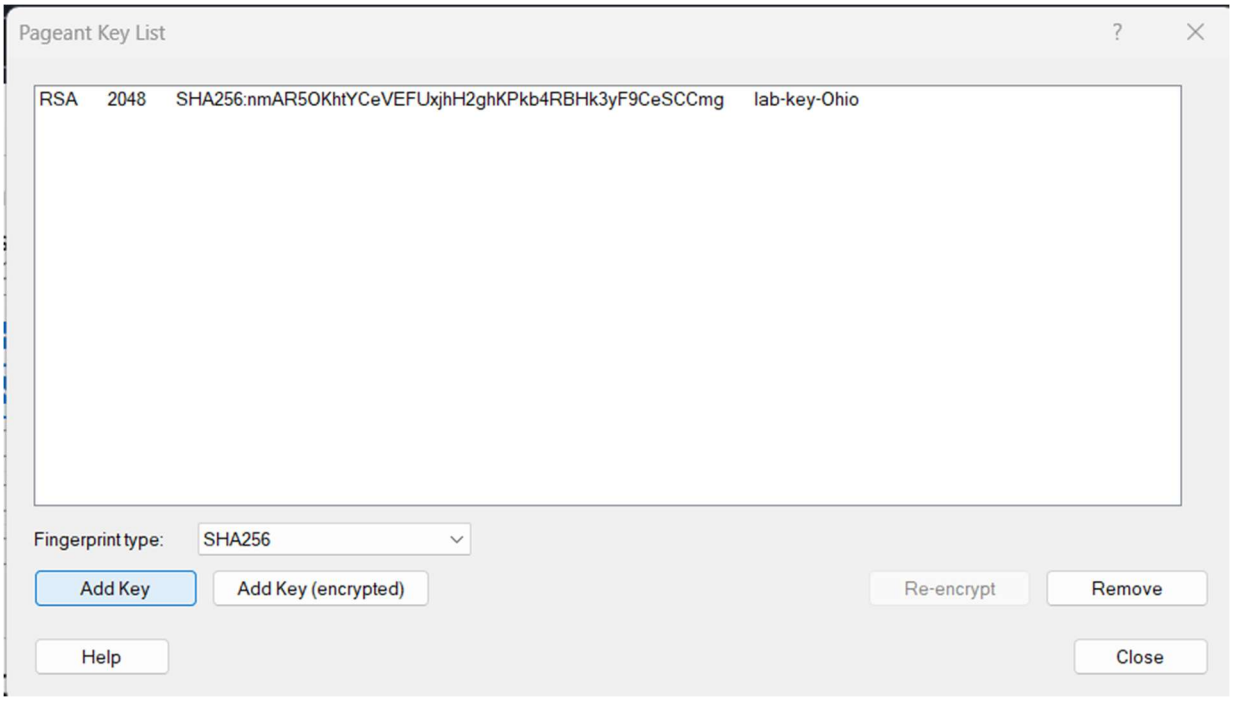


Connecting to Master machine Via Putty :

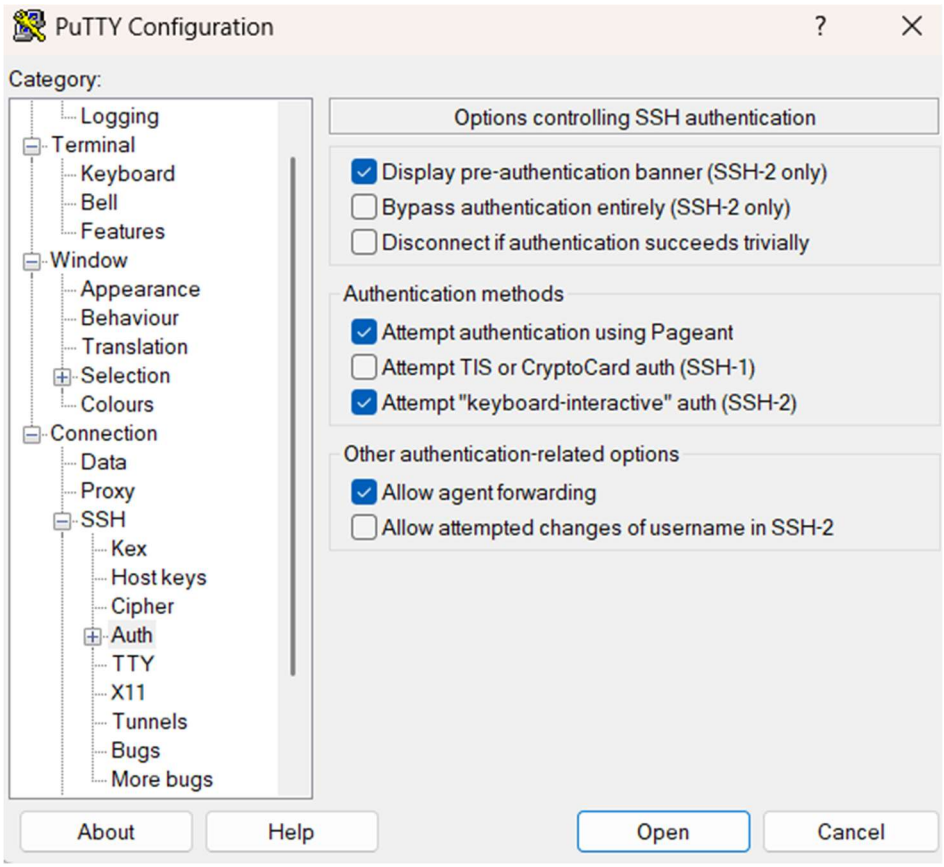

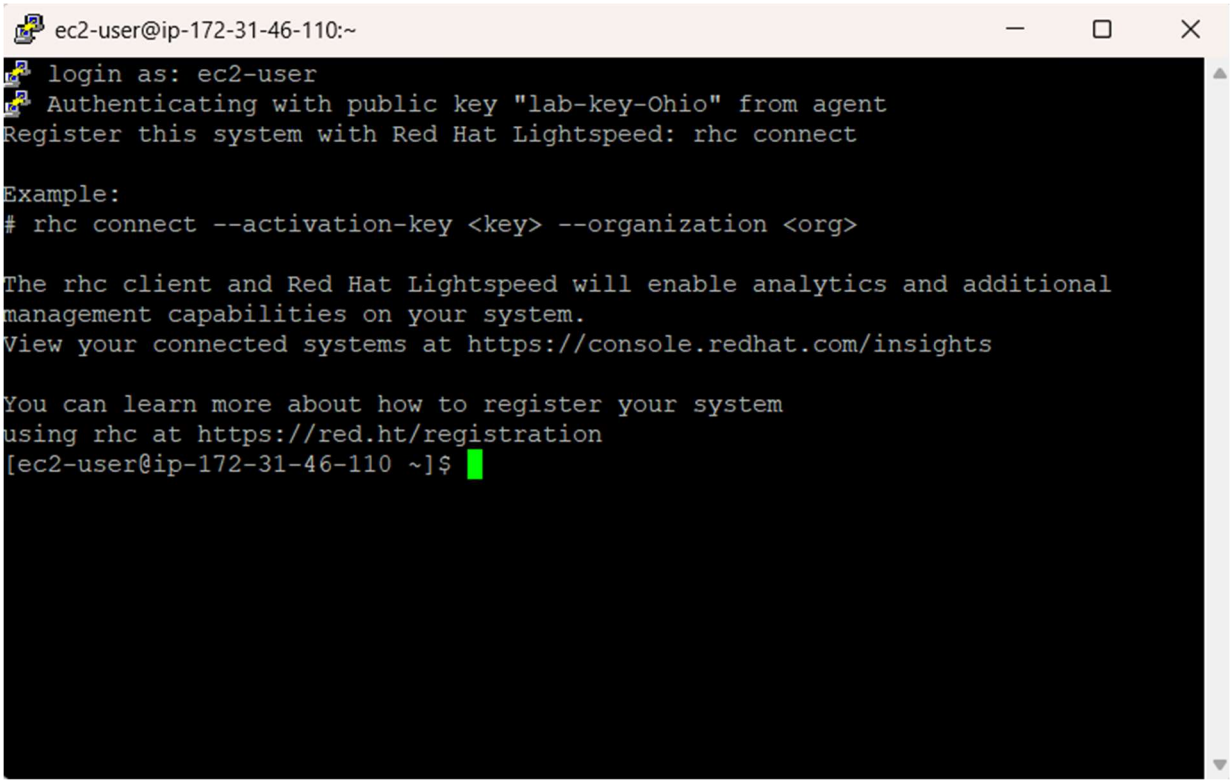

Creating The Inventory File :

Adding the private ips to the inventory file :

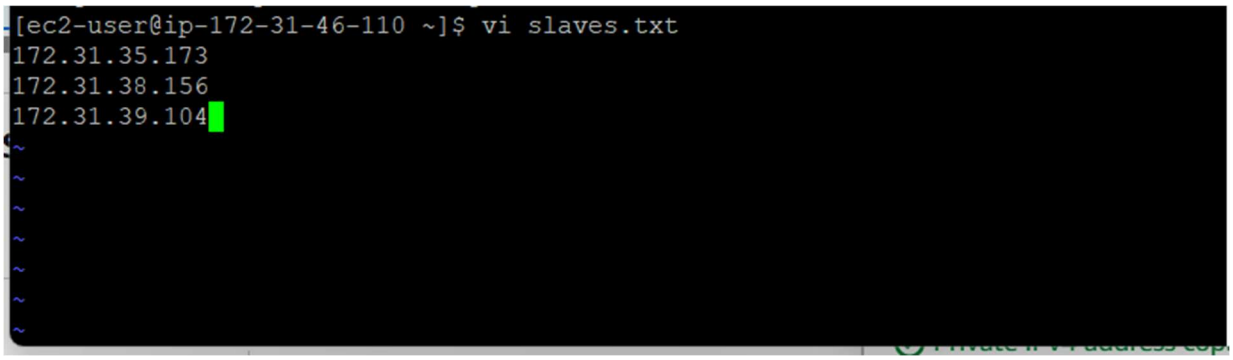

Adding the ansible.config File

```
# config file for ansible -- http://ansible.com/
# ==============================================

# nearly all parameters can be overridden in ansible-playbook
# or with command line flags. ansible will read ANSIBLE_CONFIG,
# ansible.cfg in the current working directory, .ansible.cfg in
# the home directory or /etc/ansible/ansible.cfg, whichever it
# finds first

[defaults]

# some basic default values...

inventory      = $HOME/.ansible/hosts
remote_tmp     = $HOME/.ansible/tmp
forks          = 150
sudo_user      = root
transport      = smart

# plays will gather facts by default, which contain information about
# the remote system.
#
# smart - gather by default, but don't regather if already gathered
# implicit - gather by default, turn off with gather_facts: False
# explicit - do not gather by default, must say gather_facts: True
gathering = smart

# additional paths to search for roles in, colon separated
roles_path    = $HOME/.ansible/roles

# uncomment this to disable SSH key host checking
host_key_checking = False

# logging is off by default unless this path is defined
# if so defined, consider logrotate
log_path = /var/log/ansible.log

# default module name for /usr/bin/ansible
module_name = shell

# set plugin path directories here, separate with colons
action_plugins     = /usr/share/ansible_plugins/action_plugins:$HOME/.ansible/plugins/action_plugins
callback_plugins   = /usr/share/ansible_plugins/callback_plugins:$HOME/.ansible/plugins/callback_plugins
connection_plugins = /usr/share/ansible_plugins/connection_plugins:$HOME/.ansible/plugins/connection_plugins
lookup_plugins     = /usr/share/ansible_plugins/lookup_plugins:$HOME/.ansible/plugins/lookup_plugins
vars_plugins       = /usr/share/ansible_plugins/vars_plugins:$HOME/.ansible/plugins/vars_plugins
filter_plugins     = /usr/share/ansible_plugins/filter_plugins:$HOME/.ansible/plugins/filter_plugins

"ansible.cfg" 132L, 5132B
```

Checking:

```
[ec2-user@ip-172-31-46-110 ~]$ ansible all -i slaves.txt -m ping
[WARNING]: log file at '/var/log/ansible.log' is not writeable and we cannot cre
ate it, aborting

[WARNING]: Host '172.31.39.104' is using the discovered Python interpreter at '/
usr/bin/python3.12', but future installation of another Python interpreter could
 cause a different interpreter to be discovered. See https://docs.ansible.com/an
sible-core/2.21/reference_appendices/interpreter_discovery.html for more informa
tion.
172.31.39.104 | SUCCESS => {
    "ansible_facts": {
        "discovered_interpreter_python": "/usr/bin/python3.12"
    },
    "changed": false,
    "ping": "pong"
}
[WARNING]: Host '172.31.35.173' is using the discovered Python interpreter at '/
usr/bin/python3.12', but future installation of another Python interpreter could
 cause a different interpreter to be discovered. See https://docs.ansible.com/an
sible-core/2.21/reference_appendices/interpreter_discovery.html for more informa
tion.
172.31.35.173 | SUCCESS => {
    "ansible_facts": {
        "discovered_interpreter_python": "/usr/bin/python3.12"
    },
    "changed": false,
    "ping": "pong"
}
[WARNING]: Host '172.31.38.156' is using the discovered Python interpreter at '/
usr/bin/python3.12', but future installation of another Python interpreter could
 cause a different interpreter to be discovered. See https://docs.ansible.com/an
sible-core/2.21/reference_appendices/interpreter_discovery.html for more informa
tion.
172.31.38.156 | SUCCESS => {
    "ansible_facts": {
        "discovered_interpreter_python": "/usr/bin/python3.12"
    },
    "changed": false,
    "ping": "pong"
}
```

Checking the Uptime and the OS Info:

```
[ec2-user@ip-172-31-46-110 ~]$ ansible all -i slaves.txt -a "uname -a"
[WARNING]: log file at '/var/log/ansible.log' is not writeable and we cannot create it, aborting

172.31.39.104 | CHANGED | rc=0 >>
Linux ip-172-31-39-104.us-east-2.compute.internal 6.12.0-211.16.1.el10_2.x86_64 #1 SMP PREEMPT_DYNAMIC Mon May 18 10:23:57 EDT 2026 x86_64 GNU/Linux
172.31.35.173 | CHANGED | rc=0 >>
Linux ip-172-31-35-173.us-east-2.compute.internal 6.12.0-211.16.1.el10_2.x86_64 #1 SMP PREEMPT_DYNAMIC Mon May 18 10:23:57 EDT 2026 x86_64 GNU/Linux
172.31.38.156 | CHANGED | rc=0 >>
Linux ip-172-31-38-156.us-east-2.compute.internal 6.12.0-211.16.1.el10_2.x86_64 #1 SMP PREEMPT_DYNAMIC Mon May 18 10:23:57 EDT 2026 x86_64 GNU/Linux
[ec2-user@ip-172-31-46-110 ~]$ ansible all -i slaves.txt -a "uptime"
[WARNING]: log file at '/var/log/ansible.log' is not writeable and we cannot create it, aborting

172.31.39.104 | CHANGED | rc=0 >>
 16:19:29 up  6:21,  1 user,  load average: 0.00, 0.00, 0.00
172.31.38.156 | CHANGED | rc=0 >>
 16:19:29 up  6:21,  1 user,  load average: 0.02, 0.01, 0.00
172.31.35.173 | CHANGED | rc=0 >>
 16:19:29 up  6:21,  1 user,  load average: 0.01, 0.00, 0.00
[ec2-user@ip-172-31-46-110 ~]$
```

Installing the nginx on all machines :

```
[ec2-user@ip-172-31-46-110 ~]$ ansible all -i slaves.txt -m dnf -a "name=nginx state=present" -b
[WARNING]: log file at '/var/log/ansible.log' is not writeable and we cannot create it, aborting


172.31.39.104 | CHANGED => {
    "ansible_facts": {
        "pkg_mgr": "dnf"
    },
    "changed": true,
    "msg": "",
    "rc": 0,
    "results": [
        "Installed: redhat-logos-httpd-100.3-2.el10.noarch",
        "Installed: nginx-core-2:1.26.3-6.el10_2.7.x86_64",
        "Installed: nginx-filesystem-2:1.26.3-6.el10_2.7.noarch",
        "Installed: nginx-2:1.26.3-6.el10_2.7.x86_64"
    ]
}
172.31.38.156 | CHANGED => {
    "ansible_facts": {
        "pkg_mgr": "dnf"
    },
    "changed": true,
    "msg": "",
    "rc": 0,
    "results": [
        "Installed: redhat-logos-httpd-100.3-2.el10.noarch",
        "Installed: nginx-core-2:1.26.3-6.el10_2.7.x86_64",
        "Installed: nginx-filesystem-2:1.26.3-6.el10_2.7.noarch",
        "Installed: nginx-2:1.26.3-6.el10_2.7.x86_64"
    ]
}
172.31.35.173 | CHANGED => {
    "ansible_facts": {
        "pkg_mgr": "dnf"
    },
    "changed": true,
    "msg": "",
    "rc": 0,
    "results": [
        "Installed: redhat-logos-httpd-100.3-2.el10.noarch",
        "Installed: nginx-core-2:1.26.3-6.el10_2.7.x86_64",
        "Installed: nginx-filesystem-2:1.26.3-6.el10_2.7.noarch",
        "Installed: nginx-2:1.26.3-6.el10_2.7.x86_64"
    ]
}
```


Starting the nginx in all:

```
[ec2-user@ip-172-31-46-110 ~]$ ansible all -i slaves.txt -m systemd_service -a "name=nginx state=started" -b
[WARNING]: log file at '/var/log/ansible.log' is not writeable and we cannot create it, aborting

172.31.39.104 | CHANGED => {
    "changed": true,
    "name": "nginx",
    "state": "started",
    "status": {
        "AccessSELinuxContext": "system_u:object_r:httpd_unit_file_t:s0",
        "ActiveEnterTimestampMonotonic": "0",
        "ActiveExitTimestampMonotonic": "0",
        "ActiveState": "inactive",
        "After": "sysinit.target -.mount systemd-tmpfiles-setup.service system.slice nss-lookup.target tmp.mount systemd-journald.socket network-online.target basic.target remote-fs.target"
,
        "AllowIsolate": "no",
        "AssertResult": "no",
        "AssertTimestampMonotonic": "0",
        "Before": "shutdown.target",
        "BindLogSockets": "no",
        "BlockIOAccounting": "no",
        "BlockIOWeight": "[not set]",
        "CPUAccounting": "yes",
        "CPUAffinityFromNUMA": "no",
        "CPUQuotaPerSecUSec": "infinity",
        "CPUQuotaPeriodUSec": "infinity",
        "CPUSchedulingPolicy": "0",
        "CPUSchedulingPriority": "0",
        "CPUSchedulingResetOnFork": "no",
        "CPUShares": "[not set]",
        "CPUUsageNSec": "[not set]",
        "CPUWeight": "[not set]",
        "CacheDirectoryMode": "0755",
        "CanFreeze": "yes",
        "CanIsolate": "no",
```

Checking :

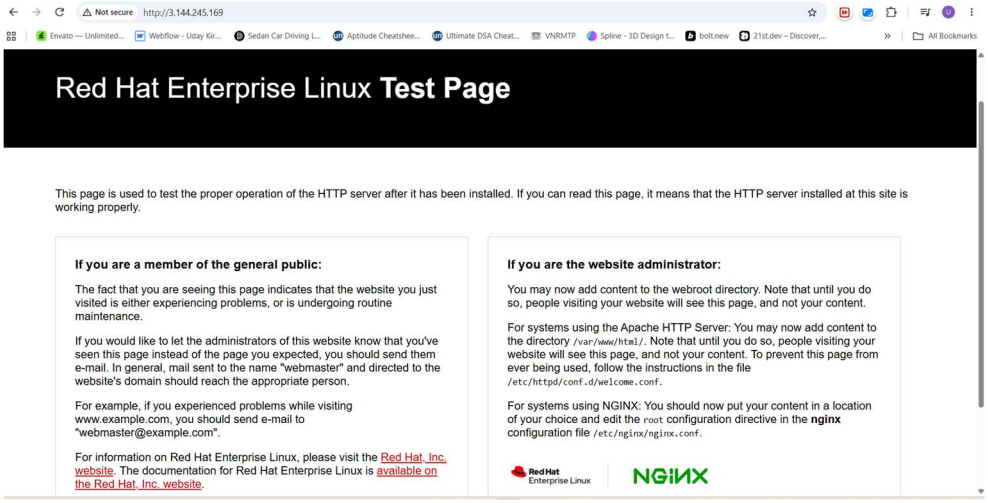

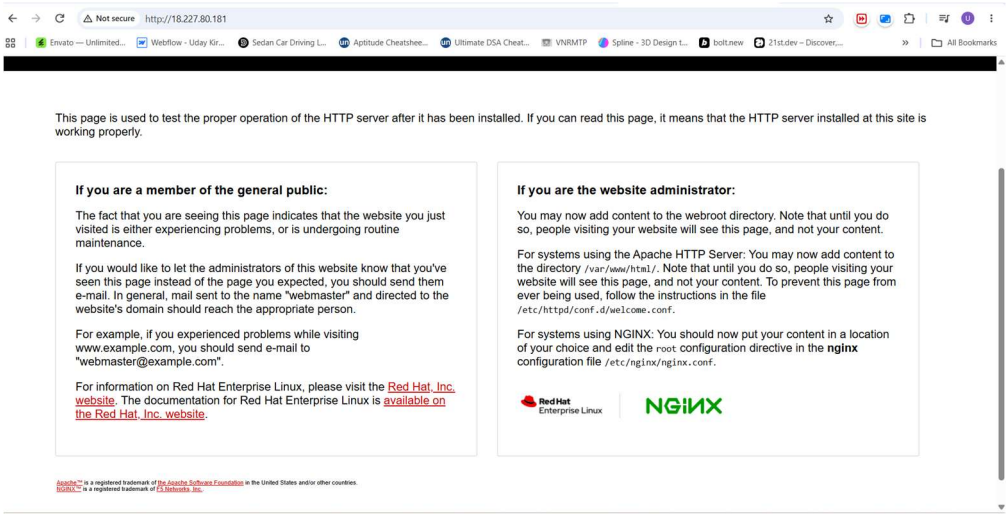

Creating the Users With the Password :

HASH=$(python3 -c 'import crypt;print(crypt.crypt("password123",crypt.mksalt(crypt.METHOD_SHA512)))')

ansible all -i slaves.txt -m user -a "name=uday password=$HASH state=present create_home=yes" -b

Removing the Users:

ansible all -i slaves.txt -m user -a "name=uday state=absent remove=yes" -b

```
[ec2-user@ip-172-31-46-110 ~]$ HASH=$(python3 -c 'import crypt; print(crypt.crypt("password123", crypt.mksalt(crypt.METHOD_SHA512))
<string>:1: DeprecationWarning: 'crypt' is deprecated and slated for removal in Python 3.13
[ec2-user@ip-172-31-46-110 ~]$ ansible all -i slaves.txt -m user -a "name=arun password=$HASH state=present create_home=yes" -b
[WARNING]: log file at '/var/log/ansible.log' is not writeable and we cannot create it, aborting

172.31.39.104 | CHANGED => {
    "changed": true,
    "comment": "",
    "create_home": true,
    "group": 1001,
    "groups": "",
    "home": "/home/arun",
    "name": "arun",
    "password": "NOT_LOGGING_PASSWORD",
    "shell": "/bin/bash",
    "state": "present",
    "system": false,
    "uid": 1001
}
172.31.38.156 | CHANGED => {
    "changed": true,
    "comment": "",
    "create_home": true,
    "group": 1001,
    "groups": "",
    "home": "/home/arun",
    "name": "arun",
    "password": "NOT_LOGGING_PASSWORD",
    "shell": "/bin/bash",
    "state": "present",
    "system": false,
    "uid": 1001
}
172.31.35.173 | CHANGED => {
    "changed": true,
    "comment": "",
    "create_home": true,
    "group": 1001,
    "groups": "",
    "home": "/home/arun",
    "name": "arun",
```

Checking By logging into a system and switching :

```
[ec2-user@ip-172-31-46-110 ~]$ ssh ec2-user@3.144.245.169
Register this system with Red Hat Lightspeed: rhc connect

Example:
# rhc connect --activation-key <key> --organization <org>

The rhc client and Red Hat Lightspeed will enable analytics and additional
management capabilities on your system.
View your connected systems at https://console.redhat.com/insights

You can learn more about how to register your system
using rhc at https://red.ht/registration
Last login: Thu Oct 22 16:54:55 2026 from 52.14.141.119
[ec2-user@ip-172-31-35-173 ~]$ su arun
Password:
[arun@ip-172-31-35-173 ec2-user]$
```

Copying the sample Index.html to Nginx html :

```
[ec2-user@ip-172-31-46-110 ~]$ vi index.html
This is the sample html file from the ansible master machine
```

```
[ec2-user@ip-172-31-46-110 ~]$ ansible all -i slaves.txt -m copy -a "src=index.html dest=/usr/share/nginx/html/index.html owner=root group=root mode=0644" -b
[WARNING]: log file at '/var/log/ansible.log' is not writeable and we cannot create it, aborting

[WARNING]: Host '172.31.39.104' is using the discovered Python interpreter at '/usr/bin/python3.12', but future installation of another Python interpreter could cause a different interpreter to be discovered. See https://docs.ansible.com/ansible-core/2.21/reference_appendices/interpreter_discovery.html for more information.
172.31.39.104 | CHANGED => {
    "ansible_facts": {
        "discovered_interpreter_python": "/usr/bin/python3.12"
    },
    "changed": true,
    "checksum": "7e6407cd541d6e07d167a8941ddd2d0b36c83cec",
    "dest": "/usr/share/nginx/html/index.html",
    "gid": 0,
    "group": "root",
    "md5sum": "2f69644867be972d42a0ed0db54616a3",
    "mode": "0644",
    "owner": "root",
    "secontext": "unconfined_u:object_r:httpd_sys_content_t:s0",
    "size": 62,
    "src": "/home/ec2-user/.ansible/tmp/ansible-tmp-1792688523.274931-4274-279286295525242/.source.html",
    "state": "file",
    "uid": 0
}
[WARNING]: Host '172.31.38.156' is using the discovered Python interpreter at '/usr/bin/python3.12', but future installation of another Python interpreter could cause a different interpreter to be discovered. See https://docs.ansible.com/ansible-core/2.21/reference_appendices/interpreter_discovery.html for more information.
172.31.38.156 | CHANGED => {
    "ansible_facts": {
        "discovered_interpreter_python": "/usr/bin/python3.12"
    },
    "changed": true,
    "checksum": "7e6407cd541d6e07d167a8941ddd2d0b36c83cec",
```

Checking :

