

Creating the Alias

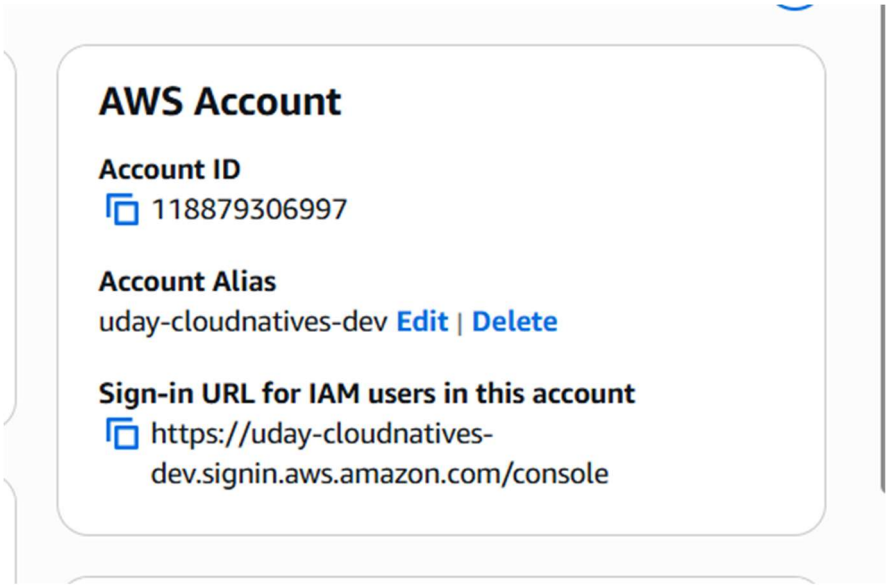

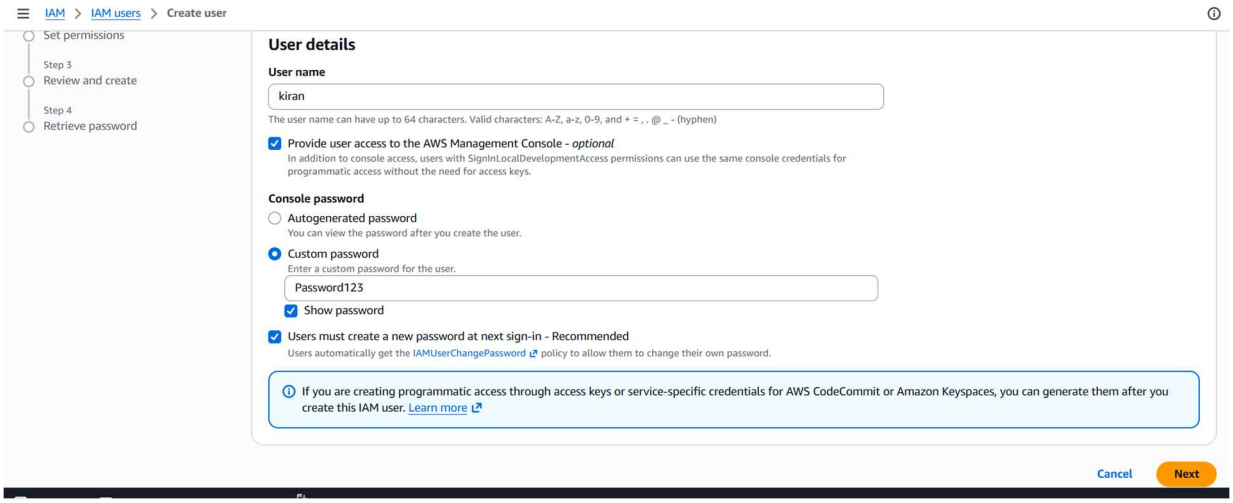

Permissions options

- ○ **Add user to group**
  Add user to an existing group, or create a new group. We recommend using groups to manage user permissions by job function.
- ○ **Copy permissions**
  Copy all group memberships, attached managed policies, and inline policies from an existing user.
- ◉ **Attach policies directly**
  Attach a managed policy directly to a user. As a best practice, we recommend attaching policies to a group instead. Then, add the user to the appropriate group.

Permissions policies (1/1586)


Choose one or more policies to attach to your new user.


Create policy


Filter by Type

ec2 | All types | 52 matches | 1 2 3


Policy name	Type	Attached entities
AmazonEC2ContainerRegistryFullAccess	AWS managed	0
AmazonEC2ContainerRegistryPowerUser	AWS managed	0
AmazonEC2ContainerRegistryPullOnly	AWS managed	0
AmazonEC2ContainerRegistryReadOnly	AWS managed	0
AmazonEC2ContainerServiceAutoscale…	AWS managed	0

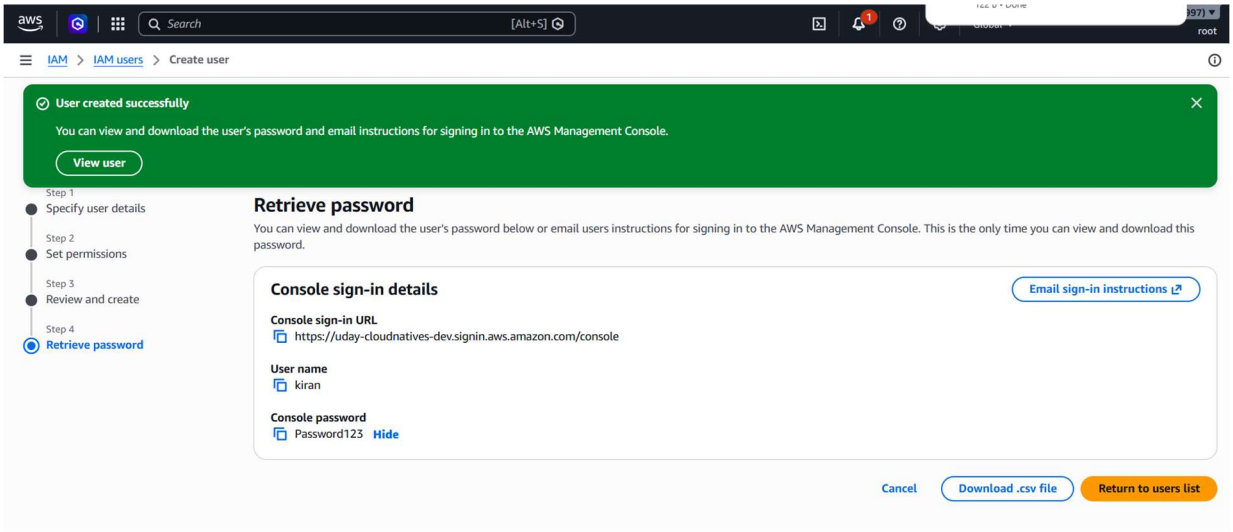

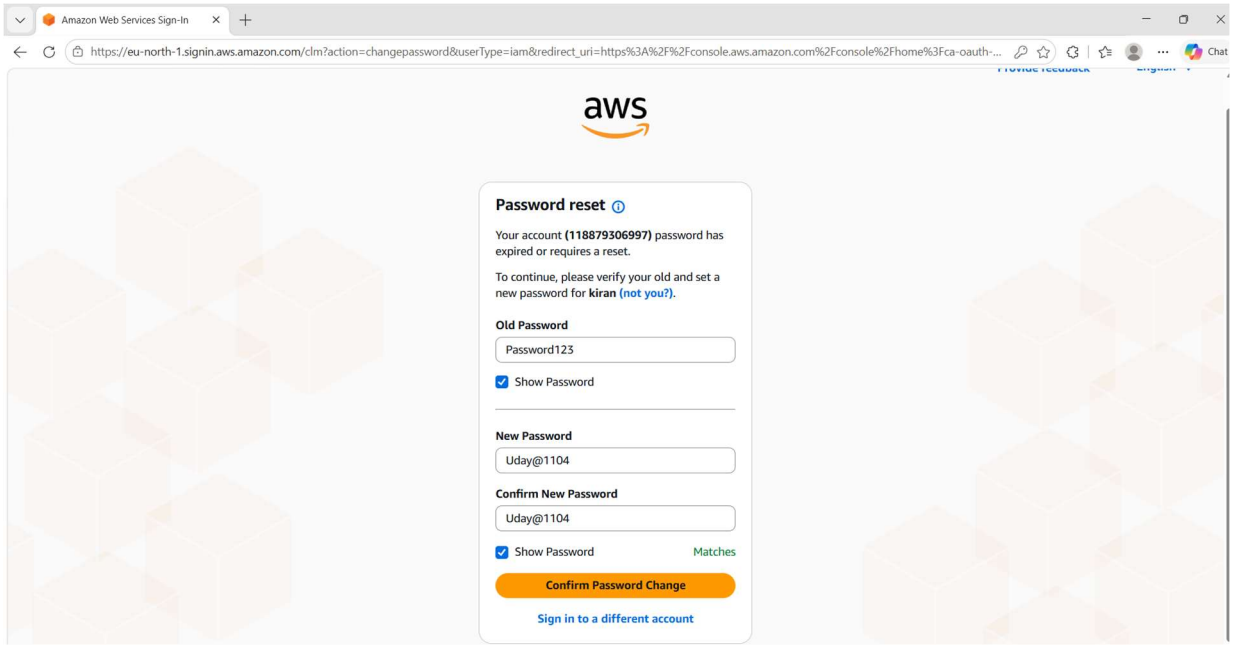

Amazon Web Services Sign-In
https://eu-north-1.signin.aws.amazon.com/clm?action=changepassword&userType=iam&redirect_uri=https%3A%2F%2Fconsole.aws.amazon.com%2Fconsole%2Fhome%3Fca-oauth-...
Chat
aws
Password reset
Your account (118879306997) password has expired or requires a reset.
To continue, please verify your old and set a new password for kiran (not you?).
Old Password
Password123
Show Password
New Password
Uday@1104
Confirm New Password
Uday@1104
Show Password
Matches
Confirm Password Change
Sign in to a different account

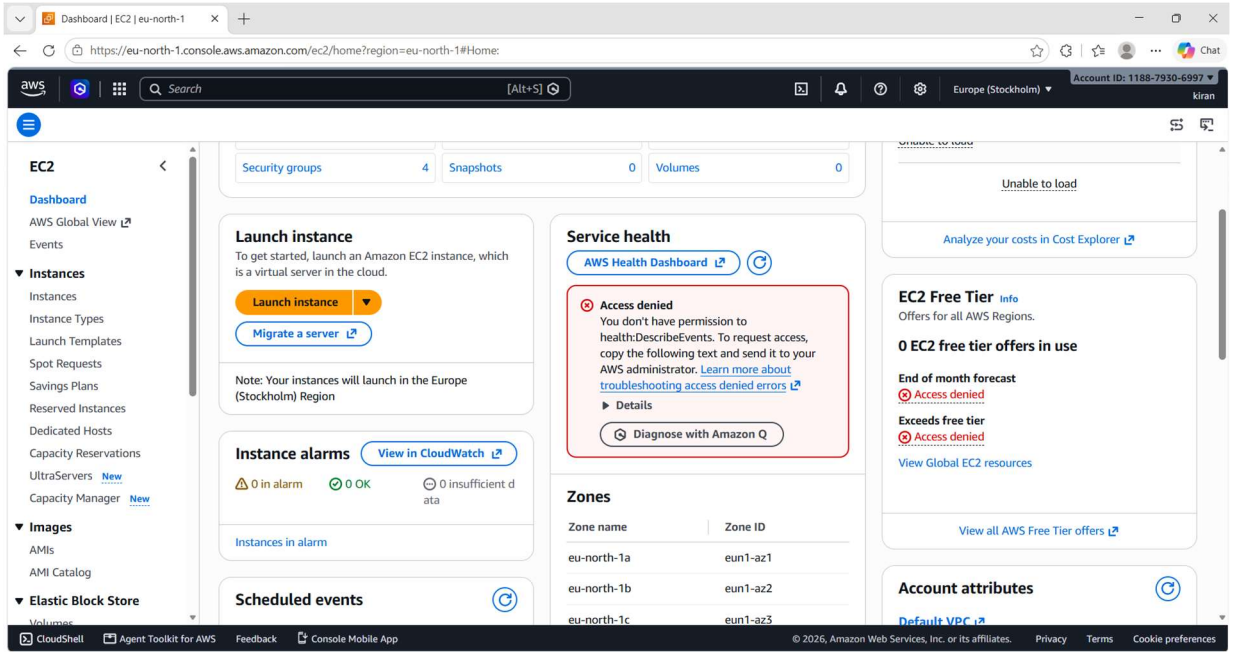
Dashboard | EC2 | eu-north-1
https://eu-north-1.console.aws.amazon.com/ec2/home?region=eu-north-1#Home:
Chat
aws
Search
[Alt+S]
Europe (Stockholm)
Account ID: 1188-7930-6997
kiran
EC2
Dashboard
AWS Global View
Events
Instances
Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations
UltraServers New
Capacity Manager New
Images
AMIs
AMI Catalog
Elastic Block Store
Security groups 4
Snapshots 0
Volumes 0
Launch instance
To get started, launch an Amazon EC2 instance, which is a virtual server in the cloud.
Launch instance
Migrate a server
Note: Your instances will launch in the Europe (Stockholm) Region
Instance alarms
View in CloudWatch
0 in alarm
0 OK
0 insufficient data
Instances in alarm
Scheduled events
Service health
AWS Health Dashboard
Access denied
You don't have permission to health:DescribeEvents. To request access, copy the following text and send it to your AWS administrator. Learn more about troubleshooting access denied errors
Details
Diagnose with Amazon Q
Zones
Zone name
Zone ID
eu-north-1a
eun1-az1
eu-north-1b
eun1-az2
eu-north-1c
eun1-az3
Unable to load
Analyze your costs in Cost Explorer
EC2 Free Tier Info
Offers for all AWS Regions.
0 EC2 free tier offers in use
End of month forecast
Access denied
Exceeds free tier
Access denied
View Global EC2 resources
View all AWS Free Tier offers
Account attributes
Default VPC
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


Creating Group

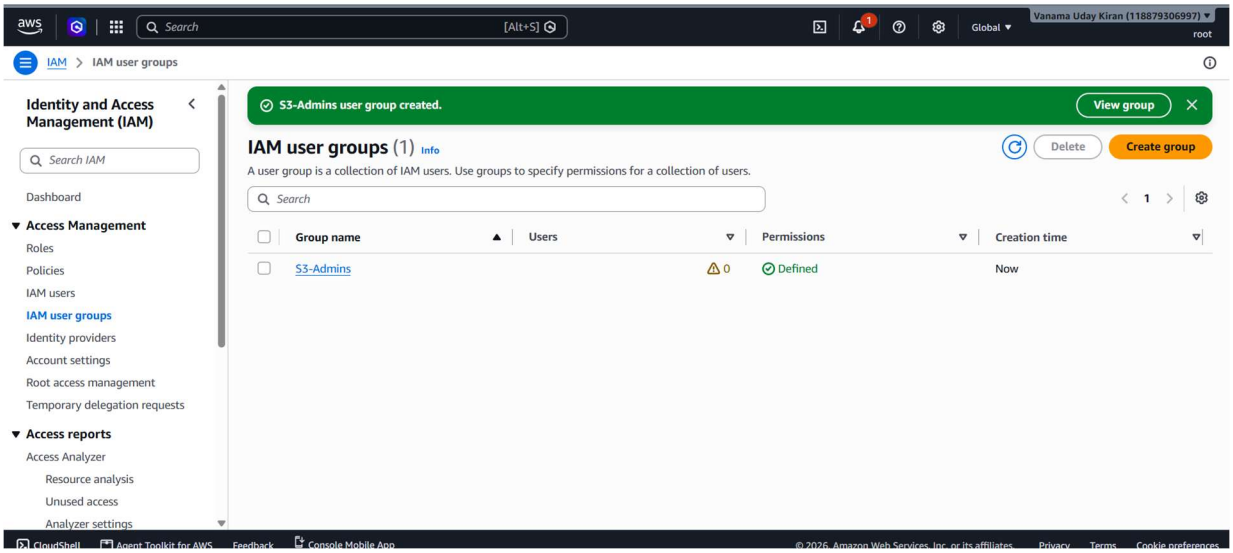



Creating Policies

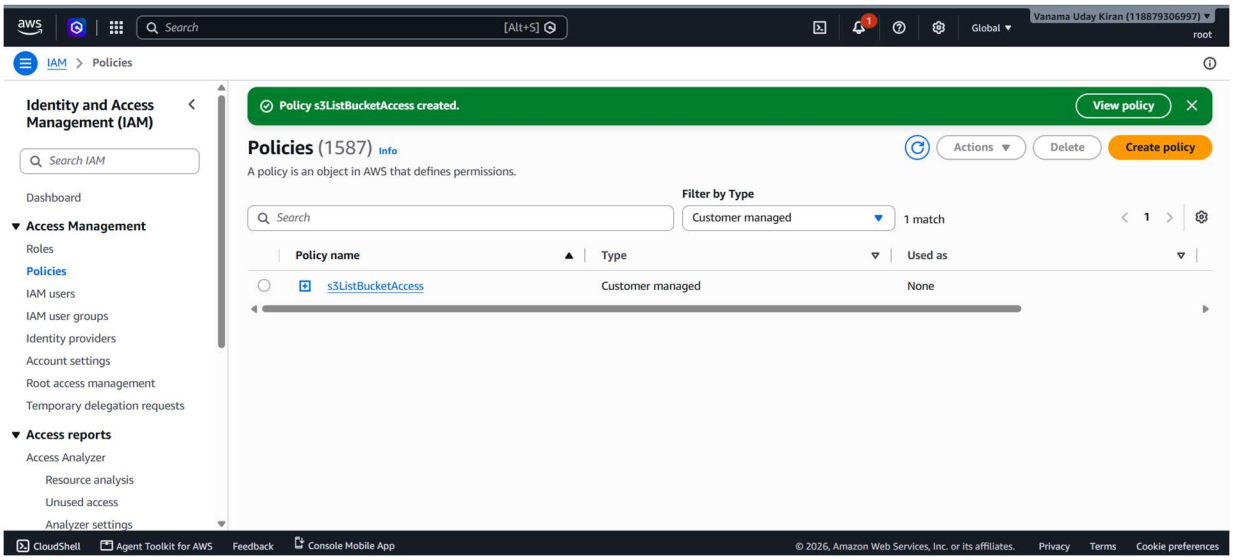


Editing the User Permissions

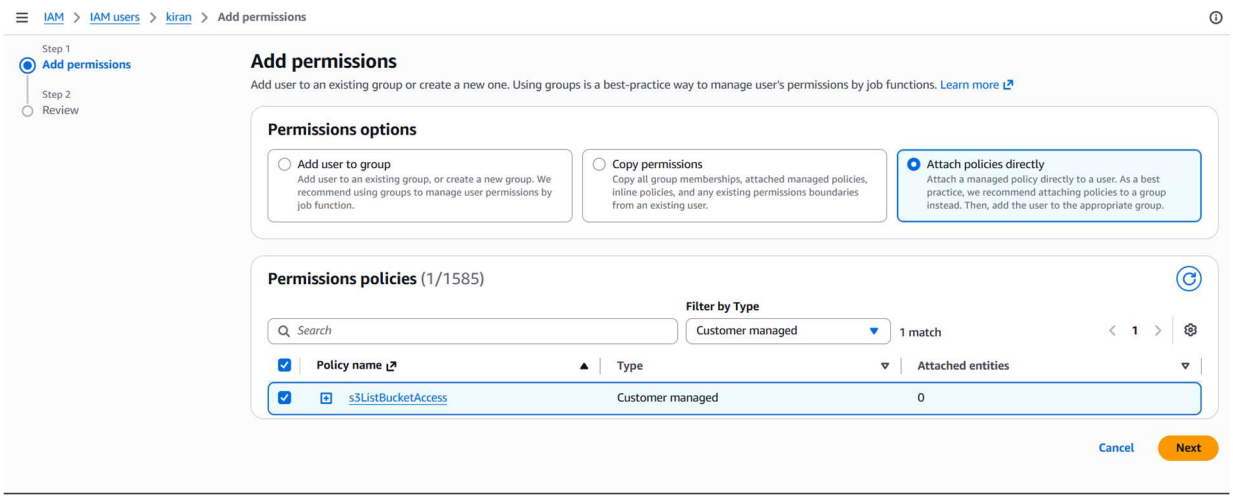

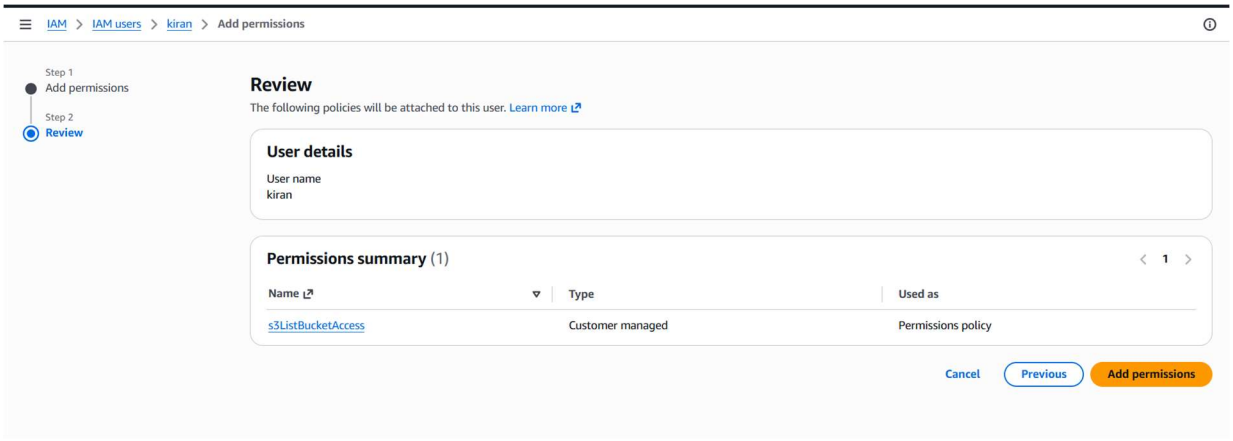


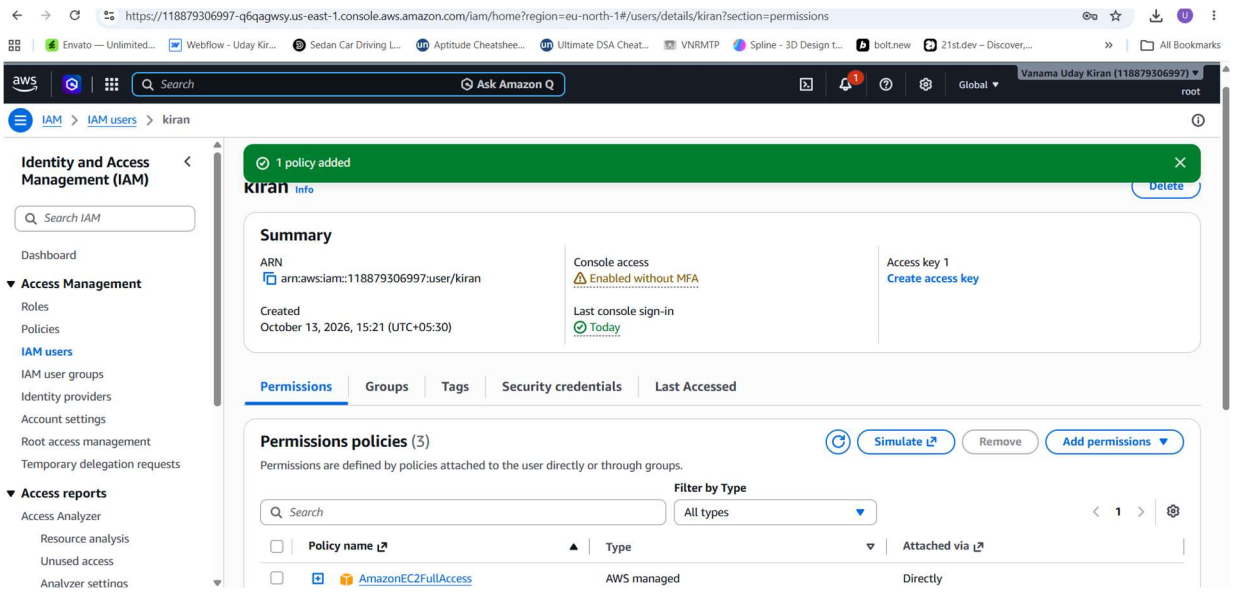


Viewing the Buckets By an User After the Permission

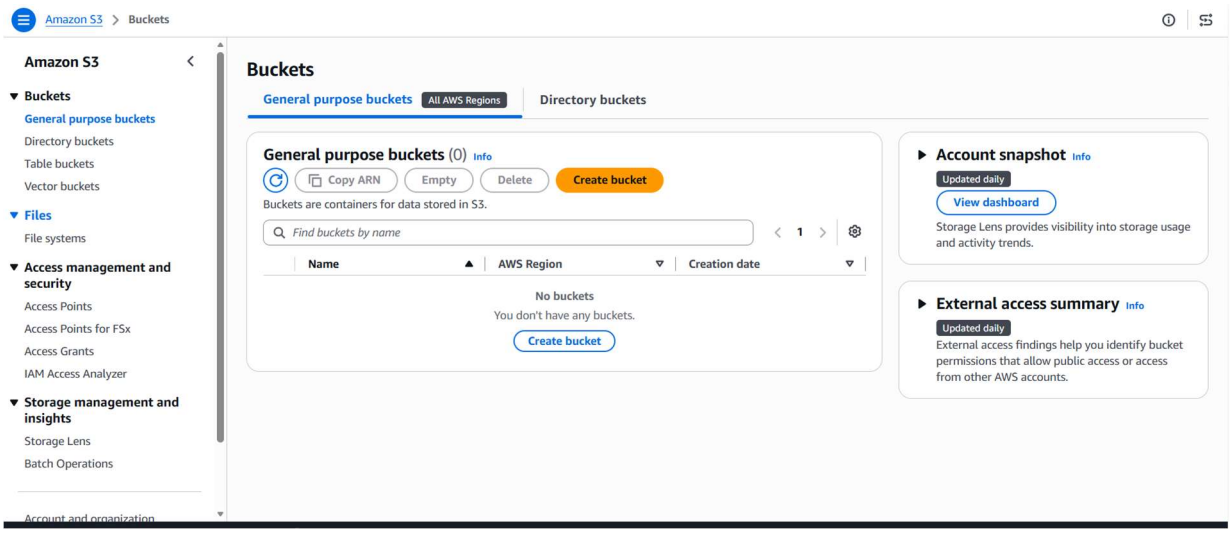


Enabling MFA For the User

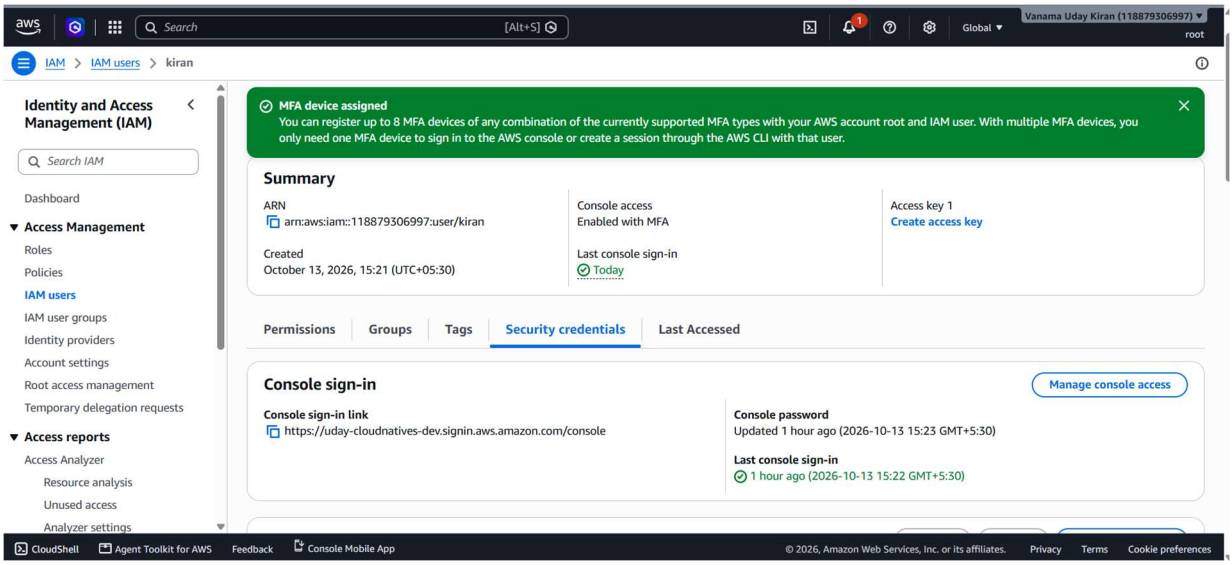


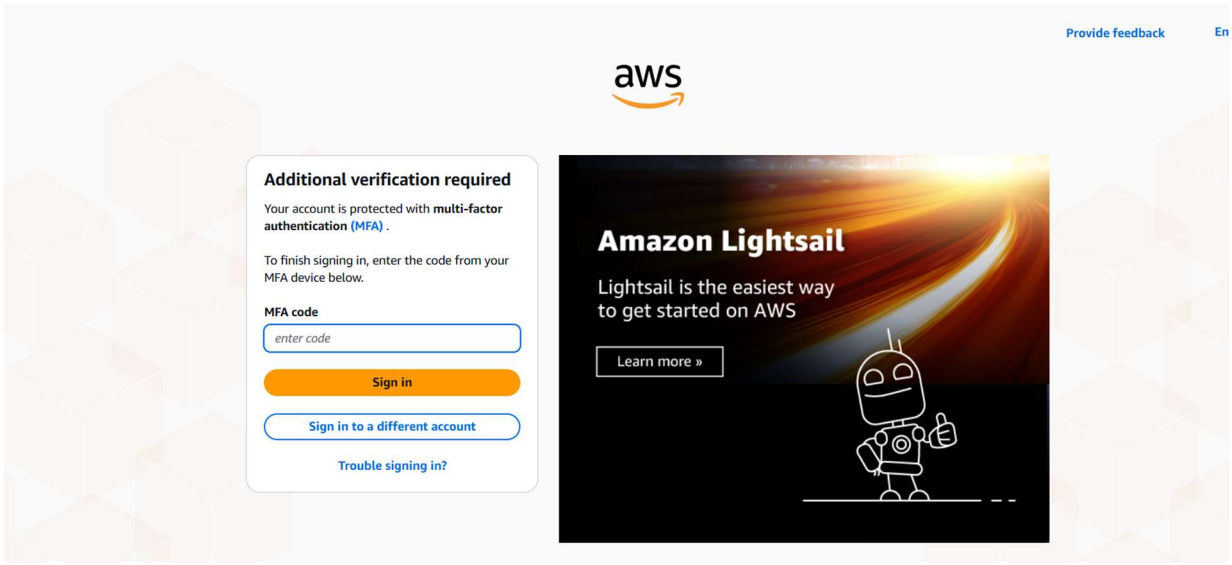


Logged in Using the MFA

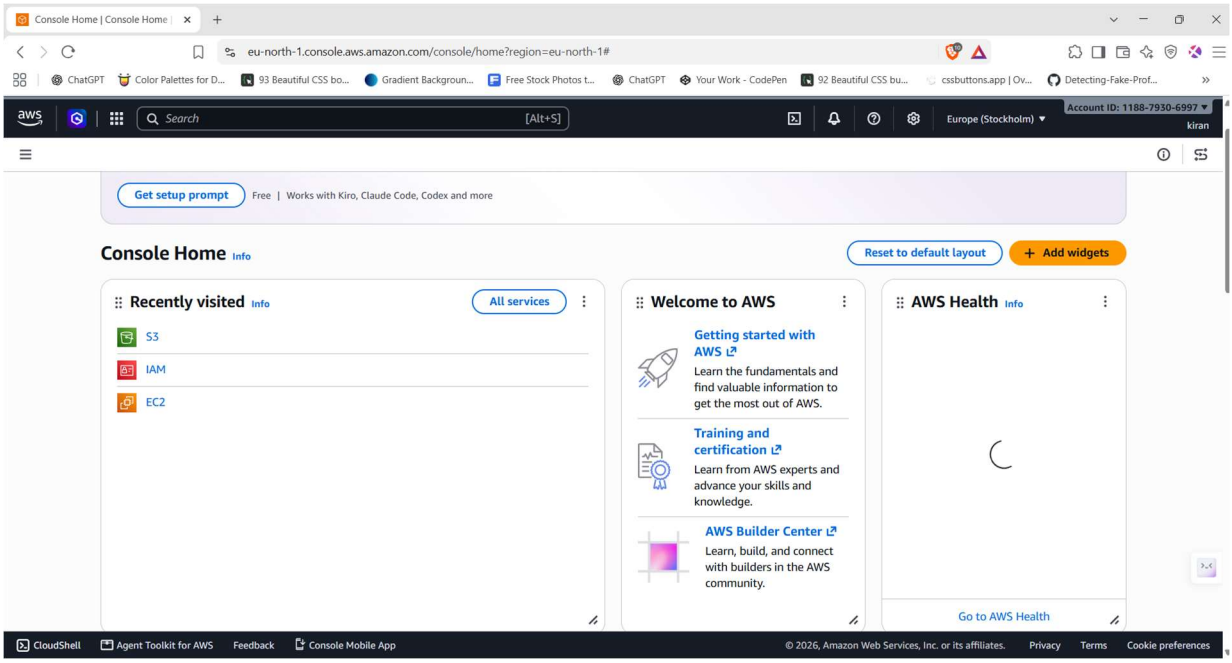


Created a Linux Instance

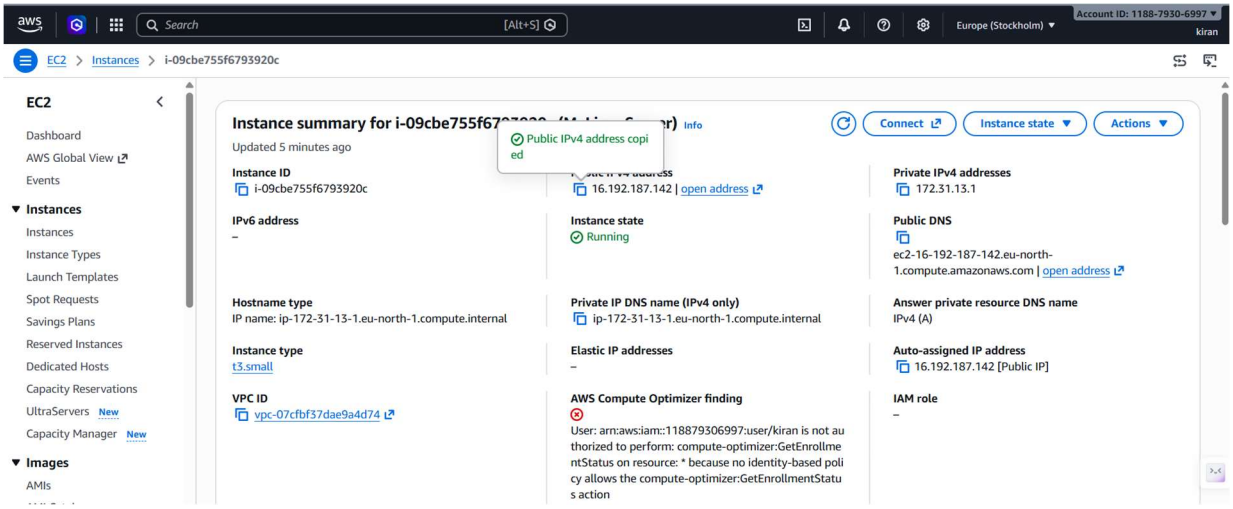



Login the instance using the putty :

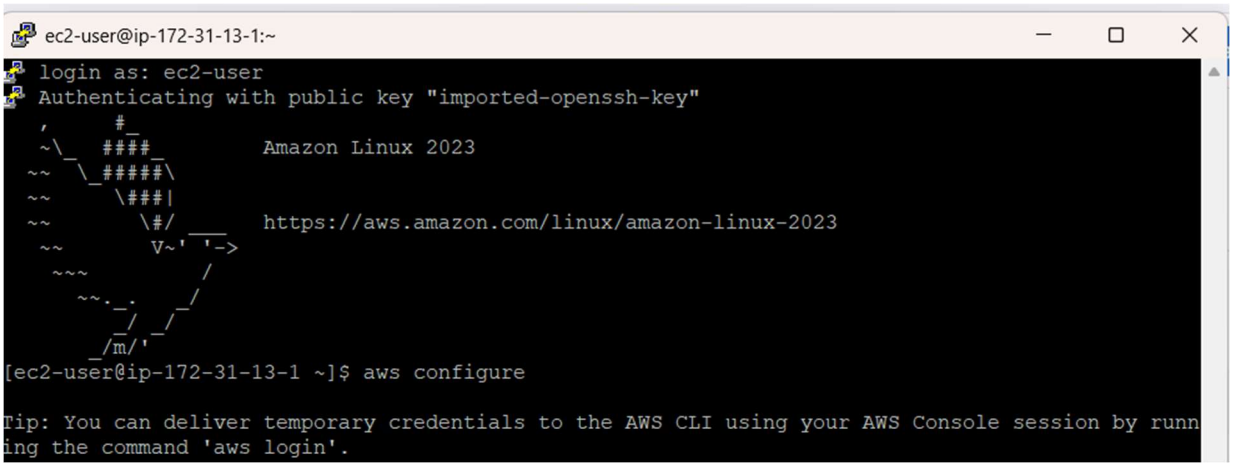

Creating the access Key :

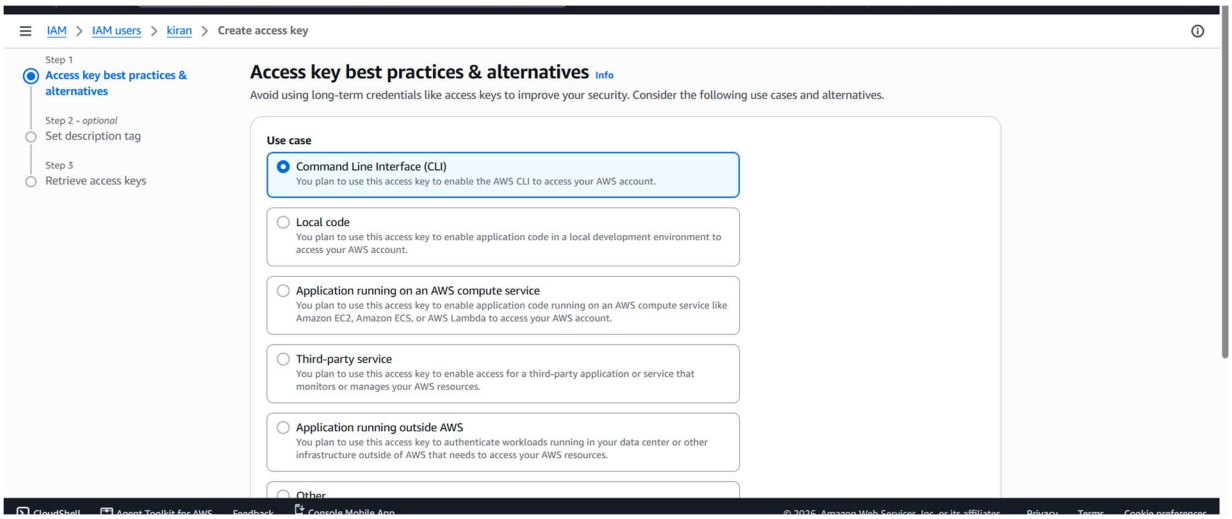
IAM > IAM users > kiran > Create access key
Step 1
Access key best practices & alternatives
Step 2 - optional
Set description tag
Step 3
Retrieve access keys
Access key best practices & alternatives Info
Avoid using long-term credentials like access keys to improve your security. Consider the following use case and alternatives.
Use case
Command Line Interface (CLI)
You plan to use this access key to enable the AWS CLI to access your AWS account.
Local code
You plan to use this access key to enable application code in a local development environment to access your AWS account.
Application running on an AWS compute service
You plan to use this access key to enable application code running on an AWS compute service like Amazon EC2, Amazon ECS, or AWS Lambda to access your AWS account.
Third-party service
You plan to use this access key to enable access for a third-party application or service that monitors or manages your AWS resources.
Application running outside AWS
You plan to use this access key to authenticate workloads running in your data center or other infrastructure outside of AWS that needs to access your AWS resources.
Other

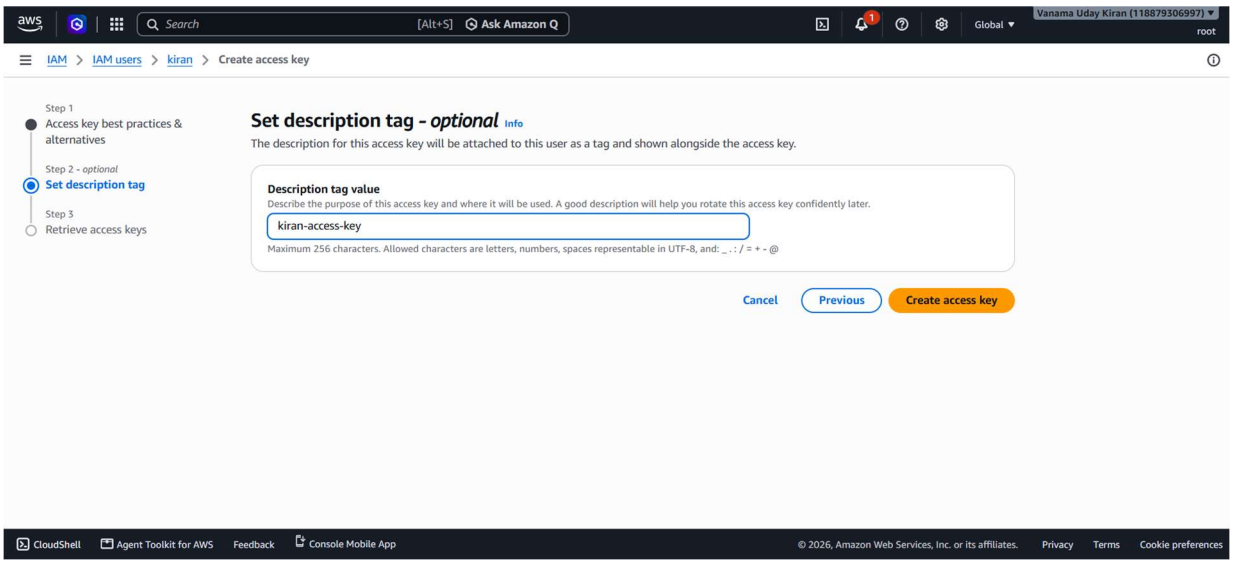
Search
[Alt+S]
Ask Amazon Q
Global
Vanama Uday Kiran (118879306997)
root
IAM > IAM users > kiran > Create access key
Step 1
Access key best practices & alternatives
Step 2 - optional
Set description tag
Step 3
Retrieve access keys
Set description tag - optional Info
The description for this access key will be attached to this user as a tag and shown alongside the access key.
Description tag value
Describe the purpose of this access key and where it will be used. A good description will help you rotate this access key confidently later.
kiran-access-key
Maximum 256 characters. Allowed characters are letters, numbers, spaces representable in UTF-8, and: _ . : / = + - @
Cancel
Previous
Create access key
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

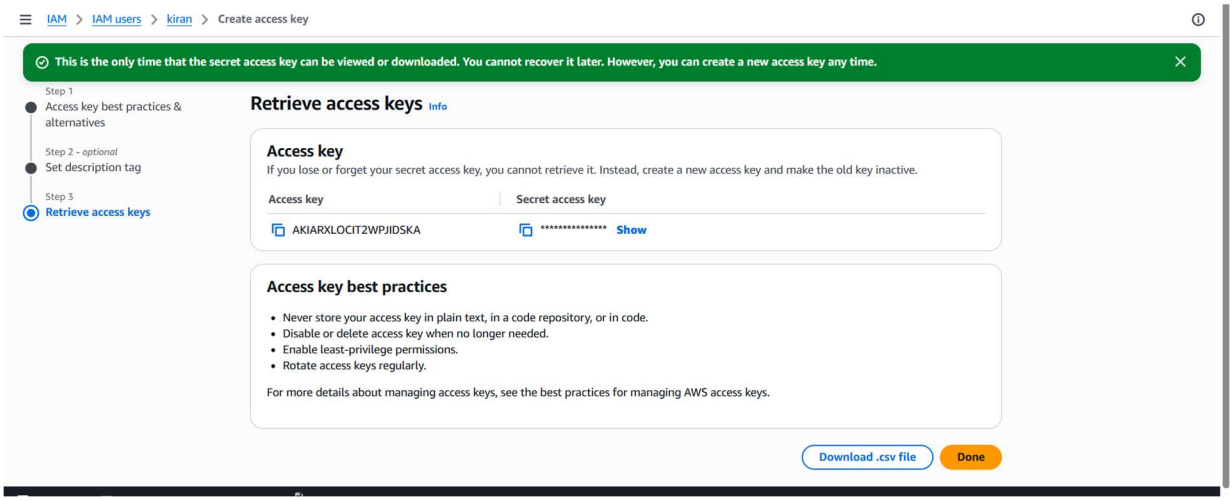
IAM > IAM users > kiran > Create access key
This is the only time that the secret access key can be viewed or downloaded. You cannot recover it later. However, you can create a new access key any time.
Step 1
Access key best practices & alternatives
Step 2 - optional
Set description tag
Step 3
Retrieve access keys
Retrieve access keys Info
Access key
If you lose or forget your secret access key, you cannot retrieve it. Instead, create a new access key and make the old key inactive.
Access key
Secret access key
AKIARXLOCIT2WPJIDSKA
********** Show
Access key best practices
Never store your access key in plain text, in a code repository, or in code.
Disable or delete access key when no longer needed.
Enable least-privilege permissions.
Rotate access keys regularly.
For more details about managing access keys, see the best practices for managing AWS access keys.
Download .csv file
Done

Login Via The Console and verification

```
[ec2-user@ip-172-31-13-1 ~]$
[ec2-user@ip-172-31-13-1 ~]$ aws configure

Tip: You can deliver temporary credentials to the AWS CLI using your AWS Console session by runn
ing the command 'aws login'.

AWS Access Key ID [None]: AKIARXLOCIT2WPJIDSKA
AWS Secret Access Key [None]: ffLRnlNFXDhmClOuhj64vD17EKlfwqLr7e9iRXuY
Default region name [None]: eu-north-1
Default output format [None]: [ec2-user@ip-172-31-13-1 ~]$
[ec2-user@ip-172-31-13-1 ~]$
[ec2-user@ip-172-31-13-1 ~]$
[ec2-user@ip-172-31-13-1 ~]$ aws configure
AWS Access Key ID [****************DSKA]: AWS Secret Access Key [****************RXuY]: Default
region name [eu-north-1]: Default output format [None]: json
[ec2-user@ip-172-31-13-1 ~]$
[ec2-user@ip-172-31-13-1 ~]$
[ec2-user@ip-172-31-13-1 ~]$
[ec2-user@ip-172-31-13-1 ~]$
[ec2-user@ip-172-31-13-1 ~]$
[ec2-user@ip-172-31-13-1 ~]$ aws sts get-caller-identity
{
    "UserId": "AIDARXLOCIT24O2RZDFYA",
    "Account": "118879306997",
    "Arn": "arn:aws:iam::118879306997:user/kiran"
}
[ec2-user@ip-172-31-13-1 ~]$
```

```
[ec2-user@ip-172-31-13-1 ~]$ aws ec2 describe-instances --query "Reservations[].Instances[][Ins
anceId, State.Name, InstanceType, PublicIpAddress]" --output table
-------------------------------------------------------------------
|                        DescribeInstances                        |
+----------------------+----------+-----------+------------------+
|  i-09cbe755f6793920c |  running |  t3.small |  16.192.187.142  |
+----------------------+----------+-----------+------------------+
[ec2-user@ip-172-31-13-1 ~]$
```

Creating the Users and The Groups

