
1. dmesg -T | tail -30

System logs

Displays the latest 30 kernel messages with readable timestamps.

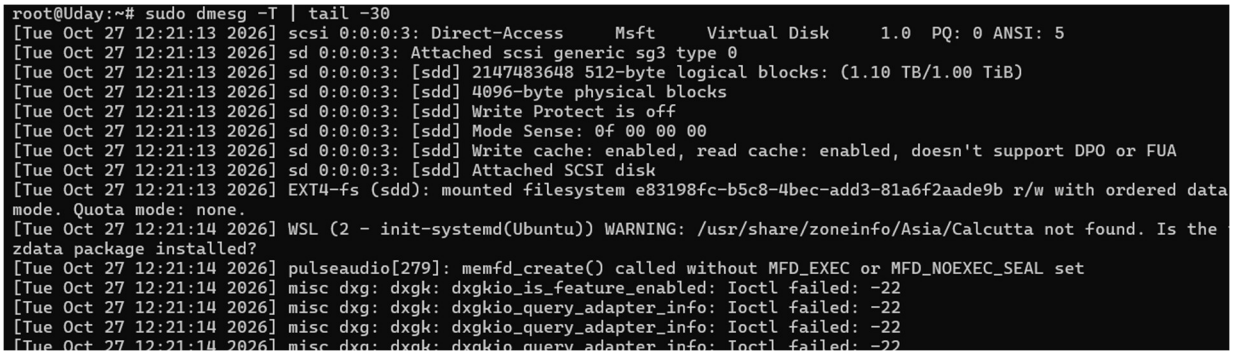


2. uptime

Shows how long the system has been running, the number of logged-in users, and load averages.




3. mpstat -P ALL 1 5

Displays CPU utilization for all processors every second for five reports.

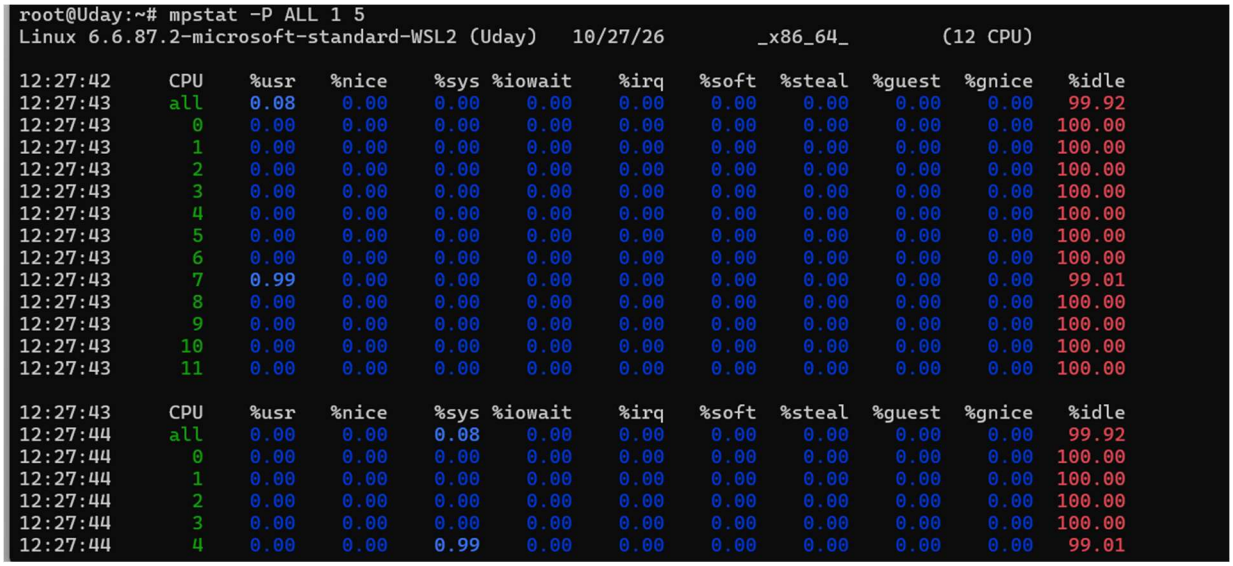

4. pidstat -u 1 5

Reports CPU usage by individual processes every second for five reports.

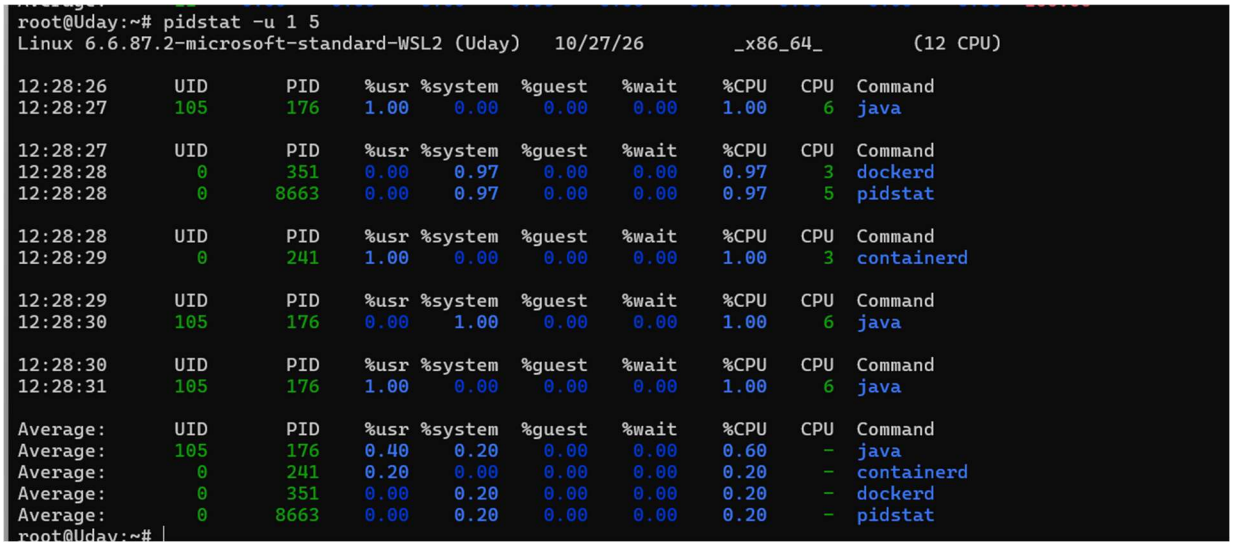

```
root@Uday:~# pidstat -u 1 5
Linux 6.6.87.2-microsoft-standard-WSL2 (Uday)   10/27/26        _x86_64_        (12 CPU)

12:28:26      UID       PID    %usr %system  %guest   %wait    %CPU   CPU  Command
12:28:27      105       176    1.00    0.00    0.00    0.00    1.00     6  java

12:28:27      UID       PID    %usr %system  %guest   %wait    %CPU   CPU  Command
12:28:28        0       351    0.00    0.97    0.00    0.00    0.97     3  dockerd
12:28:28        0      8663    0.00    0.97    0.00    0.00    0.97     5  pidstat

12:28:28      UID       PID    %usr %system  %guest   %wait    %CPU   CPU  Command
12:28:29        0       241    1.00    0.00    0.00    0.00    1.00     3  containerd


12:28:29      UID       PID    %usr %system  %guest   %wait    %CPU   CPU  Command
12:28:30      105       176    0.00    1.00    0.00    0.00    1.00     6  java

12:28:30      UID       PID    %usr %system  %guest   %wait    %CPU   CPU  Command
12:28:31      105       176    1.00    0.00    0.00    0.00    1.00     6  java

Average:      UID       PID    %usr %system  %guest   %wait    %CPU   CPU  Command
Average:      105       176    0.40    0.20    0.00    0.00    0.60     -  java
Average:        0       241    0.20    0.00    0.00    0.00    0.20     -  containerd
Average:        0       351    0.00    0.20    0.00    0.00    0.20     -  dockerd
Average:        0      8663    0.00    0.20    0.00    0.00    0.20     -  pidstat
root@Uday:~#
```

5. free -h


Displays RAM and swap memory usage in human-readable units.

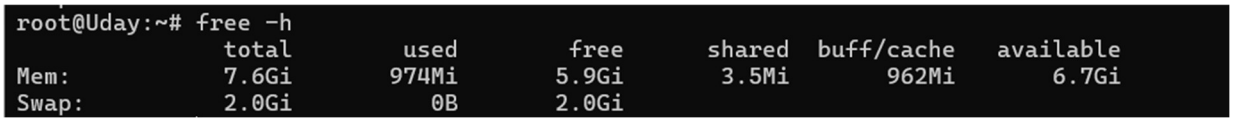

```
root@Uday:~# free -h
               total        used        free      shared  buff/cache   available
Mem:           7.6Gi       974Mi       5.9Gi       3.5Mi       962Mi       6.7Gi
Swap:          2.0Gi          0B       2.0Gi
```

6. df -hT

Shows filesystem disk usage, filesystem types, and available space.

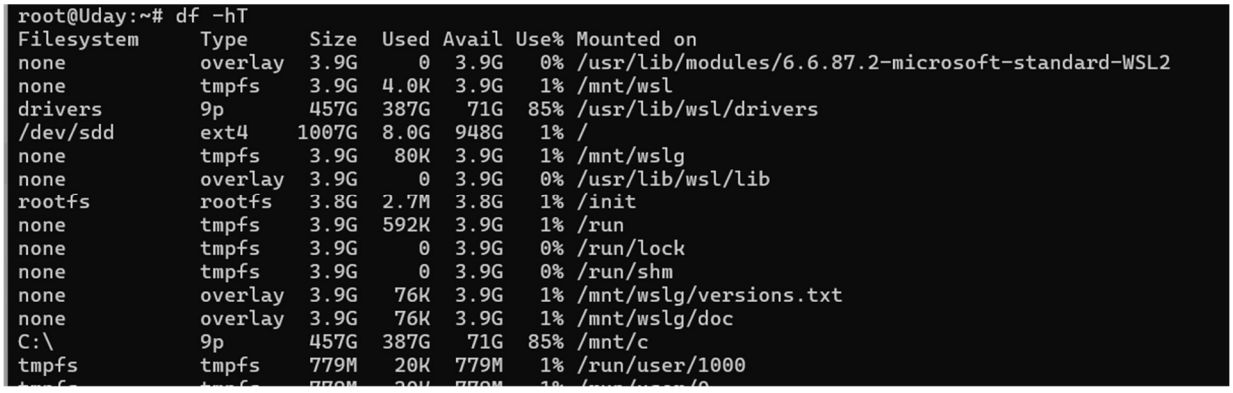

```
root@Uday:~# df -hT
Filesystem     Type      Size  Used Avail Use% Mounted on
none           overlay   3.9G     0  3.9G   0% /usr/lib/modules/6.6.87.2-microsoft-standard-WSL2
none           tmpfs     3.9G  4.0K  3.9G   1% /mnt/wsl
drivers        9p        457G  387G   71G  85% /usr/lib/wsl/drivers
/dev/sdd       ext4     1007G  8.0G  948G   1% /
none           tmpfs     3.9G   80K  3.9G   1% /mnt/wslg
none           overlay   3.9G     0  3.9G   0% /usr/lib/wsl/lib
rootfs         rootfs    3.8G  2.7M  3.8G   1% /init
none           tmpfs     3.9G  592K  3.9G   1% /run
none           tmpfs     3.9G     0  3.9G   0% /run/lock
none           tmpfs     3.9G     0  3.9G   0% /run/shm
none           overlay   3.9G   76K  3.9G   1% /mnt/wslg/versions.txt
none           overlay   3.9G   76K  3.9G   1% /mnt/wslg/doc
C:\            9p        457G  387G   71G  85% /mnt/c
tmpfs          tmpfs     779M   20K  779M   1% /run/user/1000
```

7. du -sh /var/log

Calculates the total space occupied by a directory.

```
root@Uday:~# sudo du -sh /var/log
365M    /var/log
```

8. lsblk -f

Lists block devices, partitions, filesystems, and mount points.

```
root@Uday:~# lsblk -f
NAME
    FSTYPE FSVER LABEL UUID                                 FSAVAIL FSUSE% MOUNTPOINTS
sda ext4   1.0
sdb ext4   1.0
sdc swap   1           be017a3d-e3a6-4057-ad1c-a9422a3538c5                [SWAP]
sdd ext4   1.0         e83198fc-b5c8-4bec-add3-81a6f2aade9b  947.7G     1% /var/lib/docker
                                                                           /mnt/wslg/distro
                                                                           /
```

9. ss -lntp

Lists TCP ports that are listening, along with process details where permissions allow.

Use case: Check whether a web server, Jenkins, or another application is listening on the expected port.

- -l: Listening sockets
- -n: Numeric addresses and ports
- -t: TCP sockets
- -p: Process information

```
root@Uday:~# sudo ss -lntp
State    Recv-Q   Send-Q      Local Address:Port      Peer Address:Port   Process
LISTEN   0        1000       10.255.255.254:53            0.0.0.0:*
LISTEN   0        4096        127.0.0.53%lo:53            0.0.0.0:*       users:(("systemd-resolve",pid=1847,fd=15))
LISTEN   0        4096            127.0.0.1:40715         0.0.0.0:*       users:(("containerd",pid=241,fd=15))
LISTEN   0        4096           127.0.0.54:53            0.0.0.0:*       users:(("systemd-resolve",pid=1847,fd=17))
LISTEN   0        50                    *:8080                *:*       users:(("java",pid=176,fd=9))
root@Uday:~#
```

10. **ip route**

Displays the system's routing table.

```
root@Uday:~# ip route
default via 172.19.176.1 dev eth0 proto kernel
172.17.0.0/16 dev docker0 proto kernel scope link src 172.17.0.1 linkdown
172.19.176.0/20 dev eth0 proto kernel scope link src 172.19.186.218
```