Installing the Git :

```
ip-172-31-1-74:~ # sudo zypper install git
Refreshing service 'SUSE_Linux_Enterprise_Server_x86_64'.
Loading repository data...
Reading installed packages...
Resolving package dependencies...

The following recommended package was automatically selected:
  git-email

The following 4 packages are suggested, but will not be installed:
  git-daemon git-gui gitk git-web

The following 14 NEW packages are going to be installed:
  git git-core git-email libsha1detectcoll1 perl-Authen-SASL perl-Crypt-URandom
  perl-Digest-HMAC perl-Error perl-Git perl-IO-Socket-SSL perl-MailTools
```

Configuring The Git Folder and Local Repository :

```
ip-172-31-1-74:~ # mkdir dev
ip-172-31-1-74:~ # cd dev
ip-172-31-1-74:~/dev # ls
ip-172-31-1-74:~/dev # vi sample.html
```

16.192.127.158 - PuTTY

```
This is the sample Html File
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
```

```
ip-172-31-1-74:~/dev # git init
hint: Using 'master' as the name for the initial branch. This default branch n
e
hint: is subject to change. To configure the initial branch name to use in all
hint: of your new repositories, which will suppress this warning, call:
hint:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint:   git branch -m <name>
```

```
Initialized empty Git repository in /root/dev/.git/
ip-172-31-1-74:~/dev # git add .
ip-172-31-1-74:~/dev # git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   sample.html

ip-172-31-1-74:~/dev #
```

```
ip-172-31-1-74:~/dev # git commit -m "added sample.html file"
[master (root-commit) 1bbc6f5] added sample.html file
 Committer: root <root@ip-172-31-1-74.eu-north-1.compute.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

 1 file changed, 1 insertion(+)
 create mode 100644 sample.html
```

Configuring the Details:


```
ip-172-31-1-74:~/dev # git config --global user.name "UdayKiran110405"
ip-172-31-1-74:~/dev # git config --global user.email "vanamaudaykiran@gmail.com
"
ip-172-31-1-74:~/dev # git config --global --list
```

```
user.name=UdayKiran110405
user.email=vanamaudaykiran@gmail.cor
core.repositoryformatversion=0
core.filemode=true
core.bare=false
core.logallrefupdates=true
```

Making the Default branch as main :

```
ip-172-31-1-74:~/dev # git config --global init.defaultBranch main
```

Creating a Remote Repository :

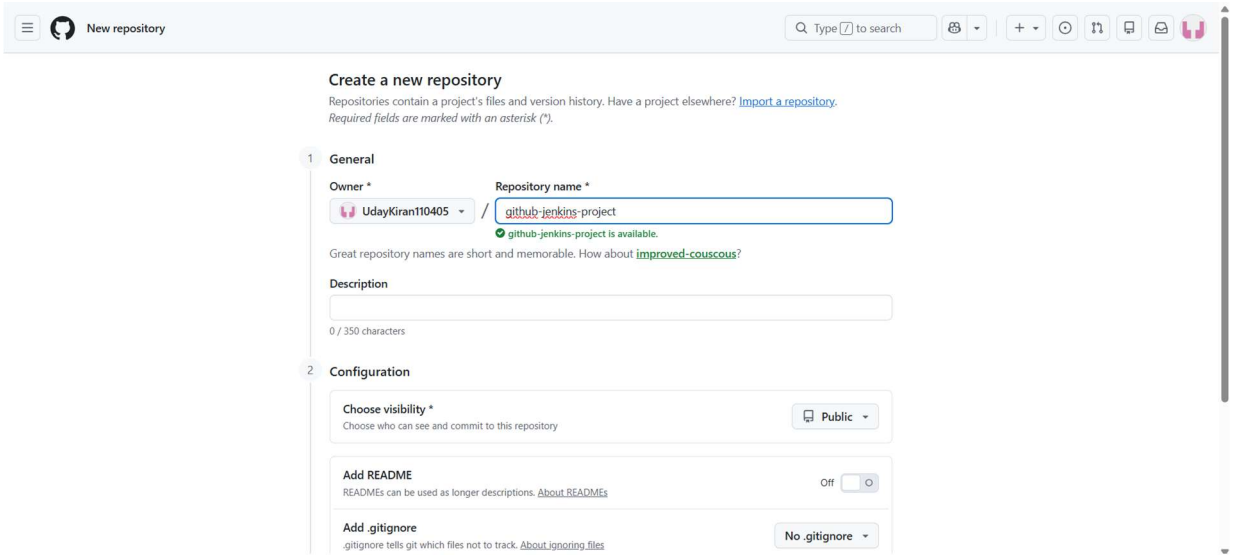


Adding the remote repo and check:


```
ip-172-31-1-74:~/dev # git remote add origin https://github.com/UdayKiran110405/
github-jenkins-project.git
ip-172-31-1-74:~/dev # git remote -v
origin  https://github.com/UdayKiran110405/github-jenkins-project.git (fetch)
origin  https://github.com/UdayKiran110405/github-jenkins-project.git (push)
```

Creating the Personal Access Token :

Generating the Classic Token

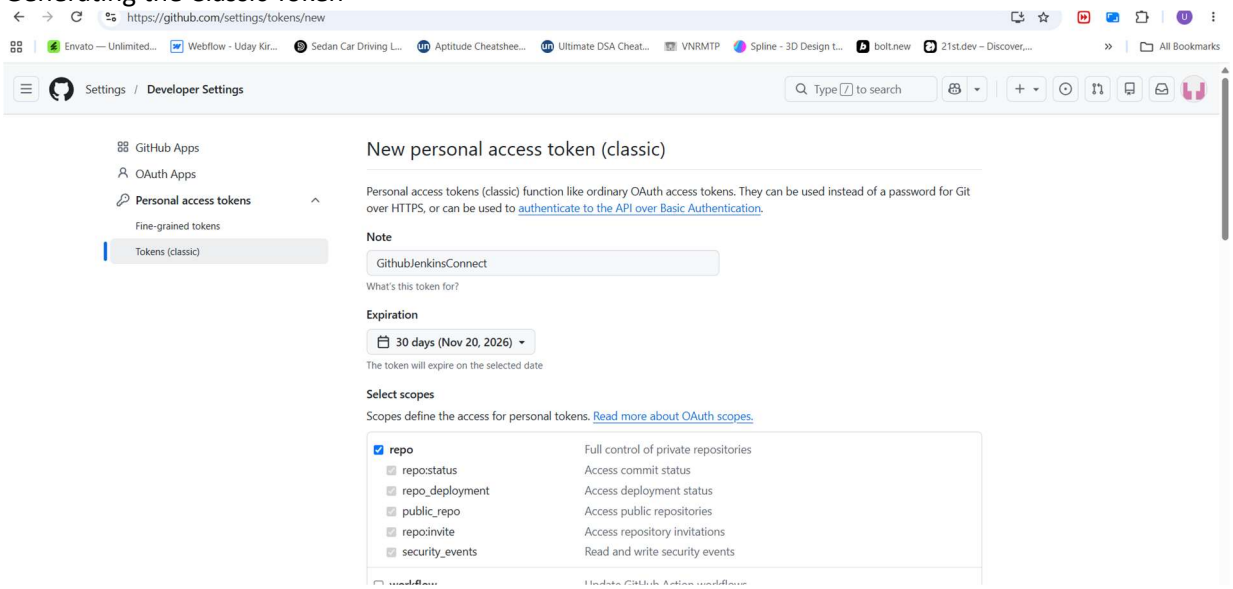


Permitted to access the repos

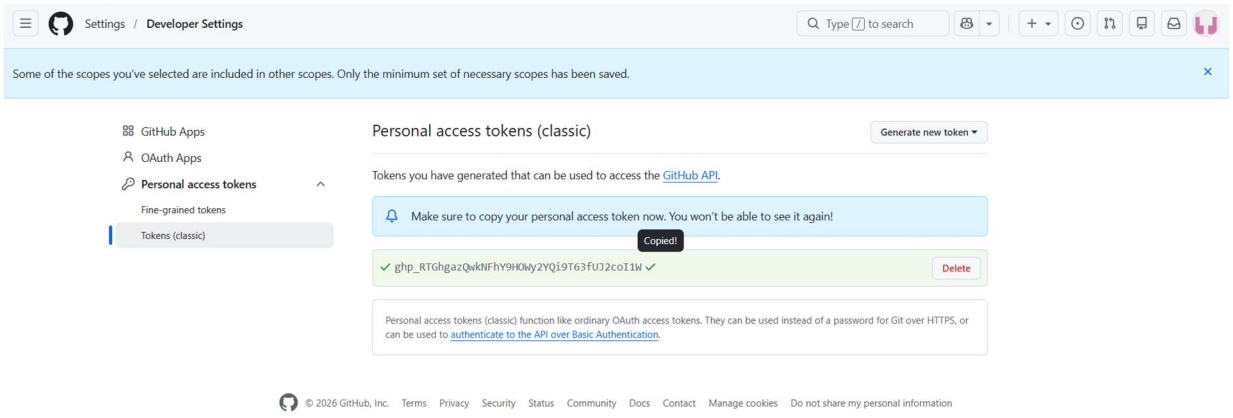


Pushing to The Remote Repository :


```
ip-172-31-1-74:~/dev # git push origin main
Username for 'https://github.com': UdayKiran110405
Password for 'https://UdayKiran110405@github.com':
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 263 bytes | 263.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/UdayKiran110405/github-jenkins-project.git
 * [new branch]      main -> main
```

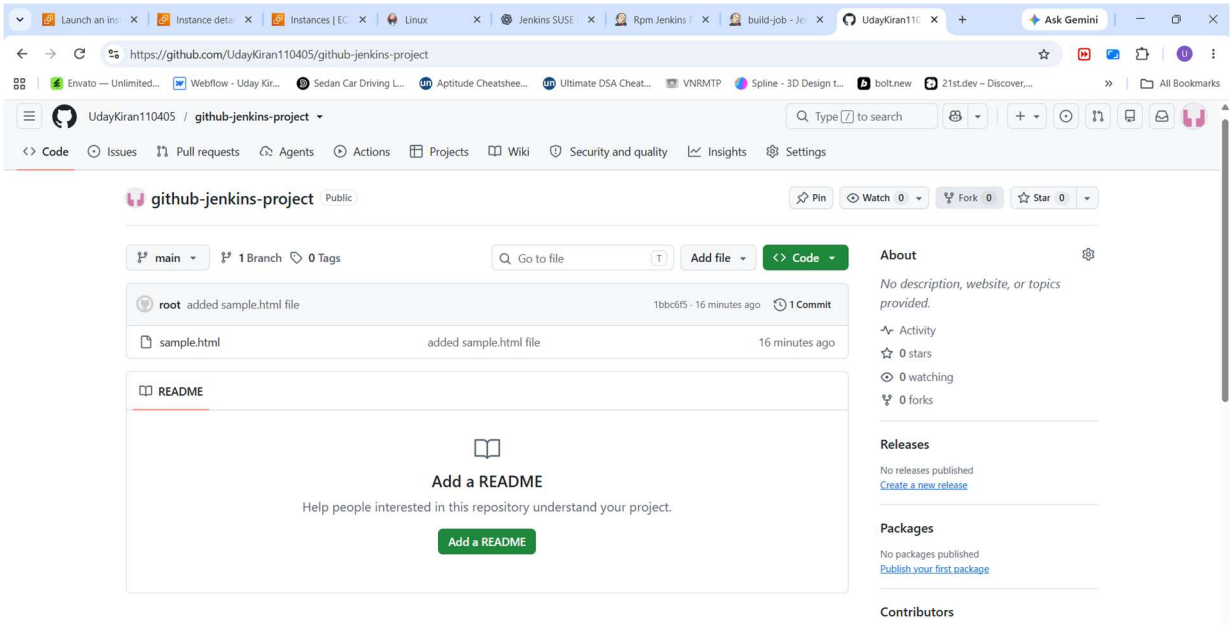


Connecting the Git to The Jenkins :

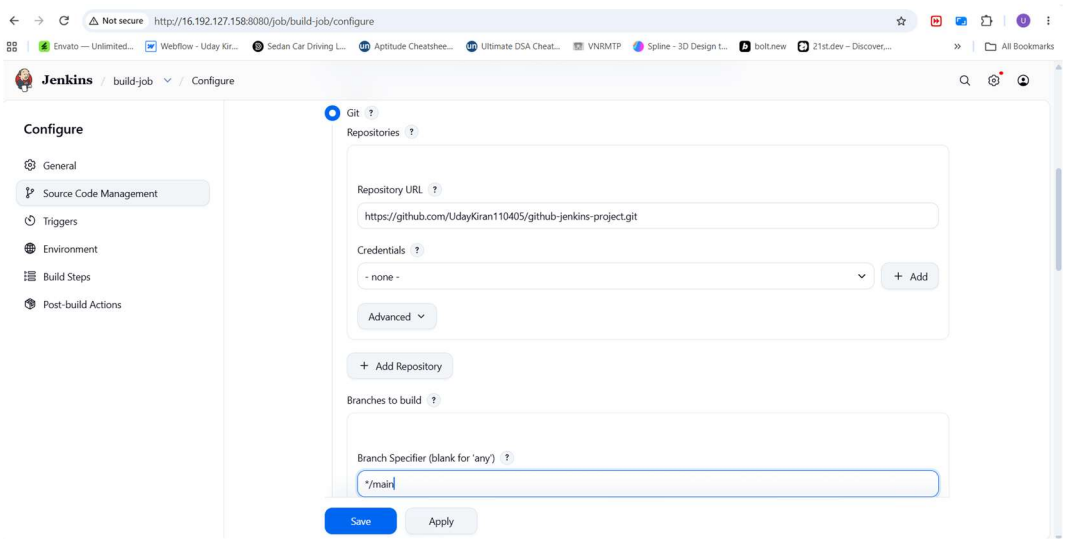


Enabled The Pull Trigger On Building :

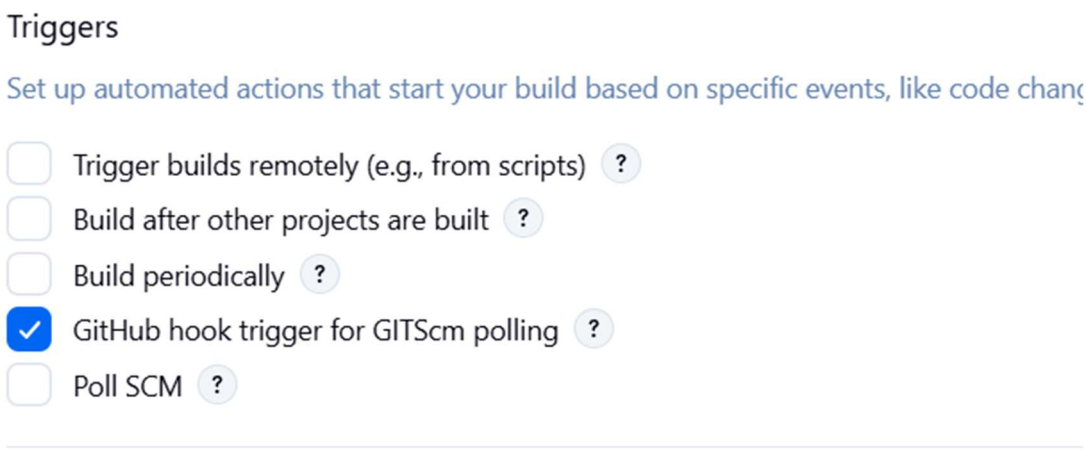



Connecting The Jenkins To Git :

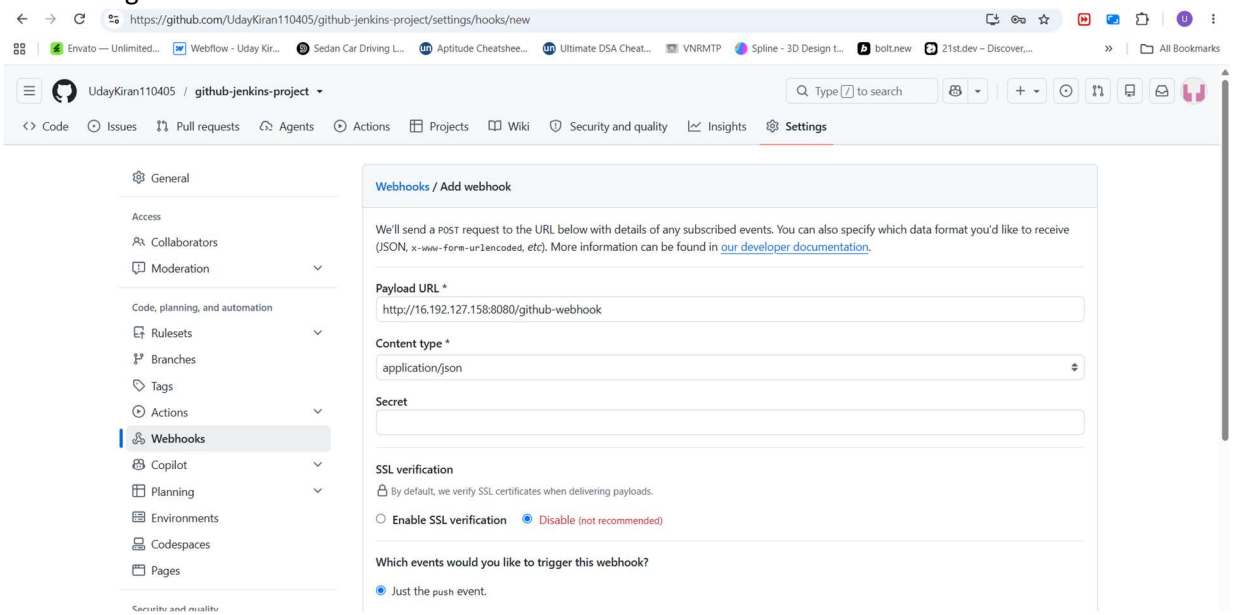


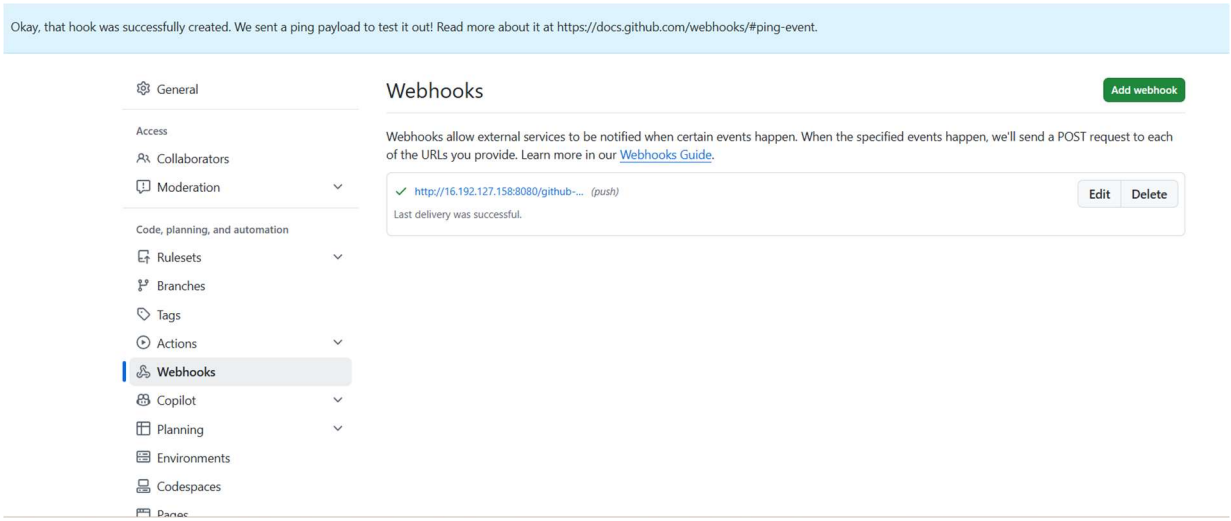


Checking By Repushing with Changes:

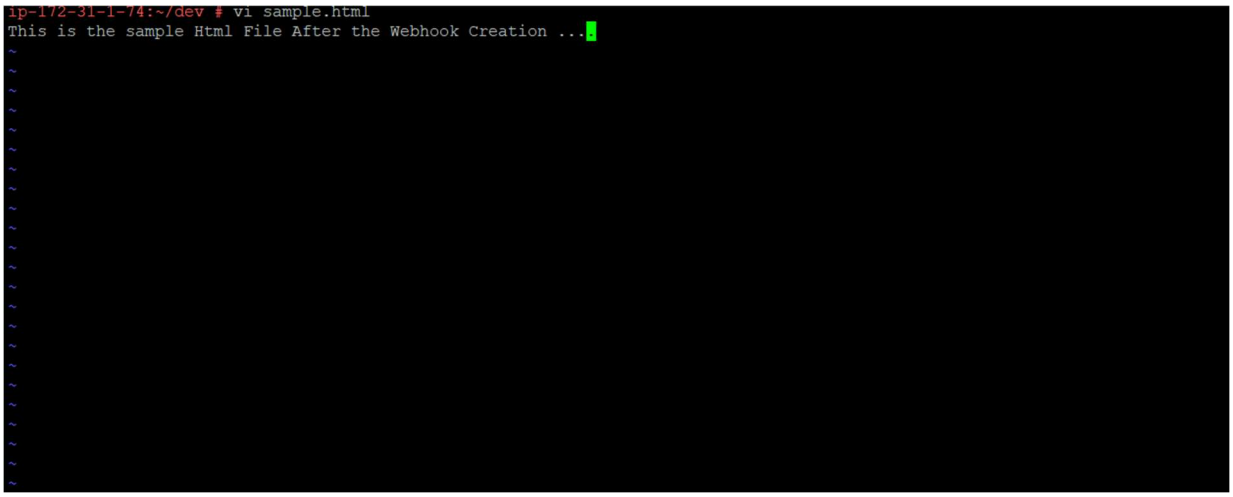

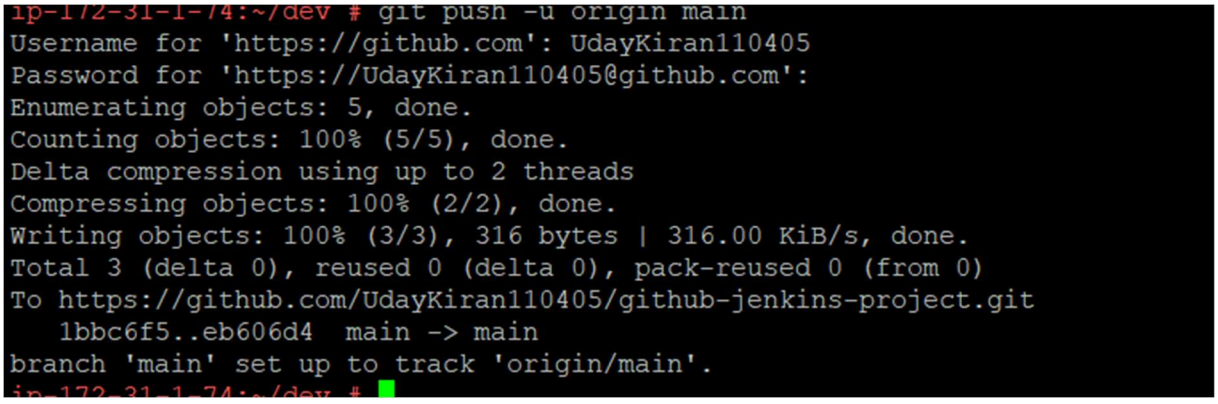

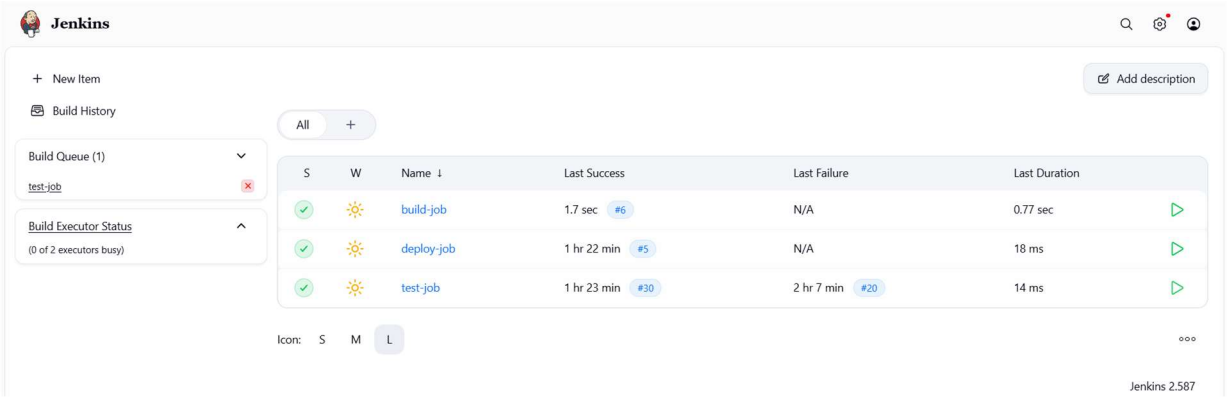
Jenkins
New Item
Build History
Build Queue (1)
test-job
Build Executor Status
(0 of 2 executors busy)
Add description
All
S W Name ↓ Last Success Last Failure Last Duration
build-job 1.7 sec #6 N/A 0.77 sec
deploy-job 1 hr 22 min #5 N/A 18 ms
test-job 1 hr 23 min #30 2 hr 7 min #20 14 ms
Icon: S M L
Jenkins 2.587

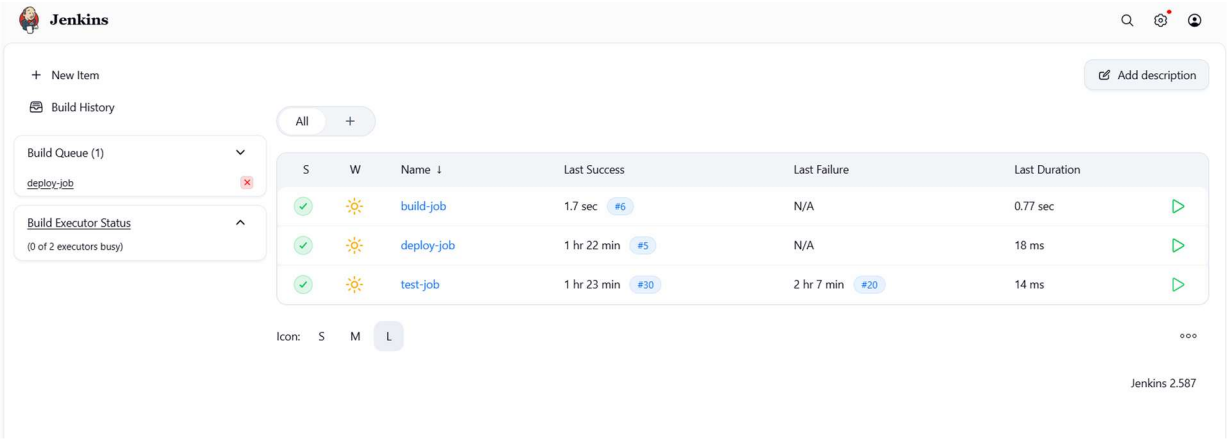
Jenkins
New Item
Build History
Build Queue (1)
deploy-job
Build Executor Status
(0 of 2 executors busy)
Add description
All
S W Name ↓ Last Success Last Failure Last Duration
build-job 1.7 sec #6 N/A 0.77 sec
deploy-job 1 hr 22 min #5 N/A 18 ms
test-job 1 hr 23 min #30 2 hr 7 min #20 14 ms
Icon: S M L
Jenkins 2.587