




Creating the SUSE EC2 Instance:

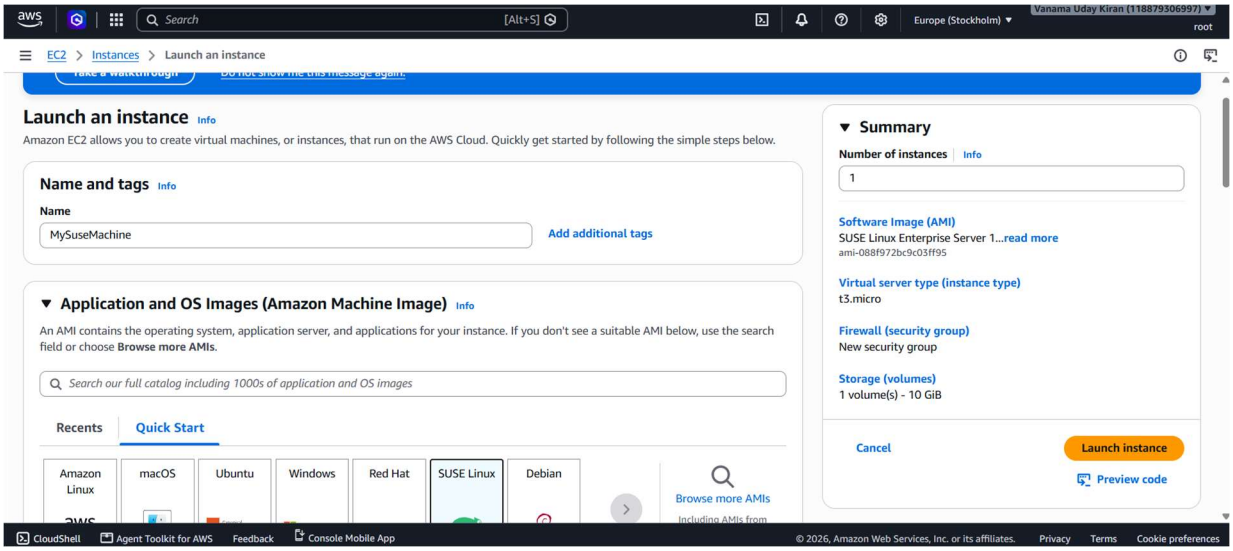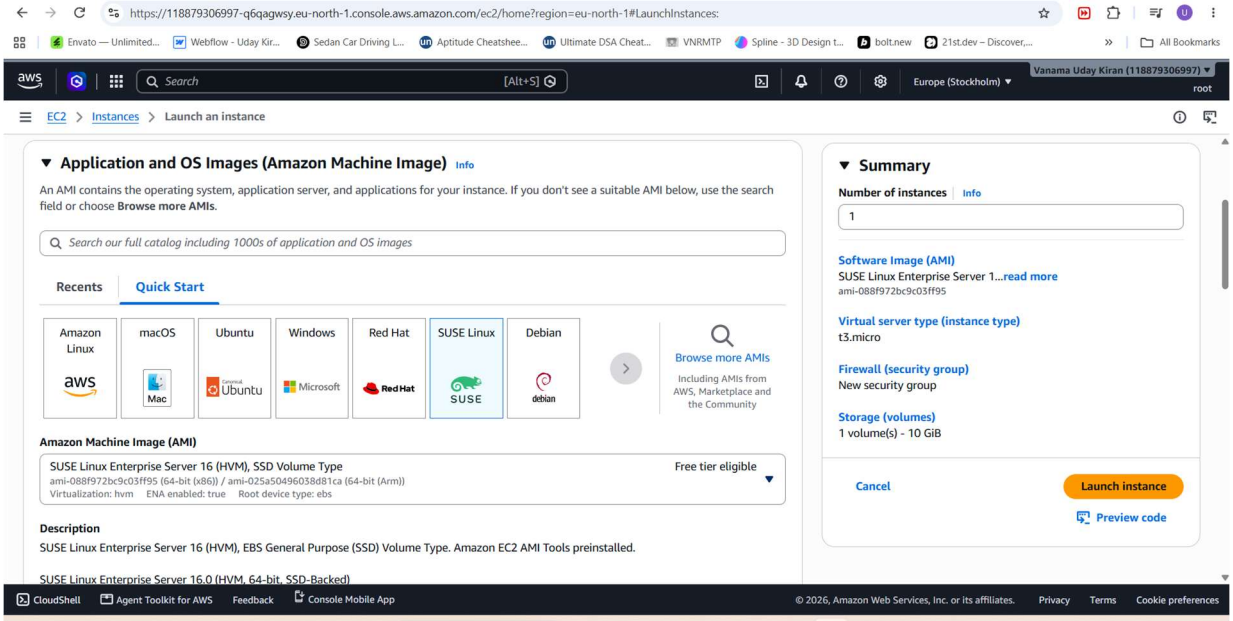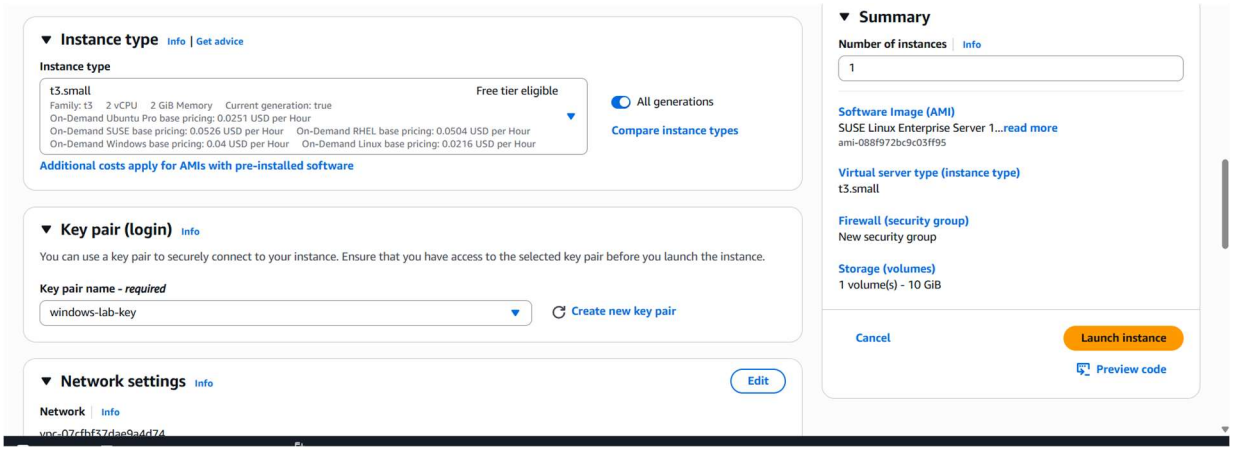


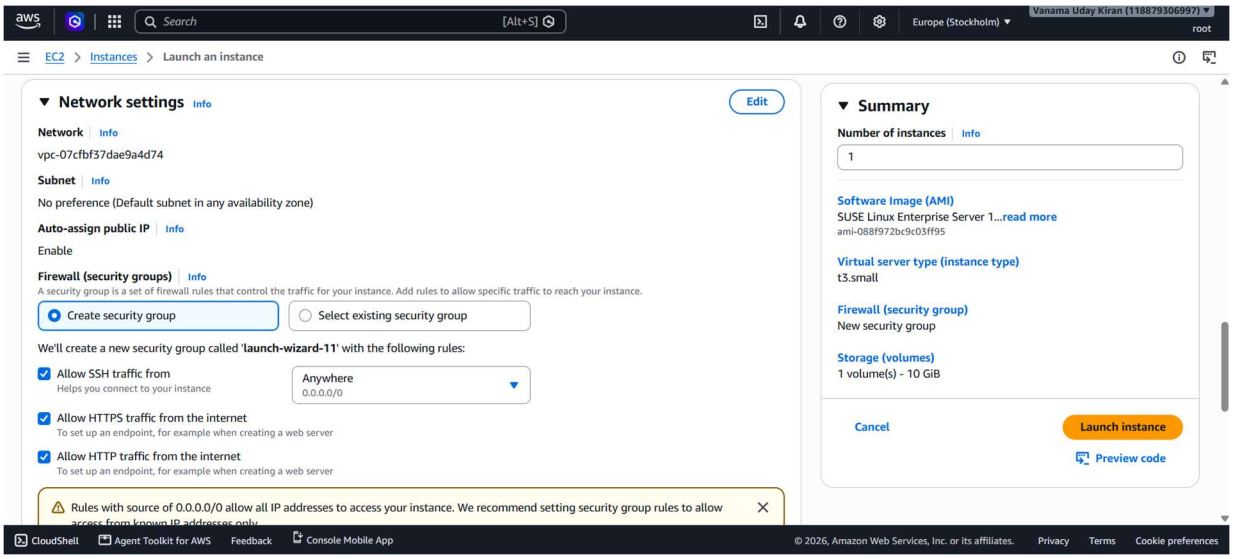

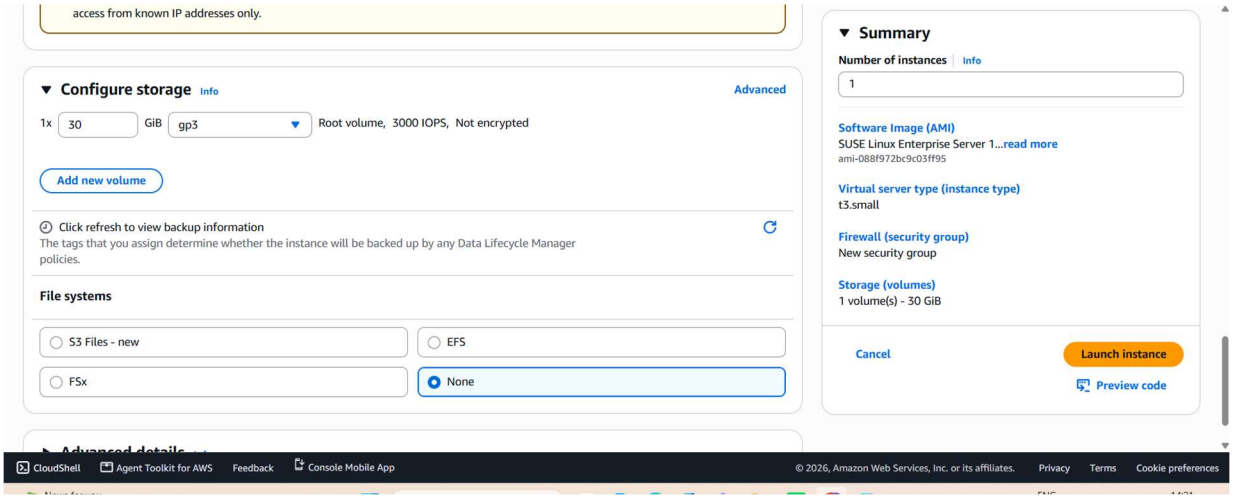



Search [Alt+S]
Europe (Stockholm)
Vanama Uday Kiran (118879306997)
root
EC2 > Instances > Launch an instance
Network settings Info
Edit
Network Info
vpc-07cfbf37dae9a4d74
Subnet Info
No preference (Default subnet in any availability zone)
Auto-assign public IP Info
Enable
Firewall (security groups) Info
A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.
Create security group
Select existing security group
We'll create a new security group called 'launch-wizard-11' with the following rules:
Allow SSH traffic from
Helps you connect to your instance
Anywhere
0.0.0.0/0
Allow HTTPS traffic from the internet
To set up an endpoint, for example when creating a web server
Allow HTTP traffic from the internet
To set up an endpoint, for example when creating a web server
Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow
Summary
Number of instances Info
1
Software Image (AMI)
SUSE Linux Enterprise Server 1...read more
ami-088f972bc9c03ff95
Virtual server type (instance type)
t3.small
Firewall (security group)
New security group
Storage (volumes)
1 volume(s) - 10 GiB
Cancel
Launch instance
Preview code
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


access from known IP addresses only.
Configure storage Info
Advanced
1x 30 GiB gp3 Root volume, 3000 IOPS, Not encrypted
Add new volume
Click refresh to view backup information
The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.
File systems
S3 Files - new
EFS
FSx
None
Summary
Number of instances Info
1
Software Image (AMI)
SUSE Linux Enterprise Server 1...read more
ami-088f972bc9c03ff95
Virtual server type (instance type)
t3.small
Firewall (security group)
New security group
Storage (volumes)
1 volume(s) - 30 GiB
Cancel
Launch instance
Preview code
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

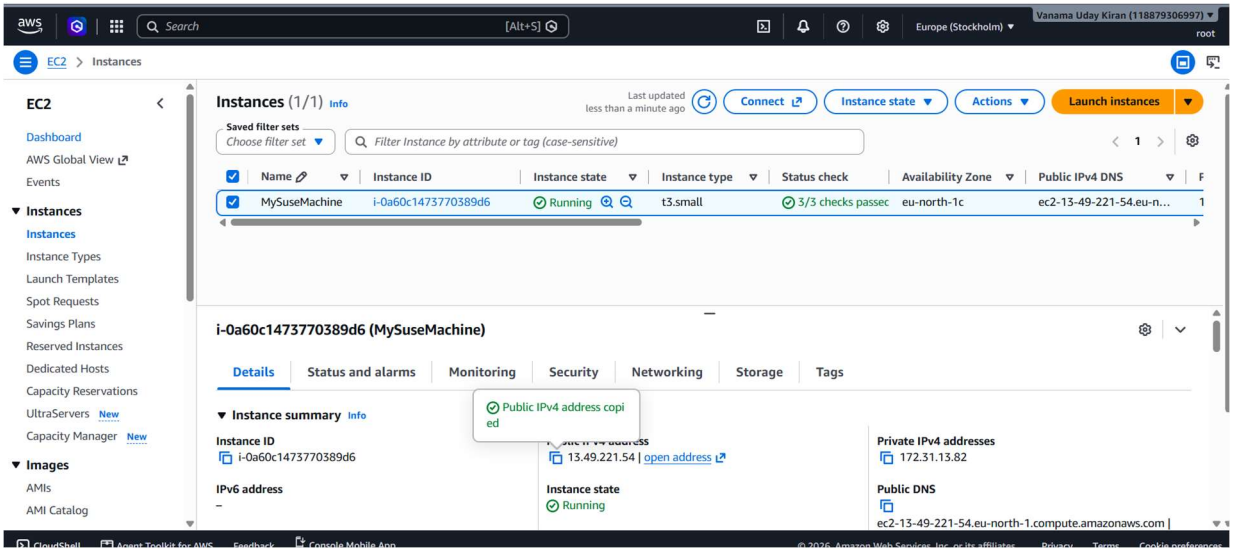





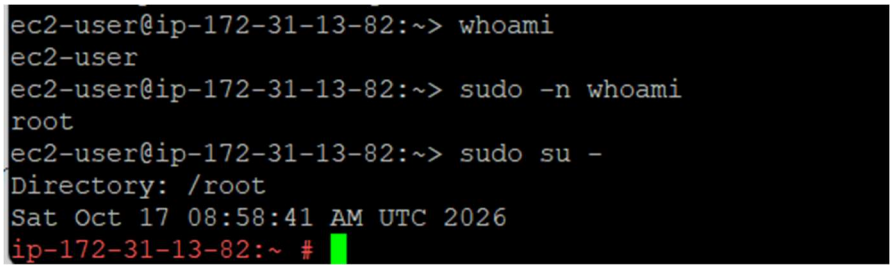

Installing the Docker

SUSE normally uses zypper to install software



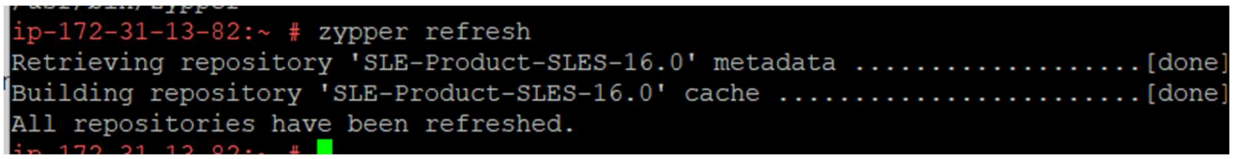

```
ip-172-31-13-82:~ # zypper install -y docker
Refreshing service 'SUSE_Linux_Enterprise_Server_x86_64'.
Loading repository data...
Reading installed packages...
Resolving package dependencies...

The following recommended package was automatically selected:
  docker-rootless-extras

The following 8 NEW packages are going to be installed:
  containerd docker docker-buildx docker-rootless-extras docker-zsh-completion
  libslirp0 rootlesskit slirp4netns

8 new packages to install.

Package download size:    82.9 MiB

Package install size change:
```

```
ip-172-31-13-82:~ # systemctl enable --now docker
Created symlink '/etc/systemd/system/multi-user.target.wants/docker.service' → '
/usr/lib/systemd/system/docker.service'.
```

```
ip-172-31-13-82:~ # docker --version
Docker version 29.4.0-ce, build daa0cb7f23
```

Creating the Directory

```
ip-172-31-13-82:~ # mkdir -p /root/ssh-docker-lab
ip-172-31-13-82:~ # cd /root/ssh-docker-lab
ip-172-31-13-82:~/ssh-docker-lab #
```

```
ip-172-31-13-82:~/ssh-docker-lab # vi Dockerfile
~
~
~
~
```

```
FROM ubuntu:24.04

ENV DEBIAN_FRONTEND=noninteractive

RUN apt-get update && apt-get install -y vim openssh-server \
    && rm -rf /var/lib/apt/lists/*

RUN useradd -m -s /bin/bash labuser \
    && echo 'labuser:LabUser@2026!' | chpasswd

RUN mkdir -p /run/sshd \
    && sed -i 's/^#\?PasswordAuthentication.*/PasswordAuthentication yes/' /etc/
ssh/sshd_config \
    && sed -i 's/^#\?PermitRootLogin.*/PermitRootLogin no/' /etc/ssh/sshd_config


EXPOSE 22

CMD ["/usr/sbin/sshd", "-D", "-e"]
EOF
~
~
```

Building Image


```
ip-172-31-13-82:~/ssh-docker-lab # vi Dockerfile
ip-172-31-13-82:~/ssh-docker-lab # docker build -t ssh-lab:v1 .
[+] Building 6.2s (4/7)                                          docker:default
 => [internal] load build definition from Dockerfile                      0.0s
 => => transferring dockerfile: 589B                                      0.0s
 => [internal] load metadata for docker.io/library/ubuntu:24.04           1.3s
 => [internal] load .dockerignore                                         0.1s
 => => transferring context: 2B                                           0.0s
 => [1/4] FROM docker.io/library/ubuntu:24.04@sha256:68ee22004a9109b44973  1.7s
 => => resolve docker.io/library/ubuntu:24.04@sha256:68ee22004a9109b44973  0.1s
 => => sha256:f2b4ef06ff01a67d4bed7657a4ae379a7d07934b7 29.77MB / 29.77MB  0.4s
 => => extracting sha256:f2b4ef06ff01a67d4bed7657a4ae379a7d07934b7c3e7434  1.1s
 => [2/4] RUN apt-get update && apt-get install -y vim openssh-server     3.1s
 => => # Get:18 http://security.ubuntu.com/ubuntu noble-security/restricted amd
 => => # 64 Packages [2122 kB]
 => => # Get:19 http://security.ubuntu.com/ubuntu noble-security/main amd64 Pac
 => => # kages [1409 kB]
 => => # Fetched 33.6 MB in 2s (16.2 MB/s)
 => => # Reading package lists...
```

Add the port 2323 In the inbound Rules

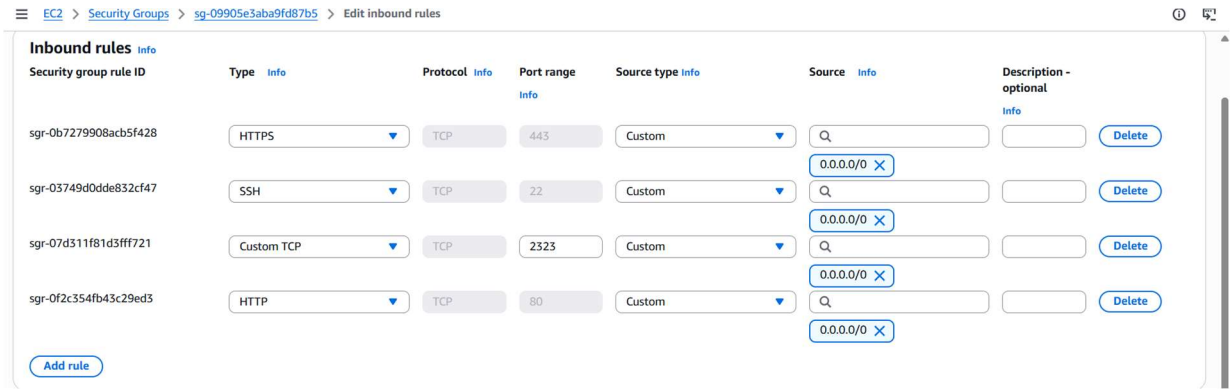


```
labuser@813a567c41c1:~$ la -l
total 16
-rw-r--r--. 1 labuser labuser  220 Mar 31  2024 .bash_logout
-rw-r--r--. 1 labuser labuser 3771 Mar 31  2024 .bashrc
drwx------. 1 labuser labuser   40 Oct 17 09:21 .cache
-rw-r--r--. 1 labuser labuser  807 Mar 31  2024 .profile
-rw-------. 1 labuser labuser  675 Oct 17 09:22 .viminfo
-rw-rw-r--. 1 labuser labuser    0 Oct 17 09:22 ls
```

Connecting the Putty With the port 2323

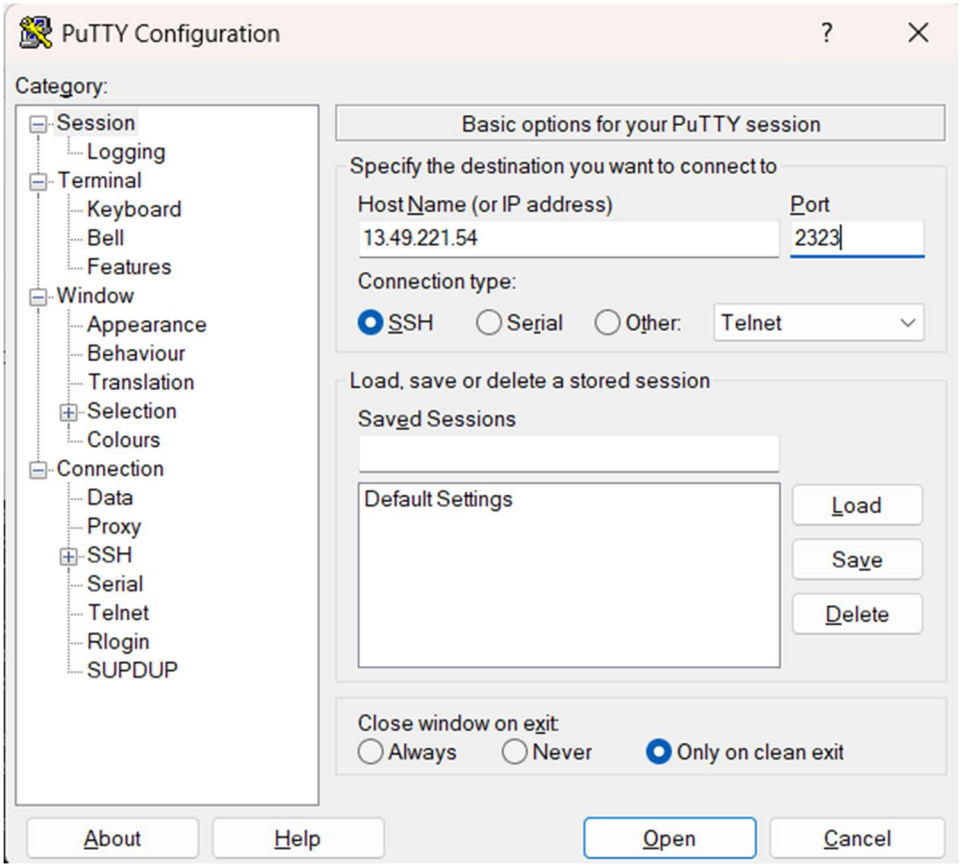


```
login as: labuser
labuser@13.49.221.54's password:
Welcome to Ubuntu 24.04.5 LTS (GNU/Linux 6.12.0-160000.29-default x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:     https://landscape.canonical.com
 * Support:        https://ubuntu.com/pro

This system has been minimized by removing packages and content that are
not required on a system that users do not log into.

To restore this content, you can run the 'unminimize' command.

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

labuser@813a567c41c1:~$
```

```
ip-172-31-13-82:~/ssh-docker-lab # docker images
                                                    i Info →   U  In Use
IMAGE         ID             DISK USAGE   CONTENT SIZE   EXTRA
ssh-lab:v1    5963cbda27f9        404MB         97.5MB
```

Running the Image

```
ip-172-31-13-82:~/ssh-docker-lab # docker run -itd --name sshdcontainer -p "2323
:22" ssh-lab:v1
813a567c41c13cb7d8076ea1fdb7f98940b2a98c0d7cfda24df929661604c3ac
ip-172-31-13-82:~/ssh-docker-lab # docker ps
CONTAINER ID   IMAGE         COMMAND                  CREATED         STATUS
    PORTS                                  NAMES
813a567c41c1   ssh-lab:v1    "/usr/sbin/sshd -D -e"   8 seconds ago   Up 7 second
s   0.0.0.0:2323->22/tcp, [::]:2323->22/tcp   sshdcontainer
```

Logging with the New User Details :