



Creating the SUSE Machine

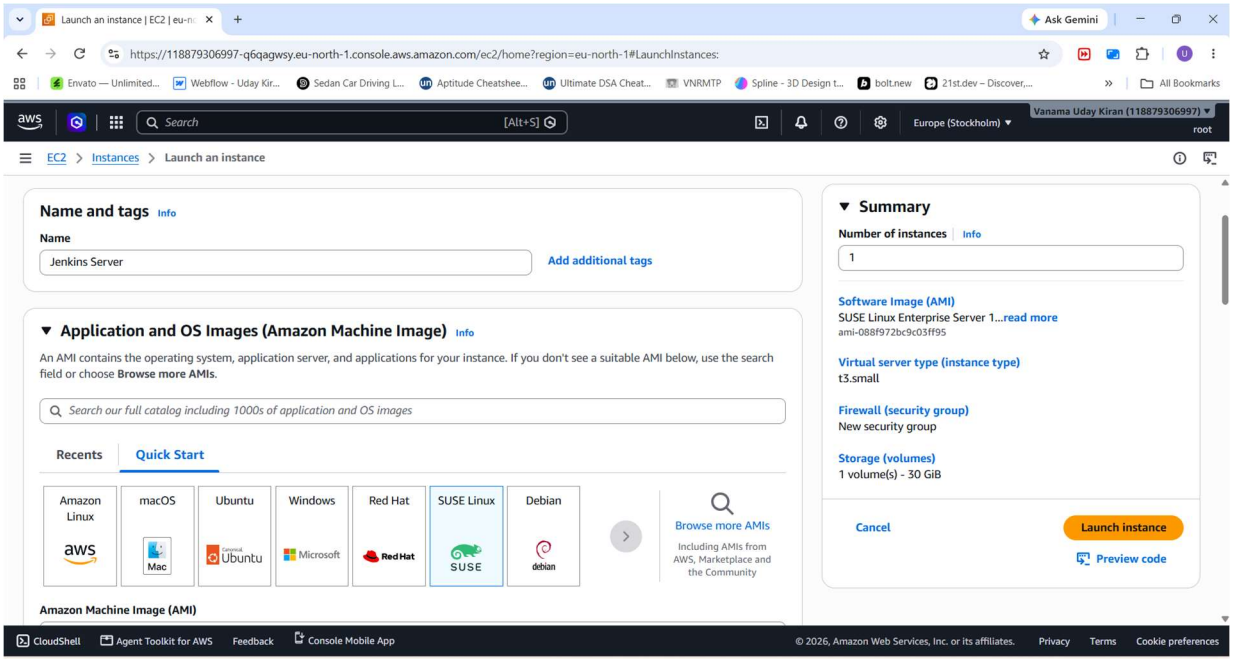

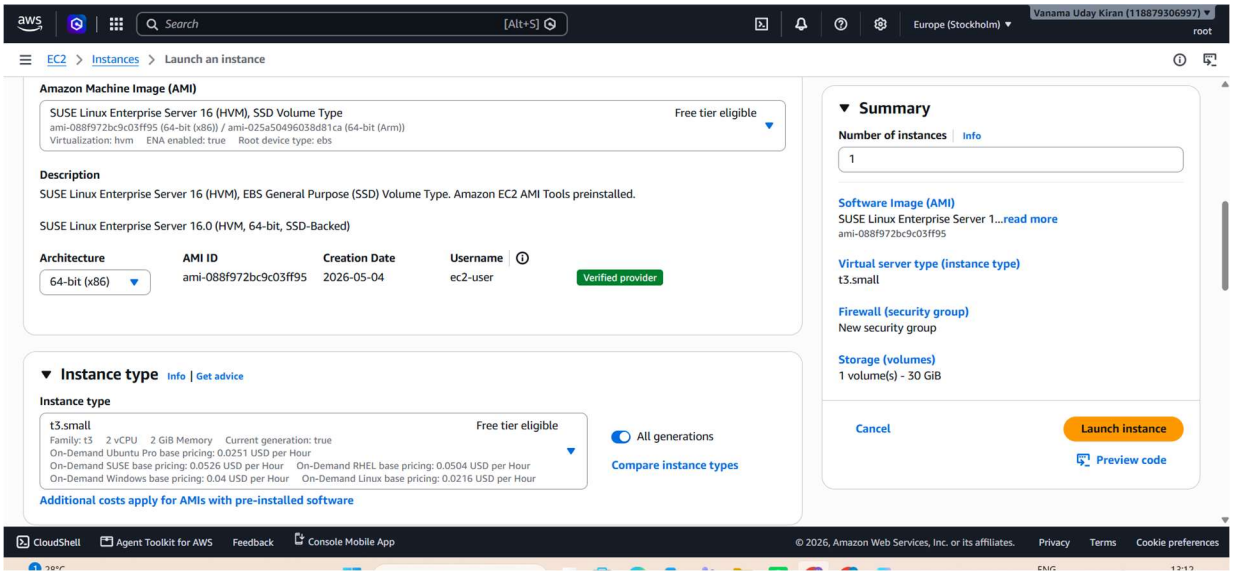


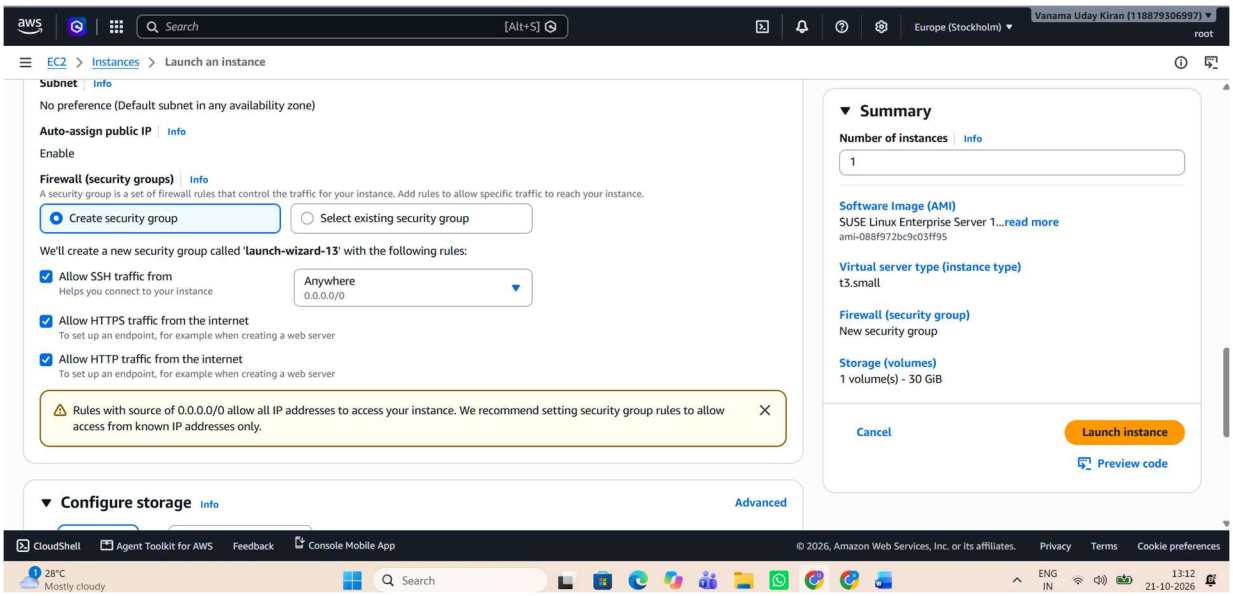


Enabling the Jenkins port 8080 In the inbound rules :

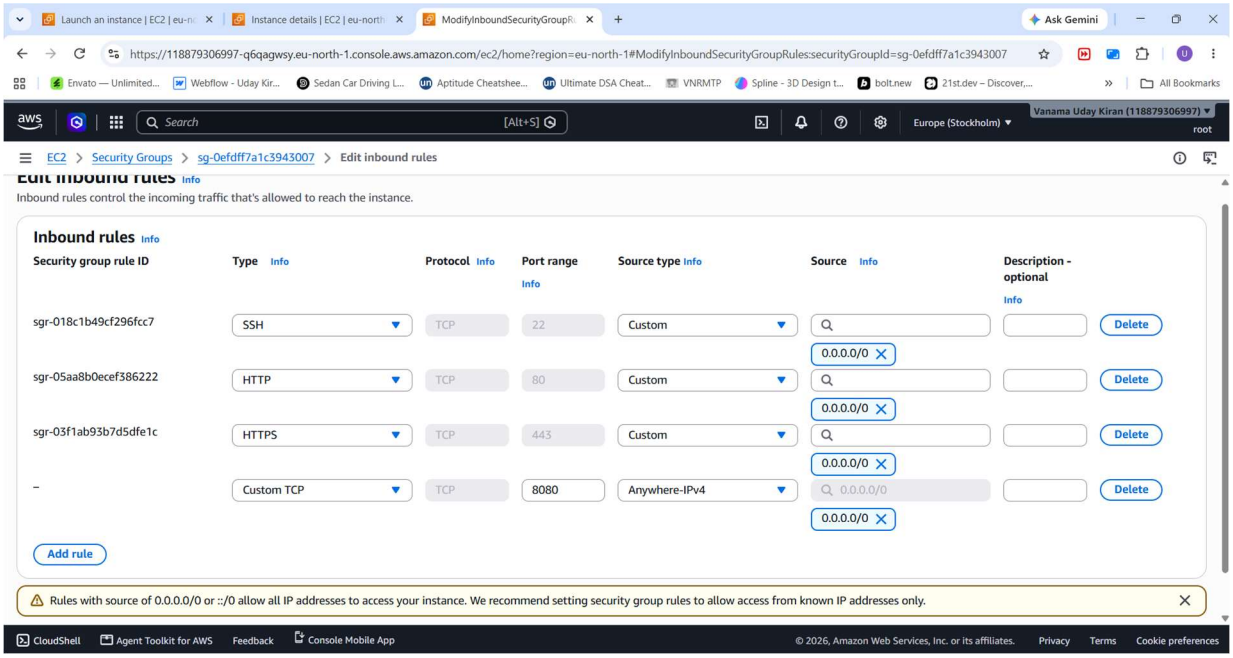

Connecting to the Putty :

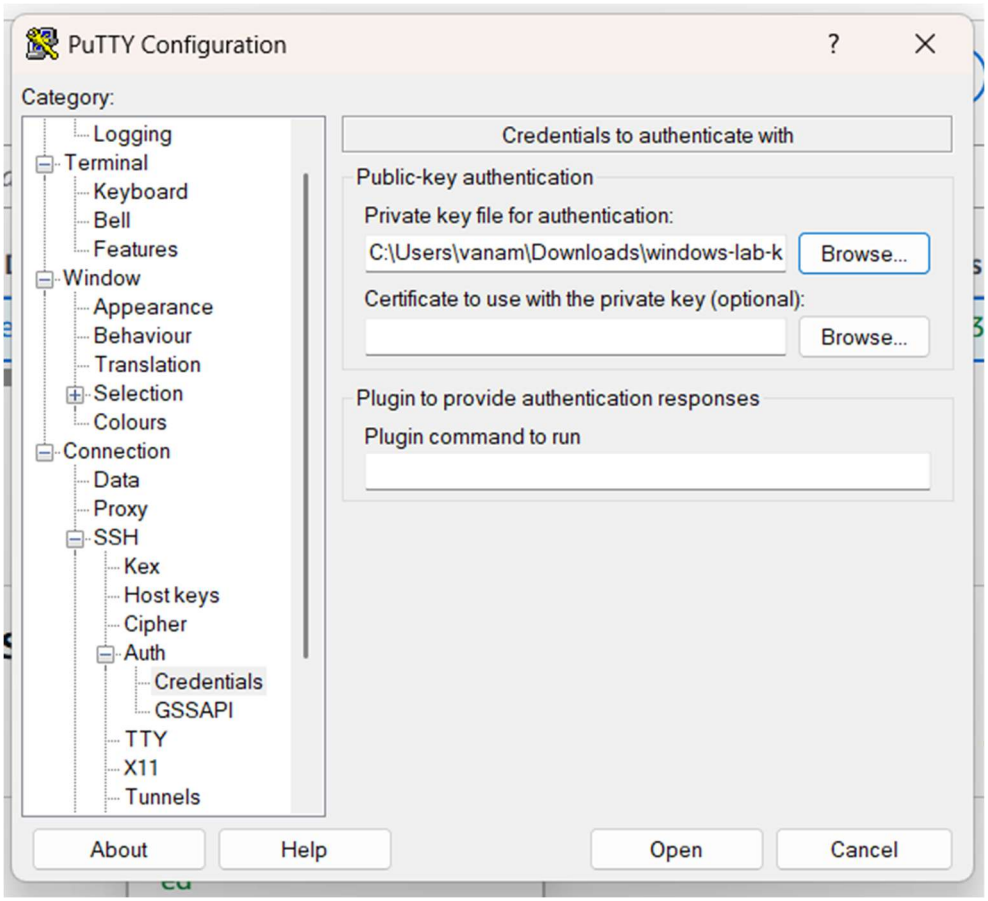
PuTTY Configuration
Category:
Logging
Terminal
Keyboard
Bell
Features
Window
Appearance
Behaviour
Translation
Selection
Colours
Connection
Data
Proxy
SSH
Kex
Host keys
Cipher
Auth
Credentials
GSSAPI
TTY
X11
Tunnels
Credentials to authenticate with
Public-key authentication
Private key file for authentication:
C:\Users\vanam\Downloads\windows-lab-k
Browse...
Certificate to use with the private key (optional):
Browse...
Plugin to provide authentication responses
Plugin command to run
About
Help
Open
Cancel

Upgrading the packages :

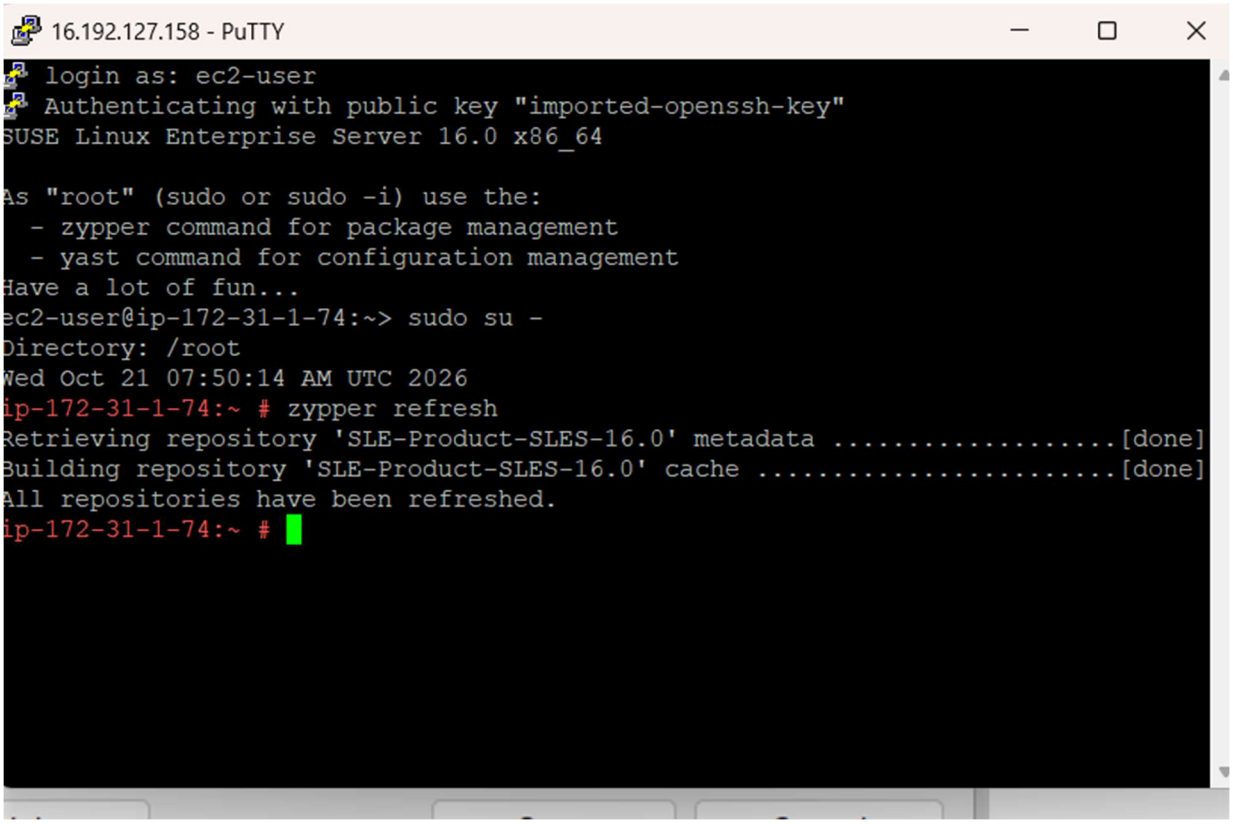

Installing the Java 21 openjdk

```
ip-172-31-1-74:~ # zypper install dejavu-fonts fontconfig java-21-openjdk wget
Refreshing service 'SUSE_Linux_Enterprise_Server_x86_64'.
Loading repository data...
Reading installed packages...
'fontconfig' is already installed.
No update candidate for 'fontconfig-2.16.0-160000.2.2.x86_64'. The highest avai
able version is already installed.
'dejavu-fonts' is already installed.
```

```
ip-172-31-1-74:~ # wget -O /etc/zypp/repos.d/jenkins.repo \
>       https://pkg.jenkins.io/rpm/jenkins.repo
--2026-10-21 09:03:38--  https://pkg.jenkins.io/rpm/jenkins.repo
Resolving pkg.jenkins.io (pkg.jenkins.io)... 199.232.174.133, 2a04:4e42:6b::645
Connecting to pkg.jenkins.io (pkg.jenkins.io)|199.232.174.133|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 246 [application/octet-stream]
Saving to: '/etc/zypp/repos.d/jenkins.repo'

/etc/zypp/repos.d/j 100%[==================>]     246  --.-KB/s    in 0s

2026-10-21 09:03:38 (10.2 MB/s) - '/etc/zypp/repos.d/jenkins.repo' saved [246/24
6]
```

Checking the Java :

```
ip-172-31-1-74:~ # java -version
openjdk version "21.0.12.1" 2026-08-18
OpenJDK Runtime Environment (build 21.0.12.1+1-suse-01600-x8664)
OpenJDK 64-Bit Server VM (build 21.0.12.1+1-suse-01600-x8664, mixed mode, sharin
g)
```

Installing the Jenkins

```
ip-172-31-1-74:~ # zypper install jenkins
Refreshing service 'SUSE_Linux_Enterprise_Server_x86_64'.
Looking for gpg keys in repository Jenkins.
  gpgkey=https://pkg.jenkins.io/rpm/repodata/repomd.xml.key

New repository or package signing key received:

  Repository:       Jenkins
  Key Fingerprint:  5E38 6EAD B55F 0150 4CAE 8BCF 7198 F4B7 14AB FC68
  Key Name:         Jenkins Project <jenkinsci-board@googlegroups.com>
  Key Algorithm:    RSA 4096
  Key Created:      Mon 22 Dec 2025 01:24:19 PM UTC
  Key Expires:      Thu 21 Dec 2028 01:24:19 PM UTC
  Rpm Name:         gpg-pubkey-14abfc68-69494683



    Note: Signing data enables the recipient to verify that no modifications
    occurred after the data were signed. Accepting data with no, wrong or
    unknown signature can lead to a corrupted system and in extreme cases even
    to a system compromise.

    Note: A GPG pubkey is clearly identified by its fingerprint. Do not rely o
```

Enabling the Jenkins:

```
ip-172-31-1-74:~ # sudo systemctl enable jenkins
Created symlink '/etc/systemd/system/multi-user.target.wants/jenkins.service' →
'/usr/lib/systemd/system/jenkins.service'.
```

Starting the Jenkins and checking status :

```
ip-172-31-1-74:~ # sudo systemctl start jenkins
ip-172-31-1-74:~ # sudo systemctl status jenkins
● jenkins.service - Jenkins Continuous Integration Server
     Loaded: loaded (/usr/lib/systemd/system/jenkins.service; enabled; preset: >
     Active: active (running) since Wed 2026-10-21 09:08:05 UTC; 24s ago
 Invocation: 5522d92c404d4abe841edeb5df4224de
   Main PID: 7613 (java)
      Tasks: 49
        CPU: 21.901s
     CGroup: /system.slice/jenkins.service
             └─7613 /usr/lib64/jvm/jre-21-openjdk/bin/java -Djava.awt.headless=>

Oct 21 09:07:59 ip-172-31-1-74 jenkins[7613]: [LF]>
Oct 21 09:07:59 ip-172-31-1-74 jenkins[7613]: [LF]> **************************>
Oct 21 09:07:59 ip-172-31-1-74 jenkins[7613]: [LF]> **************************>
Oct 21 09:07:59 ip-172-31-1-74 jenkins[7613]: [LF]> **************************>
Oct 21 09:08:05 ip-172-31-1-74 jenkins[7613]: 2026-10-21 09:08:05.219+0000 [id=>
Oct 21 09:08:05 ip-172-31-1-74 jenkins[7613]: 2026-10-21 09:08:05.248+0000 [id=>
Oct 21 09:08:05 ip-172-31-1-74 systemd[1]: Started Jenkins Continuous Integrati>
Oct 21 09:08:06 ip-172-31-1-74 jenkins[7613]: 2026-10-21 09:08:06.133+0000 [id=>
Oct 21 09:08:06 ip-172-31-1-74 jenkins[7613]: 2026-10-21 09:08:06.136+0000 [id=>
Oct 21 09:08:10 ip-172-31-1-74 jenkins[7613]: 2026-10-21 09:08:10.293+0000 [id=>
lines 1-20/20 (END)
```

Checking Via Processes:

```
ip-172-31-1-74:~ # ps -ef|grep jenkins
jenkins     7613       1 23 09:07 ?        00:00:22 /usr/lib64/jvm/jre-21-openj
k/bin/java -Djava.awt.headless=true -jar /usr/share/java/jenkins.war --webroot=
var/cache/jenkins/war --httpPort=8080
root        7930    2473  0 09:09 pts/1    00:00:00 grep --color=auto jenkins
```

Checking Via Browser and Logging in :

i)Getting the Password:

```
ip-172-31-1-74:~ # cat /var/lib/jenkins/secrets/initialAdminPassword
ea77062ee004479c919d9da77da707d2
```

Unlock Jenkins

To ensure Jenkins is securely set up by the administrator, a password has been written to the log (not sure where to find it?) and this file on the server:


`/var/lib/jenkins/secrets/initialAdminPassword`


Please copy the password from either location and paste it below.


Administrator password

••••••••••••••••••••••••••••••••

Adding the Suggested Plugins:

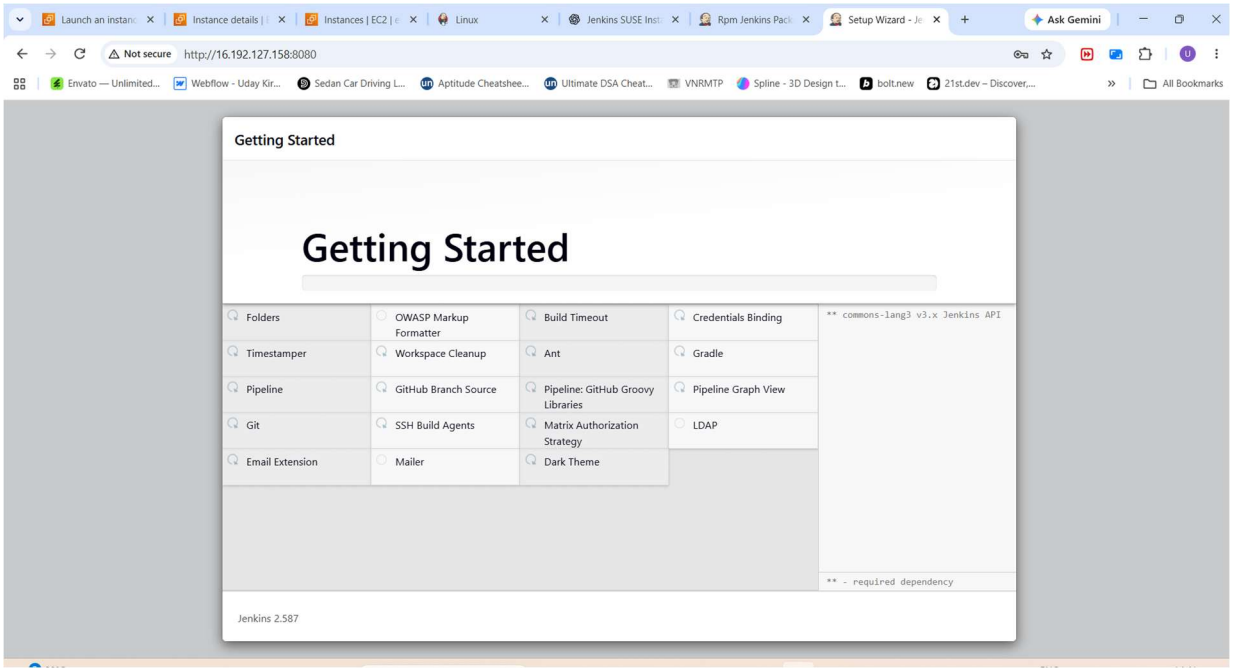

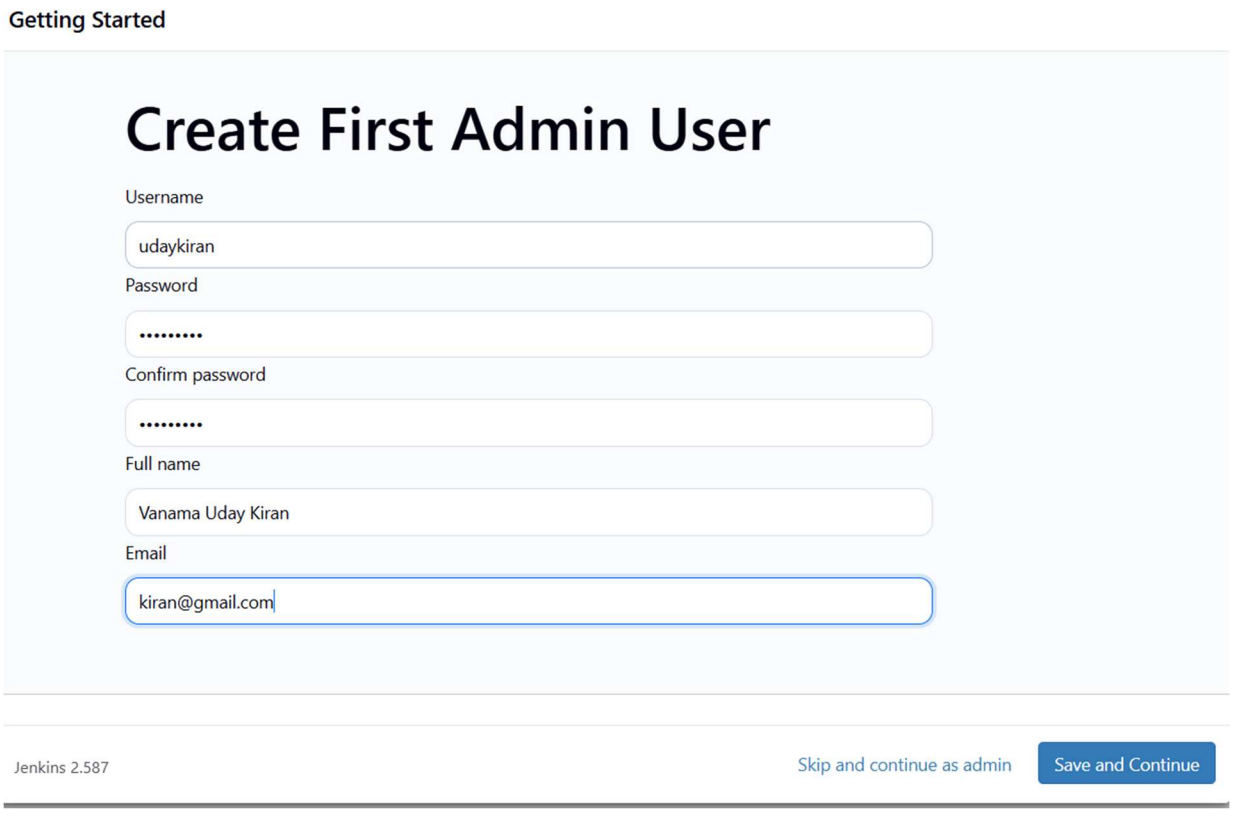

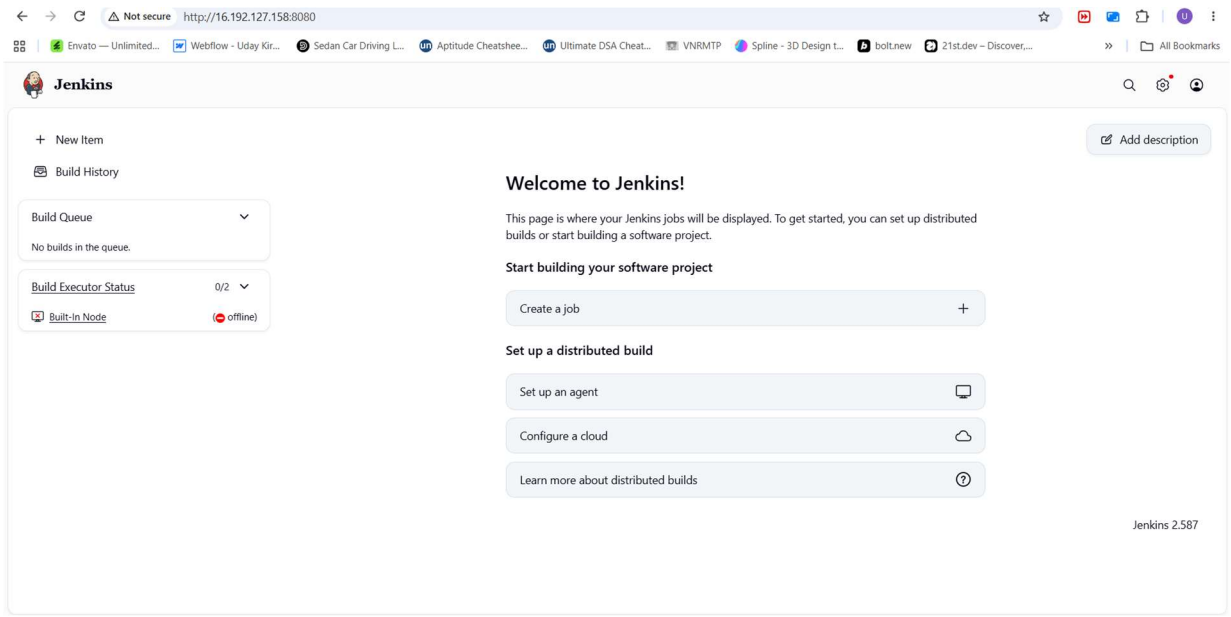
Not secure
http://16.192.127.158:8080
Envato — Unlimited...
Webflow - Uday Kir...
Sedan Car Driving L...
Aptitude Cheatshee...
Ultimate DSA Cheat...
VNRMTP
Spline - 3D Design t...
bolt.new
21st.dev – Discover,...
All Bookmarks
Jenkins
New Item
Build History
Build Queue
No builds in the queue.
Build Executor Status
0/2
Built-In Node
(offline)
Add description
Welcome to Jenkins!
This page is where your Jenkins jobs will be displayed. To get started, you can set up distributed builds or start building a software project.
Start building your software project
Create a job
Set up a distributed build
Set up an agent
Configure a cloud
Learn more about distributed builds
Jenkins 2.587