

## Additional Notes: Beginning the Major Project - 1

---

### Create Multiple Directories:

If you want to create multiple directories together in vs code terminal, then you have to use this command:

```
mkdir directoryName, another_directory_name
```

### Initialise Git :


**Problem:** At the time of Git initialisation, if you have got an error like this:

```
PS C:\Users\HP\OneDrive\Desktop\WebD Backend\Backend\nodews\codeial> git init
git : The term 'git' is not recognized as the name of a cmdlet, function, script file, or operable program.
Check the spelling of the name, or if a path was included, verify that the path is correct and try again.
At line:1 char:1
+ git init
+ ~~~~
+ CategoryInfo          : ObjectNotFound: (git:String) [], CommandNotFoundException
+ FullyQualifiedErrorId : CommandNotFoundException
```


Solution. You can use the Git bash terminal for GitHub operations:

### Steps to add Git Bash terminal to your vs code editor:


**Step 1.** Open the terminal in VS Code. (Go to terminal and select New Terminal).

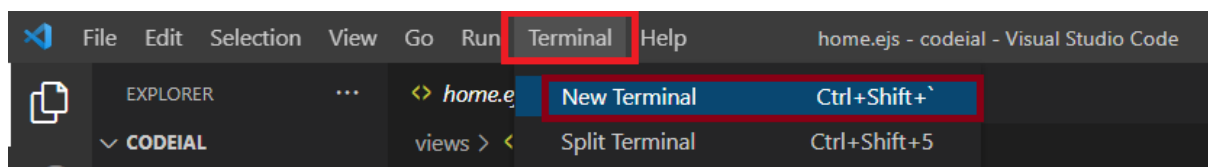

It will look like this:

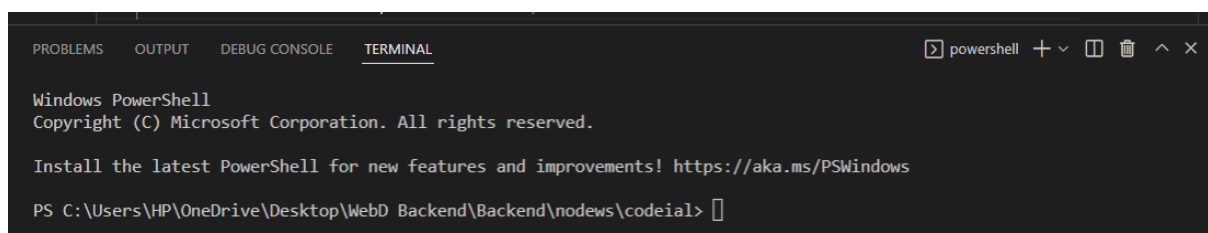

**Step 2.** Click on the power shell's down key.

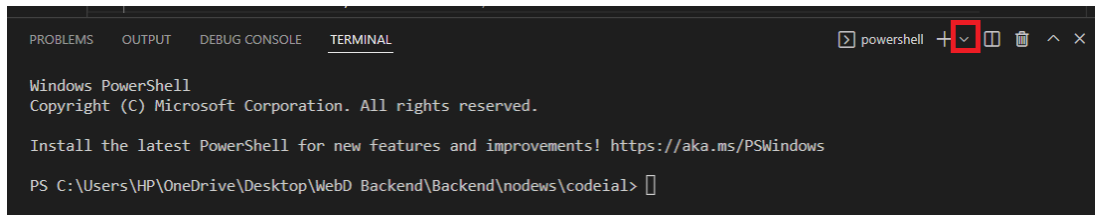


```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
powershell + v [ ] [ ] [ ] [ ] [ ] [ ]

Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows

PS C:\Users\HP\OneDrive\Desktop\WebD Backend\Backend\nodews\codeial> [ ]
```

and select Git Bash

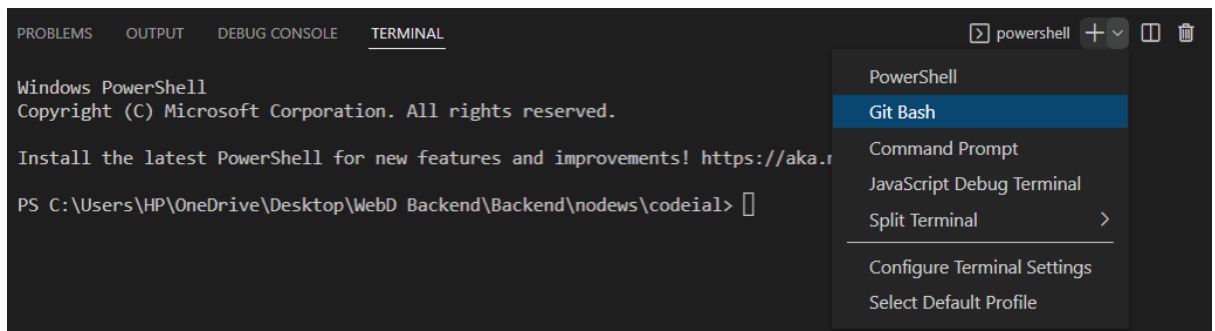

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
powershell + v [ ] [ ] [ ] [ ] [ ] [ ]


Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows

PS C:\Users\HP\OneDrive\Desktop\WebD Backend\Backend\nodews\codeial> [ ]
```

- PowerShell
- Git Bash**
- Command Prompt
- JavaScript Debug Terminal
- Split Terminal >
- Configure Terminal Settings
- Select Default Profile

After that Terminal look like this :

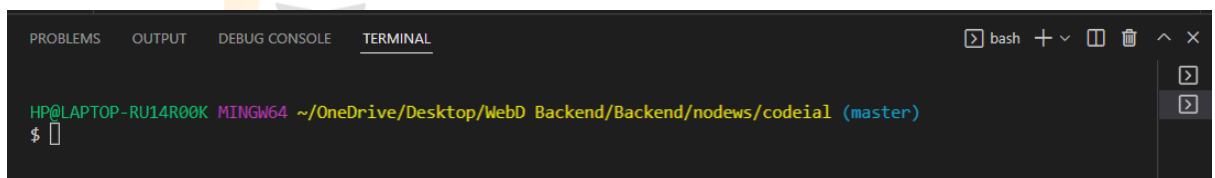

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
bash + v [ ] [ ] [ ] [ ] [ ] [ ]

HP@LAPTOP-RU14R00K MINGW64 ~/OneDrive/Desktop/WebD Backend\Backend\nodews\codeial (master)
$ [ ]
```

**Step 3:** Now you can initialise Git and perform other operations in this git bash terminal.

```
HP@LAPTOP-RU14R00K MINGW64 ~/OneDrive/Desktop/WebD Backend\Backend\nodews\codeial (master)
$ git init
Reinitialized existing Git repository in C:/Users/HP/OneDrive/Desktop/WebD Backend\Backend\nodews\codeial/.git/
```