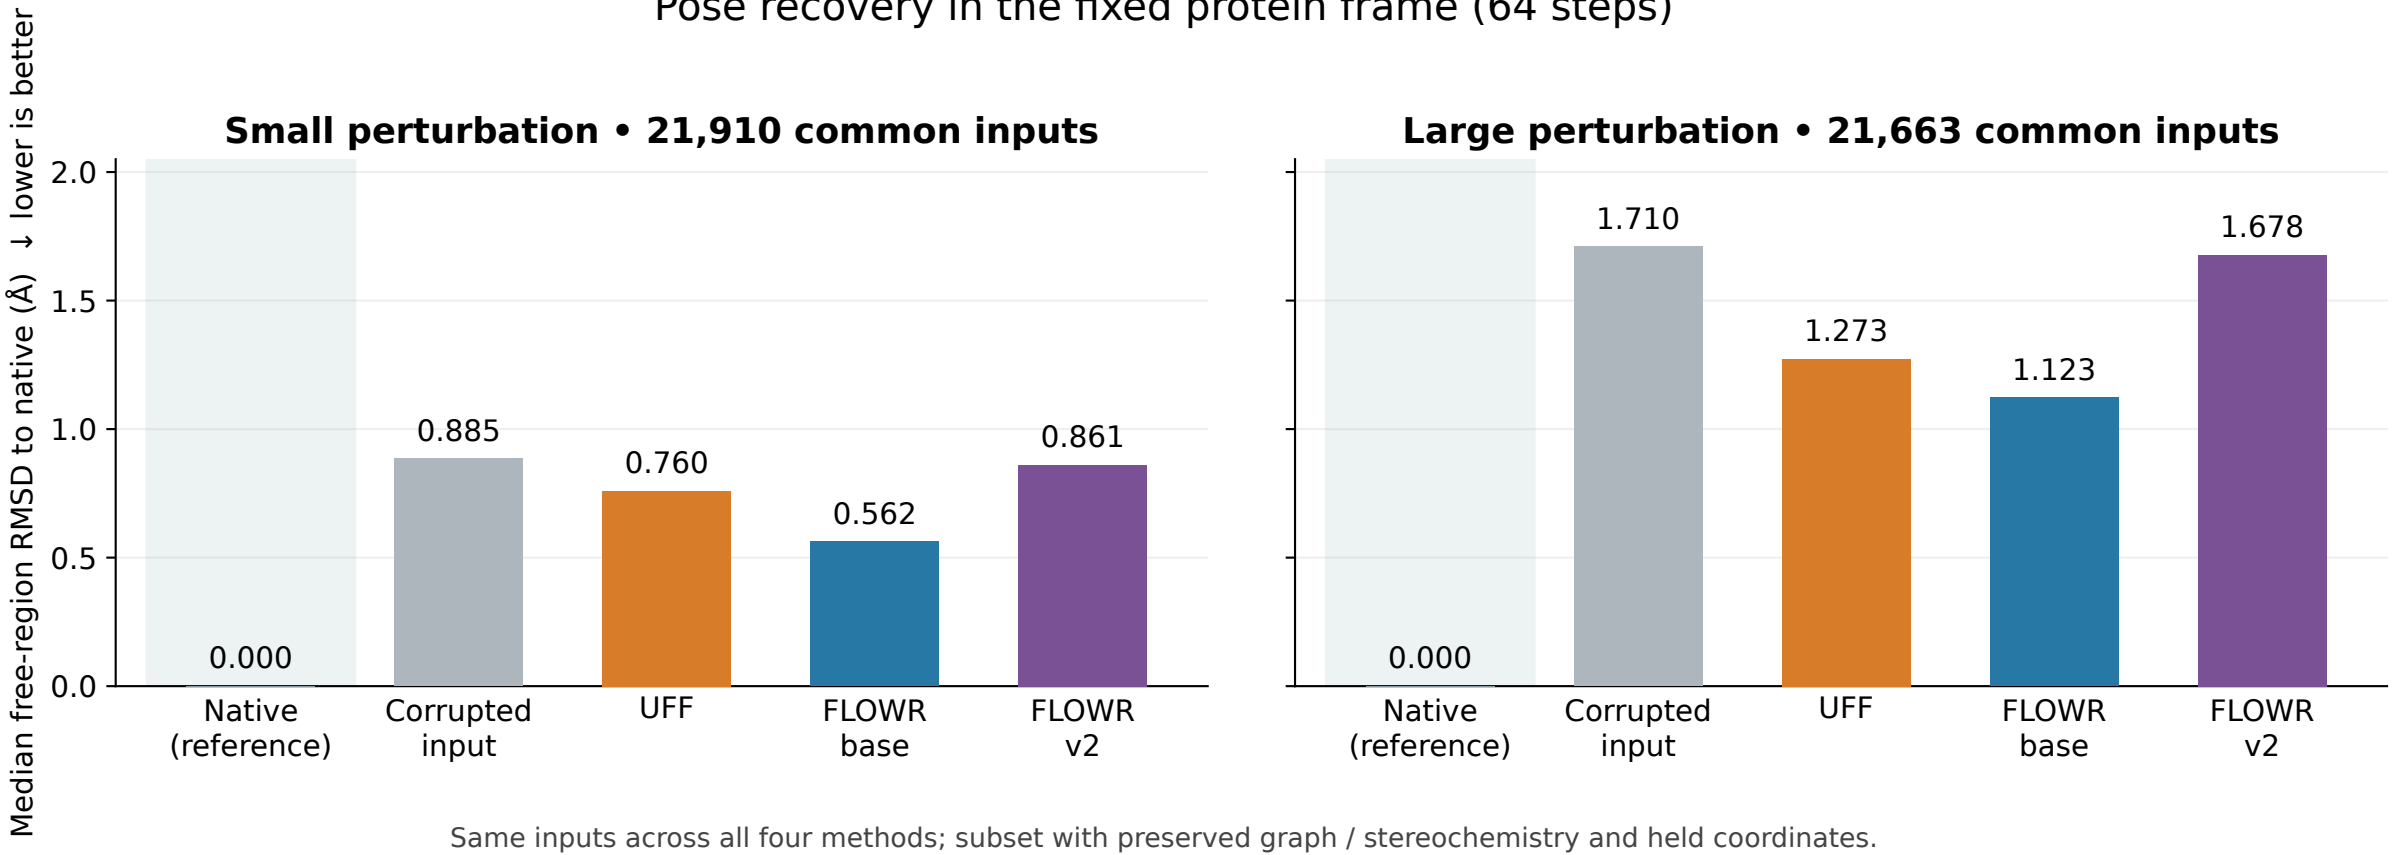
Pose recovery in the fixed protein frame (64 steps)
Median free-region RMSD to native (Å) ↓ lower is better
Small perturbation • 21,910 common inputs
Large perturbation • 21,663 common inputs
2.0
1.5
1.0
0.5
0.0
0.000
0.885
0.760
0.562
0.861
1.710
1.273
1.123
1.678
Native (reference)
Corrupted input
UFF
FLOWR base
FLOWR v2
Same inputs across all four methods; subset with preserved graph / stereochemistry and held coordinates.
Native is the reference: its RMSD is zero by definition. No ligand realignment.