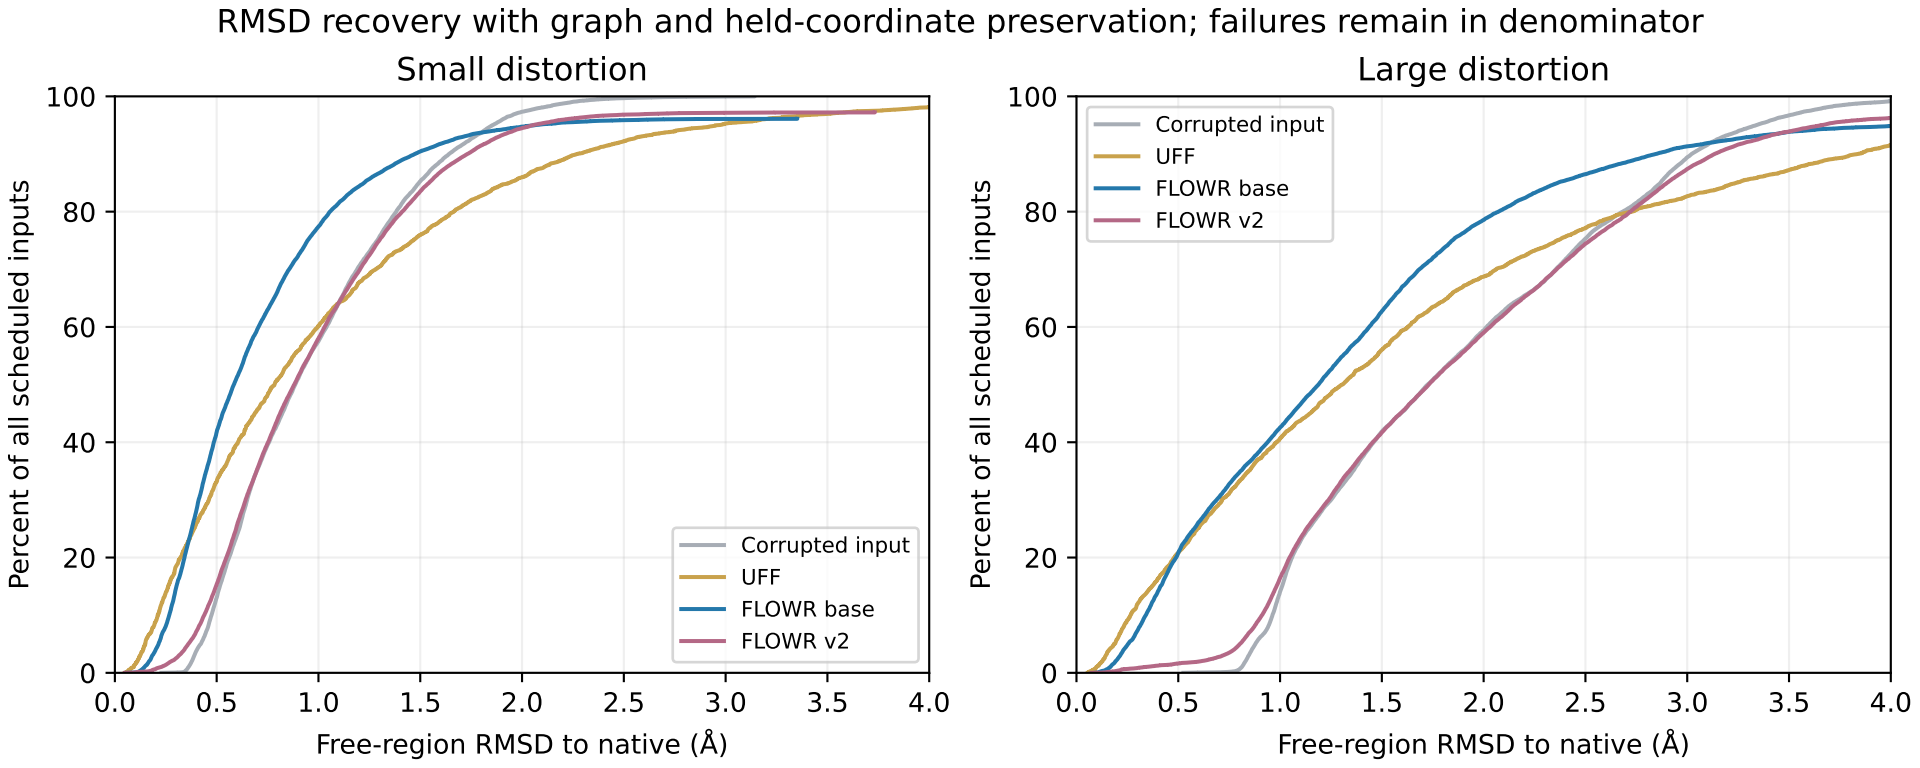

RMSD recovery with graph and held-coordinate preservation; failures remain in denominator
Small distortion
Large distortion
Percent of all scheduled inputs
Free-region RMSD to native (Å)
Corrupted input
UFF
FLOWR base
FLOWR v2
0
20
40
60
80
100
0.0
0.5
1.0
1.5
2.0
2.5
3.0
3.5
4.0