


IDB Lab 6

COFFEE SHOP MANAGEMENT SYSTEM

ER Diagram :

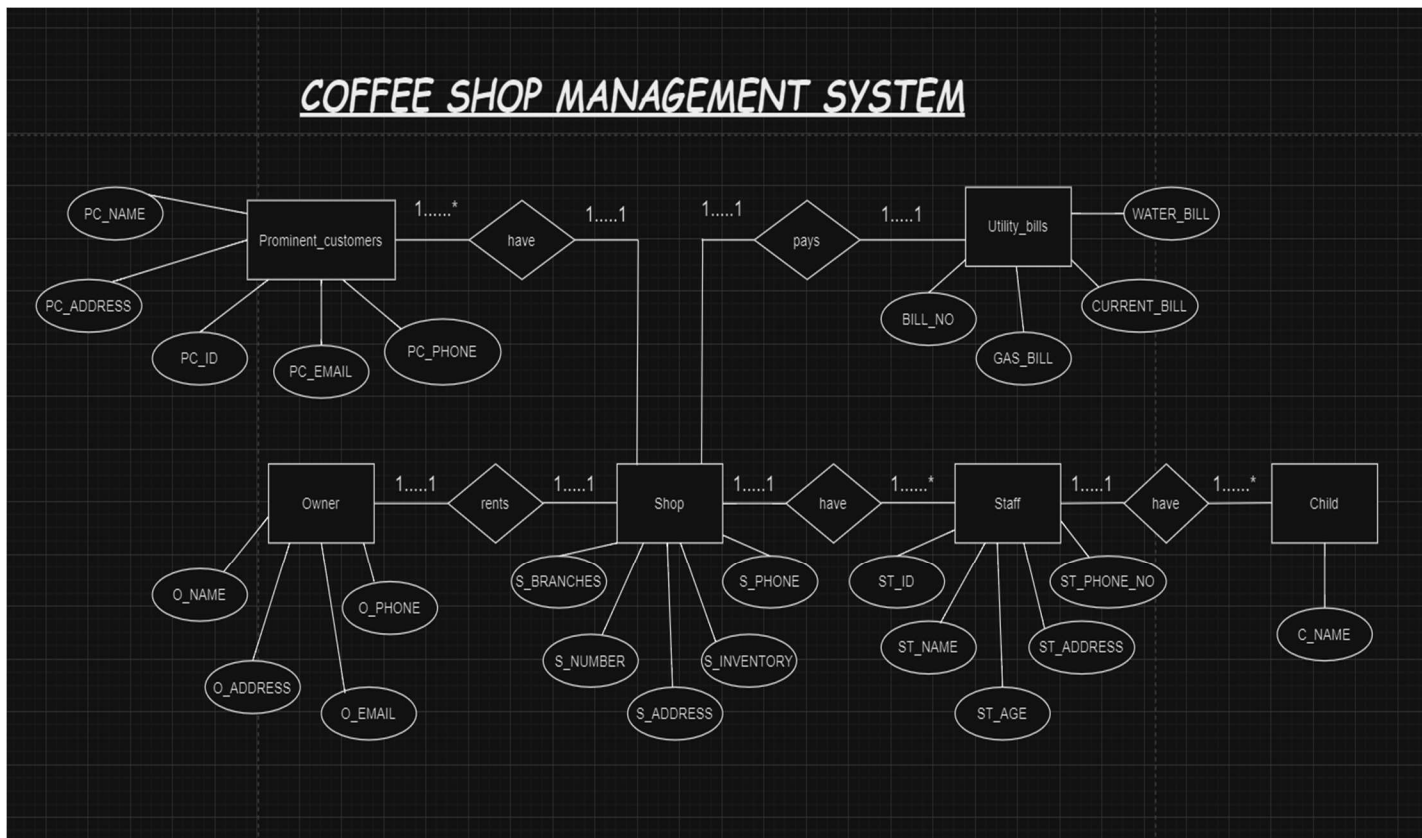

Query :

1) CREATE TABLE shop (

```
S_branches varchar2(30),  
S_number varchar2(30),  
S_address varchar2(30),  
S_inventory varchar2(30),  
S_phone_no varchar2(30)  
);
```

```
CREATE TABLE shop (  
S_branches varchar2(30),  
S_number varchar2(30),  
S_address varchar2(30),  
S_inventory varchar2(30),  
S_phone_no varchar2(30)  
);|
```

Results	Explain	Describe	Saved SQL	History
---------	---------	----------	-----------	---------

Table created.

0.00 seconds

SHOP

TableDataIndexesModelConstraintsGrantsStatisticsUI DefaultsTriggersDependenciesSQL

Add ColumnModify ColumnRename ColumnDrop ColumnRenameCopyDropTruncateCreate Lookup Table

Column Name	Data Type	Nullable	Default	Primary Key
S_BRANCHES	VARCHAR2(30)	Yes	-	-
S_NUMBER	VARCHAR2(30)	Yes	-	-
S_ADDRESS	VARCHAR2(30)	Yes	-	-
S_INVENTORY	VARCHAR2(30)	Yes	-	-
S_PHONE_NO	VARCHAR2(30)	Yes	-	-

1 - 5

```
2) CREATE TABLE staff (
ST_ID varchar2(30),
ST_name varchar2(30),
ST_age number,
ST_address varchar2(30),
ST_phone_no varchar2(30)
);
```

☒ Autocommit
Display 10 ▼

```
CREATE TABLE staff (
ST_ID varchar2(30),
ST_name varchar2(30),
ST_age number,
ST_address varchar2(30),
ST_phone_no varchar2(30)
);
```

STAFF

TableDataIndexesModelConstraintsGrantsStatisticsUI DefaultsTriggersDependenciesSQL

Add ColumnModify ColumnRename ColumnDrop ColumnRenameCopyDropTruncateCreate Lookup Table

Column Name	Data Type	Nullable	Default	Primary Key
ST_ID	VARCHAR2(30)	Yes	-	-
ST_NAME	VARCHAR2(30)	Yes	-	-
ST_AGE	NUMBER	Yes	-	-
ST_ADDRESS	VARCHAR2(30)	Yes	-	-
ST_PHONE_NO	VARCHAR2(30)	Yes	-	-

1 - 5

3) CREATE TABLE child (
C_name varchar2(30)
);

```
CREATE TABLE child (  
  C_name varchar2(30)  
);
```

Results Explain Describe Saved SQL History

Table created.

0.00 seconds

Language: en-us

CHILD

Table Data Indexes Model Constraints Grants Statistics UI Defaults Triggers Dependencies SQL

Add Column Modify Column Rename Column Drop Column Rename Copy Drop Truncate Create Lookup Table

Column Name	Data Type	Nullable	Default	Primary Key
C_NAME	VARCHAR2(30)	Yes	-	-
1 - 1				

4) CREATE TABLE Prominent_customer (
 PC_name varchar2(30),
 PC_address varchar2(30),

```
PC_ID varchar2(30),  
PC_email varchar2(30),  
PC_phone varchar2(30)  
);
```

☒ Autocommit Display 10 ▼

```
CREATE TABLE Prominent_customer (  
PC_name varchar2(30),  
PC_address varchar2(30),  
PC_ID varchar2(30),  
PC_email varchar2(30),  
PC_phone varchar2(30)  
);
```

Results Explain Describe Saved SQL History

Table created.

0.01 seconds

Language: en-us

PROMINENT_CUSTOMER

TableDataIndexesModelConstraintsGrantsStatisticsUI DefaultsTriggersDependenciesSQL

Add ColumnModify ColumnRename ColumnDrop ColumnRenameCopyDropTruncateCreate Lookup Table

Column Name	Data Type	Nullable	Default	Primary Key
PC_NAME	VARCHAR2(30)	Yes	-	-
PC_ADDRESS	VARCHAR2(30)	Yes	-	-
PC_ID	VARCHAR2(30)	Yes	-	-
PC_EMAIL	VARCHAR2(30)	Yes	-	-
PC_PHONE	VARCHAR2(30)	Yes	-	-

1 - 5

```

5) CREATE TABLE utility_bills (
bill_no varchar2(30),
gas_bill varchar2(30),
current_bill varchar2(30),
water_bill varchar2(30)
);

```


6) INSERT INTO owner
(O_NAME,O_ADDRESSSS,O_EMAIL,O_PHONE_NO) values
('Rupa','Hogwarts','rupa@gmail.com','12345678');

OWNER				
 Row deleted.				
Table Data Indexes Model Constraints Grants Statistics UI Defaults				
Query Count Rows Insert Row				
EDIT	O_NAME	O_ADDRESSSS	O_EMAIL	O_PHONE_NO
	Rupa	Hogwarts	rupa@gmail.com	12345678
row(s) 1 - 1 of 1				
Download				

7) INSERT INTO owner
(O_NAME,O_ADDRESSSS,O_EMAIL,O_PHONE_NO) values
('Ujjoyeni','Paris','ujjoyeni@gmail.com','22222222');

OWNER				
Table Data Indexes Model Constraints Grants Statistics UI Defaults				
Query Count Rows Insert Row				
EDIT	O_NAME	O_ADDRESSSS	O_EMAIL	O_PHONE_NO
	Ujjoyeni	Paris	ujjoyeni@gmail.com	22222222
	Rupa	Hogwarts	rupa@gmail.com	12345678
row(s) 1 - 2 of 2				
Download				

8) INSERT INTO owner
(O_NAME,O_ADDRESSSS,O_EMAIL,O_PHONE_NO) values
('Joon','Seoul','joon@gmail.com','71111111');

OWNER

Table	Data	Indexes	Model	Constraints	Grants	Statistics	UI Defaults
Query	Count Rows	Insert Row					
EDIT	O_NAME	O_ADDRESSES	O_EMAIL	O_PHONE_NO			
	Joon	Seoul	joon@gmail.com	71111111			
	Ujjoyeni	Paris	ujjoyeni@gmail.com	22222222			
	Rupa	Hogwarts	rupa@gmail.com	12345678			
					row(s) 1 - 3 of 3		
Download							

9) INSERT INTO shop
(S_BRANCHES,S_NUMBER,S_ADDRESS,S_INVENTORY,S_PHONE_NO) values ('CTG Branch','1','CTG','An industrial coffee grinder','11111111');

SHOP

Create

Table

Data

Indexes

Model

Constraints

Grants

Statistics

UI Defaults

Triggers

Dependencies

SQL

Query

Count Rows

Insert Row

EDIT

S_BRANCHES

S_NUMBER

S_ADDRESS

S_INVENTORY

S_PHONE_NO



CTG Branch

1

CTG

An industrial coffee grinder

11111111

row(s) 1 - 1 of 1

Download

10) INSERT INTO shop
(S_BRANCHES,S_NUMBER,S_ADDRESS,S_INVENTORY,S_PHONE_NO) values ('Dhaka Branch','2','Dhaka','Automatic drip coffee makers','33333333');

SHOP

Create

Table

Data

Indexes

Model

Constraints

Grants

Statistics

UI Defaults

Triggers

Dependencies

SQL

Query

Count Rows

Insert Row

EDIT	S_BRANCHES	S_NUMBER	S_ADDRESS	S_INVENTORY	S_PHONE_NO
	CTG Branch	1	CTG	An industrial coffee grinder	11111111
	Dhaka Branch	2	Dhaka	Automatic drip coffee makers	33333333
row(s) 1 - 2 of 2					

Download

11) INSERT INTO shop
 (S_BRANCHES,S_NUMBER,S_ADDRESS,S_INVENTORY,S_PHONE_NO) values ('Sylhet Branch','3','Sylhet','Industrial blenders','44444444');

SHOP

Create ▼

Table

Data

Indexes

Model

Constraints

Grants

Statistics

UI Defaults

Triggers

Dependencies

SQL

Query

Count Rows

Insert Row

EDIT	S_BRANCHES	S_NUMBER	S_ADDRESS	S_INVENTORY	S_PHONE_NO
	CTG Branch	1	CTG	An industrial coffee grinder	11111111
	Sylhet Branch	3	Sylhet	Industrial blenders	44444444
	Dhaka Branch	2	Dhaka	Automatic drip coffee makers	33333333
row(s) 1 - 3 of 3					

Download

12) INSERT INTO staff
 (ST_ID,ST_NAME,ST_AGE,ST_ADDRESS,ST_PHONE_NO) values ('001','Amy','19','Dinajpur','55555555');

STAFF

TableDataIndexesModelConstraintsGrantsStatisticsUI DefaultsTriggersDependenciesSQL

QueryCount RowsInsert Row

EDIT	ST_ID	ST_NAME	ST_AGE	ST_ADDRESS	ST_PHONE_NO
	001	Amy	19	Dinajpur	55555555
row(s) 1 - 1 of 1					

Download

13) INSERT INTO staff
(ST_ID,ST_NAME,ST_AGE,ST_ADDRESS,ST_PHONE_NO) values
('002','Otis','21','Feni','66666666');

STAFF

Table Data Indexes Model Constraints Grants Statistics UI Defaults Triggers Dependencies SQL

Query Count Rows Insert Row

EDIT	ST_ID	ST_NAME	ST_AGE	ST_ADDRESS	ST_PHONE_NO
	001	Amy	19	Dinajpur	55555555
	002	Otis	21	Feni	66666666
row(s) 1 - 2 of 2					

Download

14) INSERT INTO staff
(ST_ID,ST_NAME,ST_AGE,ST_ADDRESS,ST_PHONE_NO) values
('003','Ruby','23','Khulna','77777777');

STAFF

Table Data Indexes Model Constraints Grants Statistics UI Defaults Triggers Dependencies SQL

Query Count Rows Insert Row

EDIT	ST_ID	ST_NAME	ST_AGE	ST_ADDRESS	ST_PHONE_NO
	001	Amy	19	Dinajpur	55555555
	002	Otis	21	Feni	66666666
	003	Ruby	23	Khulna	77777777
row(s) 1 - 3 of 3					

Download

15) INSERT INTO child (C_NAME) values ('Yug');

CHILD

Table Data Indexes Model Constraints Grants Statistics UI Defaults

Query Count Rows Insert Row

EDIT	C_NAME
	Yug
row(s) 1 - 1 of 1	

Download

16) INSERT INTO child (C_NAME) values ('Rohan');

CHILD	
Table	Data
Query	Count Rows
Insert Row	
EDIT	C_NAME
	Yug
	Rohan
row(s) 1 - 2 of 2	
Download	

17) INSERT INTO child (C_NAME) values ('Yuvani');

CHILD	
Table	Data
Query	Count Rows
Insert Row	
EDIT	C_NAME
	Yug
	Rohan
	Yuvani
row(s) 1 - 3 of 3	
Download	

18) INSERT INTO prominent_customer
(PC_NAME,PC_ADDRESS,PC_ID,PC_EMAIL,PC_PHONE) values
('Jin','Melbourne','101','jin@gmail.com','72222222');

PROMINENT_CUSTOMER

TableDataIndexesModelConstraintsGrantsStatisticsUI DefaultsTriggers

QueryCount RowsInsert Row

EDIT	PC_NAME	PC_ADDRESS	PC_ID	PC_EMAIL	PC_PHONE
	Jin	Melbourne	101	jin@gmail.com	72222222
					row(s) 1 - 1 of 1

Download

19) INSERT INTO prominent_customer
(PC_NAME,PC_ADDRESS,PC_ID,PC_EMAIL,PC_PHONE) values
('Hobi','Singapore','102','hobi@gmail.com','73333333');

PROMINENT_CUSTOMER

Table Data Indexes Model Constraints Grants Statistics UI Defaults Triggers

Query Count Rows Insert Row

EDIT	PC_NAME	PC_ADDRESS	PC_ID	PC_EMAIL	PC_PHONE
	Jin	Melbourne	101	jin@gmail.com	72222222
	Hobi	Singapore	102	hobi@gmail.com	73333333
row(s) 1 - 2 of 2					

Download

20) INSERT INTO prominent_customer
(PC_NAME,PC_ADDRESS,PC_ID,PC_EMAIL,PC_PHONE) values
('Suga','Malyasia','103','suga@gmail.com','74444444');

PROMINENT_CUSTOMER

TableDataIndexesModelConstraintsGrantsStatisticsUI DefaultsTriggers

QueryCount RowsInsert Row

EDIT	PC_NAME	PC_ADDRESS	PC_ID	PC_EMAIL	PC_PHONE
	Jin	Melbourne	101	jin@gmail.com	72222222
	Hobi	Singapore	102	hobi@gmail.com	73333333
	Suga	Malyasia	103	suga@gmail.com	74444444
row(s) 1 - 3 of 3					

Download

21) INSERT INTO utility_bills
 (BILL_NO,GAS_BILL,CURRENT_BILL,WATER_BILL) values
 ('111','2\$','3\$','4\$');

UTILITY_BILLS

TableDataIndexesModelConstraintsGrantsStatisticsUI Defaults

QueryCount RowsInsert Row

EDIT	BILL_NO	GAS_BILL	CURRENT_BILL	WATER_BILL
	111	2\$	3\$	4\$
				row(s) 1 - 1 of 1

Download

22) INSERT INTO utility_bills
 (BILL_NO,GAS_BILL,CURRENT_BILL,WATER_BILL) values
 ('222','5\$','6\$','7\$');

