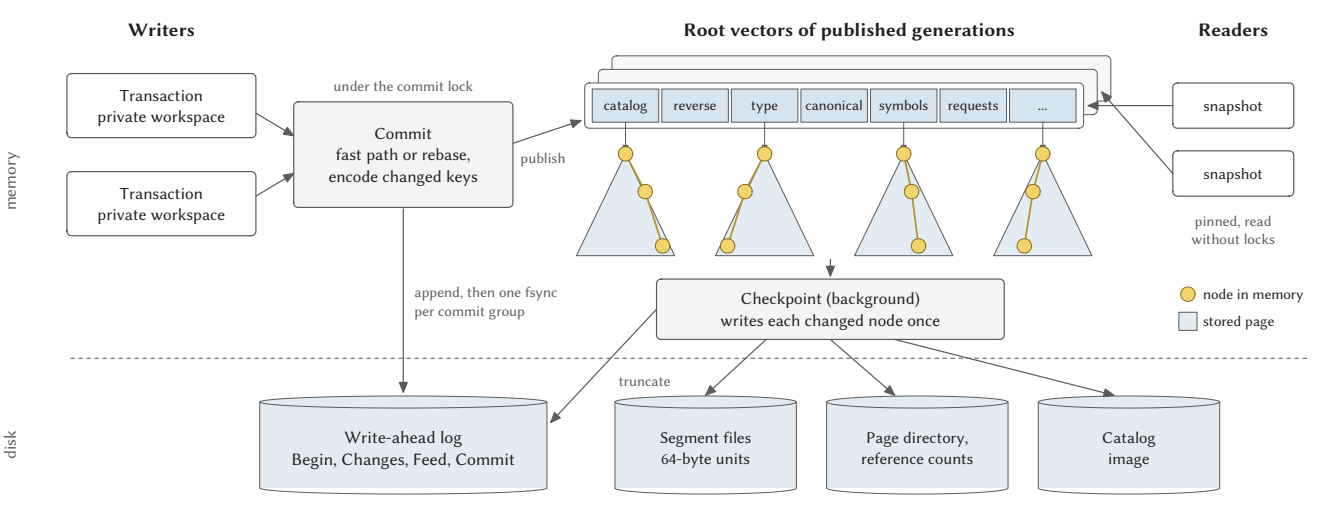
Writers
Root vectors of published generations
Readers
memory
disk
Transaction
private workspace
Transaction
private workspace
under the commit lock
Commit
fast path or rebase,
encode changed keys
publish
catalog
reverse
type
canonical
symbols
requests
...
snapshot
snapshot
pinned, read
without locks
append, then one fsync
per commit group
Checkpoint (background)
writes each changed node once
node in memory
stored page
truncate
Write-ahead log
Begin, Changes, Feed, Commit
Segment files
64-byte units
Page directory,
reference counts
Catalog
image