SKILL-12

2400030531

D.V.UJWAL

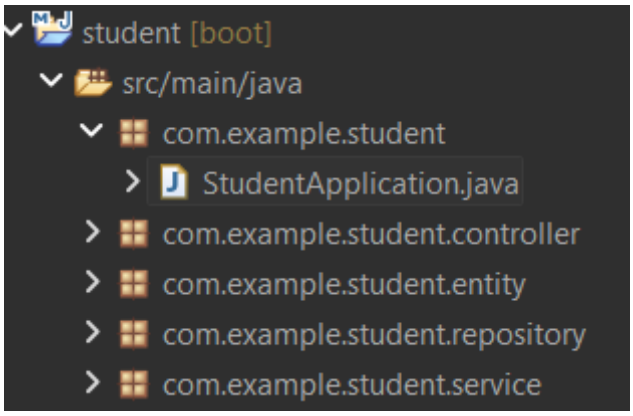

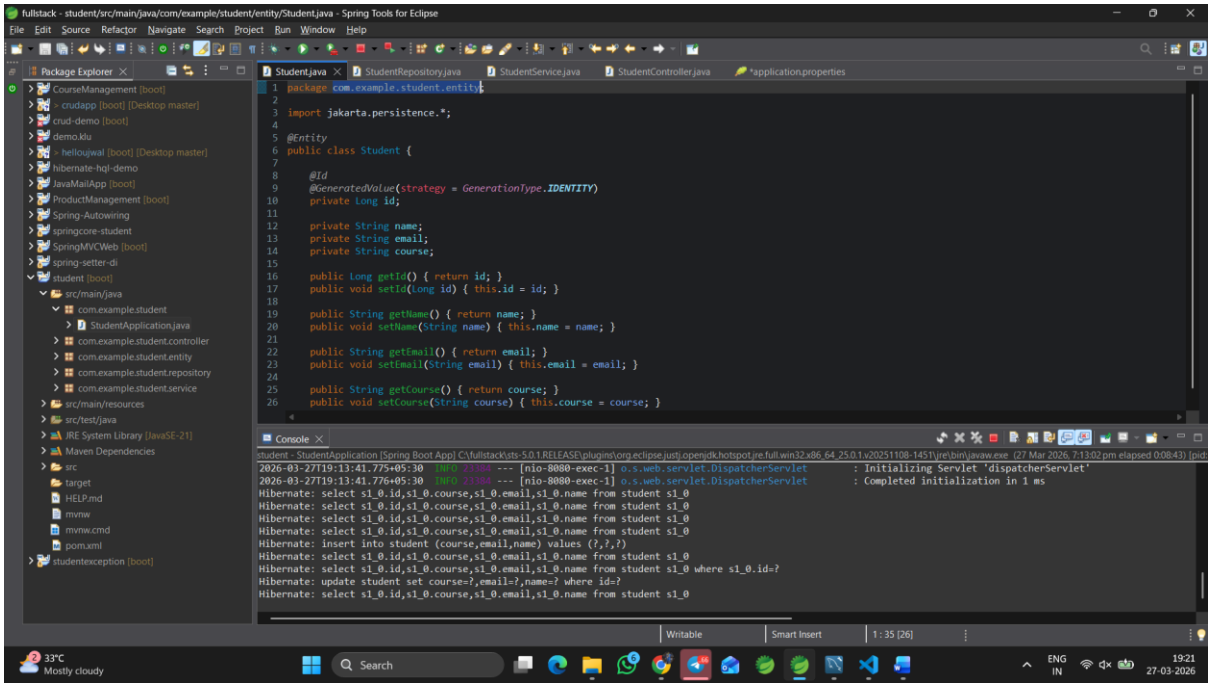

fullstack - student/src/main/java/com/example/student/repository/StudentRepository.java - Spring Tools for Eclipse

```java
package com.example.student.repository;

import com.example.student.entity.Student;

public interface StudentRepository extends JpaRepository<Student, Long> {
}
```

```
student - StudentApplication [Spring Boot App] C:\fullstack\sts-5.0.1.RELEASE\plugins\org.eclipse.justj.openjdk.hotspot.jre.full.win32.x86_64_25.0.1.v20251108-1451\jre\bin\javaw.exe (27 Mar 2026, 7:13:02 pm elapsed 0:08:55) [pid:
2026-03-27T19:13:41.775+05:30  INFO 23384 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet        : Initializing Servlet 'dispatcherServlet'
2026-03-27T19:13:41.776+05:30  INFO 23384 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet        : Completed initialization in 1 ms
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: insert into student (course,email,name) values (?,?,?)
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0 where s1_0.id=?
Hibernate: update student set course=?,email=?,name=? where id=?
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
```

fullstack - student/src/main/java/com/example/student/service/StudentService.java - Spring Tools for Eclipse

```java
package com.example.student.service;

import com.example.student.entity.Student;

@Service
public class StudentService {

    @Autowired
    private StudentRepository repo;

    public Student save(Student s) {
        return repo.save(s);
    }

    public List<Student> getAll() {
        return repo.findAll();
    }

    public Student update(Long id, Student s) {
        Student st = repo.findById(id).orElseThrow();
        st.setName(s.getName());
        st.setEmail(s.getEmail());
        st.setCourse(s.getCourse());
        return repo.save(st);
    }

}
```

```
student - StudentApplication [Spring Boot App] C:\fullstack\sts-5.0.1.RELEASE\plugins\org.eclipse.justj.openjdk.hotspot.jre.full.win32.x86_64_25.0.1.v20251108-1451\jre\bin\javaw.exe (27 Mar 2026, 7:13:02 pm elapsed 0:09:42) [pid:
2026-03-27T19:13:41.775+05:30  INFO 23384 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet        : Initializing Servlet 'dispatcherServlet'
2026-03-27T19:13:41.776+05:30  INFO 23384 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet        : Completed initialization in 1 ms
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: insert into student (course,email,name) values (?,?,?)
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0 where s1_0.id=?
Hibernate: update student set course=?,email=?,name=? where id=?
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
```

fullstack - student/src/main/java/com/example/student/controller/StudentController.java - Spring Tools for Eclipse

```java
package com.example.student.controller;

import com.example.student.entity.Student;

@RestController
@CrossOrigin(origins = "*")
@RequestMapping("/students")
public class StudentController {

    @Autowired
    private StudentService service;

    @PostMapping
    public ResponseEntity<Student> add(@RequestBody Student s) {
        return ResponseEntity.ok(service.save(s));
    }

    @GetMapping
    public ResponseEntity<List<Student>> getAll() {
        return ResponseEntity.ok(service.getAll());
    }

    @PutMapping("/{id}")
    public ResponseEntity<Student> update(@PathVariable Long id, @RequestBody Student s) {
        return ResponseEntity.ok(service.update(id, s));
    }
```

```
2026-03-27T19:13:41.775+05:30  INFO 21384 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet        : Initializing Servlet 'dispatcherServlet'
2026-03-27T19:13:41.776+05:30  INFO 21384 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet        : Completed initialization in 1 ms
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: insert into student (course,email,name) values (?,?,?)
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0 where s1_0.id=?
Hibernate: update student set course=?,email=?,name=? where id=?
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
```

fullstack - student/src/main/resources/application.properties - Spring Tools for Eclipse

```properties
spring.datasource.url=jdbc:mysql://localhost:3306/studentdbnew
spring.datasource.username=root
spring.datasource.password=Ujwal2007@

spring.jpa.hibernate.ddl-auto=update
spring.jpa.show-sql=true
```


```
2026-03-27T19:13:41.775+05:30  INFO 21384 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet        : Initializing Servlet 'dispatcherServlet'
2026-03-27T19:13:41.776+05:30  INFO 21384 --- [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet        : Completed initialization in 1 ms
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: insert into student (course,email,name) values (?,?,?)
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0 where s1_0.id=?
Hibernate: update student set course=?,email=?,name=? where id=?
Hibernate: select s1_0.id,s1_0.course,s1_0.email,s1_0.name from student s1_0
```

student-app > src > StudentList.js > default

```javascript
import { useEffect, useState } from "react";
import axios from "axios";

function StudentList({ onEdit, refresh }) {
  const [students, setStudents] = useState([]);

  useEffect(() => {
    axios.get("http://localhost:8080/students")
      .then(res => setStudents(res.data));
  }, [refresh]);

  const deleteStudent = (id) => {
    axios.delete(`http://localhost:8080/students/${id}`)
      .then(() => window.location.reload());
  };

  return (
    <table border="1">
      <tr>
        <th>Name</th>
        <th>Email</th>
        <th>Course</th>
        <th>Action</th>
      </tr>

      {students.map(s => (
        <tr key={s.id}>
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
PS C:\Users\Deevi Ujwal\OneDrive - K L University\Desktop\springbootproject\frontend56\student-app> c
md

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
```

student-app > src > AddStudent.js > default

```javascript
import { useState, useEffect } from "react";
import axios from "axios";

function AddStudent({ selected, reload }) {
  const [form, setForm] = useState({ name: "", email: "", course: "" });

  useEffect(() => {
    if (selected) setForm(selected);
  }, [selected]);

  const handleChange = (e) => {
    setForm({ ...form, [e.target.name]: e.target.value });
  };

  const submit = (e) => {
    e.preventDefault();

    if (form.id) {
      axios.put(`http://localhost:8080/students/${form.id}`, form)
        .then(() => reload());
    } else {
      axios.post("http://localhost:8080/students", form)
        .then(() => reload());
    }

    setForm({ name: "", email: "", course: "" });
  };
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
PS C:\Users\Deevi Ujwal\OneDrive - K L University\Desktop\springbootproject\frontend56\student-app> cmd
  On Your Network:  http://10.123.8.79:3000

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
```

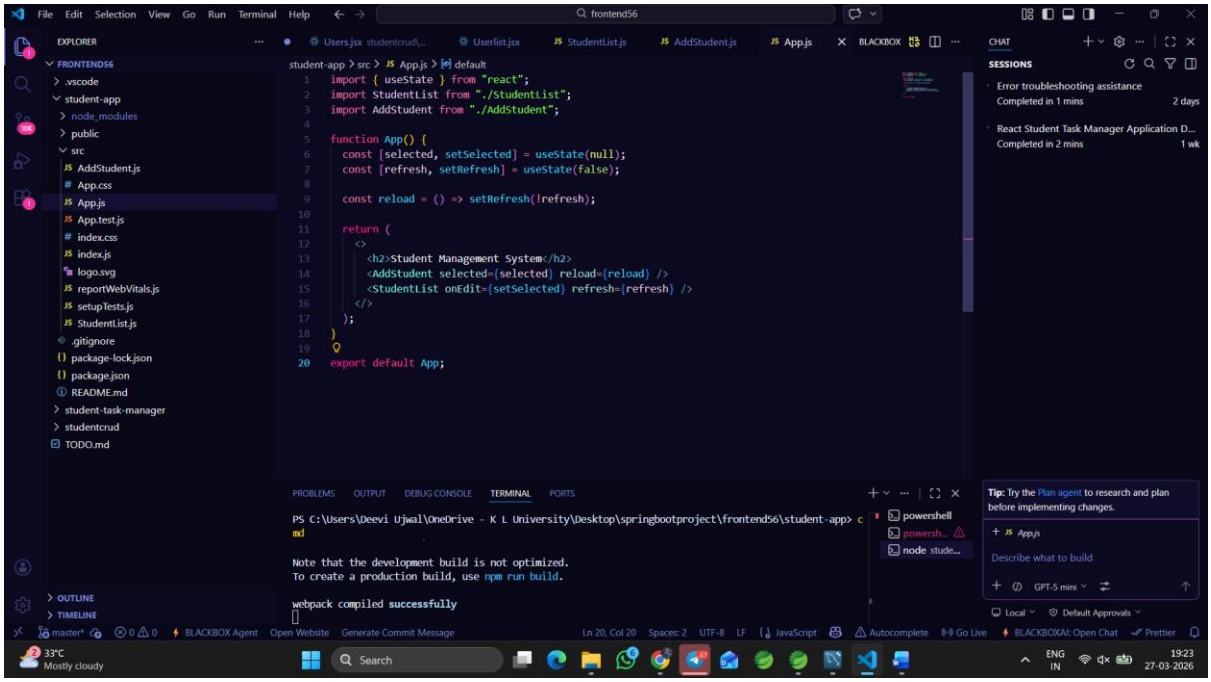

Student Management System

Name	Email	Course	Save

Name	Email	Course	Action

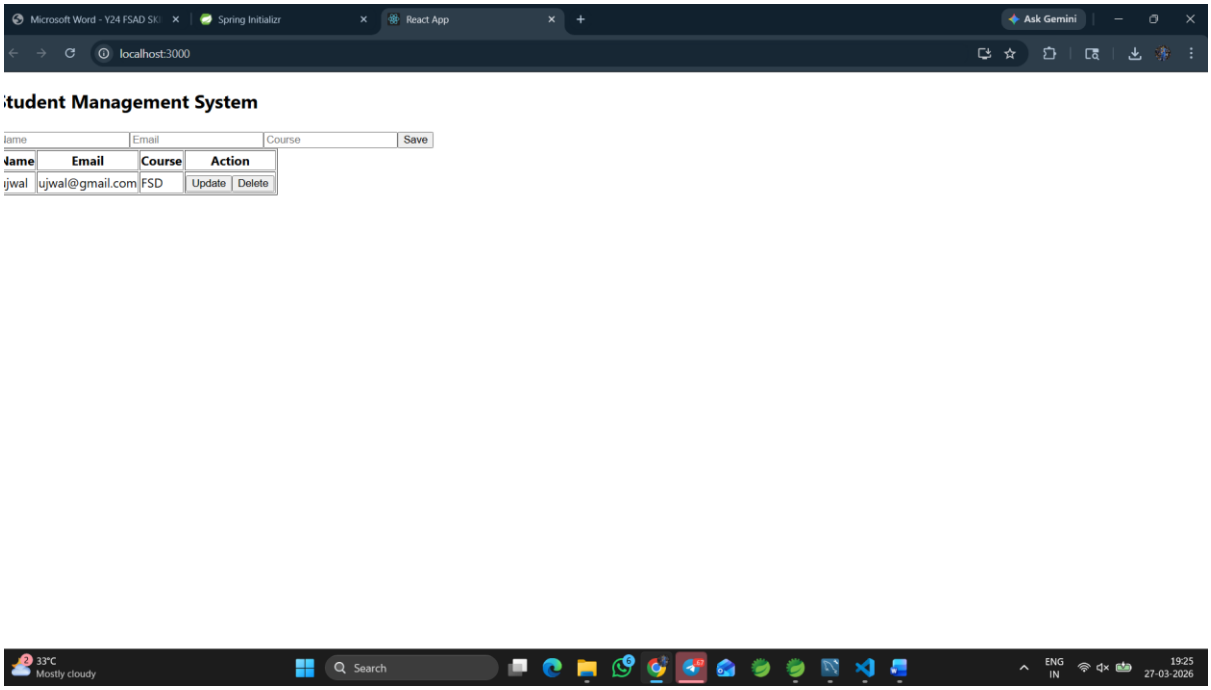
Microsoft Word - Y24 FSAD SK
Spring Initializr
React App
Ask Gemini
localhost:3000
tudent Management System
Name
Email
Course
Save
Name
Email
Course
Action
ujwal
ujwal@gmail.com
FSD
Update
Delete
33°C
Mostly cloudy
Search
ENG
IN
19:25
27-03-2026

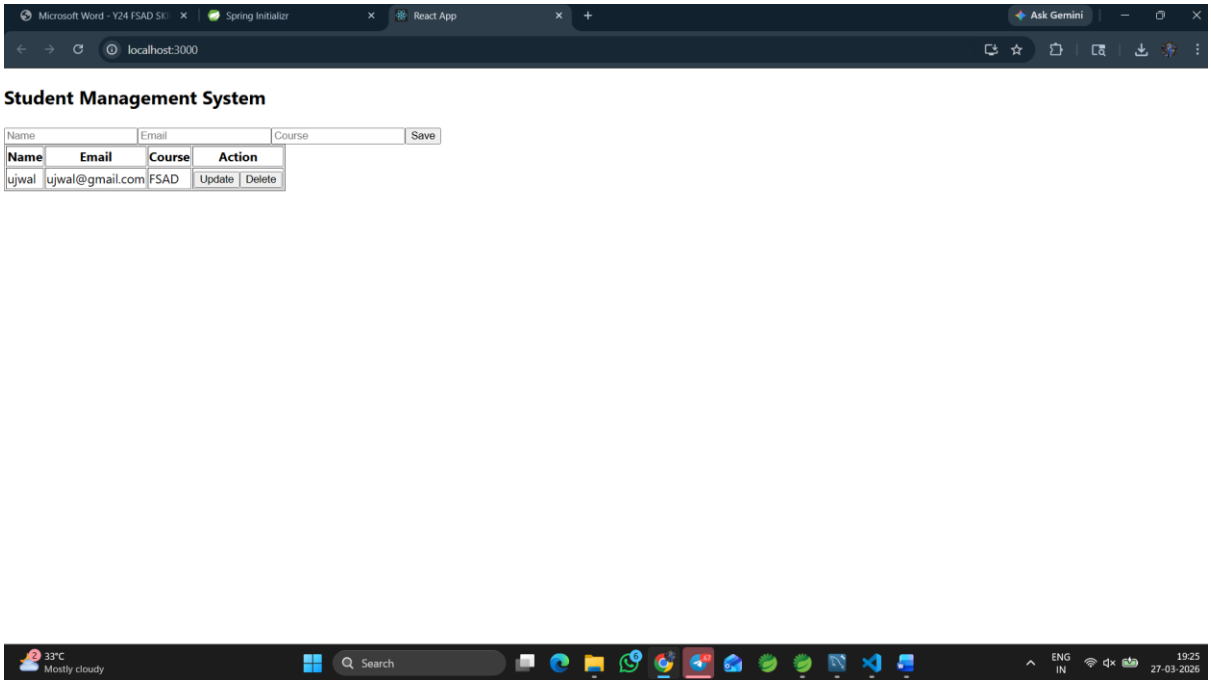
Microsoft Word - Y24 FSAD SK
Spring Initializr
React App
Ask Gemini
localhost:3000
Student Management System
Name
Email
Course
Save
Name
Email
Course
Action
ujwal
ujwal@gmail.com
FSAD
Update
Delete
33°C
Mostly cloudy
Search
ENG
IN
19:25
27-03-2026

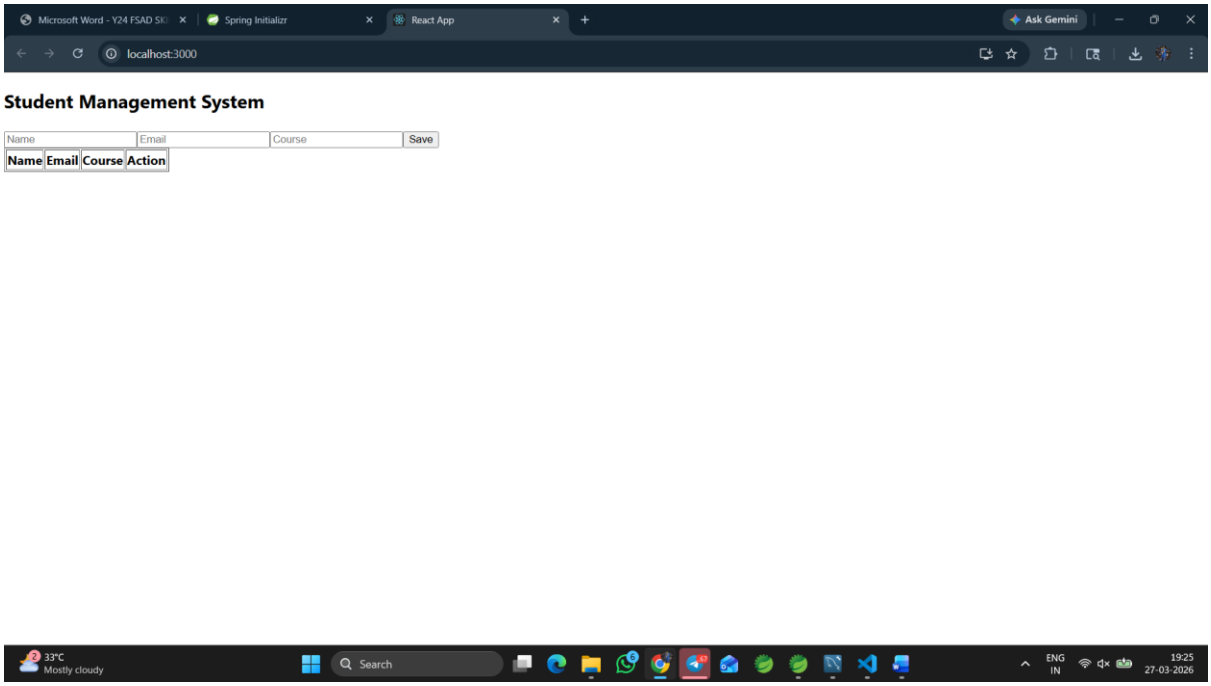

Git Hub Link: https://github.com/Ujwal200707/FSAD_SKILL_EXPERIMENTS.git