


Overview of Upgrade from ENOVIA V6/3DEXPERIENCE Releases to 3DEXPERIENCE R2026x

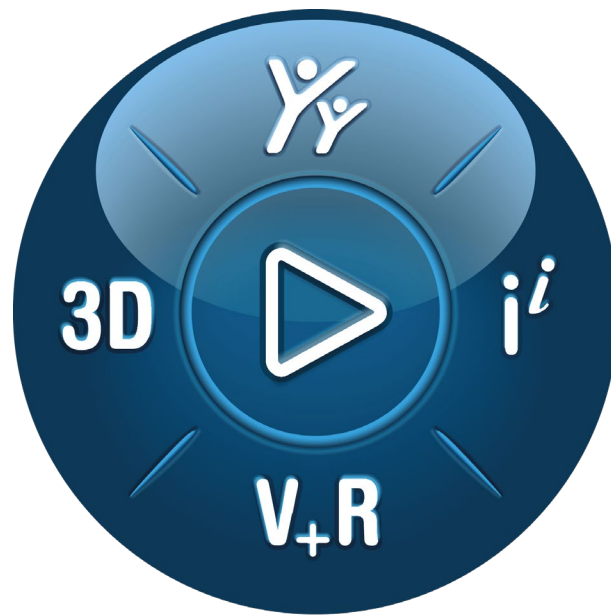

3DEXPERIENCE®

Version 1.0 - 2/13/2026

Written by: Vinayak CHIVATE, Dhanashree SHIRKE

Validated by: Rajendra NENE

Edited by: Arati DESAI

3DEXPERIENCE Platform R2026x

Executive Summary

This Best Practices document provides general information on migration (Upgrade) from the older V6/3DEXPERIENCE releases to the 3DEXPERIENCE R2026x platform.

Note: The methodology and different observations are based on different in-house tests on pure OOTB stacks and sample data. In-house tests have been carried out on upgrade to 3DEXPERIENCE R2026x releases starting from V6R2013x.

Target Audience: Dassault Systèmes Customers & Partners (IT / Software Architects & Administrators) who are planning to upgrade to 3DEXPERIENCE R2026x release. It also provides information about the known issues and their possible solutions/bypasses, some hints/tips for different steps involved in the upgrade process.

Disclaimer: This Best Practices document contains general guidelines related to upgrading to the 3DEXPERIENCE R2026x release. While performing such upgrades at the customer's production side requires assessing the actual database size, customizations in place, different dependencies, and so on. Recommendation is to get in touch with the Dassault Systèmes Services team for assistance with the smooth transition to the 3DEXPERIENCE R2026x release.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

1 Table of contents

1. Migration vs Upgrade.....	6
2. Scope of the Best Practice	6
2.1. Considerations	6
2.2. Base Installation Stack Details.....	7
2.3. Customization	7
3. Hardware Software Prerequisites	8
4. Execute VPMDDataChecker Tool on Older Release	8
5. Export and Import of Database and Backup Files from Older Release	9
5.1. Exporting Database from Older Release	9
5.1.1. 3DPassport Database Export.....	9
5.1.2. 3DDashboard Database Export.....	11
5.1.3. 3DSpace Database Export	11
5.1.4. 3DSwym Database Export	12
5.1.5. 3DComment Database Export.....	12
5.1.6. 3DNotification Database Export	13
5.2. Importing Database to New Environment	13
5.2.1. Database Import for 3DPassport.....	14
5.2.2. Database Import for 3DDashboard.....	17
5.2.3. Database Import for 3DSpace	18
5.2.4. Database Import for 3DSwym	19
5.2.5. Database Import for 3DComment.....	21
5.2.6. Database Import for 3DNotification	21
5.3. Backup of Files from Older Release	22
5.3.1. Backup 3DPassport Files	23
5.3.2. Backup 3DDashboard Files.....	23
5.3.3. Backup 3DSpace Files	23
5.3.4. Backup Files for 3DSwym, 3DComment, and 3DNotification	23
6. Reverse Proxy Configuration.....	24
7. Upgrading 3DPassport	24
7.1. Schematic Upgrade Process for 3DPassport.....	25
7.1.1. Setting the Old Level Cypher File.....	25
7.1.2. Installation of 3DPassport for 3DEXPERIENCE R2026x	26



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

7.1.3.	Run Reconfig Tool for 3DPassport to Correct JDBC URL.....	26
8.	Upgrading 3DDashboard	28
9.	Upgrading 3DSearch	28
10.	Upgrading 3DSpace	28
10.1.	Schematic of the Upgrade Process	28
10.2.	3DSpace And Other Apps Installation	30
10.2.1.	Points to Consider Before 3DSpace Installation	30
10.2.2.	Upgrading from ENOVIA V6 Level before V6R2013x.....	33
10.2.3.	Upgrading from ENOVIA V6R2013x or Later V6/3DEXPERIENCE Levels	33
10.3.	Using 3DSpace Installer	33
10.4.	Upgrade and Validate the Database Schema	37
10.4.1.	Creating Missing Indexes.....	37
10.4.2.	Upgrade Pre-Processing.....	38
10.4.3.	Running the Upgrade.....	40
10.4.4.	Upgrading the Database to Add Support for File Uniqueness	41
10.4.5.	Upgrade Post-Processing	42
10.5.	Using the "install3DSpaceR2026x[.bat .sh]" File	43
10.6.	Installing Other Apps	44
10.7.	Installing 3DEXPERIENCE R2026x FPXXXX	45
10.8.	Data Migration	45
10.8.1.	Migrating PLMEntity Data-VPLMDataMigration(VPM Data)	46
10.8.2.	Business Process Services (BPS)	49
10.8.3.	Multi-Discipline Collaboration Platform (EVP).....	51
10.8.4.	Enterprise Change Management (ECM).....	51
10.8.5.	Engineering BOM Management (ENG)	52
10.8.6.	Traceable Requirements Management (RMT)	53
10.8.7.	Variant Configuration Management (FTR).....	53
10.8.8.	Manufacturing BOM Management (MFG).....	54
10.8.9.	Program Management (PRG)	54
10.8.10.	IP Classification (LBC)	54
10.8.11.	Supplier Quality Management (SUP).....	55
10.8.12.	RFQ Management (SRC)	55
10.9.	Execute War Redeploy	55



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

10.10.	Compiling all JPOs	55
10.11.	Migrating from Former Typing to Unified Typing	56
10.11.1.	About the Unified Typing Migration Tool	57
10.11.2.	Parallelizing Unified Typing Migration Processes	57
10.12.	Configuring Store Data (VPMDData)	57
11.	Upgrading 3DSwym	58
12.	Upgrading 3DComment	58
13.	Upgrading 3DNotification	59
14.	Post-Installation Procedures	59
14.1.	Importing Existing Users Created in an Earlier Release.....	59
14.2.	Reconfiguring 3DEXPERIENCE Server Deployment Parameters	60
14.3.	Reconfiguring 3DEXPERIENCE Server (from Test to Production Environment) ...	61
15.	Frequently Asked Question (FAQs)	62
16.	Document History.....	64



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

1. Migration vs Upgrade

Migration is the process of replicating applications from one architecture to another.

For example, when a customer moves from ENOVIA VPM V5 to **3DEXPERIENCE** platform, this can be termed as migration as the customer is migrating from one architecture to a completely different architecture. For example, if the user is moving from AIX to Windows, it can be termed as Migration.

Upgrade means the process of replacing your existing application/architecture with a newer version of the same application/architecture. An upgrade is a process of moving from an older/ previous release to a higher release to take benefit of the enhancements done on the latest marketed release. Upgrade allows such move along with the legacy data.

For example, when the customer moves from ENOVIA V6R2013x to **3DEXPERIENCE** R2026x, it may be termed as an upgrade as the customer is migrating to a newer version of **3DEXPERIENCE** platform. For example, if the customer is moving from Windows 7 SP1 to SP2, it can be termed as an Upgrade.

2. Scope of the Best Practice

This Best Practices document contains general guidelines related to upgrade to **3DEXPERIENCE** R2026x release.

2.1. Considerations

Following points were considered during the creation of this Best Practice.

- We have tried to evolve the methodologies while upgrading from different ENOVIA V6 or **3DEXPERIENCE** releases, starting from V6R2013x to the **3DEXPERIENCE** R2026x platform.
- We have considered these ENOVIA V6 or **3DEXPERIENCE** releases as base installation and upgrading it directly to **3DEXPERIENCE** R2026x platform. All these base installations are pure OOTB installations that do not have any UI configurations /customizations or any DMC.
- Tests have been carried out on Windows platform, Oracle.
- Methodologies and suggestions provided in the subsequent sections are derived from the in-house conducted tests. We have created sample datasets in each app to test the validity of **3DEXPERIENCE** R2026x upgrade and thus the data integrity.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

2.2. Base Installation Stack Details

The environment and stack details used for V6/3DEXPERIENCE releases from where the upgrade to 3DEXPERIENCE R2026x was carried-out are listed below.

OS – Windows Server 2022

Database – Oracle (with compatible version as applicable)

If the following centrals/apps are already installed in the older level, then you must install the same stack for 3DEXPERIENCE R2026x level. You can add additional apps to the new environment as required.

- 3DPassport (For 3DEXPERIENCE R2015x and above)
- 3DDashboard (For 3DEXPERIENCE R2015x and above)
- 3DSearch
- 3DSpace
 - ENOVIA Live Collaboration Server (CSR)
 - ENOVIA Business Process Services (BPS)
 - ENOVIA Multi-Discipline collaboration Platform (EVP)
 - ENOVIA Engineering BOM Management (ENG)
 - ENOVIA Manufacturing BOM Management (MFG)
 - ENOVIA Collaborative Tasks Foundation
 - ENOVIA Project Management (PRG)
 - ENOVIA IP Classification (LBC)
 - ENOVIA Variant Management (FTR)
 - ENOVIA Sourcing Central (SRC)
 - ENOVIA Supplier Quality Management (SUP)
 - ENOVIA Traceable Requirements Management (RMT)
- 3DSpace Index
- File Collaboration Server (FCS)
- 3DSwym
- 3DComment (For 3DEXPERIENCE R2017x and above)
- 3DNotification (For 3DEXPERIENCE R2017x and above)

2.3. Customization

Customization is modification, addition, or deletion of the OOTB ENOVIA components, Schema, or Web UI to meet the customer requirements. Customer typically makes customization on top of OOTB ENOVIA to achieve the business processes or transactions.

Complexity of customization could be Low, Medium, and High.

The process of database upgrade happens during the following two steps:

- CORE 3DEXPERIENCE platform upgrade.
- BPS, application and integration upgrade.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

The CORE **3DEXPERIENCE** platform upgrade process is to bring the database tables from source release to the target release. For example, if a customer is upgrading from V6R2013x to **3DEXPERIENCE** R2026x, then the core upgrade steps update all the LX_ & MX_ tables to the latest version.

The BPS, application and integration upgrade process is used to update the AS-IS custom schema with the latest target release OOTB schema. This process could be an interactive process as the custom schema results into multiple conflicts and requires a fix to progress.

Both the above steps are performed using the Dassault Systèmes R&D provided scripts and installers. The Web UI or Application files do not update and these files must be updated manually by reapplying customization (when relevant) on top of the new standard OOTB files.

Note: For any customization-related topics or queries, contact the Dassault Systèmes Services team.

3. Hardware Software Prerequisites

Based on the requirement, ensure that you choose the right hardware configuration. For more details of the supported platform for **3DEXPERIENCE** platform installation, refer to the Program Directory:

<https://www.3ds.com/support/documentation/program-directories>

The Program Directory also contains information about the software prerequisites. Ensure that you install them on the system before starting the upgrade process.

4. Execute VPMDDataChecker Tool on Older Release

Before backing up the database, run the VPMDDataChecker utility located in Install Dir\server\win_b64\code\command with only ERR_ORPHAN_PORT and ERR_ORPHAN_CNX rules in the repair mode. You must run this in a previous/old V6 release.

The Multi-Discipline Collaboration Platform installation checks for ports and connections that do not have a unique owner. If such orphaned Port/Connection exists in the database, then the installation fails.

For more details, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform Administration | 3DSpace | Multi-Discipline Collaboration Platform | Data Administration Tools and Techniques | Using the Data Checker



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

5. Export and Import of Database and Backup Files from Older Release

When migrating the environment from older release to newer release, you must first export the old DB and import it to the newer release. Then, take a backup of files from the older release. The following subsections explain the method to export and import DB and store backup files from an older release.

5.1. Exporting Database from Older Release

Following sections explain the commands to export database from the older release.

5.1.1. 3DPassport Database Export

To export a 3DPassport DB, you require two users (admin user and token user) and two tablespaces. You must export these two schemas during the upgrade. The commands for exporting a database are as follows:

A. Commands for Oracle:

The command for exporting multiple schemas is as follows:

```
expdp system/system@DBNAME schemas=schemaname1, schemaname2
directory=DATA_PUMP_DIR dumpfile=ExportPassportdump.dmp exclude=statistics
logfile=logname.log
```

For example:

```
expdp system/system@e4all schemas=iam,cas directory=DATA_PUMP_DIR
dumpfile=Passport_R2019x.dmp exclude=statistics logfile=Passport_R2019x.log
```

Where,


iam = Passport Database User Schema

cas = Passport Tokens User Schema


B. Commands for MS SQL:

To take a backup of database files from older releases follow the below steps:

- a. Open **Microsoft SQL Server Management Studio** window, select the required database, right-click and select **Tasks > Back Up...**

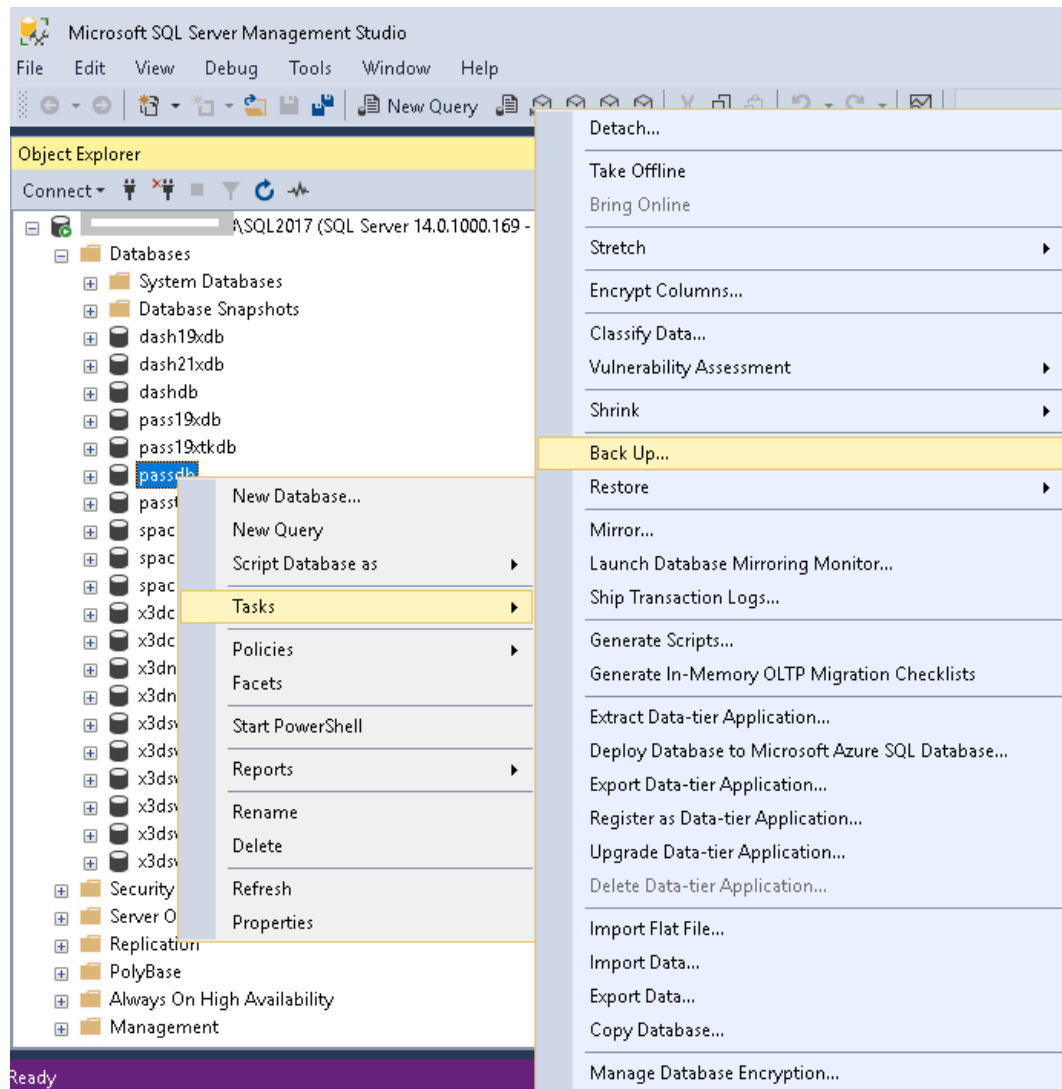

- b. The **Back Up Database** window opens.
 - i. Under **Source**, select **Database**.
 - ii. Under **Destination** select **disk** in the **Back up to** field and add the destination path where you want to back up the file, as shown in the image below.

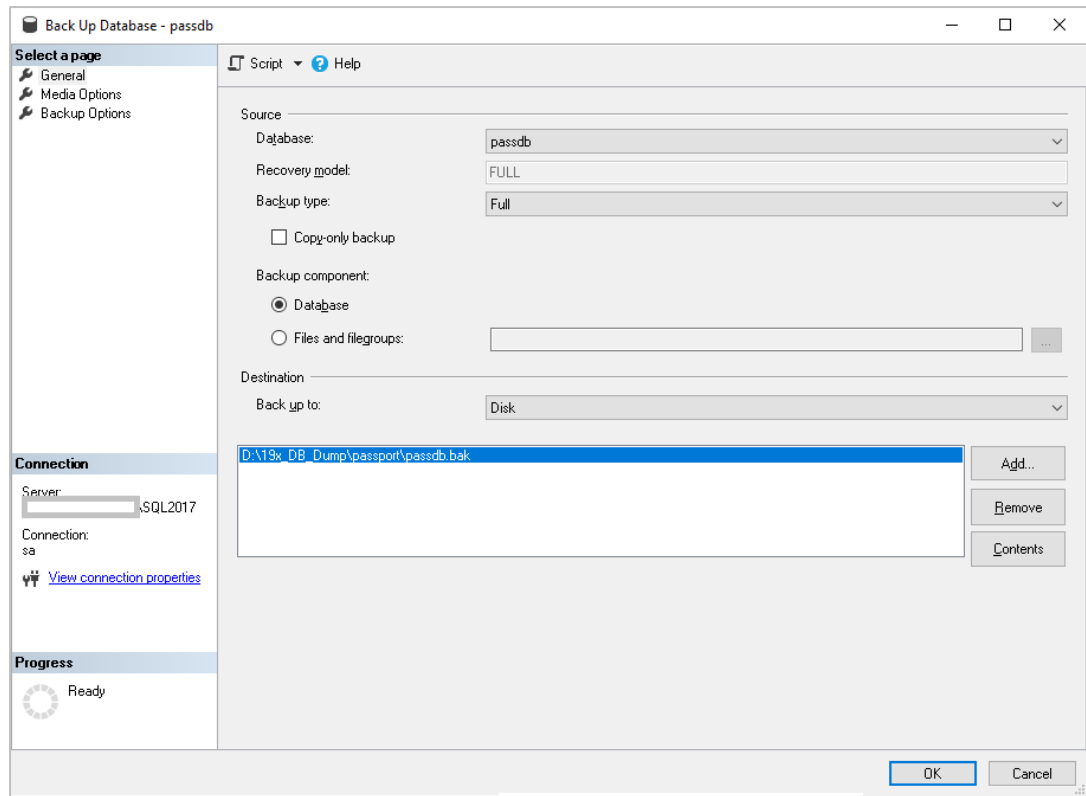

- c. After successful backup, a backup file (.bak) will be generated in the destination folder.

Note: Take a backup of the Passport database and Passport Tokens database.

5.1.2. 3DDashboard Database Export

The commands for exporting the 3DDashboard schema is as follows:

A. Commands for Oracle:

```
expdp system/system@e4all SCHEMAS=x3ddash DIRECTORY=DATA_PUMP_DIR
DUMPFILE=3DDashboard_R2019x.DMP LOGFILE= 3DDashboard_R2019x.log
```

Where,

x3ddash = 3DDashboard Schema

B. Commands for MS SQL:

Take a backup of the 3DDashboard database from the older release. Refer to the 3DPassport database export method given above for the MS SQL database.

5.1.3. 3DSpace Database Export

The commands for exporting the 3DSpace schema is as follows:



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

A. Commands for Oracle:

```
expdp system/system@e4all SCHEMAS= MATRIXV5  
DIRECTORY=DATA_PUMP_DIR DUMPFILE=3DSpace_R2019x.DMP LOGFILE=  
3DSpace_R2019x.log
```

Where,

MATRIXV5 = 3DSpace Schema

B. Commands for MS SQL:

Take a backup of the 3DSpace database from the older release. Refer to the 3DPassport database export method given above for the MS SQL database.

5.1.4. 3DSwym Database Export

The commands for exporting the 3DSwym schema is as follows:

A. Commands for Oracle:

```
expdp system/system@e4all SCHEMAS=  
x3dsywm,x3dsywm_media,x3dsywm_widget DIRECTORY=DATA_PUMP_DIR  
DUMPFILE= x3dsywm_R2019x.DMP LOGFILE= x3dsywm_R2019x.log
```

Where,

x3dsywm = database schema for 3DSwym Content: database name where all community-related content will be stored.

x3dswym_media = database schema for 3DSwym rich media: database name where media metadata will be stored.

x3dswym_widget = database schema for the widget platform.

B. Commands for MS SQL:

Take a backup of the 3DSwym databases from the older release for all three schemas as explained above in point A. Refer to the 3DPassport database export method given above for the MS SQL database.

5.1.5. 3DComment Database Export

The commands for exporting the 3DComment schema is as follows:

A. Commands for Oracle:

```
expdp system/system@e4all SCHEMAS= x3dcmnt DIRECTORY=DATA_PUMP_DIR  
DUMPFILE=3DComment_R2019x.DMP LOGFILE= 3DComment_R2019x.log
```



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

Where,

x3dcmnt = 3DComment Schema

B. Commands for MS SQL:

Take a backup of the 3DComment database from the older release. Refer to the 3DPassport database export method given above for the MS SQL database.

5.1.6. 3DNotification Database Export

The commands for exporting the 3DDashboard schema is as follows:

A. Commands for Oracle:

```
expdp system/system@e4all SCHEMAS=x3dnotif DIRECTORY=DATA_PUMP_DIR
DUMPFILE=3DNotification_R2019x.DMP LOGFILE= 3DNotification_R2019x.log
```

Where,

x3dnotif = 3DNotification Schema

B. Commands for MS SQL:

Take a backup of the 3DNotification database from the older release. Refer to the 3DPassport database export method given above for the MS SQL database.

5.2. Importing Database to New Environment

After the database export is complete, copy the DB backup to a new environment and proceed with database import for each service. For a supported database version, refer to the Program Directory. Refer to the Dassault Systèmes Documentation and Installation Best Practices documents for database user creation and access.

During Database import, there could be two possible cases concerning the tablespaces:

1. The old ENOVIA V6 stack contains dedicated tablespaces.

In this case, you require to create tablespaces in the database on a new machine with the same name as that of old ENOVIA V6 database. While importing the database, data in the respective tablespaces gets imported accordingly.

2. The old ENOVIA V6 stack does not have dedicated tablespaces and hence uses the default tablespace.

In this case, there might not be a way to map the tablespaces. You might require to continue with the default tablespace.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

5.2.1. Database Import for 3DPassport

For importing the 3DPassport dump on **3DEXPERIENCE R2026x** database, run the following commands for Oracle and MS SQL:

A. Commands for Oracle:

- a. Go to the DATA_PUMP_DIR location in Oracle installation. This location is at <Oracle_Install>\admin\orcl\dpdump.
- b. Copy the .dmp file to the DATA_PUMP_DIR location on the new machine where **3DEXPERIENCE R2026x** is being installed.
- c. Provide the required privileges to the user that is used to remap this schema.
 - Connect the database in SQL prompt.
 - Alter user <username> identified by <password>;
 - Grant connect,resource,dba to <username>; (refer to the Dassault Systèmes Documentation or Installation Best Practices document.)
 - create tablespace X3DPASS datafile 'D:\app\techel\oradata\R19xto25x\X3DPASS.dbf' size 200M reuse autoextend on next 5M;
 - ALTER USER iam default tablespace "X3DPASS";
 - ALTER USER iam QUOTA UNLIMITED ON "X3DPASS";
 - GRANT UNLIMITED TABLESPACE TO iam;
 - Commit;
- d. impdp system/system@DBNAME
 remap_schema=schemaname1:newschemaname directory=DATA_PUMP_DIR
 dumpfile=ExportPassportdump.dmp logfile=logname.log

For example,

```
impdp system/system@R19xto26x REMAP_SCHEMA=iam:iam
DIRECTORY=DATA_PUMP_DIR DUMPFILE= 3DPassport_R2019x.DMP
LOGFILE= 3DPassport_iam_R2026x.log
```

Where,

iam:iam = schema of older release:schema of newer release

Similarly, create user, tablespace and import schema for Tokens database.

For example,

```
impdp system/system@R19xto25x REMAP_SCHEMA=cas:cas
DIRECTORY=DATA_PUMP_DIR DUMPFILE= 3DPassport_R2019x.DMP
LOGFILE= 3DPassport_cas_R2026x.log
```

Where,

cas:cas= schema of older release tokens database:schema of newer release tokens database







Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

B. Commands for MS SQL:

- a. Copy the .bak file backup from older server to a new server where you require to restore the DB.
- b. Now, restore DB backup to the new server as shown in the following images.

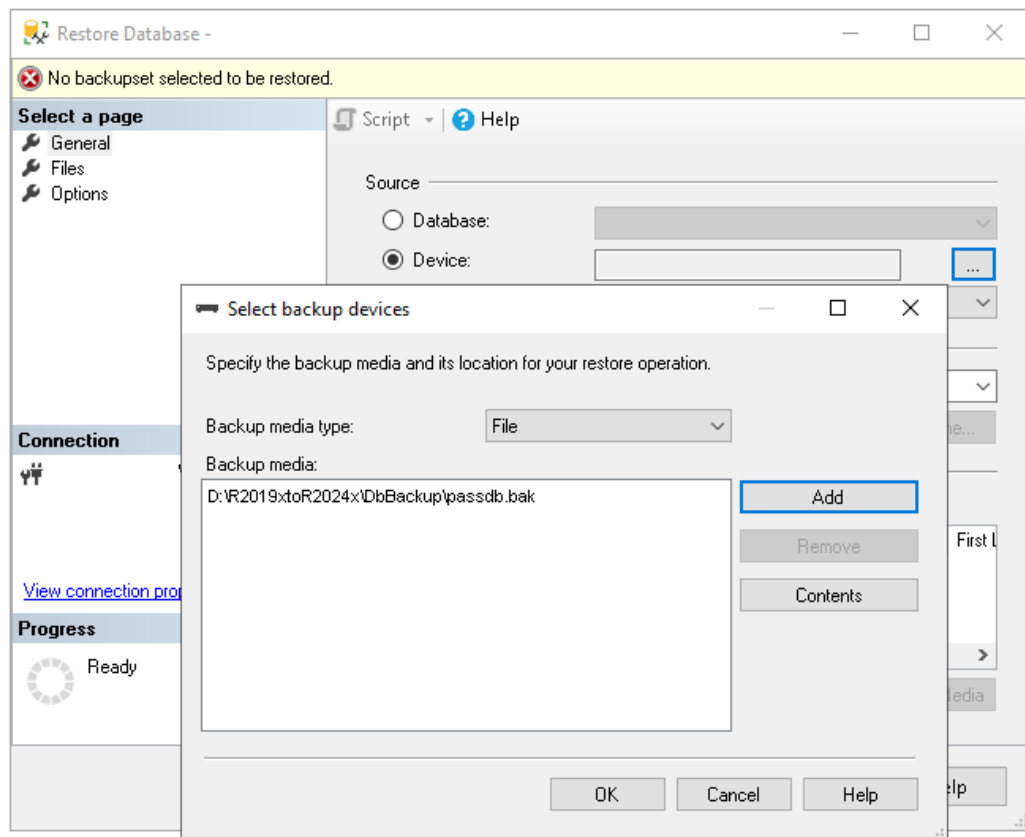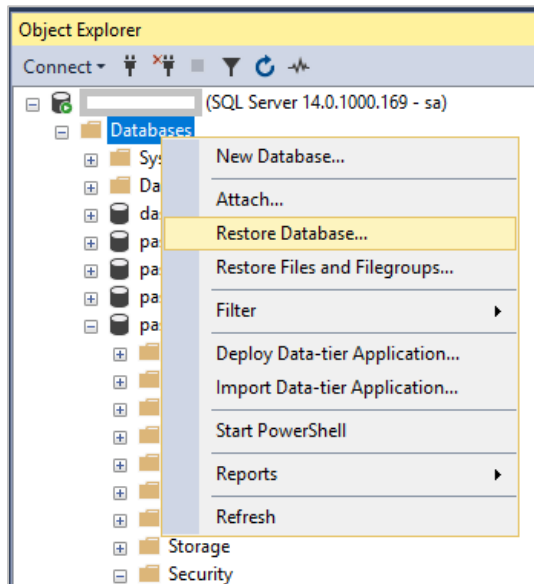

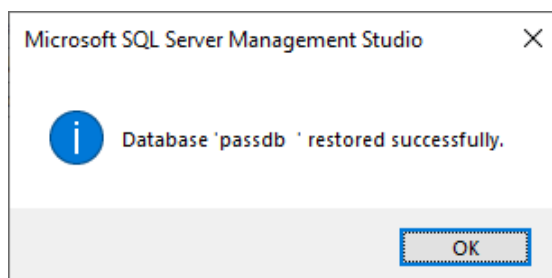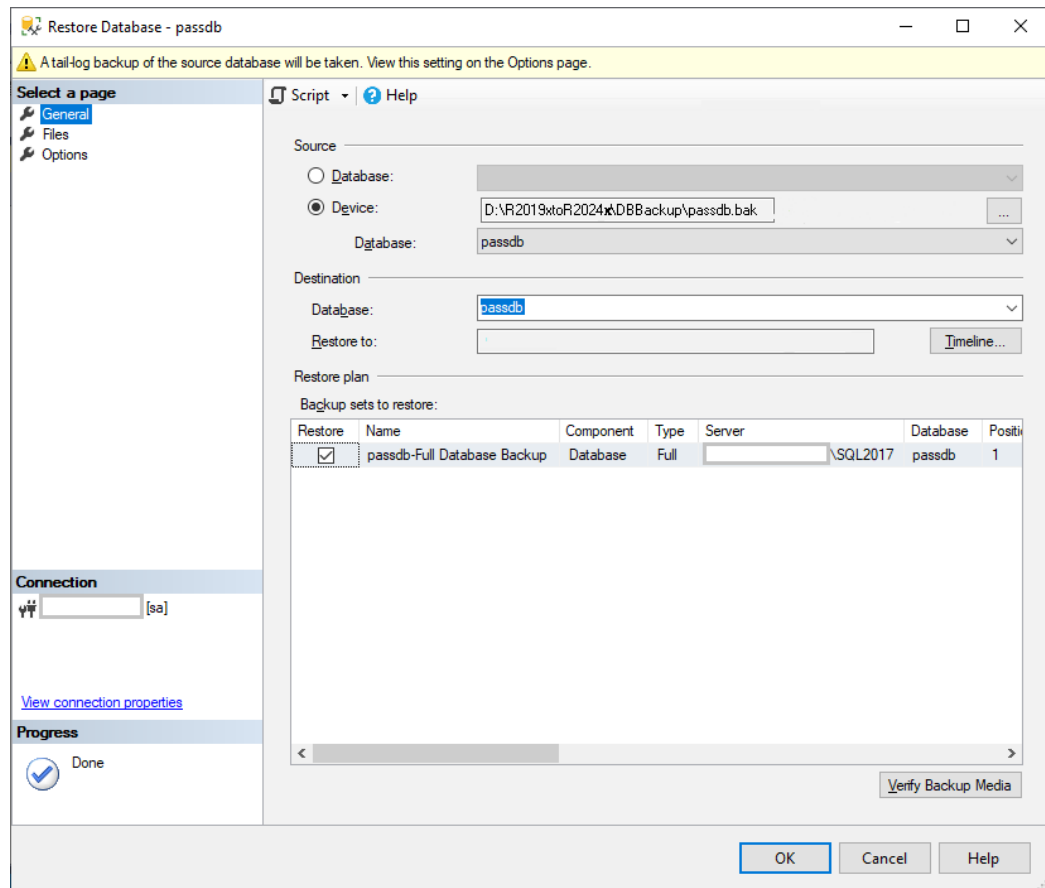

- c. Create MS SQL database User to login in Master DB:

```
CREATE LOGIN [x3dpass] WITH PASSWORD = 'x3dpass', CHECK_POLICY = OFF;
```

```
CREATE LOGIN [x3dpassadmin] WITH PASSWORD = 'x3dpassadmin', CHECK_POLICY = OFF;
```

```
CREATE LOGIN [x3dpasstokens] WITH PASSWORD = 'x3dpasstokens', CHECK_POLICY = OFF;
```

Note:

- Logins created in SQL DB in the security section are same as the user's available after restoring the SQL DB.

- CHECK_POLICY = OFF

It is used to ignore an error related to password complexity.

- d. After the logins are created, map and sync the user's by running the below commands:

```
use passdb;
```

```
EXEC sp_change_users_login 'Update_One', 'x3dpass', 'x3dpass';
```

```
EXEC sp_change_users_login 'Update_One', 'x3dpassadmin', 'x3dpassadmin';
```

```
use passtadb;
```

```
EXEC sp_change_users_login 'Update_One', 'x3dpasstokens', 'x3dpasstokens';
```

Where,

Passdb = 3DPassport Database

Passtadb = 3DPassport Tokens Database

x3dpass = 3DPassport Database User (this is a general database account used by the application for all users connected to 3DPassport)

x3dpassadmin = 3DPassport Database Administrator User (this database account is used by the application when the administrator user is connected to 3DPassport)

x3dpasstokens = 3DPassport Tokens Database User

5.2.2. Database Import for 3DDashboard

For importing the 3DDashboard dump on **3DEXPERIENCE** R2026x database, run the following commands for Oracle and MS SQL:

A. Commands for Oracle:

Create a 3DDashboard user, tablespace and import schema for 3DDashboard database.

```
impdp system/system@R19xto25x REMAP_SCHEMA= x3ddash:x3ddash
DIRECTORY=DATA_PUMP_DIR DUMPFILE= 3DDashboard_R2019x.DMP
LOGFILE= 3DDashboard_R2026x.log
```

Where,

x3ddash:x3ddash = schema of older release:schema of newer release



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

B. Commands for MS MSQL:

Refer to the commands given in 3DPassport Section 5.2.1, “Database Import for 3DPassport” step B and restore the database for 3DDashboard. After restoring the database, create and map the user.

```
CREATE LOGIN [x3ddash] WITH PASSWORD = 'x3ddash', CHECK_POLICY = OFF;
```

```
CREATE LOGIN [x3ddashadmin] WITH PASSWORD = 'x3ddashadmin',  
CHECK_POLICY = OFF;
```

```
use dashdb;
```

```
EXEC sp_change_users_login 'Update_One', 'x3ddash', 'x3ddash';
```

```
EXEC sp_change_users_login 'Update_One', 'x3ddashadmin', 'x3ddashadmin';
```

Where,

Dashdb = 3DDashboard Database

X3ddash = an application user

X3ddashadmin = a database administrator user

5.2.3. Database Import for 3DSpace

For importing the 3DSpace dump on **3DEXPERIENCE** R2026x database, run the following commands for Oracle and MS SQL:

A. Commands for Oracle:

```
impdp system/system@R19xto25x REMAP_SCHEMA=MATRIXV5:MATRIXV5  
DIRECTORY=DATA_PUMP_DIR DUMPFILE= 3DSpace_R2019x.DMP LOGFILE=  
3DSpace_R2026x.log
```

Where,

MATRIXV5:MATRIXV5 = schema of older release:schema of newer release

B. Commands for MS SQL:

Refer to the commands given in 3DPassport Section 5.2.1, “Database Import for 3DPassport” step B and restore the database for 3DSpace. After restoring the database, create and map the user.

```
CREATE LOGIN [m1] WITH PASSWORD = 'm1', CHECK_POLICY = OFF;
```

```
use spacedb;
```



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

```
EXEC sp_change_users_login 'Update_One', 'm1', 'm1';
```

Where,

spacedb = 3DSpace Database

m1= an application user

5.2.4. Database Import for 3DSwym

For importing the 3DSwym dump on **3DEXPERIENCE** R2026x database, run the following commands for Oracle and MS SQL:

A. Commands for Oracle:

```
impdp system/system@R19xto25x remap:SCHEMA= x3dswym:x3dswym  
DIRECTORY=DATA_PUMP_DIR DUMPFILE= x3dswym_R2019x.DMP LOGFILE=  
x3dswym_R2026x.log
```

Where,

x3dswym:x3dswym = schema of older release:schema of newer release

Similarly, create user, tablespace and import schema for 3DSwym rich media database.

For example,

```
impdp system/system@R19xto25x REMAP_SCHEMA=  
x3dswym_media:x3dswym_media DIRECTORY=DATA_PUMP_DIR DUMPFILE=  
x3dswym_media_R2019x.DMP LOGFILE= x3dswym_media_R2026x.log
```

Where,

x3dswym_media: x3dswym_media = schema of older release:schema of newer release

Similarly, create user, tablespace and import schema for 3DSwym widget database.

```
impdp system/system@R19xto25x  
REMAP_SCHEMA=x3dswym_widget:x3dswym_widget  
DIRECTORY=DATA_PUMP_DIR DUMPFILE= x3dswym_widget_R2019x.DMP  
LOGFILE= x3dswym_widget_R2026x.log
```

Where,

x3dswym_widget:x3dswym_widget = schema of older release:schema of newer release



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

B. Commands for SQL:

Refer to the commands given in 3DPassport Section 5.2.1, “Database Import for 3DPassport” step B and restore the database for 3DSwym. After restoring the database, create and map the user.

```
CREATE LOGIN [x3ds] WITH PASSWORD = 'x3ds', CHECK_POLICY = OFF;
```

```
CREATE LOGIN [x3ds_admin] WITH PASSWORD = 'x3ds_admin',  
CHECK_POLICY = OFF;
```

```
use x3dswym_social;
```

```
EXEC sp_change_users_login 'Update_One', 'x3ds', 'x3ds';
```

```
use x3dswym_social;
```

```
EXEC sp_change_users_login 'Update_One', 'x3ds_admin', 'x3ds_admin';
```

```
use x3dswym_widget;
```

```
EXEC sp_change_users_login 'Update_One', 'x3ds', 'x3ds';
```

```
use x3dswym_widget;
```

```
EXEC sp_change_users_login 'Update_One', 'x3ds_admin', 'x3ds_admin';
```

```
use x3dswym_media;
```

```
EXEC sp_change_users_login 'Update_One', 'x3ds', 'x3ds';
```

```
use x3dswym_media;
```

```
EXEC sp_change_users_login 'Update_One', 'x3ds_admin', 'x3ds_admin';
```

Where,

x3dswym_social = database name for 3DSwym Content

x3dswym_widget = database name for 3DSwym rich media

x3dswym_media = database name for the widget platform

x3ds = an application user

x3ds_admin = a database administrator User

Note: If you have SQL Server 2017, then run the following additional script:

```
USE x3dswym_social;
```

```
-- Enable LEGACY_CARDINALITY_ESTIMATION setting
```



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

```
ALTER DATABASE SCOPED CONFIGURATION SET
LEGACY_CARDINALITY_ESTIMATION = ON;
```

5.2.5. Database Import for 3DComment

For importing the 3DComment dump on **3DEXPERIENCE** R2026x database, run the following commands for Oracle and MS SQL:

A. Commands for Oracle:

```
impdp system/system@R19xto25x REMAP_SCHEMA= x3dcmnt:x3dcmnt
DIRECTORY=DATA_PUMP_DIR DUMPFILE= 3DComment_R2019x.DMP
LOGFILE= 3DComment_R2026x.log
```

Where,

x3dcmnt:x3dcmnt = schema of older release:schema of newer release

B. Commands for MS SQL:

Refer to the commands given in 3DPassport Section 5.2.1, “Database Import for 3DPassport” step B and restore the database for 3DComment. After restoring the database, create and map the user.

```
CREATE LOGIN [x3ds] WITH PASSWORD = 'x3ds', CHECK_POLICY = OFF;
```

```
CREATE LOGIN [x3ds_admin] WITH PASSWORD = 'x3ds_admin',
CHECK_POLICY = OFF;
```

```
use x3dcomment;
```

```
EXEC sp_change_users_login 'Update_One', 'x3ds', 'x3ds';
```

```
use x3dcomment;
```

```
EXEC sp_change_users_login 'Update_One', 'x3ds_admin', 'x3ds_admin';
```

Where,

x3dcomment = 3DComment Database

x3ds = an application user

x3ds_admin = a database administrator User

5.2.6. Database Import for 3DNotification

For importing the 3DNotification dump on **3DEXPERIENCE** R2026x database, run the following commands for Oracle and MS SQL:



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

A. Commands for Oracle

```
impdp system/system@R19xto25x REMAP_SCHEMA= x3dnotif: x3dnotif
DIRECTORY=DATA_PUMP_DIR DUMPFILE= 3DNotification_R2019x.DMP
LOGFILE= 3DNotification_R2026x.log
```

Where,

x3dnotif: x3dnotif = schema of older release:schema of newer release

B. Commands for MS SQL:

Refer to the commands given in 3DPassport Section 5.2.1, “Database Import for 3Dpassport” step B and restore the database for 3DNotification. After restoring the database, create and map the user.

```
CREATE LOGIN [x3ds] WITH PASSWORD = 'x3ds', CHECK_POLICY = OFF;
```

```
CREATE LOGIN [x3ds_admin] WITH PASSWORD = 'x3ds_admin',
CHECK_POLICY = OFF;
```

```
use x3notification;
```

```
EXEC sp_change_users_login 'Update_One', 'x3ds', 'x3ds';
```

```
use x3notification;
```

```
EXEC sp_change_users_login 'Update_One', 'x3ds_admin', 'x3ds_admin';
```

Where,

x3notification = 3DNotification Database

x3ds = an application user

x3ds_admin = a database administrator User

5.3. Backup of Files from Older Release

The admin needs to back up certain files or directories to transfer encryption, configuration, or customization from an older release to a new release. Follow the steps below to back up files from the older release.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

5.3.1. Backup 3DPassport Files

Take a backup of cypher file from the older 3DPassport release available at the following path:

```
<install_directory>\3DPassport\win_b64\3dpass.cypher
```

5.3.2. Backup 3DDashboard Files

Backup the following 3DDashboard directories from the older release:

- a. Ensure that the templates directory does not contain any images. If it contains images, take a backup of the following directory:

```
<3DDashboardInstallPath>\win_b64\templates
```

- b. Copy images from the **templates** directory under the shared location:

```
C:\DassaultSystemes\3DDashboardData\templates
```

5.3.3. Backup 3DSpace Files

Backup the following directories from the older release for 3DSpace:

- a. ENOVIA Stores:

To identify the location of the store, run: MQL> list store * select path;

This command gives the path for the files that are located for the stores. Back up these directories for each store at a safe and convenient location.

- b. ENOVIA Application Files:

Backup the files from <server_installed_directory> \STAGING\ematrix and Tomcat Install\webapps\<Root URI name> Directory.

For VPLM, backup the files from <server_installed_directory> \STAGING\ematrix\WEB-INF\classes\vplm directory.

This step ensures that you back up the UI configurations/customizations and other relevant required files.

5.3.4. Backup Files for 3DSwym, 3DComment, and 3DNotification

Take a backup of 3DSwym, 3DComment, and 3DNotification data directory from the older release as explained in the Dassault Systèmes Documentation.

Installation and Setup | Install | 3DEXPERIENCE Platform | Installing 3DEXPERIENCE Platform Services for the First Time | Installing Services One-by-One



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

6. Reverse Proxy Configuration

For configuring Reverse Proxy server, refer to Program Directory and Dassault Systèmes Documentation as mentioned below:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform Installation | Installing Services One-by-One | 3DPassport | Configuring the Reverse Proxy

Note: For Apache Reverse Proxy server, perform the following checks after completion of migration and before starting the apache http server:

1. Ensure that the latest apache configuration is applied from the latest release fragment configuration files or apache configuration modification done as per the **3DEXPERIENCE R2026x** level.
2. Clear the apache cache directory (defined with the CacheRoot directive in the apache .conf file). Clean the cache as follows:
 - a. Stop the apache (httpd) server.
 - b. Take a backup of contents in the directory (/var/cache/httpd).
 - c. Rename the apache cache directory (/var/cache/httpd) or remove all the contents.
 - d. Restart the apache server.

7. Upgrading 3DPassport

For more details, refer to the following Dassault Systèmes Documentation:

Installation and Setup | Install | 3DEXPERIENCE Platform | Installing 3DEXPERIENCE Platform Services for the First Time | Installing Services One-by-One | 3DPassport | Upgrading 3DPassport

Refer to the PDIR for an update on the issue detected with Login#.

http://pdir/?pdir=3Dexp.r2026x.update01&context=all&sub=.%5Cinstallation%5C3dexp_installation.html#3dcomment

If you are upgrading to the latest release from a release earlier than R2024x, you might encounter login issues. Workaround: Rename the table from iam_config_tenants to iam_config_tenant before starting the upgrade.

Backup the 3DPassport database from an earlier **3DEXPERIENCE** platform version and import it on a new server machine. In case of **3DEXPERIENCE R2016x** and higher; import the database in Oracle 19c. During the **3DEXPERIENCE R2026x** 3DPassport installation, when prompted to select the database, specify the parameters of the previous database. This upgrades the database.




Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

7.1. Schematic Upgrade Process for 3DPassport

- The schematic process to upgrade 3DPassport is as follows:

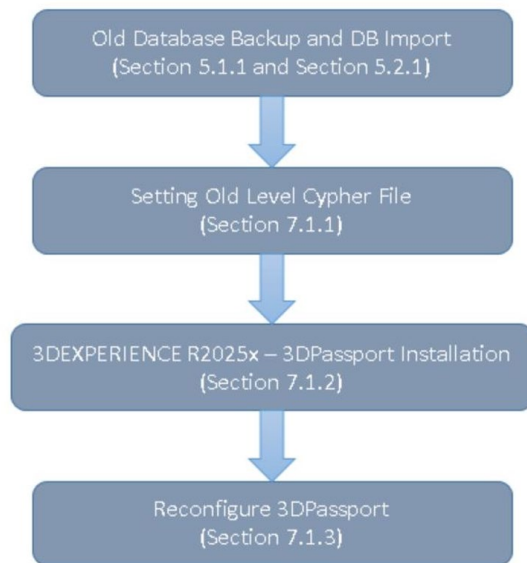

7.1.1. Setting the Old Level Cypher File

Perform the following steps to set the old level cypher file.

- Copy the old level Cypher file from the following path from older release:
`<install_directory>\3DPassport\win_b64\3dpass.cypher`
 Set the cypher file path in command prompt as follows:
 For example:
 Set `X3DPASS_EKEY_PATH=D:\R19xto25x\passport\3dpass.cypher`
- Install 3DPassport:
`cd <Installable_path>`
`setup.exe`
 Refer to the following image:

```

Administrator: Command Prompt
Microsoft Windows [Version 10.0.17763.6893]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\windows\system32>Set X3DPASS_EKEY_PATH=D:\R20xto25x\3dpass.cypher
C:\windows\system32>cd..
C:\Windows>cd..
C:\>D:
D:\>cd D:\R2025x_GA_Installable\3DPassport.Windows64_package\3DPassport-V6R2025x.Windows64\3DPassport.Windows64\1
D:\R2025x_GA_Installable\3DPassport.Windows64_package\3DPassport-V6R2025x.Windows64\3DPassport.Windows64\1>setup.exe
  
```

7.1.2. Installation of 3DPassport for 3DEXPERIENCE R2026x

For detailed information about installing 3DPassport, refer to the Installation Best Practices documents on **3DEXPERIENCE R2026x**.

During the installation process, when the window shown in the image below appears, the Admin should make the suggested changes. This includes specifying the database connection URL, database name, database username, and password that were created in the new release.

3DEXPERIENCE R2026x - 3DPassport

Directory tnsnames.ora (optional. Usually <oracle_home>\network\admin)

D:\Oracle19c\DB\WINDOWS.X64_193000_db_home\network\admin Browse...

Net_service_name (with tnsnames.ora) or //host[:port]/service_name for 3DPassport application
vc1

Net_service_name (with tnsnames.ora) or //host[:port]/service_name for 3DPassport tokens
vc1

Database username
IAM

Database user's password

Tokens database username
CAS

Tokens database user's password


Check database connection
☒ Check database connection

< Back Next > Cancel

7.1.3. Run Reconfig Tool for 3DPassport to Correct JDBC URL

After installing 3DPassport, if you encounter issues during login, you will need to correct the JDBC URL in the database. To do this, run the 3DPassport reconfig tool at the 3DPassport GA level. Then, continue with the FP installation.

```
Administrator: Command Prompt
D:\Installable\AM_3DEXP_Platform.AlloS\1\3DPassport\Windows64\1>
D:\Installable\AM_3DEXP_Platform.AlloS\1\3DPassport\Windows64\1>setup.exe --reconfig_
```

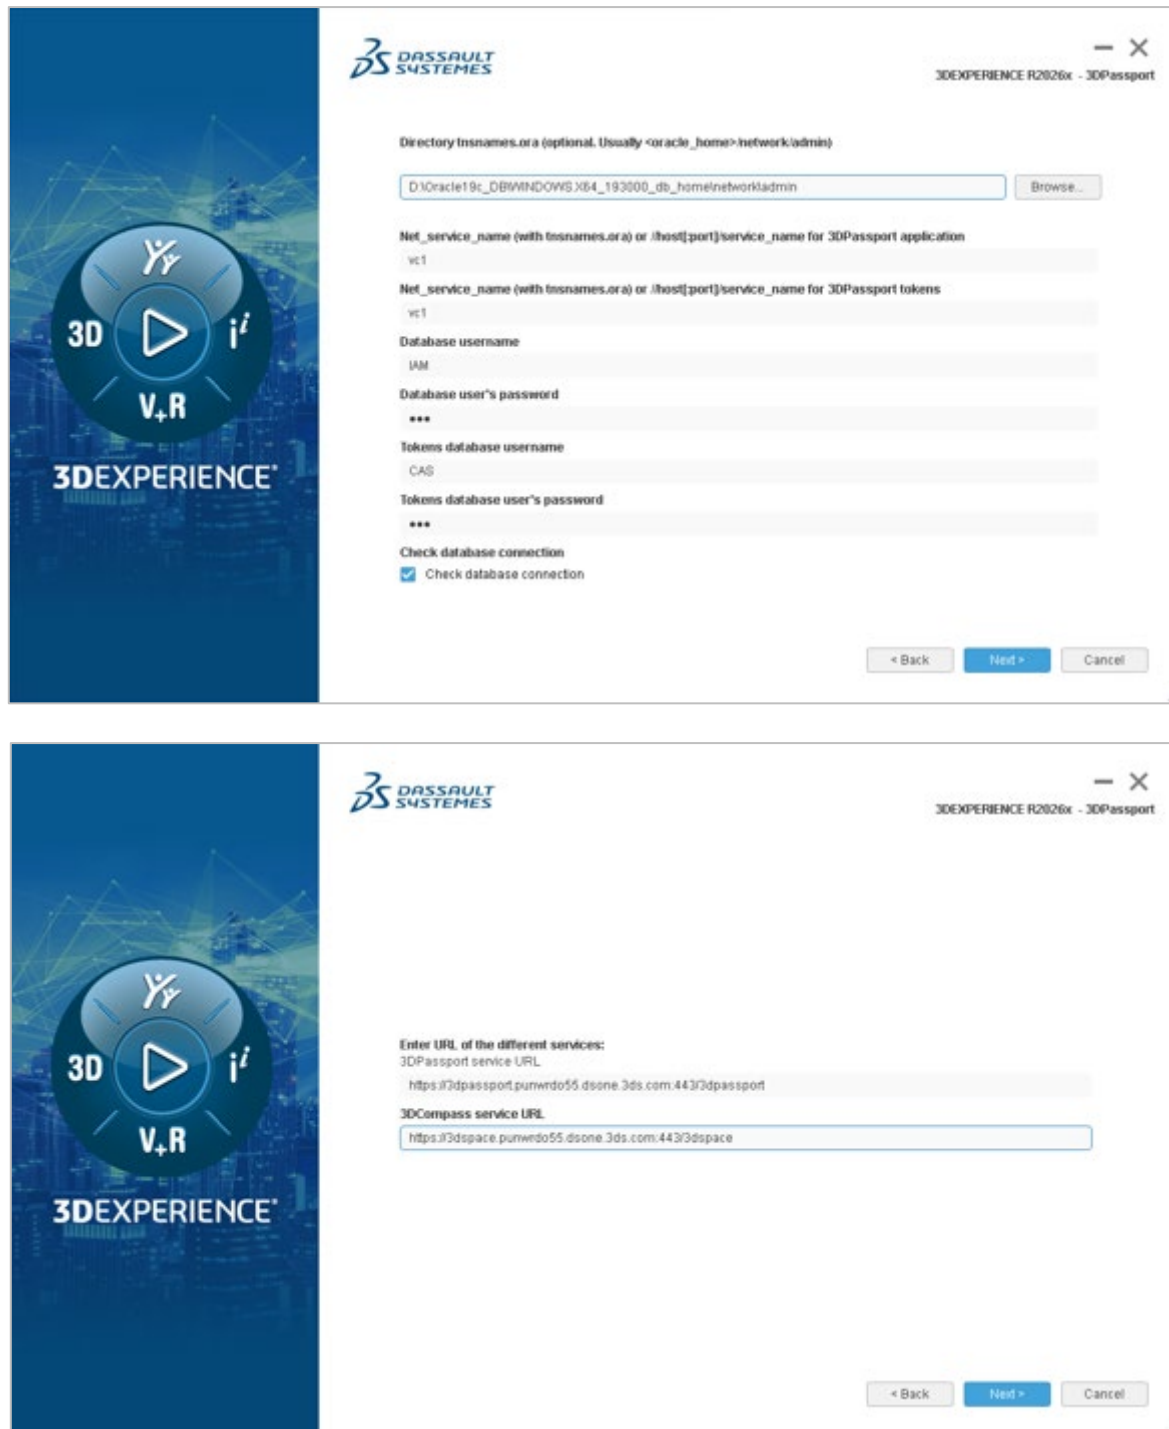

3DEXPERIENCE R2026x - 3DPassport

Directory tnsnames.ora (optional. Usually <oracle_home>\network\admin)

D:\Oracle19c\DB\WINDOWS\X64_193000_db_home\network\admin Browse...

Net_service_name (with tnsnames.ora) or <host[:port]/>service_name for 3DPassport application
vc1

Net_service_name (with tnsnames.ora) or <host[:port]/>service_name for 3DPassport tokens
vc1

Database username
IAM

Database user's password

Tokens database username
CAS

Tokens database user's password

Check database connection
☒ Check database connection

< Back Next > Cancel

3DEXPERIENCE R2026x - 3DPassport

Enter URL of the different services:

3DPassport service URL
https://3dpasport.punwdo55.dsone.3ds.com:443/3dpasport

3DCompass service URL
https://3dspace.punwdo55.dsone.3ds.com:443/3dspace

< Back Next > Cancel

Before starting the HotFix installation, export the full cypher file path as follows:

```
set X3DPASS_EKEY_PATH= <full_cypher key path>
```

Note: For possible updates before installing the Fix Pack, refer to the Program Directory to find the concerned FP levels of **3DEXPERIENCE R2026x**.



Confidential information. Copyright Dassault Systèmes [2026].
This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

8. Upgrading 3DDashboard

For more details, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform Installation | Installing Services One-by-One | 3DDashboard | Upgrading 3DDashboard

Backup the 3DDashboard database from an earlier **3DEXPERIENCE** platform version and import it on a new server machine. Import the database in Oracle 19c in case of **3DEXPERIENCE** R2016x and higher release. During the R2026x 3DDashboard installation, when prompted to select the database and parameters, specify the database and parameters of the previous database. This upgrades the database.

Note: Before installing the Fix Pack, refer to the Program Directory to find the concerned FP levels of **3DEXPERIENCE** R2026x, for possible updates.

9. Upgrading 3DSearch

For details, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform Administration | 3DSearch (Federated Search) | Migrating Favorite Searches information

The user may face problems after upgrading the 3DSearch / 3DSpace Indexes, for example; you can no longer search files containing non-alphanumeric characters.

To avoid this problem, refer to **QA00000055795** and follow the methodology outlined in the Knowledge Article.

Note: Before installing the Fix Pack, refer to the Program Directory to find the concerned FP levels of **3DEXPERIENCE** R2026x, for possible updates.

10. Upgrading 3DSpace

This section explains the procedure for upgrading 3DSpace. This part of the upgrade is a key component and involves a lot of activities that need to be performed.


10.1. Schematic of the Upgrade Process

The following schematic diagram shows the flow of the upgrade process.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

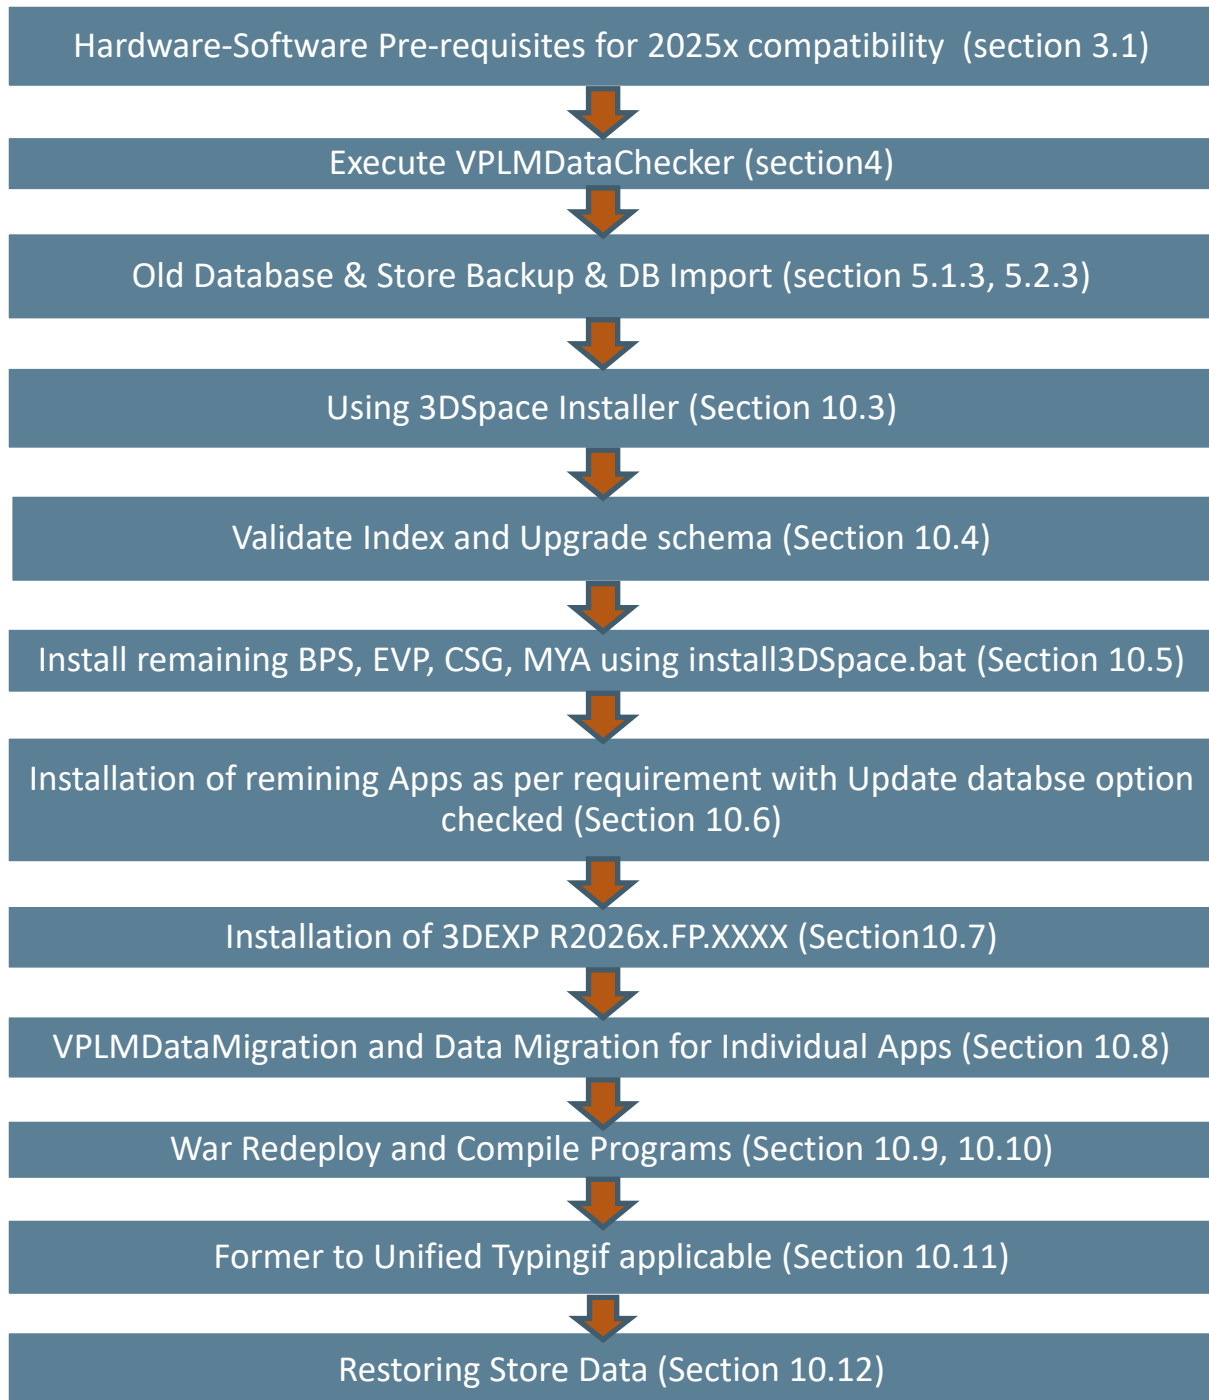

Note: This schematic is purely for the 3DSpace upgrade process and does not consider the 3DPassport/3DDashboard configuration with 3DSpace pertaining to **3DEXPERIENCE** R2026x platform. Follow the corresponding installation procedure as described in the Dassault Systèmes Documentation.

3DSpace Installer also performs the **<MQL>upgrade;** command before installing the Live Collab Server, BPS, Multidiscipline Collaboration, and so on; but you must still validate the database schema.

10.2. 3DSpace And Other Apps Installation

Ensure that you install all the software prerequisites as mentioned in the Program Directory. Also, ensure that you follow the prerequisites for database and middleware.

10.2.1. Points to Consider Before 3DSpace Installation

Consider the following points before proceeding with 3DSpace Installation:

- If user is upgrading from **3DEXPERIENCE** R2017x level, user must first upgrade to the latest available FP and then upgrade to **3DEXPERIENCE** R2026x level.

For more details, refer to **QA00000057572**.

- If your server was operated in the previous release in a baseline behavior environment (in former typing mode), then you must migrate the content to support the default unified typing mode. The former typing objects must be imported into a **3DEXPERIENCE** R2026x server in a baseline behavior environment as unified typing objects. For more details, refer to Section 10.11, “Migrating from Former Typing to Unified Typing”.
- When migrating from **3DEXPERIENCE** R2018x FP2051 level to **3DEXPERIENCE** R2026x level, some errors might occur during EVP installation on **3DEXPERIENCE** R2026x GA.

For example:

An error occurred when executing: mql run.

D:/R18xto25x/3DSpace/win_b64/reffiles/MQLFamilies/mql/ParameterUI_RMT-V6R2018x-HF17-downgrade.mql :

Error: #1900010: Occurred on line number '7' in

'D:\R18xto25x\3DSpace\win_b64\reffiles\MQLFamilies\mql\ParameterUI_RMT-V6R2018x-HF17-downgrade.mql'

Error: #1900003: Expected keyword - got 'ParameterUI_RMT-V6R2018x-HF17 nothing to downgrade'

Executing mql run

D:/R18xto25x/3DSpace/win_b64/reffiles/MQLFamilies/mql/ParameterUI-V6R2018x-HF17-downgrade.mql...

Error occurred when executing mql run

D:/R18xto25x/3DSpace/win_b64/reffiles/MQLFamilies/mql/ParameterUI-V6R2018x-HF17-downgrade.mql :

Error: #1900010: Occurred on line number '7' in

'D:\R18xto25x\3DSpace\win_b64\reffiles\MQLFamilies\mql\ParameterUI-V6R2018x-



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

HF17-downgrade.mql'

Error: #1900003: Expected keyword - got 'ParameterUI-V6R2018x-HF17 nothing to downgrade'

Workaround : This issue got introduced on the **3DEXPERIENCE R2018x FP2051** level and has been fixed in the **3DEXPERIENCE R2018x FP2108** level. With these errors, the EVP installation does not fail and the failing script does not have any impact, hence the user can ignore this error.

- Upgrading from **3DEXPERIENCE R2019x.FD06** or **FD07**

If you are upgrading from **3DEXPERIENCE R2019x.FD06** or **FD07**, execute the following MQL command before running the upgrade:

<MQL> mod relationship "Follower" property version value R421;

- Lxfile table unique index issues during migration:

The LXHOST column in the LXFILE table is designed to record the host information of a checked-in file. This value was useful in the past, but it is no longer used.

The column remains in the table and its value is still populated. However, since the coexistence of two files with the same BO, format, filename, path, location, but different hostname, is no longer allowed, removing the hostname from the unique index definition is a more accurate enforcement of the design.

Users should upgrade the database as usual. In the vast majority of the cases, the upgrade will be successful. However, if the LXFILE table has non-unique rows and if the non-unique rows are caused by obsolete rows, using a clean-up method that was run prior to the unique index insertion will resolve the problem. Alternatively, you can also use the tidy store command to clean up the obsolete rows. However, it will be more time-consuming as it will clean all obsolete rows, and is not limited to duplicate obsolete rows. If the non-unique rows are caused by active rows, the clean-up method would not be able to resolve the problem and therefore the unique index insertion will fail.

If the upgrade fails, you must manually fix the problem by removing the non-unique rows from LXFILE (and their corresponding physical file) and rerun the upgrade.

For more details, refer to the Program Directory: **3DEXPERIENCE R2026x GA - Program Directory - On Premises | Deployment | Installation | 3DEXPERIENCE Platform Installation | File Collaboration Server (FCS) | Lxfile table unique index issues during migration**

- For migrations from R2019x, vocabularies are upgraded automatically and it is no longer required to delete and reimport them. For migrations from R2018x, delete



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

the custom vocabularies before migration and reimport them after the migration is complete.

For more details, refer to the following Dassault Systèmes Documentation:
 Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE
 Platform Administration | 3DSpace | Enterprise Control Center | Managing
 Vocabulary Files | Importing RDF Files

- Sometimes, when upgrading from **3DEXPERIENCE R2018x FP1838** or higher, the Upgrade of Program Central (ENOVIAProjectManagementFoundation) fails at some point with the following error in the logs:

```
>ERROR      : emxInstallAdmin
>Column HiddenNameColumn1 Does Not Exists In Table
PMCWBSPlanningViewTable
```

Solution:

Create a column manually:

```
<MQL> modify table 'PMCWBSPlanningViewTable' system column name
'HiddenNameColumn1' businessobject name label
'emxProgramCentral.Common.HiddenNameColumn1' setting 'Auto Filter' 'true'
setting 'Display Mode' 'none' setting 'Export' 'false' setting 'Registered Suite'
'ProgramCentral' order '1' column name 'HiddenNameColumn2' businessobject
name label 'emxProgramCentral.Common.HiddenNameColumn2' setting 'Auto
Filter' 'true' setting 'Display Mode' 'none' setting 'Export' 'false' setting 'Registered
Suite' 'ProgramCentral' order '2';
```

- If you are upgrading from **3DEXPERIENCE R2016x.HF10** or a higher HF to **3DEXPERIENCE R2026x**, run the script **EnterpriseChangeMgtFixBaselineForCOOnUpgrade.tcl** before running the **3DEXPERIENCE R2026x** installation. This script adjusts the "Fast Track Change" and "Formal Change" policies so that the baseline policy rules can be applied in the Enterprise Change Management installer

```
<MQL> set context user creator;
```

```
<MQL> set env REGISTRATIONOBJECT eServiceSchemaVariableMapping.tcl;
```

```
<MQL> run {path}\server\Apps\EnterpriseChangeMgt\V6R2026x\Modules\ENO
EnterpriseChangeMgt\AppInstall\Programs\EnterpriseChangeMgtFixBaselineFo
rCOOnUpgrade.tcl;
```

where {path} is the path to the script file.

- If you are upgrading from R2020x to R2026x, you may get an error "MxDBInstallAction from feature CODEwin_b64ENOProgramCentral failed." while installing the Project Management Foundation app. In this case, run the MQL commands as suggested in **QA00000302328** and you will be able to install the app successfully.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

For detailed information, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform
Installation | Installing Services One-by-One

10.2.2. Upgrading from ENOVIA V6 Level before V6R2013x

If you are upgrading from ENOVIA V6 level before V6R2013x, then follow the procedure below:

1. Install ENOVIALiveCollaborationServer V6R2013x GA. Then, install ENOVIALiveCollaborationServer FP1604 (or later).
2. Copy the bootstrap to point to the original database.
3. Using the latest ENOVIALiveCollaborationServer level installed, run: MQL>upgrade
4. Export the database after performing upgrade on V6 R2013x level.
5. Install 3DSpace R2026x. (Proceed with Section 10.3, “Using 3DSpace Installer”).

Note: Customers migrating from the V6 R2012 release might not have the major version present on the VPMReference. However, in **3DEXPERIENCE** releases, the Major Version is mandatory. To set the Major Version on migrated data, refer to **QA00000065878**.

10.2.3. Upgrading from ENOVIA V6R2013x or Later V6/3DEXPERIENCE Levels

For upgrading from ENOVIA V6R2013x, the customer will first require to update the FP level to FP1604 (or later) and proceed with Section 10.3, “Using 3DSpace Installer”.

For releases later than ENOVIA V6R2013x, the customer can continue with Section 10.3, “Using 3DSpace Installer”.

10.3. Using 3DSpace Installer

From **3DEXPERIENCE** R2016x onwards, only the 3DSpace Installer is available as an installation media. This is a unique installer that allows you to install all 3DSpace components (BPS, EVP, MYA, and CSG). It also deploys the server that is up and running and ready to use, or upgrade an existing installation. From **3DEXPERIENCE** R2018x, the 3DSpace Installer allows you to reconfigure parameters for the existing installations.

For more details, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform Installation |
Installing Services One-by-One | 3DSpace | 3DSpace

This section includes few important steps involved in 3DSpace Installer from the ‘Upgrade’ point of view only. For **3DEXPERIENCE** R2026x platform installation instructions, refer to the Dassault Systèmes Documentation mentioned above.


Below are the important points and steps to follow:




Confidential information. Copyright Dassault Systèmes [2026].


This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

1. Ensure that the correct Java version is installed. If you are upgrading and previously used AdoptOpenJDK, refer to the knowledge article QA00000309124 for Java support information.

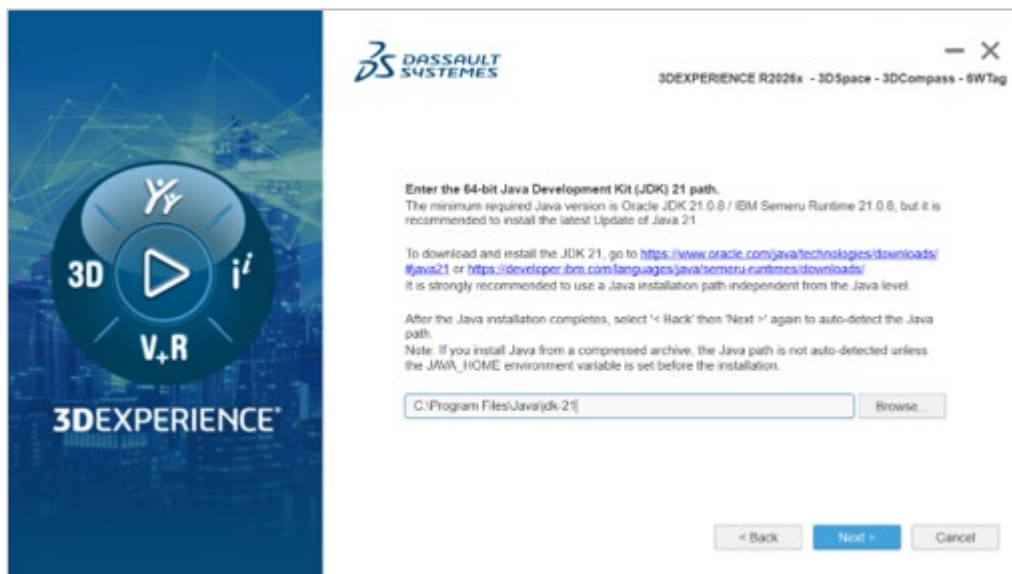

2. For a 3DEXPERIENCE R2026x fresh installation, the default admin user is **admin_platform**. But, in case of an upgrade, this would be an Administrator user that was present/used in the earlier ENOVIA V6 release. For more details, refer to the following image. During installation, the user must specify the correct data and index tablespace names to ensure that the schema user is correctly associated with the old tablespace.

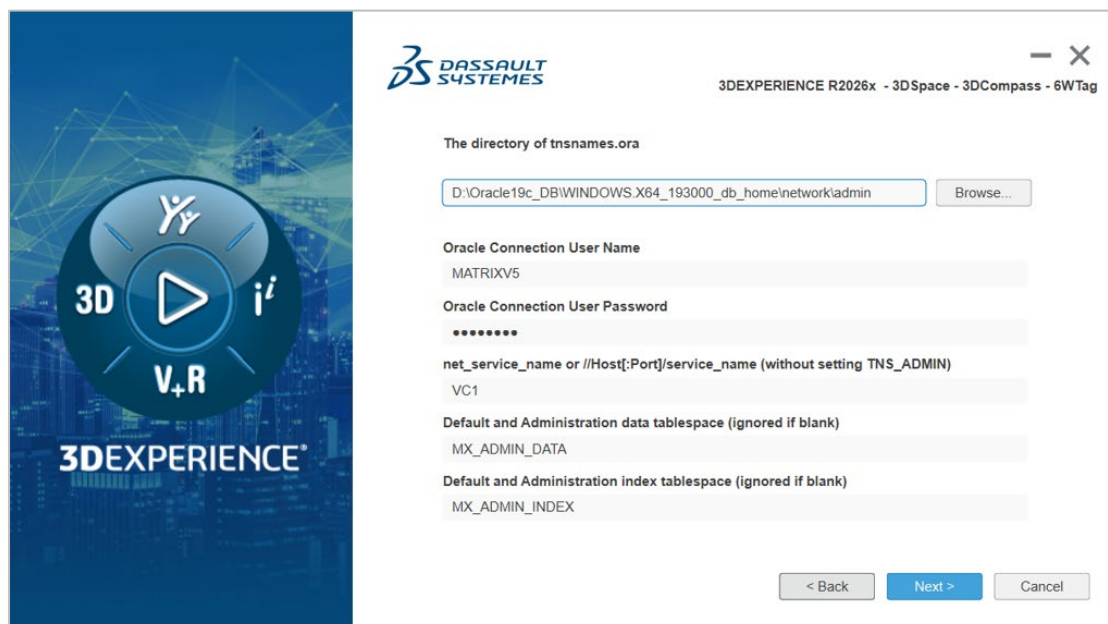


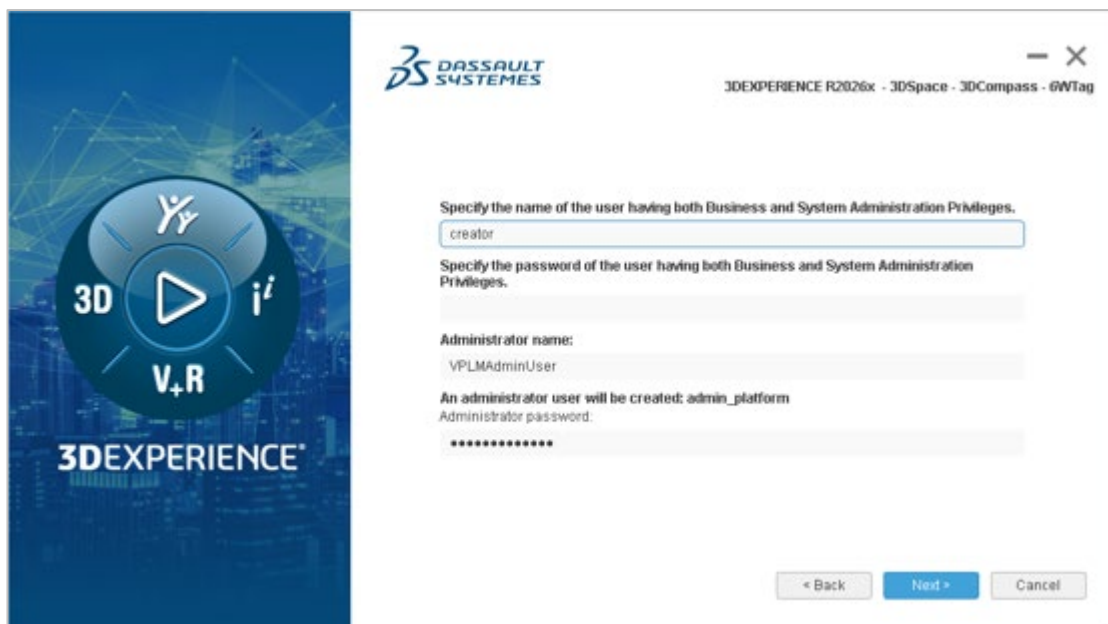

You must also create this user in 3DPassport so that it can connect to 3DSpace as an Admin user.

Note: If it is being upgraded from a level prior to **3DEXPERIENCE R2014x** without EVP (Multi-Discipline Collaboration Platform), then you do not require to create a 'admin_platform' user manually. A new 'admin_platform' user will be created at this step with system/business access. This newly created user will be the administrator.

3. If you select the **Update database** option, it will upgrade the database schema by performing **MQL>upgrade**; during installation.

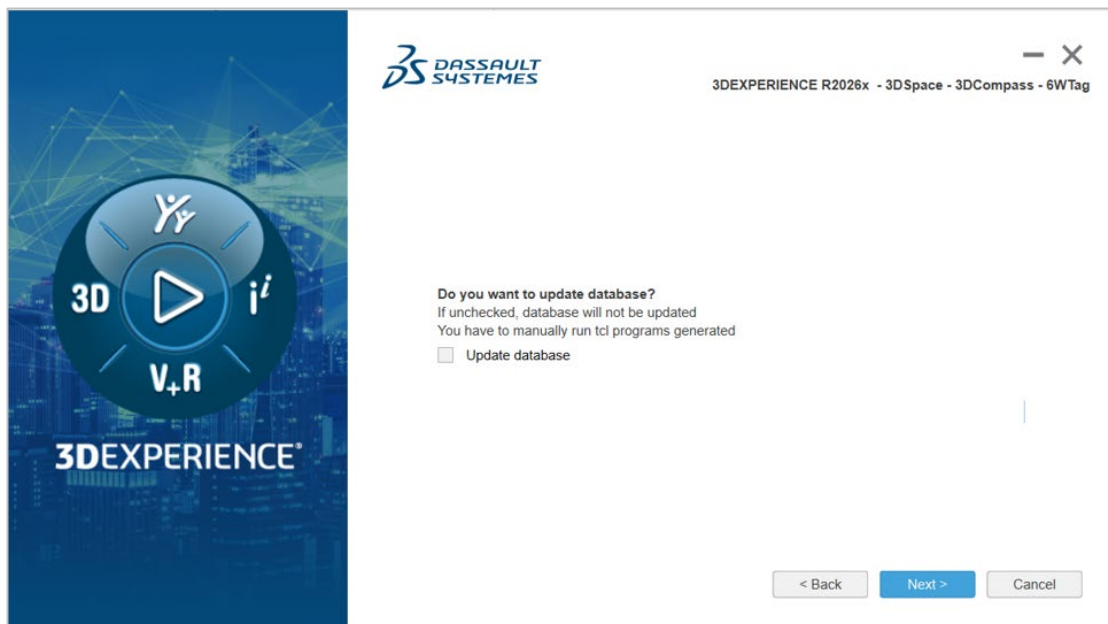

If this option is not selected, then you can run the tcl programs manually.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

Note: this is done for the database and not for the data.

If the **Update database** option is not selected, then, only the code is copied into the system and a script is generated at the following path:

<install_path>\Apps\install3DSpaceR2026x.bat (Windows)


<install_path>/Apps/install3DSpaceR2026x.sh (Linux)


Execute this script to update the database in a post-installation step.

If you notice the contents of the install3DSpaceR2026x[.bat|.sh] file, it first upgrades the database and then executes separate MQL statements for individual component installations under 3DSpace. Hence, in case of typical production databases, it is recommended that you clear the **Update database** check box. After the 3DSpace installation is complete, tcl scripts will be generated. Use this script for database upgrade, BPS installation, and EVP installation, separately. This will provide a better handling of the errors/failures. For more details, refer to Section 10.5, “Using the Install 3DSpace R2026x (.bat|.sh) File”.

Note: If you select the **Update database** option then, 3DSpace installation completes without the visibility of errors that occurred during the database upgrade.

4. If you select the **Migrate existing data** option, it upgrades the VPLM Data by performing MQL>exec prog VPLMDataMigration;
Recommendation: Clear the **Migrate existing data** check box and run it manually during the post-installation steps.

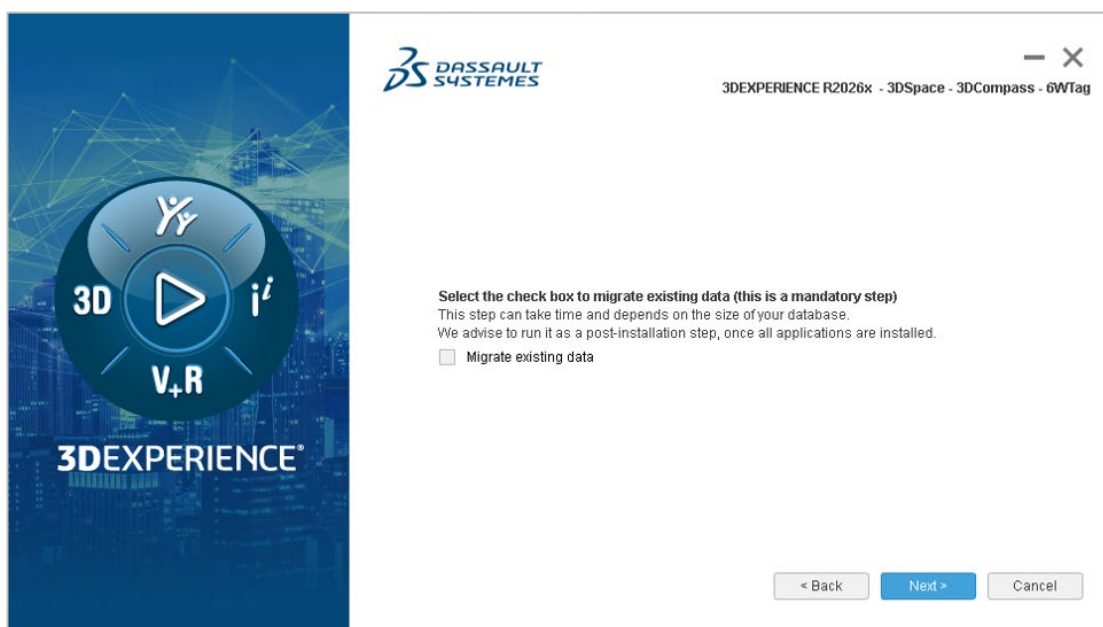

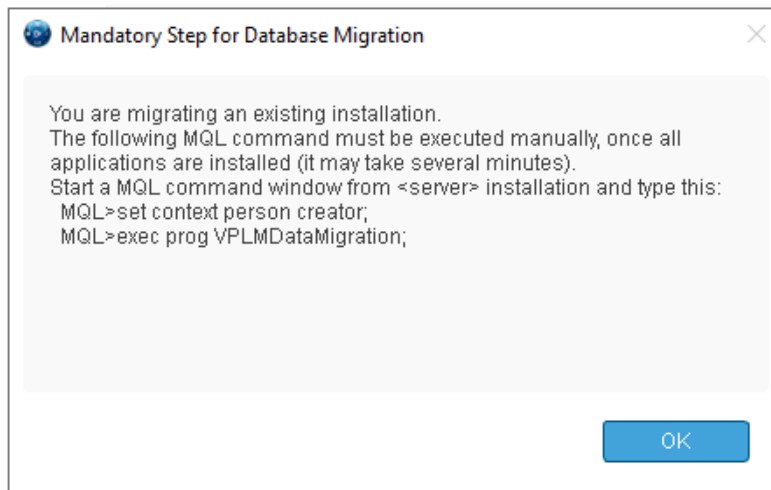

5. After completing the installation of the **3DEXPERIENCE** R2026x GA code (including BPS, EVP, MYA, and CSG), install any additional apps as needed. Then, follow the instructions in the PDIR to install FPXXXX. Once the FP installation is finished, continue with the data upgrade steps as outlined.

Before installing the Fix Pack, refer to the Program Directory to find the recommended FP level of **3DEXPERIENCE** R2026x, for possible updates.

10.4. Upgrade and Validate the Database Schema

Since the 3DSpace installer also upgrades the database during installation, it is important to perform validate upgrade to make sure that the database has been upgraded.

The subsequent sections below are not available in the Dassault Systèmes Documentation for **3DEXPERIENCE** R2026x however, they are still valid. Follow the steps that are relevant in the upgrade process.

10.4.1. Creating Missing Indexes

The upgrade command typically does not change indices on the database tables for a couple of reasons:

- It allows the admin to be able to separately schedule the updating of any indices rather than build the re-indexing time into the upgrade itself.
- There are instances when the DB admin have added custom indices to some tables and we do not want to interfere with those changes.

Run the command:

<MQL>validate index;

This command compares the existing database-level indexes with the out of the box definitions recommended by the application. Create these missing indexes manually in DB using the SQL commands.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

After fixing the missing indexes, run the validate index command once again to ensure that there are no missing indexes.

You can refer or use the following steps while working on “Missing Indexes.”. This is not the only methodology to work on Missing Indexes.

1. Run the validate index command and save its output in a text file.
For example, in a command prompt window, run the command:
`<R2026x Install>\server\win_b64\code\bin\mql.exe -c "set cont user creator; validate index;" > C:\temp\ValidateIndex.log 2>&1`
2. Save the file with a .sql extension and remove the comments after the create index command in the file. That is, only the SQL command must be present without any comments in-between.
3. On the Oracle sqlplus prompt, connect to the Oracle database instance on which the indexes are to be created.
4. Perform the following steps to proceed:
spool index.log;
set echo on;
set feedback on;
@C:\temp\ValidateIndex.sql
spool off;
5. This will create the missing indexes and save the log into index.log. Check the log file to ensure that indexes create successfully and if there are any errors. Do not ignore the errors and recreate the missing indexes accordingly.
6. Run the validate index command again and check for the missing indexes, if any.
7. Similarly, there could be some custom indexes that are missing. You require to create such missing indexes manually.

Note: The steps above include a .sql file from an Oracle perspective. Follow similar steps for other database types like MSSQL Server.

10.4.2. Upgrade Pre-Processing

Very large databases require database tuning before performing an upgrade. Upgrade Analysis gives useful analysis for such database tuning before running the actual upgrade process.

Note: Depending on the number of objects present in the database, upgrade commands might be time and resource consuming. Hence, recommendation would be to run these commands on a test environment with actual database dump before running it on the production database.

a. Validating Physical IDs

The V6R2010 release introduced two types of IDs for all objects: a physical ID (physicalid) and a logical ID (logicalid). The physical ID is unique for each object. For logical IDs, business objects are grouped together by revision family.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

The MQL command is:

<MQL> validate physicalid count;

<MQL> validate physicalid oids;

Where,

- The validate physicalid count command validates the physical IDs of all business objects and relationships in the database as well as reports the number of objects/relationships that do not have physical IDs for each of the vaults.
- The validate physicalid oids command validates the object IDs of all business objects and relationships in the database as well as lists the object IDs for all objects/relationships in the identifiers table that do not have physical IDs.

Note: As a prerequisite, it is required that all objects/relationships have a valid physicalid. Hence, it is important to run the above commands to make sure that there are no missing physicalid.

a) Validating an Upgrade [Updated from 3DEXPERIENCE R2025x FD01]

The result of this command shows the current version of each table in the database and the version that would result if the upgrade was to run successfully.

The MQL command was:

<MQL> validate [level N] upgrade;

Where,

level 0 lists all tables indicating which are changing and which are not, with old and new version numbers.

level 1 provides level 0 output but also includes the SQL commands that are run to perform each upgrade step. If you do not include the level clause then Level 1 is treated as default.

VALIDATE LEVEL 4 - UPDATE DATABASE STATISTICS

In previous releases, validation levels 1, 2, 3, 4 were provided to facilitate database maintenance.

The original options were:

Level 1: Runs analyze table

Level 2: Deletes statistics

Level 3: Calculates statistics without the compute qualifier

Level 4: Forces an update of database statistics for all tables. It supersedes the other levels and is the recommended validation level to use in almost all cases.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

Validate levels 1, 2, and 3 were rarely used. Validate Level 4 was used, but the command is not meaningful to an Administrator

With **3DEXPERIENCE R2025x FD01**, a more meaningful command has been introduced to replace the Validate Level 4 command.

<MQL> update database statistics

[vault VAULT_NAME {, VAULT_NAME}]

[output FILENAME];

Note that the “validate level 4” command is still available in MQL help, but it will be removed soon.

Refer to the Whats New topic in the following Dassault Systèmes Documentation:

Installation and Setup >3DEXPERIENCE Platform >3DEXPERIENCE Configuration and Customization >Legacy Tools> MQL Command Reference >What's New

The system admin can use validate commands as mentioned in the following Dassault Systèmes documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Configuration and Customization | Legacy Tools | MQL Command Reference |validate Command

10.4.3. Running the Upgrade

The sequence to run the upgrade commands is as follows:

- a) <MQL>upgrade physicalid;
- b) <MQL>upgrade tnr global | nonglobal;

Where,

- upgrade tnr global: Establishes a constraint on Type-Name-Revision across all business object vaults.

If you had set **MX_CHECK_DUPLICATE_NAMES=TRUE**, then TNR uniqueness was enforced across all vaults. Hence, you require to execute upgrade tnr global.

Note: It is recommended to run the **validate unique tnr** command after running the upgrade tnr global command. The validate unique tnr command scans the database to verify that it does not contain any objects in separate vaults with the same Type-Name-Revision.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

- upgrade tnr nonglobal: Establishes a constraint on Type-Name-Revision within each separate business object vault.

If you had set **MX_CHECK_DUPLICATE_NAMES=FALSE**, then TNR uniqueness was enforced only within each vault. Hence, you require to execute upgrade tnr nonglobal.

The V6R2011x release is generalized the way the 'Type-Name-Revision' uniqueness is handled for all business objects. Before the V6R2011x release, this was controlled by a uniqueness constraint on the business object table for each vault. This release introduced a more general way to define unique keys for objects. To make out-of-the-box Type-Name-Revision uniqueness more consistent with this concept, a migration step was added for the existing data. For more details, refer to the Dassault Systèmes Documentation at: Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Configuration and Customization | Legacy Tools | MQL Command Reference | validate Command

- c) To upgrade the database schema, execute the following command:

```
<MQL>upgrade;
```

- d) After the upgrade command is complete, run the validate level 0 upgrade command again and collect the output.

Note: Ensure that there is no table that still requires an update or modification. If the validate upgrade command still shows some table(s) that require upgradation, then this problem requires further investigation. Contact the Technical Support with relevant information such as SQL traces generated during the execution of the upgrade command.

10.4.4. Upgrading the Database to Add Support for File Uniqueness

There is no need to execute this step if you are upgrading from the V6R2013x release to the 3DEXPERIENCE V6R2015x platform and higher.

V6R2013x adds support for multi-value and range-value attributes. It also adds a file uniqueness constraint to the database.

The upgrade command anyway upgrades the database for File Uniqueness. Run the below command to ensure that there are unique (duplicate) file instances in the database.

```
<MQL>validate lxfileunique;
```

This command returns the corrupted business object with its vault name, corresponding database table, business object ID, and the corresponding integer value in the lxBO column.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

If any of the duplicate rows are active, they cannot be removed and will cause the upgrade to fail, unless you remove them manually.

After completing the above command, run the validate lxfileunique command to ensure that the data has been migrated successfully.

10.4.5. Upgrade Post-Processing

After upgrade, you require to update the Database Statistics.

- a. Updating the Database Statistics: After an upgrade, update the statistics on the database with:

```
<MQL>validate level 4;
```

- b) User can now use the new command.

```
<MQL> update database statistics
```

```
[vault VAULT_NAME {, VAULT_NAME}]
```

```
[output FILENAME];
```

Troubleshooting:

In some cases, after running the validate level 4 command, it shows that lxTempSet still requires an upgrade.

```
Unchanged: lxPath_%s version 4
```

```
Unchanged: lxPE_%s version 6
```

```
Unchanged: lxBinary_%s version 1
```

```
Upgrade: lxTempSet_%s version 0 -> 1
```

```
Create table
```

```
Unchanged: ixd270db97_%s version 1
```

```
Unchanged: ixd2706acd_%s version 1
```

```
Unchanged: ixd270c2cc_%s version 1
```

Running the upgrade command again shows that tables are up-to-date but, running the validate level 4 command again shows the previous incorrect result. This goes into a loop that never ends.

Note: You can safely ignore this issue as the temporary table **LXTEMPSET** is not holding any persistent data.


10.5. Using the "install3DSpaceR2026x[.bat|.sh]" File

During 3DSpace installation, if you did not select the **Update database** option then, only the code is copied and a script is generated at the following location:

<install_path>\Apps\install3DSpaceR2026x.bat (for Windows)

<install_path>/Apps/install3DSpaceR2026x.sh (for Linux)

Execute the above scripts after 3DSpace installer has finished installation.

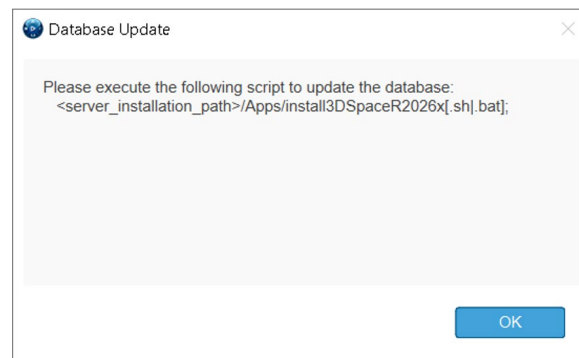

This script has a list of individual tcl scripts used for executing installation for Database Upgrade, Business Process Services, Multi-Discipline Collaboration Platform, and so on.

Recommendation: Execute one tcl at a time instead of running a complete batch file and collect individual logs as follows.

1. As we have already performed MQL upgrade (see Section 10.4.3, "Running the Upgrade"), remove the line for MQLUpgrade, and only keep the line for BPS install. Remove the line for EVP install, MYA install, and so on.

Note: It is important to execute the validate upgrade command after the MQLUpgrade command is complete. No database table must be pending for upgrade. Refer to Section 10.4.3, "Running the Upgrade" before running the BPS installation script.

2. While upgrading from V6R2012x or V6R2013x to **3DEXPERIENCE R2015x**, installation of Business Process Services (BPS) may fail with an error "**Error: #1500516: Item 'AEFWelcomeToolbar' not in menu 'AEFGlobalToolbar'**". Refer to **QA00000039419** for more details.
3. While upgrading from V6R2012x or V6R2013x to **3DEXPERIENCE R2026x**, installation of Business Process Services (BPS) may fail with an error "**version information missing on relationship_DERIVED_ABSTRACT.**". For more details on this, refer to **QA00000039678**.
4. When upgrading from a level before **3DEXPERIENCE R2022xFP2310**, the installation of EVP may fail with the following error message.

```

Upgrade succeeded...
Running D:/3DSpace2026x/win_b64/reffiles/MQLFamilies/mql/Login-MD-update-R425.mql
Error: #1900010: Occurred on line number '11' in 'D:/3DSpace2026x/win_b64/reffiles/MQLFamilies/mql/Login-MD-update-R425.mql'
Error: #1900068: add program failed
Error: #1900005: Name 'initLTUser' not unique

```

This issue has been resolved in the **3DEXPERIENCE R2022x.FP2310** release. To prevent this error, you can follow two methods outlined in knowledge article **QA00000309992**.

5. Execute the batch file from the command prompt as follows:
`<install_path>\Apps\install3DSpaceR2026x.bat > C:\temp\BPSInstall.log 2>&1`
 After the BPS installation script is complete, check the log file for errors, if any.
6. It is important to resolve the errors before proceeding to the EVP installation. Now, edit the batch file to remove the line for BPS install and add only for EVP install.
 For example,
`<install_path>\Apps\install3DSpaceR2026x.bat > C:\temp\EVPInstall.log 2>&1`
7. Once the EVP installation is complete, it is important to resolve the errors before proceeding to the next tcl script in the batch file. Similarly, edit the batch file to complete the rest of the component installations one by one.

Troubleshooting:

- If installation fails, refer to the log files generated at
`<V6_Install>\server\Apps\BusinessProcessServices\V6R2026x\InstallData\log`
- Also, refer to the `installBusinessMetricsV6R2026x.log` and `installBusinessMetricsV6R2026x.err` files located under
`<V6_Install>\server\Apps\BusinessProcessServices\V6R2026x\Modules\ENOBusine`
`ssMetrics`. During installation, database is upgraded for the corresponding central
 (refer to the Note above.) These files provide information about the
 installation/upgrade sequence followed and the errors that occurred, if any.

Note: If the BPS installation fails, you can still launch MQL from the 3DSpace directory in the **3DEXPERIENCE R2026x** installation. In case of errors during BPS installation, you need to revert the database to its initial state before the 3DSpace installation. Follow the MQL commands provided in the knowledge reference documents to address any errors from the previous BPS installation. Once the MQL commands are executed, you can proceed with the BPS installation

10.6. Installing Other Apps

During installation of apps, the **Upgrade database** option appears if you are upgrading from an older database. The installation process detects that the database is being upgraded from an earlier release to **3DEXPERIENCE R2026x**. Ensure that you select this option during installation. Now, continue installing rest of the apps (centrals) that were present in the earlier ENOVIA V6 release.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

Note: Follow the installation sequence as mentioned in Section 10.2, “3DSpace And Other Apps Installation”.

Retain the error and log files that are created under the following directory:
R2026x_Install\server\Apps\<App name>\V6R2026x\Modules\AppNameBase

Troubleshooting:

- If installation fails, refer to the log files generated at: <V6_Install>\server\Apps\< App Installed>\V6R2026x\InstallData\log.
- Also refer to .log and .err files located under <V6_Install>\server\Apps\< App installed>\V6R2026x\Modules. During installation, database upgrades for the corresponding App (refer to the Note above.) These files provide detailed information about the installation/upgrade sequence followed and the errors appearing, if any. Ideally the .err files would be empty.

10.7. Installing 3DEXPERIENCE R2026x FPXXXX

After the GA installation is complete, install the Fix Pack selecting the **Upgrade database** option. Refer to the Program Directory for the concerned FP levels of **3DEXPERIENCE R2026x**, for possible updates.

After the Fix Pack installation is complete, run **validate upgrade** command in MQL to check if there are any database tables to be upgraded (refer to Section 10.4, “Upgrade and Validating Database Schema”.) You must also run **validate index** command to ensure that there are no missing indexes.

10.8. Data Migration

Installation programs for apps recognize previously installed versions and make the required updates to upgrade the application to the new version. However, you also require to upgrade the data associated with the respective App (central) to a newer version.

Refer to the Knowledge article and PDIR references for detailed information on the data migrations required for each central as applicable.

Migration scripts mentioned in the PDIR document generate a migration.log file in the specified directory that contains all the operations executed during data migration.

https://media.3ds.com/support/progdir/all/?pdir=3Dexp.R2026x.update02&context=onpremises&sub=.%5Cmigration%5Cmigration_enovia.html



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

Program Directories

Search: Search in Program Directory | Share URL

Product Line: 3DEXPERIENCE | Release: R2025x | Level: FD02

3DEXPERIENCE R2025x FD02 - Program Directory - On Premises

Welcome

- Summary of changes
- Deployment
 - Strategic Platform Requirements
 - Product-Specific Requirements
 - Components
 - Installation
 - Data Migration
 - ENOVIA Classic Web Apps
 - SIMULIA Apps
 - Licensing
- Products
 - Shared Content

ENOVIA Classic Web Apps

Data migration procedures must be followed **depending on the application you have and the release you are coming from**. Check the linked documents below to determine what procedures, if any, are required. All classic web apps must do the Collaboration and Approvals migrations.

IMPORTANT: If you have already migrated to a release mentioned in the documents below, and subsequently are migrating to a later release that is not mentioned, follow the standard upgrade procedure and additional steps are required.

For more information on upgrading and migrating, refer to the **Administration Roadmap** topic in your app administration guide at help.3ds.com (Installation and Setup>Administration...). Always refer to the known issues for your apps for any other considerations.

3DEXPERIENCE Apps	Document Version	Document Date	Link to Latest Procedures
Adverse Event Reporting	1.0	Oct 12, 2018	Migrating Adverse Events Reporting Data
Brand Assets Management	1.0	Oct 3, 2018	Migrating Brand Assets Management Data
CAPA and Audit Management	1.5	December 22, 2023	Migrating CAPA and Audit Management Data
Collaboration and Approvals	3.27	March 04, 2025	Migrating Collaboration and Approvals Data
Collection Development and Collection Sourcing	1.1	Jan 17, 2019	Migrating Collection Data

Note: When you upgrade, you require to run the migration routines for all releases between the one you currently have and the one you are upgrading to.

For example: If you upgrade from V6R2010 to **3DEXPERIENCE R2026x**, you must run the scripts for V6R2010x, V6R2011, V6R2011x, V6R2012, V6R2012x, V6R2013, V6R2013x, **3DEXPERIENCE R2014x**, **3DEXPERIENCE R2015x** and so on as applicable or mentioned in the Program Directory.

10.8.1. Migrating PLMEntity Data-VPLMDataMigration(VPM Data)

For more details on migrating the PLMEntity data (VPM data), refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform| 3DExperience Configuration and Customization | Legacy Tools | VPM Data Model Migration | Working with Migrations | Step 10: Launch VPLMDataMigration Manually if Needed

The PLMEntity derivative type's data schema (formerly known as VPM) serves most of the CATIA, SIMULIA, and DELMIA apps.

Note: When performing VPLMDataMigration, follow the below sequence:

Install 3DSpace GA + All Apps GA (as applicable), then 3DSpace FPXXXX + All Apps FPXXXX>> Then proceed with VPLMDataMigration.

Note the following points before performing the PLMEntity Data (VPM Data) migration:

- Ensure that you migrate the DMC (Data Model Customization), if present, from the older ENOVIA V6 release to **3DEXPERIENCE R2026x** as mentioned in Section 2.3, "Customization".
- On a typical production database, the data migration steps for VPLM may require substantial database resources and can take a significant amount of time.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

Frequently perform runstats for database so as to optimize the database query performance. This helps reducing the time taken for PLMEntity Data migration to some extent.

- **VPLMDataMigration** command is executed from an MQL that is a single threaded process. In a typical production database, VPLMDataMigration may take a long time and resources to complete the process. Remove the below variables from the **enovia.ini** file, if present.

MX_MEMORY_THREAD_LIMIT

MX_MEMORY_SYSTEM_LIMIT

MX_MEMORY_KEEP_LIMIT

This helps the MQL command to utilize maximum system memory available.

If the database contains millions of PLMPort and PLMConnection objects, the migration process can be time-consuming. To reduce migration time, a new Port and Connection migration procedure has been introduced in the **3DEXPERIENCE** platform R2022x GA release. When conducting VPLMDataMigration, refer to the following Dassault Systèmes Documentation.

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform Installation | Installing Services One-by-One | 3DSpace | 3DSpace | Upgrade to R2026x GA and migrate PLMPort and PLMConnection objects

Refer to the "Reduce the PLMPort and PLMConnection objects migration time" topic.

Here, the MQL run in Step1, adds a business object and marks the BaselineIOVonPORTCXMmigration as finished.

In step2, run "exec prog VPLMDataMigration;". Here, the PORTCXMmigration will be skipped as it is already marked finished.

In step 3, run the provided MQLs. If the user can execute "update accesslist" outside the context of PortCx migration, then user can also replace MQL "exec program PortCxMigration -migrate" by "exec program PortCxMigration -migrate - no_accesslist_update".

- The dump_before.log and dump_after.log files are generated in the Install Dir\server\logs. These log files provide status of the ongoing PLMEntity Data migration. After the PLMEntity Data migration is complete, these two files must have the same file size and content, and binary compared to ensure a successful Data migration.
- Capture the MQL output while executing VPLMDataMigration. Console output displays the progress of each step performed by the utility along with the time taken to complete that step. If VPLMDataMigration takes longer time than usual, then this console output helps identifying the exact step that could be time consuming.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

Troubleshooting:

- VPLMDataMigration may fail with an error “**Not enough main memory to complete the sort.**”

If **SRonPathNewDataModel** migration fails during sort, an associated error is logged in the VPLMDataMigration program output log file. The VPLMDataMigration stops because the dump files generated by **SRonPathNewDataModel** are too huge to be compared on the server machine.

Refer to **QA00000041456** for more details on how to resolve this problem.

The following errors might occur while executing VPLMDataMigration :

- **Error: #1900068: add role failed**
System Error: #1500178: role 'CompanyA' does not exist

To resolve this error, refer to knowledge article **QA00000038973**.

To fix this issue, manually add all the missing roles mentioned in the error through MQL as shown below:

```
MQL> set context person creator; verb on;
```

```
MQL> add role CompanyA asanorg;
```

- **System Error: #5000001: Error: #1900068: modify business object failed**
Error: #1600507: role not a project

This error occurs if the user has a project name same as the name of the Company. In this case, the VPLMDataMigration program is unable to recognize and upgrade the project and hence the error occurs. The only solution is to list out the organizations and projects, and delete a project that is clashing with the company name.

The VPLMDataMigration.log provides the time spent for each step of VPLMDataMigration. If you notice that the time spent on the SRLastPIDAndRole step is too long, you can improve the performance by adding further threads allocated to this step. The SRLastPIDAndRole step is multi-threaded, you can also configure the number of threads. Perform the following steps to increase the number of threads for the SRLastPIDAndRole step.

- Go to
 <INSTALL_DIR>/Apps/VPMMultiDiscipline/V6R2026x/mql/VPLMxDataMigration-Execution-Wrapper-R425.mql
 and back up the original file.
- Modify the below line in the VPLMxDataMigration-Execution-Wrapper-R425.mql file as shown below:



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.


```
<MQL>exec program SRLastPIDAndRole -migration -thread 3 -dir  
"$mxtracefilepath";
```

to

```
<MQL>exec program SRLastPIDAndRole -migration -thread 6 -dir  
"$mxtracefilepath";
```

where,

thread=Number of threads corresponding to the number of cores the server may have.

- c) On MQL window, execute the following commands:

```
<MQL>del program VPLMDataMigration;
```

```
<MQL> add program VPLMDataMigration mql file
```

```
<INSTALL_DIR>/Apps/VPMMultiDiscipline/V6R2026x/mql/VPLMxDataMigration-Execution-Wrapper-R425.mql;
```

Execute the 'VPLMDataMigration' program again to improve the performance.

10.8.2. Business Process Services (BPS)

For more details on business process services migration, refer to the following PDIR link:

PDIR link: <http://www.3ds.com/support/documentation/program-directories/>

Path: Deployment | Data Migration | ENOVIA Classic Web Apps | Collaboration and Approvals

- About Migrating User Roles

This section provides more details about the person migration that is required when upgrading from V6R2013x or earlier to **3DEXPERIENCE** platform.

Before V6R2013x, ENOVIA apps used the role-based approach and VPLM world used the security context. On V6R2013x, there is a homogenization of both ENOVIA and VPLM data models, all moving to security context. To do so, we create a Global project and create all possible combinations of the role-organization-collaborative space.

A single person may have more than one role on one or more operational organizations within one or more projects. Persons are assigned to one or more operational organizations according to the roles they can perform. These organizations can then be assigned to one or more vessels because the same roles are often required on different types of vessels.

This leads to a triple relationship: role-organization-collaborative space. This relationship is referred to as a security context.




Confidential information. Copyright Dassault Systèmes [2026].


This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

Now when performing migration of persons, execute the emxSecurityMigrationMigratePersonObjects program. This program creates new security contexts with all possible combinations of Role, Project, and Organizations present in earlier V6 release. Then, every user is assigned to all those security contexts for a particular role to which this user was added in previous V6 release.

Before migrating Persons/User Roles:

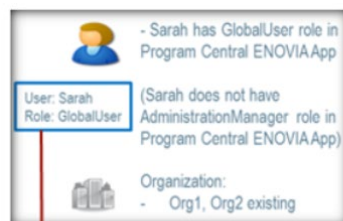

After migrating Persons/User Roles

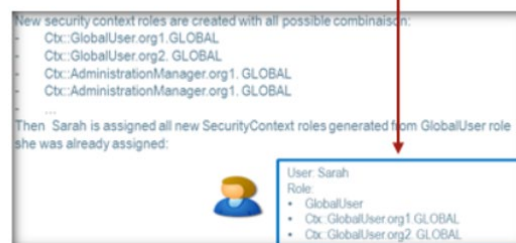

This information can be useful to review possible impacts that may occur at the customer site on case-to-case basis.

Note: An Administrator can remove users from the unwanted Security Contexts as required and also delete the Security Contexts that are not required.

- Clarification related to “Migrating Multiple Ownership Access Levels” step is available in the Migration document, “migratingcollaborationandapprovals.pdf”. Specifically, if you are migrating from a release prior to **3DEXPERIENCE R2018x.FD03**, you need to update the mapping of these accesses in the DomainAccess.xml file.
 - Migration script was promoted to migrate from same release, that is, **3DEXPERIENCE R2018x.Older FD** to **3DEXPERIENCE R2018x.FD06** or higher. If you are migrating from **3DEXPERIENCE R2018x**, you don't need to do anything.
 - If you are migrating from **3DEXPERIENCE R2017x** or older release, you will have to delete changesov bits from migration script and not from DomainAccess.xml. In the migration script emxSecurityMigrationMigrateMOAAccessBase, delete the changesov access bit from the FULL_RES_UNRES variable because changesov access was not supported in releases prior to **3DEXPERIENCE R2018x.FD03**.

For more information refer to **BR10000295014**.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

Troubleshooting:

- During BPS content migration related to Workspace and Workspace Vaults, the user might face errors related to access. These errors might occur during upgrade from V6R2013x or prior releases because of a missing role or license. Following are examples of errors:
 - Modify Folder 17926.45205.20000.52057 Add objectOwnership for user 'xxxxx' is not supported because of the following two reasons:
 1. The member is a Role or Group
 2. The member is not Migrated to be added....
 - Object of type 'xxxx' does not migrate because it does not require any access grant. Refer to **QA00000046931** for more information on these errors.
- During the BPS content migration related to Objects, users might face the following error,
execute program emxSecurityMigrationMigrateTeamObjects E: BPS\Workspace 1 n;
User might face errors similar to the following error
Un-Expected type Contract Part found during team central migration.
Refer to **QA00000049352** for more details.

10.8.3. Multi-Discipline Collaboration Platform (EVP)

To upgrade from a previous EVT/EVP Installation to **3DEXPERIENCE** R2026x, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform Installation | Installing Services One-by-One | 3DSpace | 3DSpace | Upgrading from a Previous EVT/EVP Installation to **3DEXPERIENCE** R2026x

When upgrading from a previous EVT/EVP installation to **3DEXPERIENCE** R2026x, consider the following points:

- Perform this upgradation only if you have performed parameterization of the previous V6 release in One-Click Deployment Experience. In other words, if you have defined attributes/parameters on PhysicalProduct and PhysicalRepresentation, you require to perform the migration steps as mentioned in this section.
- Perform this upgradation before performing Former to Unified Typing migration for One-Click Deployment Experience with parameterization.
- You do not require this upgradation for Former to Unified Typing migration for customer specific environment having DMC customization.

10.8.4. Enterprise Change Management (ECM)

For migrating the Enterprise Change Management (ECM) data, refer to the following documentation:



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

PDIR link: <http://www.3ds.com/support/documentation/program-directories/>

Path: Deployment | Data Migration | ENOVIA Classic Web Apps | Enterprise Change Management

Note: There was no ECM before or on ENOVIA R2013x level. So, you can skip ECM migration while migrating from or before ENOVIA R2013x level to the **3DEXPERIENCE** R2026x level.

10.8.5. Engineering BOM Management (ENG)


For migrating the Engineering BOM Management (ENG) data, refer to the following documentation:

PDIR link: <http://www.3ds.com/support/documentation/program-directories/>

Path: Deployment | Data Migration | ENOVIA Classic Web Apps | Engineering BOM Management

Troubleshooting:

- Commands related to ECO/ECR migration while upgrading to **3DEXPERIENCE** platform from releases before V6R2013X might not return any objects. Running the commands mentioned under section “Standard ECR/ECO Migration” in the PDIR might not return any object id’s and show failure of the migration command. Refer to **QA00000046818** for more details.
- Engineering BOM installation fails while upgrading from **3DEXPERIENCE** R2015x to **3DEXPERIENCE** R2026x showing schema installation error as follows:

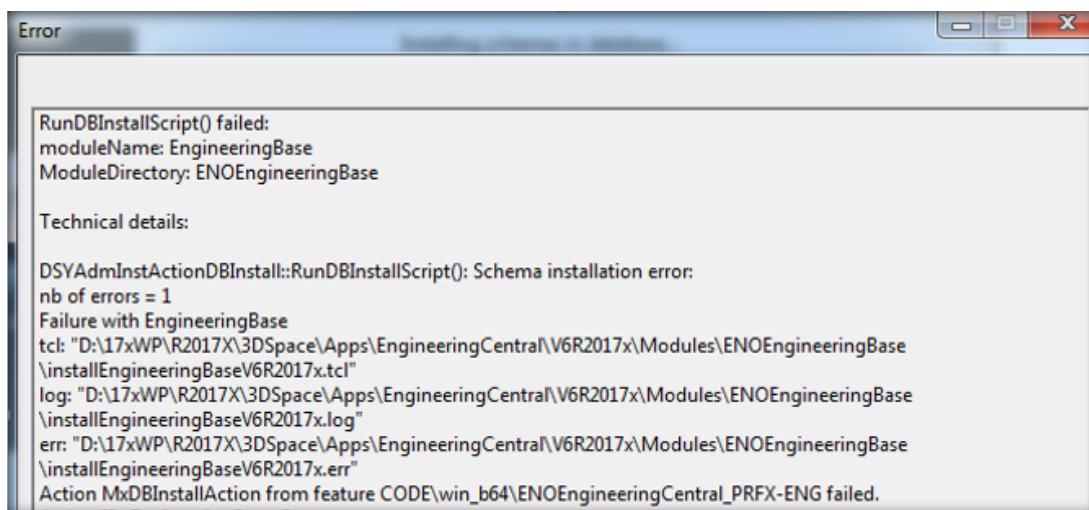

Note: This issue has been fixed in **3DEXPERIENCE** R2015x FP1706 (FD11).

- When upgrading from **3DEXPERIENCE** R2015x with a level before FP1706, you can use the following MQL command as a bypass:



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

<MQL>modify table PartWhereUsedTable system column name "ActiveECR" setting "Access Expression" "false";

- Following error might occur while executing the below MQL:

<MQL> run ENGLedTimeTransition.tcl;

Error: #1900068: pri type failed

System Error: #1500178: business type 'type_Part' does not exist

Solution: To resolve the above error, execute the following MQL:

<MQL> set env REGISTRATIONOBJECT eServiceSchemaVariableMapping.tcl;

<MQL> run ENGLedTimeTransition.tcl;

10.8.6. Traceable Requirements Management (RMT)

For migrating the Traceable Requirements Management (RMT) data, refer to the following documentation:

PDIR link: <http://www.3ds.com/support/documentation/program-directories/>

Path: Deployment | Data Migration | ENOVIA Classic Web Apps | Traceable Requirements Management

Troubleshooting:

The path for the **emxRequirementsStringResource_en.properties** file in the documentation could be incorrect. The correct path for this file is:

Install **Location/server/managed/properties**.

Edit this file to create the migration output files at the required location.

10.8.7. Variant Configuration Management (FTR)

For migrating the Variant Configuration Management (FTR) data, refer to the following documentation:

PDIR link: <http://www.3ds.com/support/documentation/program-directories/>

Path: Deployment | Data Migration | ENOVIA Classic Web Apps | Variant Management

When you upgrade, you require to run the migration routines for all releases between the one you currently have installed and the one you are upgrading to. For example, if you upgrade from V6R2010 to **3DEXPERIENCE R2026x**, you must run the scripts for V6R2010x, V6R2011, V6R2011x, V6R2012, V6R2012x, V6R2013, V6R2013x, **3DEXPERIENCE R2014x**, **3DEXPERIENCE R2015x** and so on, as applicable.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

Troubleshooting:

- During actual Migration step (Step 6 as per the Dassault Systèmes Documentation), you might receive the following error: **“java.lang.Exception: Message:ORA-00911: invalid character.”**

Solution: To resolve this, put **verb off** in MQL before running the **emxVariantConfigurationIntermediateObjectMigration** script.

- During the **emxVariantConfigurationIntermediateObjectMigration** script execution, there could be some unConverted Object Ids with the following error: **“java.lang.Exception: Message:'from' relationship does not allow type of business object Severity:2 ErrorCode:1500183”**

Solution: This error may appear because of some unsupported type of data structure having multiple hierarchy of Configuration Feature.

For example,

```
Product---Style(CF)—Interior(CF)--(CF)—(CF)
Product---Style(CF)—Exterior(CF)--(CF)—(CF)
```

Therefore, you must create a single level hierarchy for Configuration Feature.
For more information, refer to **QA00000034017** in the knowledge base.

10.8.8. Manufacturing BOM Management (MFG)

For more information on Manufacturing BOM Management, refer to the following documentation:

PDIR link: <http://www.3ds.com/support/documentation/program-directories/>

Path: Deployment | Data Migration | ENOVIA Classic Web Apps | Manufacturing BOM Management

10.8.9. Program Management (PRG)

For migrating the Program Management (PRG) data, refer to the following documentation:

PDIR link: <http://www.3ds.com/support/documentation/program-directories/>

Path: Deployment | Data Migration | ENOVIA Classic Web Apps | Project Management

10.8.10. IP Classification (LBC)

(Formerly: Library Central)

For migrating the IP Classification (LBC) data, refer to the following documentation:



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

PDIR link: <http://www.3ds.com/support/documentation/program-directories/>
Path: Deployment | Data Migration | ENOVIA Classic Web Apps | IP Classification

10.8.11. Supplier Quality Management (SUP) (Formerly: Supplier Central)

For migrating the Supplier Quality Management (SUP) data, refer to the following documentation:

PDIR link: <http://www.3ds.com/support/documentation/program-directories/>
Path: Deployment | Data Migration | ENOVIA Classic Web Apps | Supplier Quality Management

10.8.12. RFQ Management (SRC) (Formerly: Sourcing Central)

For migrating the RFQ Management (SRC) data, refer to the following documentation:

PDIR link: <http://www.3ds.com/support/documentation/program-directories/>
Path: Deployment | Data Migration | ENOVIA Classic Web Apps | RFQ Management

10.9. Execute War Redeploy

After installing other apps on either GA level or FP level, execute war redeployment by running the following batch files in sequence:

1. BuildDeploy3DSpace_CAS.bat / BuildDeploy3DSpace_CAS[.bat |.sh]
2. BuildDeploy3DSpace_NoCAS.bat / BuildDeploy3DSpace_NoCAS[.bat |.sh]

For more information, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform Installation | Installing Services One-by-One | 3DSpace | 3DSpace | Installing Additional Apps

10.10. Compiling all JPOs

Compile all JPO programs by running the following MQL command:

```
<MQL>set context user creator;  
<MQL>compile prog * force;
```

Note: After you finish the 3DSpace and apps installation, compile the JPOs with Tomcat running to ensure the Web Services are published correctly.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

10.11. Migrating from Former Typing to Unified Typing

Only customers who use 'Former Typing' are required to perform this step. This step can be skipped if the environment is set to Unified typing by default.

The **3DEXPERIENCE** platform offers two typing modes:

- Former Typing
- Unified Typing.

Unified Typing is the default Typing mode in the **3DEXPERIENCE** platform.

If upgrading from One Click Deployment Experience (formerly RACE), Unified Typing is the default typing mode in **3DEXPERIENCE** platform.

Note:

- Unified typing mode is mandatory for baseline behavior and Former typing is deprecated from **3DEXPERIENCE** R2020x.
- You must migrate the PLMEntity data (VPM) using the VPLMDataMigration program before the Unified Typing migration.
- There are four typical migration profiles, depending on whether you have used the Former Typing or Unified Typing, the One-Click Deployment Experience or the customer-specific environment in the previous ENOVIA V6 releases. Refer to the corresponding Dassault Systèmes Documentation for more details about the migration procedure you require to follow.
- To get the data ready for migration, the admin must run the data checker for electrical rules. For more details, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Configuration and Customization | 3DSpace Data Model | Unified Typing Migration Tool | Preparing the Migration | Procedure for Preparing the Migration

- When performing Former to Unified Typing migration for One-Click Deployment Experience, you must upgrade the EVP data as described in Section 10.10.3, "Multi-Discipline Collaboration Platform (EVP)".
- Migrate the DMC (Data Model Customization), if present, from older ENOVIA V6 release to the **3DEXPERIENCE** R2026x. Refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Configuration and Customization | 3DEXPERIENCE Platform Customization Roadmap | Migrating between Former Typing and Unified Typing

Also, refer to **QA00000038952** for more information/recommendations.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

10.11.1. About the Unified Typing Migration Tool

For more information, especially recommendations, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Configuration and Customization | 3DSpace Data Model | Unified Typing Migration Tool | Unified Typing Migration Tool Basics

Troubleshooting:

If Unified Typing migration tool `emxNewTypingMigrationProgram` execution fails, share the following information with the Technical Support team for further investigation:

- Contents of the 'VPLMAdminV6GA.adm' file located in <3DEXPERIENCE_Install>\server\STAGING\ematrix\WEB-INF\classes\vp1m\environment or in the folder pointed by the **MX_CLASSPATH** variable.
- Contents of the directory pointed by the **-dir** option is used in the **emxNewTypingMigrationProgram**.
- The console output with verbose traces.

10.11.2. Parallelizing Unified Typing Migration Processes

Considering huge number of objects present in a typical Production Database, the Unified Typing migration tool can take a lot of time to migrate these objects. Hence, a methodology involving parallelization has been introduced where you can execute multiple migration processes in parallel.

For more details, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Configuration and Customization | 3DSpace Data Model | Unified Typing Migration Tool | Procedure for Parallelizing Migration Processes

10.12. Configuring Store Data (VPMDData)

Once Upgrade is completed, you will need to configure the store backup (refer to Section 5.3.3, "Backup 3DSpace Files") from old release to newer release using Enterprise Control Center widget.

Refer to following Dassault Systèmes Documentation:


Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform Administration | 3DSpace | Enterprise Control Center | Site Location and Replication

System Administrators can use the Enterprise Control Center widget to setup a store and location. Define the new FCS URL and Path of old store file backup.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

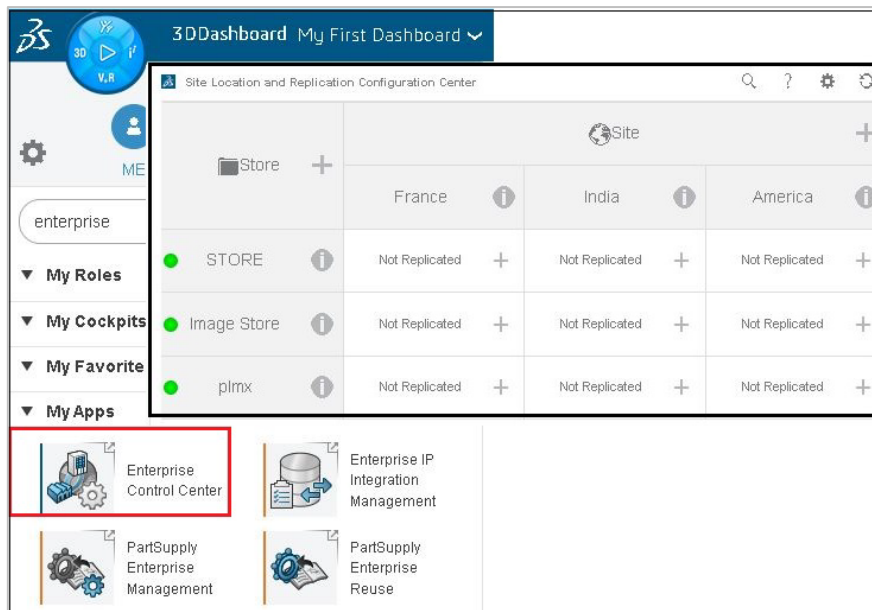

The user using the Enterprise Control Center widget needs to have the 'System Admin access' as a pre-requisite to access it.

Once you have configured the old store as described above, you can validate by opening an old document in 3DSpace to verify if you are able to assess them.

11. Upgrading 3DSwym

For more details, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform Installation | Installing Services One-by-One | 3DSwym | Upgrading 3DSwym

Back up the 3DSwym database from an earlier **3DEXPERIENCE** platform version and import it on a new Server machine.

Follow the steps as mentioned in the Dassault Systèmes Documentation.

During the R2026x 3DSwym installation, database upgrades to the new version will no longer be compatible with computers running the previous versions of 3DSwym.

Note: Before installing the Fix Pack, refer to the Program Directory for finding the concerned FP levels of **3DEXPERIENCE** R2026x, for possible updates.

12. Upgrading 3DComment

For details, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform Installation | Installing Services One-by-One | 3DComment | Upgrading 3DComment



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

If users like and comment in 3DSpace Collaboration Spaces, upgrading 3Dcomment with Oracle released before R2020x might fail. Refer to the Program Directory to find a solution: **3DEXPERIENCE R2026x FD01 - Program Directory - On Premises | Deployment | Installation | 3DEXPERIENCE Platform Installation | 3DComment**

Note: Refer to the Program Directory to discover any updates related to 3DComment.

13. Upgrading 3DNotification

For details, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform Installation | Installing Services One-by-One | 3DNotification | Upgrading 3DNotification

Note: Refer to the Program Directory to discover any updates related to 3DNotification.

14. Post-Installation Procedures

14.1. Importing Existing Users Created in an Earlier Release

For more details, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform Installation | Installing Services One-by-One | 3DSpace | 3DSpace | Operations | Post-Installation

Refer to section, “Migrate Existing Users Created in an Earlier Release” under the Dassault Systèmes Documentation.

Note:

- Export the users from **3DEXPERIENCE R2026x** upgraded stack using the **VPMPosExport** utility before configuring with 3DPassport. This way, you can use the same administrator user (For example, PLMADM) that was present in the earlier release. You must deploy the application and use internal authentication for this procedure.
- There will be existing product licenses assigned to the users existing from the previous release. Because of change in packaging from **3DEXPERIENCE R2014x** onwards, old product licenses are of no use. Users cannot login to the server because of old product licenses. Remove the old licenses and assign the required licenses. Refer to the Program Directory for **3DEXPERIENCE R2014x** for upgrading products up to and including V6R2013x to the corresponding **3DEXPERIENCE R2014x** processes under licensing.
- After 3DPassport upgrade, users can change the password in 3DPassport at a later stage. If 3DPassport is integrated with LDAP then, the users can connect using their usual system/enterprise password.



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

14.2. Reconfiguring 3DEXPERIENCE Server Deployment Parameters


For more details, refer to the following Dassault Systèmes Documentation:

Installation and Setup | 3DEXPERIENCE Platform | 3DEXPERIENCE Platform Installation | Installation Maintenance | Reconfiguring the Installation | Reconfiguring the 3DEXPERIENCE Platform Installation

In many cases, customers/users proceed with the migration on a test environment and then copy/import the DB into the main server that will be used in production. In such cases, you must configure the parameters/URLs as per the new domain server requirements. In case you missed configuring these parameters, you can use the reconfiguration tool provided in the distribution media to configure them.


The reconfiguration tool allows you to tweak certain service installation and deployment parameters, avoiding the need to reinstall the platform.

Reconfiguring parameters for 3DSpace server:

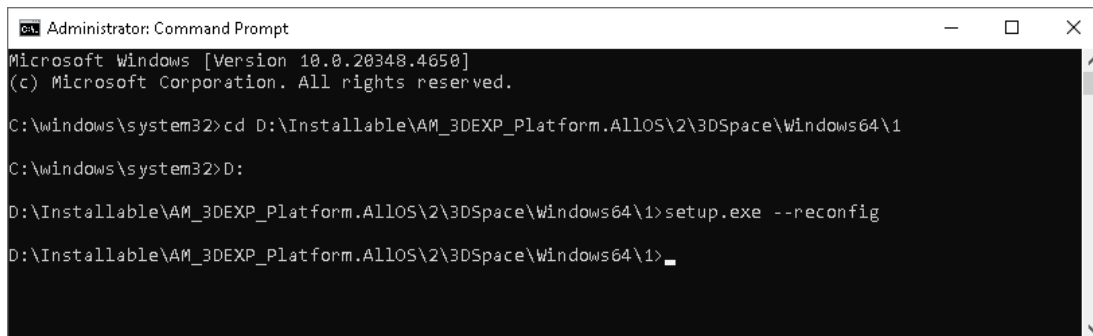

```
Administrator: Command Prompt
Microsoft Windows [Version 10.0.20348.4650]
(c) Microsoft Corporation. All rights reserved.

C:\windows\system32>cd D:\Installable\AM_3DEXP_Platform.AllOS\2\3DSpace\Windows64\1
C:\windows\system32>D:
D:\Installable\AM_3DEXP_Platform.AllOS\2\3DSpace\Windows64\1>setup.exe --reconfig
D:\Installable\AM_3DEXP_Platform.AllOS\2\3DSpace\Windows64\1>
```

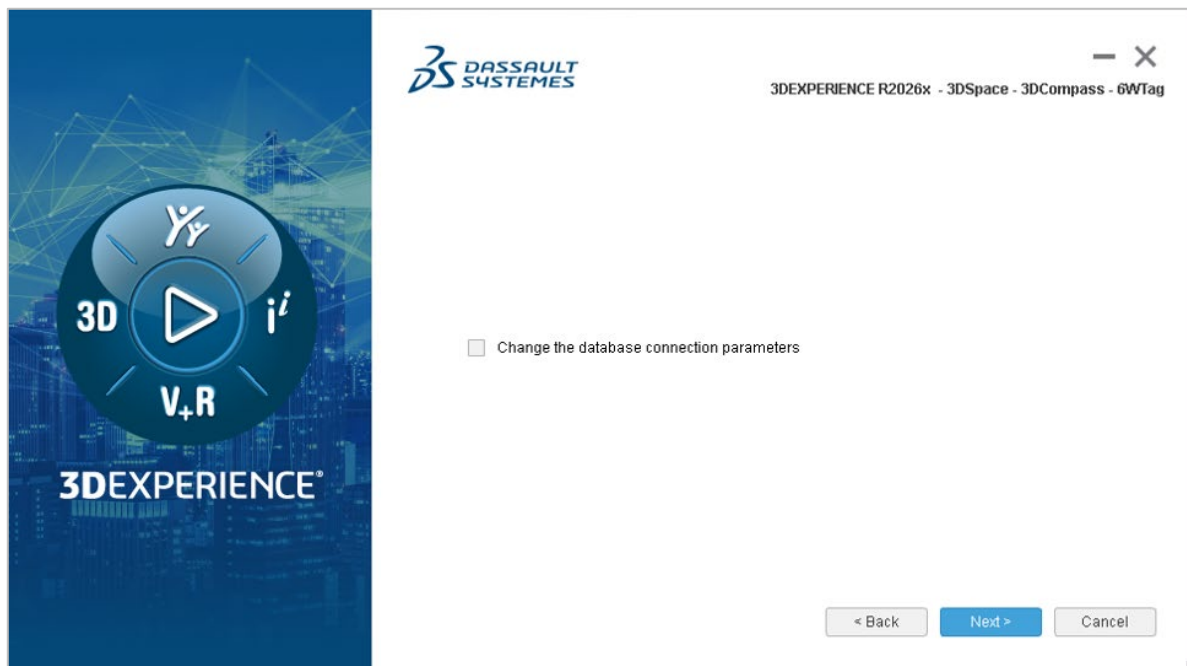

14.3. Reconfiguring 3DEXPERIENCE Server (from Test to Production Environment)

Generally, at customer end, the upgrade process is performed on a test environment. Post successful upgrade and after resolving issues in upgrade procedure, this DB needs to be moved to a different machine/Domain (Production Environment).

In this case, the complete installation cannot be moved and the reconfiguration explained in Section 14.2, “Reconfiguring 3DEXPERIENCE Server Deployment Parameters” is not applicable. (Copying the entire installation folder does not work and is not supported).

Solution:

It is recommended to follow the below reconfiguration procedure:

- 1) Take a backup of upgraded DB.
- 2) On the required server machine install a Dummy 3DSpace environment with exact central list matching with upgraded environment.
Note: Make sure that the tablespace/index names and schema user are same as present in the upgraded DB, to avoid confusion and further errors if any.
- 3) Import the upgraded DB, to the required DB instance.
- 4) Follow Section 14.2, “Reconfiguring 3DEXPERIENCE Server Deployment Parameters” for further configuration.

Use the REMAP command for importing the upgraded DB if the tablespace names on the dummy environment are different from the ones in the upgraded DB.

Following is a sample command that the user can use:

```
impdp system/system@MATRIX1 DIRECTORY=DATA_PUMP_DIR
DUMPFILE=V6R202Xx_Prod_Dmp.dmp
REMAP_SCHEMA=dbENOVIA:dbENOVIANEW
REMAP_TABLESPACE=ENOVIA_DATA:ENOVIA_DATA_NEW
REMAP_INDEX=ENOVIA_INDEX:ENOVIA_INDEX_NEW
TRANSFORM=SEGMENT_ATTRIBUTES:N:INDEX
TRANSFORM=SEGMENT_ATTRIBUTES:N:CONSTRAINT CONTENT=ALL
LOGFILE=V6R202Xx_Prod_Dmp.log
```

Note: Confirm the above command with the DB administrator before using it.



Confidential information. Copyright Dassault Systèmes [2026].


This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

15. Frequently Asked Question (FAQs)


- Where do I find new functionalities and changes for the new release?

The new functionalities can be found in the documentation under the “What’s New” section. Refer to the image below for more details.

This information is available only after the GA documentation has been released.

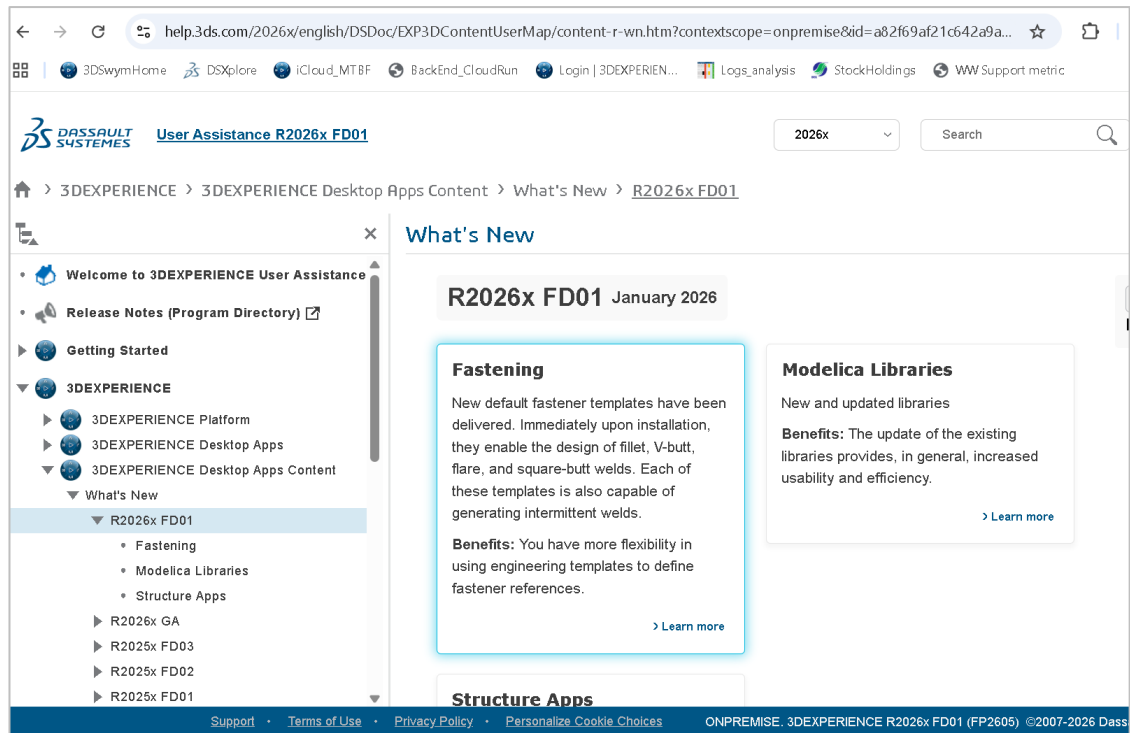

Additionally, customers should also check the PDIR for any new additions or functionalities that have been added.

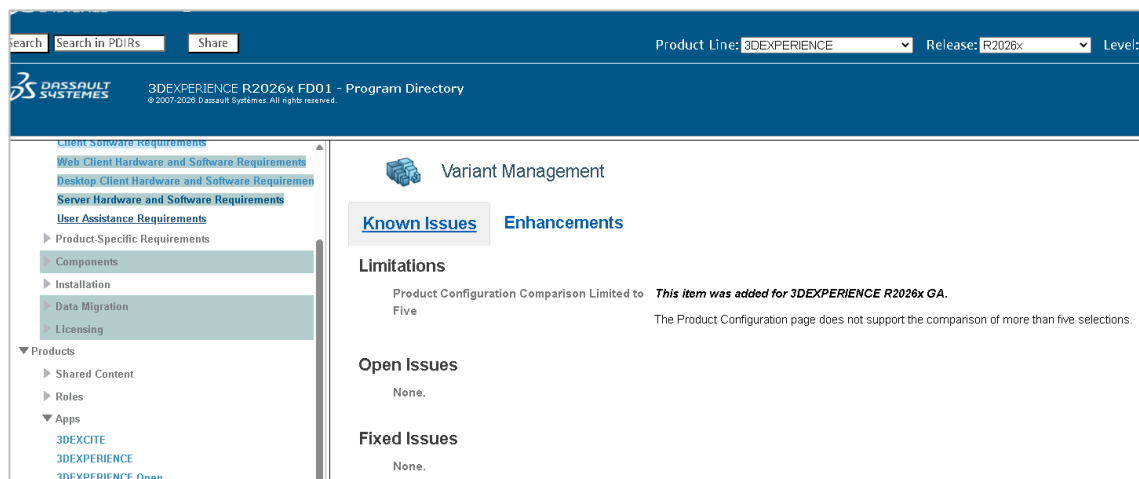


- Which TomEE should I use? Will I get support for older TomEE version?



Confidential information. Copyright Dassault Systèmes [2026].

This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.

Starting 3DEXPERIENCE R2026x level, TomEE Plus 10.x is supported.

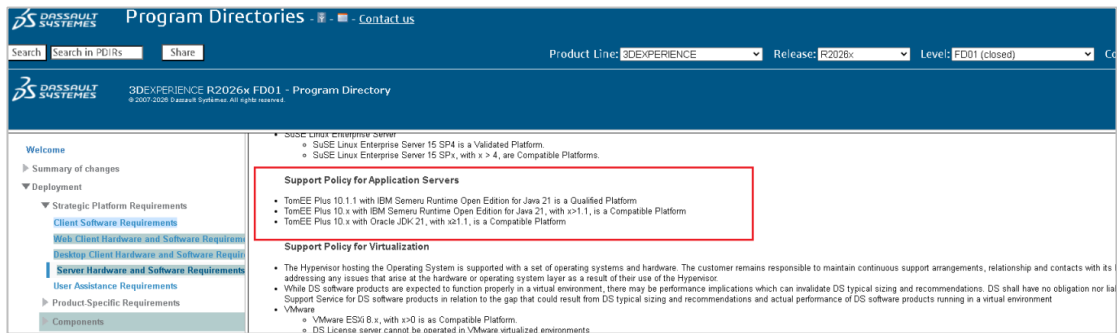

- **How do I move from 1 TomEE version to another due to end of support?**

Refer to QA00000309906 as this is a common step after an upgrade, especially considering the end of support for the TomEE application server.

- **What if I do not install an application after upgrade which was a part of my installation in previous release? For ex. I used Requirement management in 3DEXPERIENCE R2028x and now I do not need it in 3DEXPERIENCE R2026x?**

If a central is not required, the customer can choose to skip it. However, it is important to note that there will be compilation errors. It is recommended to first confirm the dependability of other applications and any potential data impact before proceeding. If you have any questions, raise a request to support.

16. Document History

Document Revision	Date	Revised By	Changes/Notes
1.0	02/13/2026	Vinayak CHIVATE, Dhanashree SHIRKE	Original



Confidential information. Copyright Dassault Systèmes [2026].
This document is provided for information purpose only and may be used by authorized users only for their own internal use. Any other use without prior written authorization from Dassault Systèmes is strictly prohibited, except as may be permitted by law.