



Planning Document

1. Component Hierarchy Diagram:

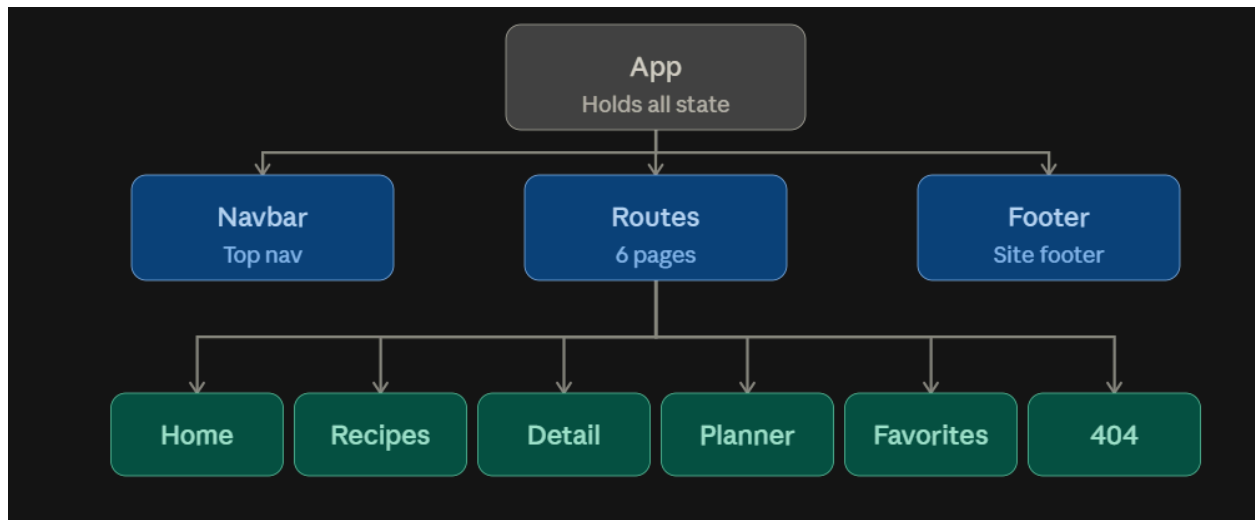

2. Data Flow Diagram:

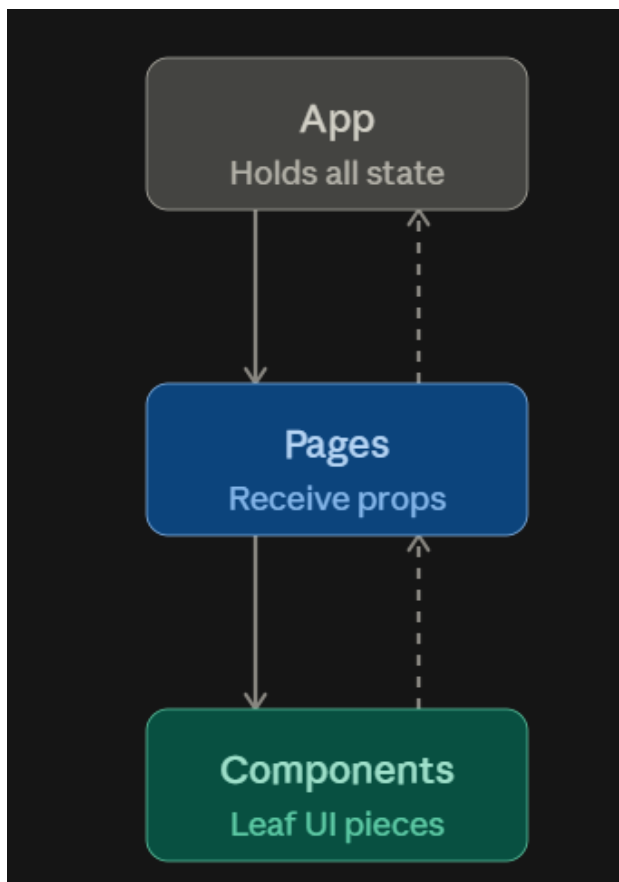

3. List of Components:

- Common: Header, Footer
- Navigation: Navbar
- UI: Button, Card, SearchBar, Loading, Modal
- Recipe: RecipeCard, RecipeList, RecipeDetail, RecipeFilter
- MealPlanner: MealPlanner, DayCard
- Media: VideoPlayer, AudioPlayer
- Pages: Home, RecipesPage, MealPlannerPage, FavoritesPage, NotFound

4. Props Flow:

Recipe objects, such as those from RecipesPage to RecipeList to RecipeCard, flow downhill as simple props. Callback props follow the same route in the opposite direction: when the user clicks the heart icon, RecipeCard calls `onFavoriteToggle`, which is declared in `App.jsx`, sent through each layer, and updates the favorites state in `App`.

5. State Management Strategy:

Since different pages must read and update the same data, `App.jsx` serves as the single source of truth for meal plans, recipes, and favorites. Paired `useEffect` hooks are used to save the meal plan and favorites in `localStorage`; one hook loads saved data upon mounting, while the other saves anytime that state changes.

Since no other element of the app needs to read it, page-specific state, like search text or active filters on the Recipes page or the meal slot being updated on the Meal Planner page, remains local to the component that requires it rather than being lifted to the app.