

MODULE :- Automation with Selenium

EXPERIMENT TITLE :- JavaScript Alerts and Confirms(Assignment 4)

1.Problem Statement :-

To automate and handle different types of JavaScript pop-up alerts using **Selenium WebDriver**. The task includes triggering a Simple Alert, Confirmation Alert, and Prompt Alert, then accepting, dismissing, and entering text into the respective alerts as required.

2. Tools and Software Required

S. No.	Tool / Software	Purpose
1	Python	Programming language used to write the automation script
2	VS Code	IDE used to develop and execute the Selenium script
3	Google Chrome	Web browser used for automation
4	Selenium WebDriver	Automates browser interactions
5	ChromeDriver	Enables Selenium to communicate with Google Chrome
6	Test Automation Practice Website	Website used for testing JavaScript alerts
7	Command Prompt / Terminal	Used to execute the Python script

3. Concepts Used :-

- **JavaScript Alert** – A browser pop-up that displays a message and requires user interaction.
- **Simple Alert** – Displays a message and is handled using `accept()`.

- **Confirmation Alert** – Provides OK and Cancel options and can be handled using `accept()` or `dismiss()`.
- **Prompt Alert** – Allows the user to enter text before submitting the alert.
- **switch_to.alert** – Used to switch Selenium's focus from the webpage to the active alert.
- **alert.accept()** – Used to click the OK button on an alert.
- **alert.dismiss()** – Used to click the Cancel button on a confirmation alert.
- **alert.send_keys()** – Used to enter text into a prompt alert.
- **Alert Text** – Retrieved using the `alert.text` property.
-

4.Source Code :-

File 1: assignment_4.py

```
from selenium import webdriver
from selenium.webdriver.common.by import By
import time

driver = webdriver.Chrome()
driver.maximize_window()

try:

    driver.get("https://testautomationpractice.blogspot.com/")

    # =====
    # 1. SIMPLE JAVASCRIPT ALERT
    # =====

    simple_alert_button = driver.find_element(
        By.ID,
        "alertBtn"
    )

    simple_alert_button.click()

    time.sleep(2)

    # Switch to alert
    alert = driver.switch_to.alert

    print("Simple Alert Text:", alert.text)

    # Accept alert
    alert.accept()

    print("Simple Alert accepted")

    time.sleep(2)


    # =====
    # 2. CONFIRMATION ALERT
    # =====
```


```
confirm_button = driver.find_element(  
    By.ID,  
    "confirmBtn"  
)  
  
confirm_button.click()  
  
time.sleep(2)  
  
# Switch to confirm alert  
confirm_alert = driver.switch_to.alert  
  
print("Confirm Alert Text:", confirm_alert.text)  
  
# Dismiss / Cancel the confirmation  
confirm_alert.dismiss()  
  
print("Confirmation Alert dismissed")  
  
time.sleep(2)  
  
# =====  
# 3. PROMPT ALERT  
# =====  
  
prompt_button = driver.find_element(  
    By.ID,  
    "promptBtn"  
)  
  
prompt_button.click()  
  
time.sleep(2)  
  
# Switch to prompt  
prompt_alert = driver.switch_to.alert  
  
print("Prompt Alert Text:", prompt_alert.text)  
  
# Enter text into prompt  
driver.switch_to.alert.send_keys("Prateek")  
  
time.sleep(2)  
  
# Accept prompt  
driver.switch_to.alert.accept()  
  
print("Prompt Alert accepted")  
  
time.sleep(3)  
  
print("PASS: All alert operations completed")  
  
finally:  
  
    driver.quit()
```

5.Implementation Steps :-

- 1.Launch the Chrome browser using Selenium WebDriver.
- 2.Open the Test Automation Practice website.
- 3.Locate and click the **Simple Alert** button.
- 4.Switch Selenium's focus to the JavaScript alert using `driver.switch_to.alert`.
- 5.Read the alert message using `alert.text`.
- 6.Accept the Simple Alert using `alert.accept()`.
- 7.Locate and click the **Confirmation Alert** button.
- 8.Switch to the confirmation alert.
- 9.Read the alert message.
- 10.Dismiss the Confirmation Alert using `alert.dismiss()`.
- 11.Locate and click the **Prompt Alert** button.
- 12.Switch to the Prompt Alert.
- 13.Read the prompt message.
- 14.Enter the required text using `alert.send_keys()`.
- 15.Accept the Prompt Alert using `alert.accept()`.
- 16.Verify that all alert operations were completed successfully.
- 17.Close the browser.

6.Output :-

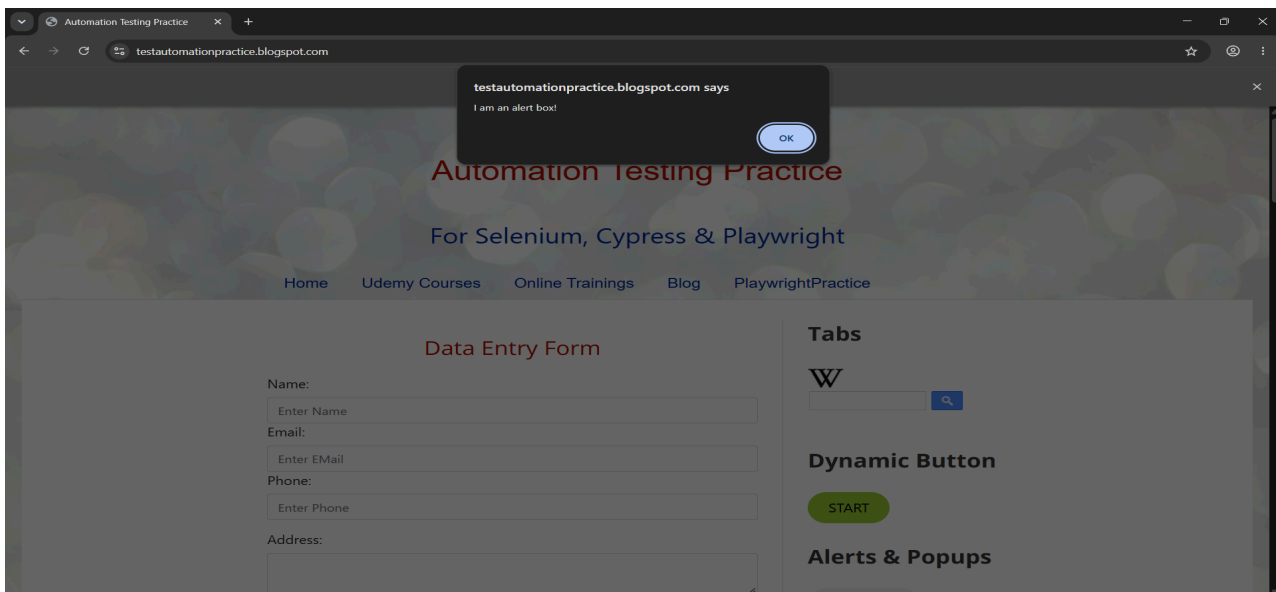

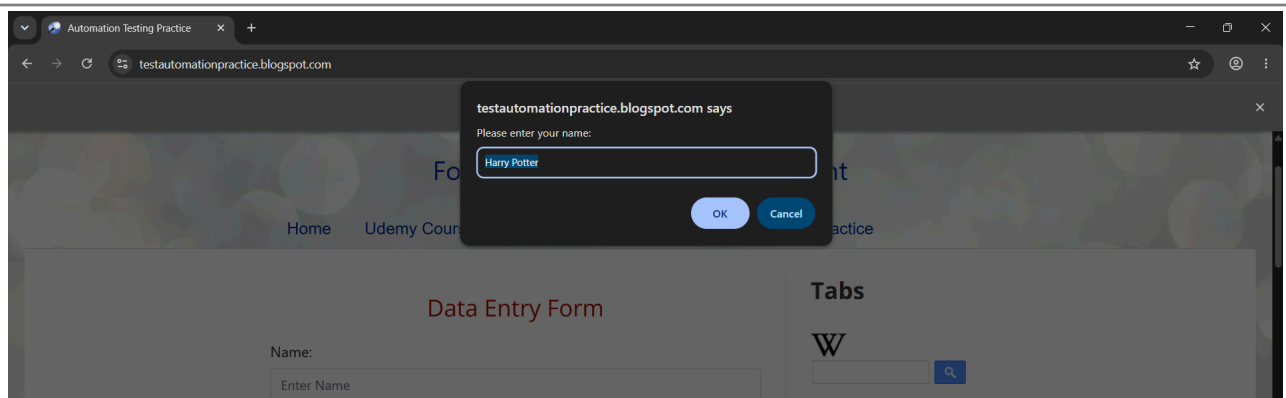

```
python -u "c:\Users\catch\OneDrive\Desktop\wipro_assignments\assignment_4.py"

Simple Alert Text: I am an alert box!
Simple Alert accepted
Confirm Alert Text: Press a button!
Confirmation Alert dismissed
Prompt Alert Text: Please enter your name:
Prompt Alert accepted
PASS: All alert operations completed
PS C:\Users\catch\OneDrive\Desktop\wipro_assignments>
```

7.Result :-

The JavaScript **Simple Alert**, **Confirmation Alert**, and **Prompt Alert** were successfully handled using Selenium WebDriver. The Simple Alert was accepted, the Confirmation Alert was dismissed, and text was entered and submitted through the Prompt Alert.

8.Observation :-

Selenium provides the `switch_to.alert` functionality to interact with browser-level JavaScript alerts. Different methods such as `accept()`, `dismiss()`, and `send_keys()` can be used depending on the type of alert.

9.Conclusion :-

Thus, Selenium WebDriver was successfully used to automate and handle different types of JavaScript alerts, including accepting alerts, dismissing confirmation boxes, and entering text into prompt boxes.