



Chapter 7 – Design and Implementation

An object-oriented design using the UML

Chapter 7 Design and Implementation



1

Topics covered



Object-oriented design
using the UML



Design patterns



Implementation issues



Open source
development

Chapter 7 Design and Implementation



2

Design and implementation



- ✧ Software design and implementation is the stage in the software engineering process at which an **executable software system is developed**.
- ✧ Software design and implementation activities are invariably inter-leaved.
 - Software design is a creative activity in which you **identify software components and their relationships, based on a customer's requirements**.
 - **Implementation is the process of realizing the design as a program.**

Chapter 7 Design and Implementation



3

Build or buy




- ✧ **In a wide range of domains, it is now possible to buy off-the-shelf systems (COTS) that can be adapted and tailored to the users' requirements.**
 - For example, if you want to implement a medical records system, you can buy a package that is already used in hospitals. It can be cheaper and faster to use this approach rather than developing a system in a conventional programming language.
- ✧ When you develop an application in this way, the design process becomes concerned with how to use the configuration features of that system to deliver the system requirements.

Chapter 7 Design and Implementation



4

Object-oriented design using the UML

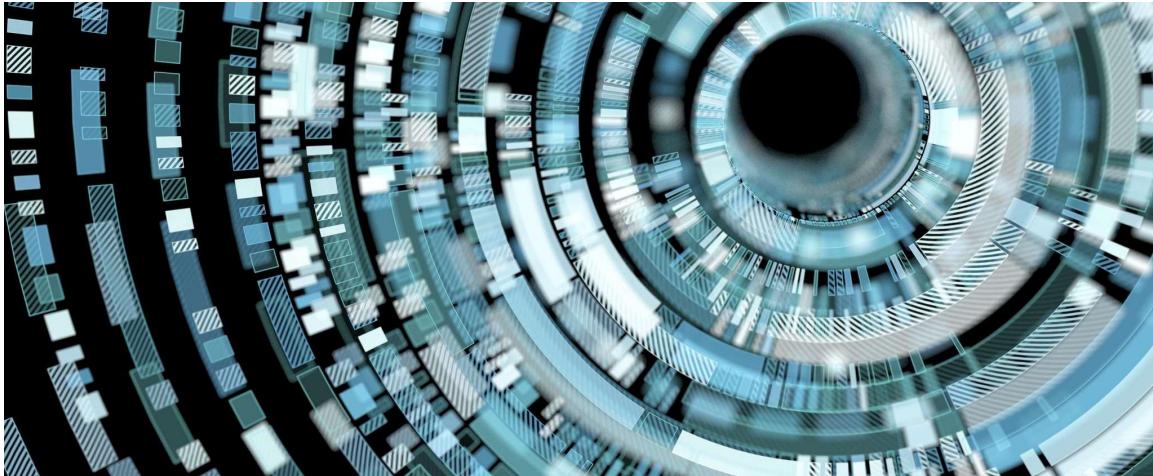

Chapter 7 Design and Implementation



5

An object-oriented design using the UML



- ✧ An object-oriented system is made up of interacting objects that maintain their own local state and provide operations on that state.
- ✧ Object-oriented design processes involve designing **object classes** and the **relationships between these classes**.
- ✧ Changing the implementation of an object or adding services **should not affect** other system objects. Because objects are associated with things, **there is often a clear mapping between real-world entities and the objects in the system**.

Chapter 7 Design and Implementation



6

An object-oriented design using the UML



- ✧ Common activities to develop a system design from concept to detailed, object-oriented design, you need to:
 - Understand and define the context and the external interactions with the system;
 - Design the system architecture;
 - **Identify the principal objects in the system;**
 - Develop design models;
 - Specify interfaces.

Chapter 7 Design and Implementation



7

System context and interactions



- ✧ The first stage in any software design process is to develop an understanding of the relationships between the software that is being designed and its external environment. This is essential for deciding how to provide the required system functionality and **how to structure the system to communicate with its environment.**
- ✧ **Understanding of the context lets you establish the boundaries of the system.** Setting the system boundaries helps you decide what features are implemented in the system being designed and what features are in other associated systems.

Chapter 7 Design and Implementation




8

Context and interaction models



- A system context model is a structural model that demonstrates the other systems in the environment of the system being developed.
- An interaction model is a dynamic model that shows how the system interacts with its environment as it is used.

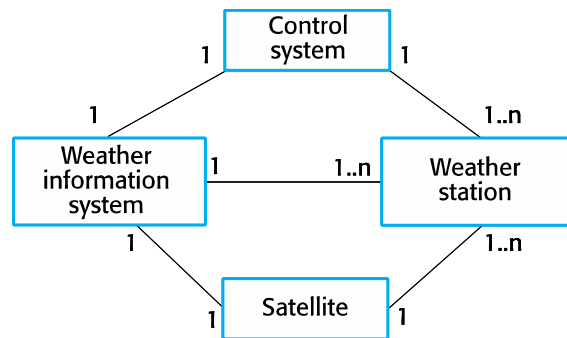

Chapter 7 Design and Implementation




9

Weather station use cases



- Report weather—send weather data to the weather information system
- Report status—send status information to the weather information system
- Restart—if the weather station is shut down, restart the system
- Shutdown—shut down the weather station
- Reconfigure—reconfigure the weather station software
- Powersave—put the weather station into power-saving mode
- Remote control—send control commands to any weather station subsystem

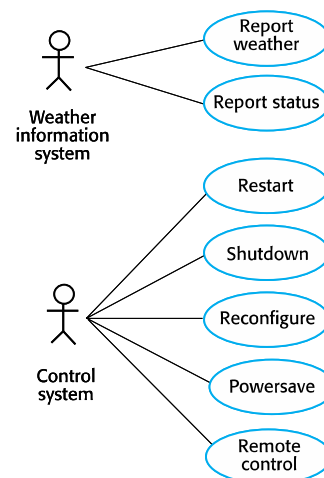

Chapter 7 Design and Implementation



10

Use case description—Report weather



System	Weather station
Use case	Report weather
Actors	Weather information system, Weather station
Description	The weather station sends a summary of the weather data that has been collected from the instruments in the collection period to the weather information system. The data sent are the maximum, minimum, and average ground and air temperatures; the maximum, minimum, and average air pressures; the maximum, minimum, and average wind speeds; the total rainfall; and the wind direction as sampled at five-minute intervals.
Stimulus	The weather information system establishes a satellite communication link with the weather station and requests transmission of the data.
Response	The summarized data is sent to the weather information system.
Comments	Weather stations are usually asked to report once per hour but this frequency may differ from one station to another and may be modified in the future.

Figure 7.3 Use case description—Report weather

Chapter 7 Design and Implementation



11

11



ARCHITECTURAL DESIGN

Chapter 7 Design and Implementation



12

12

Architectural design




- ✧ Once interactions between the system and its environment have been understood, you use this information for **designing the system architecture**.
- ✧ You identify the major components that make up the system and their interactions, and then may organize the components using an architectural pattern such as a **layered** or **client-server model**.



High-level architecture of the weather station



- The high-level architectural design for the weather station software. The weather station is composed of independent subsystems that communicate by broadcasting messages on a common infrastructure, shown as Communication link.
- Each subsystem listens for messages on that infrastructure and picks up the messages that are intended for them. This “listener model” is a commonly used architectural style for distributed systems.

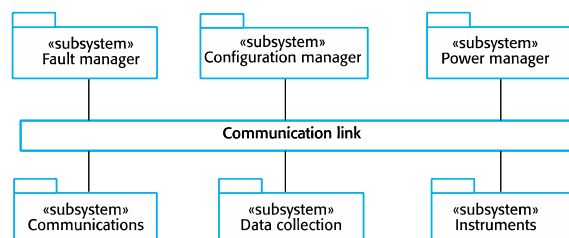

Architecture of data collection system



The architecture of the data collection subsystem. The Transmitter and Receiver objects are concerned with managing communications, and the WeatherData object encapsulates the information that is collected from the instruments and transmitted to the weather information system. This arrangement follows the producer–consumer pattern.

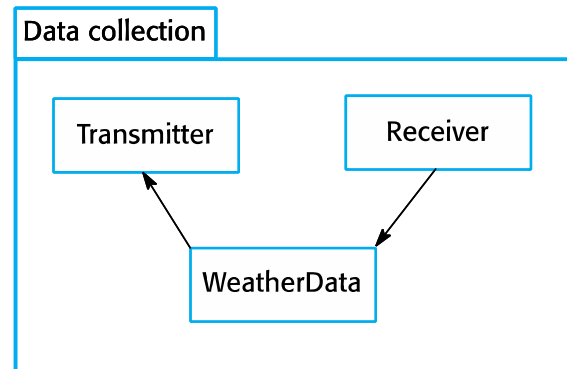


Figure 7.5 Architecture of data collection system



Object class identification




✧ As object-oriented design evolved in the 1980s, various ways of identifying object classes in object-oriented systems were suggested:

- Use a grammatical approach based on a natural language description of the system.
- Base the identification on tangible/physical things in the application domain.
- Use a behavioural approach and identify objects based on what participates in what behaviour.
- Use a scenario-based analysis. The objects, attributes and methods in each scenario are identified.





Weather station object classes

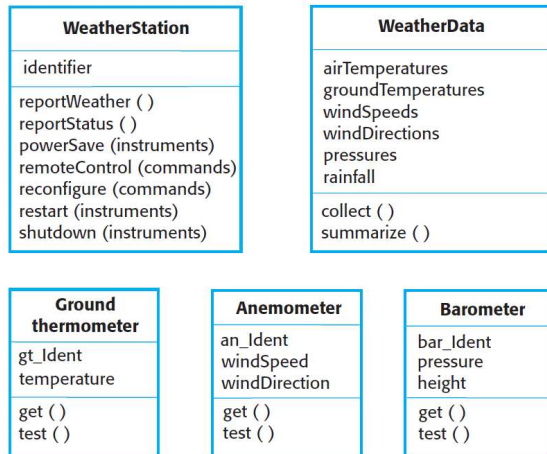

Object class identification in the weather station system may be based on the tangible hardware and data in the system:

Ground thermometer, Anemometer, Barometer

Application domain objects that are 'hardware' objects related to the instruments in the system.

Weather station

The basic interface of the weather station to its environment. It therefore reflects the interactions identified in the use-case model.

Weather data

Encapsulates the summarized data from the instruments.

Figure 7.6 Weather station objects Chapter 7 Design and Implementation





DESIGN MODELS

Chapter 7 Design and Implementation



19

19



Design models

- ✧ Design models show the objects and object classes and relationships between these entities.
- ✧ There are two kinds of design model:
 - Structural models describe the static structure of the system in terms of object classes and relationships.
 - Dynamic models describe the dynamic interactions between objects.

Chapter 7 Design and Implementation



20

20

Examples of design models



- ✧ **Subsystem models**
- ✧ Sequence models
- ✧ State machine models.
- ✧ Other models include use-case models, aggregation models, generalisation models, etc.



Subsystem models



- ✧ Shows how the design is organised into logically related groups of objects.
- ✧ In the UML, these are shown using packages - an encapsulation construct. This is a logical model. The actual organisation of objects in the system may be different.





SEQUENCE MODELS


Chapter 7 Design and Implementation



23

Sequence models

- Sequence models show the sequence of object interactions that take place
 - Objects are arranged horizontally across the top;
 - Time is represented vertically so models are read top to bottom;
 - Interactions are represented by labelled arrows, Different styles of arrow represent different types of interaction;
 - A thin rectangle in an object lifeline represents the time when the object is the controlling object in the system.

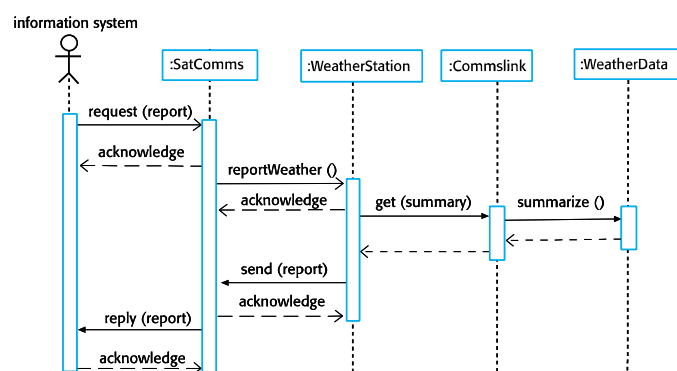

Chapter 7 Design and Implementation



24

State diagrams

- State diagrams are used to show how objects respond to different service requests and the state transitions triggered by these requests.
- State diagrams are useful high-level models of a system or an object's run-time behavior.
- You don't usually need a state diagram for all of the objects in the system. Many of the objects in a system are relatively simple and a state model adds unnecessary detail to the design.

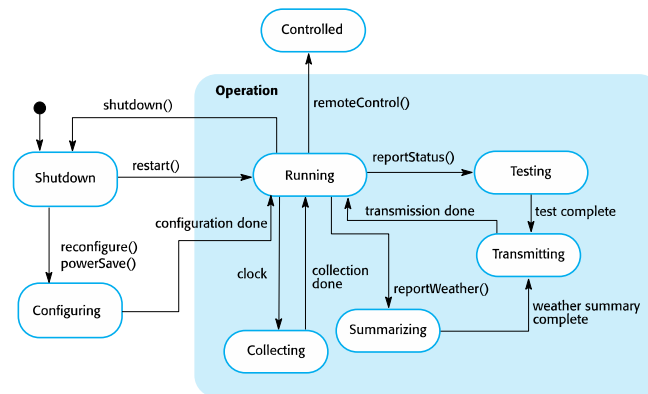


Figure 7.8 Weather station state diagram



Interface specification / can do

- Object interfaces have to be specified so that the objects and other components can be designed in parallel.
- Designers should avoid designing the interface representation but should hide this in the object itself.
- Objects may have several interfaces which are viewpoints on the methods provided.
- The UML uses class diagrams for interface specification but Java may also be used.

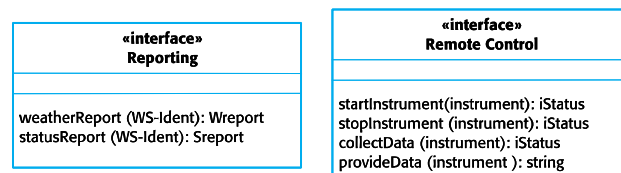


Figure 7.9 Weather station interfaces





DESIGN PATTERNS

Chapter 7 Design and Implementation



27

27



Design patterns

- ✧ A design pattern is a way of reusing abstract knowledge about a problem and its solution.
- ✧ A pattern is a description of the problem and the essence of its solution.
- ✧ Pattern descriptions usually make use of object-oriented characteristics such as **inheritance** and **polymorphism**.

Chapter 7 Design and Implementation



28

28

Patterns



- *Patterns and Pattern Languages are ways to describe best practices, good designs, and capture experience in a way that it is possible for others to reuse this experience.*
- **Some of the popular design patterns:**
 - [Singleton Design Pattern](#)
 - [Adapter Pattern](#)
 - [Command Pattern](#)
 - [Proxy Design Pattern](#)
 - [Composite Design Pattern](#)
 - [Chain of Responsibility Design Pattern](#)

<https://www.geeksforgeeks.org/software-design-patterns/>

Chapter 7 Design and Implementation



29

Pattern elements



- ✧ Name
 - A meaningful pattern identifier.
- ✧ Problem description.
- ✧ Solution description.
 - Not a concrete design but a template for a design solution that can be instantiated in different ways.
- ✧ Consequences
 - The results and trade-offs of applying the pattern.

Chapter 7 Design and Implementation



30

The Observer pattern



The Observer Pattern

- Name
Observer.
- Description
Separates the display of object state from the object itself.
- Problem description
Used when multiple displays of state are needed.
- Solution description
See slide with UML description.
- Consequences
Optimisations to enhance display performance are impractical.


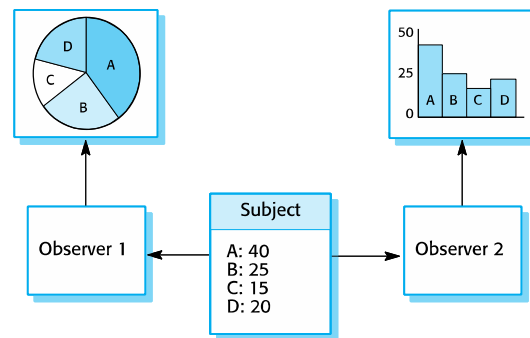


Figure 7.11 Multiple displays



A UML model of the Observer pattern

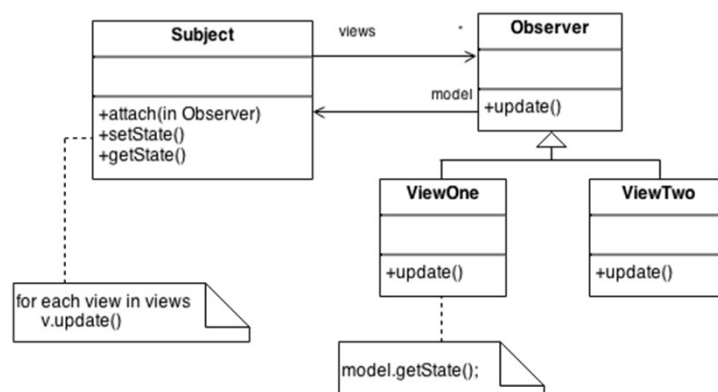


```

abstract class Observer {
    protected Subject subject;
    public abstract void update();
}

class Subject {
    private List<Observer> observers = new ArrayList<>();
    private int state;

    public void add(Observer o) {
        observers.add(o);
    }

    public int getState() {
        return state;
    }

    public void setState(int value) {
        this.state = value;
        execute();
    }

    private void execute() {
        for (Observer observer : observers) {
            observer.update();
        }
    }
}

public class ObserverDemo {
    public static void main( String[] args ) {
        Subject sub = new Subject();
        // Client configures the number and type of Observers
        new HexObserver(sub);
        new OctObserver(sub);
        new BinObserver(sub);
        Scanner scan = new Scanner(System.in);
        for (int i = 0; i < 5; i++) {
            System.out.print("\nEnter a number: ");
            sub.setState(scan.nextInt());
        }
    }
}

class HexObserver extends Observer {
    public HexObserver(Subject subject) {
        this.subject = subject;
        this.subject.add(this);
    }

    public void update() {
        System.out.print(" " + Integer.toHexString(subject.getState()));
    }
}

class OctObserver extends Observer {
    public OctObserver(Subject subject) {
        this.subject = subject;
        this.subject.add( this );
    }

    public void update() {
        System.out.print(" " + Integer.toOctalString(subject.getState()));
    }
}

class BinObserver extends Observer {
    public BinObserver(Subject subject) {
        this.subject = subject;
        this.subject.add(this);
    }
}

```

Enter a number: 55
37 67 110111



33

Design problems




✧ To use patterns in your design, you need to recognize that any design problem you are facing may have an associated pattern that can be applied. (Know the patterns)

- Tell several objects that the state of some other object has changed (Observer pattern).
- Tidy up the interfaces to a number of related objects that have often been developed incrementally (Façade pattern).
- Provide a standard way of accessing the elements in a collection, irrespective of how that collection is implemented (Iterator pattern).
- Allow for the possibility of extending the functionality of an existing class at run-time (Decorator pattern).



34

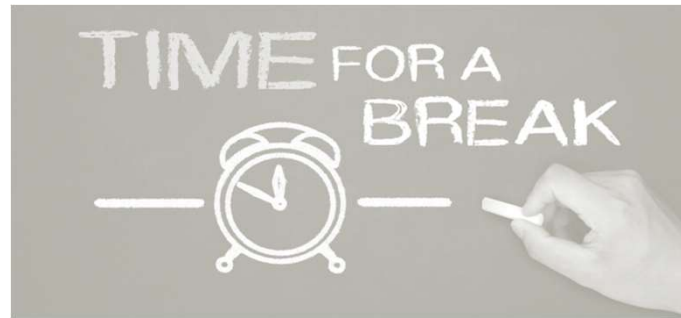

35



Implementation issues



36

Implementation issues



- ✧ Focus here is not on programming, although this is obviously important, but on other implementation issues that are often not covered in programming texts:
 - **Reuse:** Most modern software is constructed by reusing existing components or systems. When you are developing software, you should make as much use as possible of existing code.
 - **Configuration management:** During the development process, you have to keep track of the many different versions of each software component in a configuration management system.
 - **Host-target development:** Production software does not usually execute on the same computer as the software development environment. Rather, you develop it on one computer (the host system) and execute it on a separate computer (the target system).

Chapter 7 Design and Implementation



37

Reuse



- ✧ From the 1960s to the 1990s, most new software was developed from scratch, by writing all code in a high-level programming language.
 - The only significant reuse of software was the reuse of functions and objects in programming language libraries.
- ✧ Costs and schedule pressure mean that this approach became increasingly unviable, especially for commercial and Internet-based systems.
- ✧ An approach to development based around the reuse of existing software emerged and is now generally used for business and scientific software.

Chapter 7 Design and Implementation



38

Reuse levels

- The abstraction level
At this level, you don't reuse software directly but **use knowledge of successful abstractions in the design of your software.**
- The object level
At this level, you directly reuse objects from a library rather than writing the code yourself.
- The component level
Components are collections of objects and object classes that you reuse in application systems.
- The system level
At this level, you reuse entire application systems.

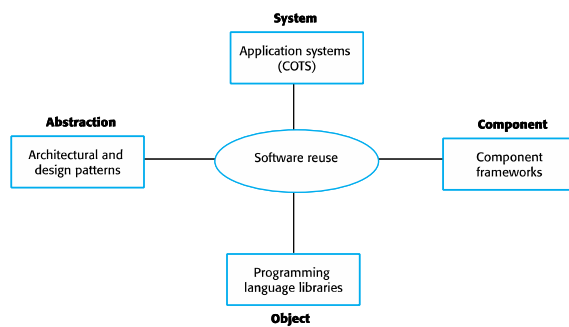


Figure 7.13 Software reuse



Reuse costs

- ✧ The costs of the time spent in looking for software to reuse and assessing whether or not it meets your needs.
- ✧ Where applicable, the costs of buying the reusable software. For large off-the-shelf systems, these costs can be very high.
- ✧ The costs of adapting and configuring the reusable software components or systems to reflect the requirements of the system that you are developing.
- ✧ The costs of integrating reusable software elements with each other (if you are using software from different sources) and with the new code that you have developed.



Configuration management



- ✧ Configuration management is the name given to the general process of managing a changing software system.
- ✧ The aim of configuration management is to support the system integration process so that all developers can access the project code and documents in a controlled way, find out what changes have been made, and compile and link components to create a system.
- ✧ See also Chapter 25.



Configuration management activities



- Version management, where support is provided to keep track of the different versions of software components. Version management systems include facilities to coordinate development by several programmers.
- System integration, where support is provided to help developers define what versions of components are used to create each version of a system. This description is then used to build a system automatically by compiling and linking the required components.
- Problem tracking, where support is provided to allow users to report bugs and other problems, and to allow all developers to see who is working on these problems and when they are fixed.

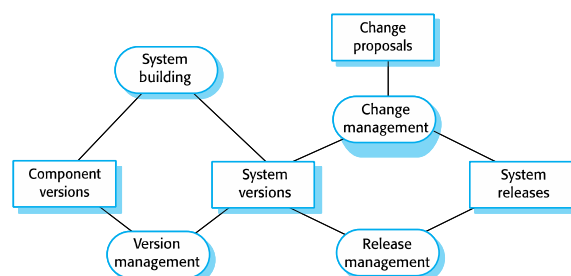



Figure 7.14 Configuration management



Host-target development



- Most software is developed on one computer (the host), but runs on a separate machine (the target).
- More generally, we can talk about a development platform and an execution platform.
A platform is more than just hardware.
It includes the installed operating system plus other supporting software such as a database management system or, for development platforms, an interactive development environment.
- Development platform usually has different installed software than execution platform; these platforms may have different architectures.

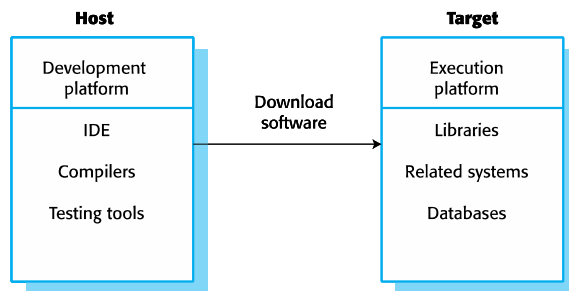

Development platform tools



- ✧ An integrated compiler and syntax-directed editing system that allows you to create, edit and compile code.
- ✧ A language debugging system.
- ✧ Graphical editing tools, such as tools to edit UML models.
- ✧ Testing tools, such as Junit that can automatically run a set of tests on a new version of a program.
- ✧ Project support tools that help you organize the code for different development projects.



Integrated development environments (IDEs)



- ✧ Software development tools are often grouped to create an integrated development environment (IDE).
- ✧ An IDE is a set of software tools that supports different aspects of software development, within some common framework and user interface.
- ✧ IDEs are created to support development in a specific programming language such as Java. The language IDE may be developed specially, or may be an instantiation of a general-purpose IDE, with specific language-support tools.

Chapter 7 Design and Implementation



45

Component/system deployment factors




- ✧ If a component is designed for a specific hardware architecture, or relies on some other software system, it must obviously be deployed on a platform that provides the required hardware and software support.
- ✧ High availability systems may require components to be deployed on more than one platform. This means that, in the event of platform failure, an alternative implementation of the component is available.
- ✧ If there is a high level of communications traffic between components, it usually makes sense to deploy them on the same platform or on platforms that are physically close to one other. This reduces the delay between the time a message is sent by one component and received by another.

Chapter 7 Design and Implementation



46

Open source development

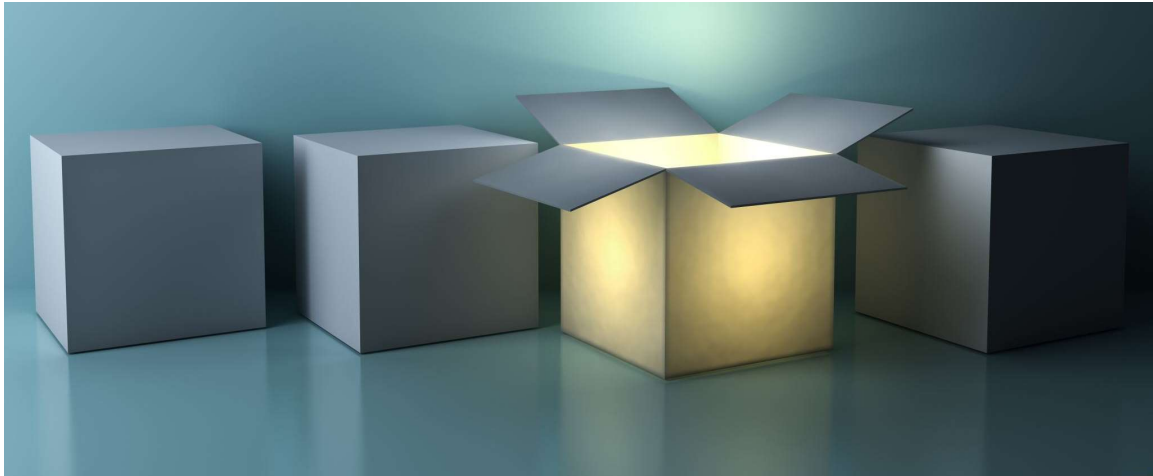

Chapter 7 Design and Implementation



47

47

Open source development



- ✧ Open source development is an approach to software development in which the source code of a software system is published and volunteers are invited to participate in the development process
- ✧ Its roots are in the Free Software Foundation (www.fsf.org), which advocates that source code should not be proprietary but rather should always be available for users to examine and modify as they wish.
- ✧ Open source software extended this idea by using the Internet to recruit a much larger population of volunteer developers. Many of them are also users of the code.

Chapter 7 Design and Implementation



48

48

Open source systems



- ✧ The best-known open source product is, of course, the Linux operating system which is widely used as a server system and, increasingly, as a desktop environment.
- ✧ Other important open source products are Java, the Apache web server and the mySQL database management system.

Chapter 7 Design and Implementation



49

49

Open source issues



- ✧ Should the product that is being developed make use of open source components?
- ✧ Should an open source approach be used for the software's development?

Chapter 7 Design and Implementation



50

50

Open source business



- ✧ More and more product companies are using an open source approach to development.
- ✧ Their business model is not reliant on selling a software product but on selling support for that product.
- ✧ They believe that involving the open source community will allow software to be developed more cheaply, more quickly and will create a community of users for the software.

Chapter 7 Design and Implementation



51

51

Open source licensing



- ✧ A fundamental principle of open-source development is that source code should be freely available, this does not mean that anyone can do as they wish with that code.
 - Legally, the developer of the code (either a company or an individual) still owns the code. They can place restrictions on how it is used by including legally binding conditions in an open source software license.
 - Some open source developers believe that if an open source component is used to develop a new system, then that system should also be open source.
 - Others are willing to allow their code to be used without this restriction. The developed systems may be proprietary and sold as closed source systems.

Chapter 7 Design and Implementation



52

52

License models



- ✧ The GNU General Public License (GPL). This is a so-called 'reciprocal' license that means that if you use open source software that is licensed under the GPL license, then you must make that software open source.
- ✧ The GNU Lesser General Public License (LGPL) is a variant of the GPL license where you can write components that link to open source code without having to publish the source of these components.
- ✧ The Berkley Standard Distribution (BSD) License. This is a non-reciprocal license, which means you are not obliged to re-publish any changes or modifications made to open source code. You can include the code in proprietary systems that are sold.

Chapter 7 Design and Implementation



53

License management



- ✧ Establish a system for maintaining information about open-source components that are downloaded and used.
- ✧ Be aware of the different types of licenses and understand how a component is licensed before it is used.
- ✧ Be aware of evolution pathways for components.
- ✧ Educate people about open source.
- ✧ Have auditing systems in place.
- ✧ Participate in the open source community.

Chapter 7 Design and Implementation



54

Key points



- ✧ Software design and implementation are inter-leaved activities. The level of detail in the design depends on the type of system and whether you are using a plan-driven or agile approach.
- ✧ The process of object-oriented design includes activities to design the system architecture, identify objects in the system, describe the design using different object models and document the component interfaces.
- ✧ A range of different models may be produced during an object-oriented design process. These include static models (class models, generalization models, association models) and dynamic models (sequence models, state machine models).
- ✧ Component interfaces must be defined precisely so that other objects can use them. A UML interface stereotype may be used to define interfaces.

Chapter 7 Design and Implementation



55

Key points



- ✧ When developing software, you should always consider the possibility of reusing existing software, either as components, services or complete systems.
- ✧ Configuration management is the process of managing changes to an evolving software system. It is essential when a team of people are cooperating to develop software.
- ✧ Most software development is host-target development. You use an IDE on a host machine to develop the software, which is transferred to a target machine for execution.
- ✧ Open source development involves making the source code of a system publicly available. This means that many people can propose changes and improvements to the software.

Chapter 7 Design and Implementation



56

The Observer pattern (1)



Pattern name	Observer
Description	Separates the display of the state of an object from the object itself and allows alternative displays to be provided. When the object state changes, all displays are automatically notified and updated to reflect the change.
Problem description	In many situations, you have to provide multiple displays of state information, such as a graphical display and a tabular display. Not all of these may be known when the information is specified. All alternative presentations should support interaction and, when the state is changed, all displays must be updated. This pattern may be used in all situations where more than one display format for state information is required and where it is not necessary for the object that maintains the state information to know about the specific display formats used.

The Observer pattern (2)



Pattern name	Observer
Solution description	This involves two abstract objects, Subject and Observer, and two concrete objects, ConcreteSubject and ConcreteObject, which inherit the attributes of the related abstract objects. The abstract objects include general operations that are applicable in all situations. The state to be displayed is maintained in ConcreteSubject, which inherits operations from Subject allowing it to add and remove Observers (each observer corresponds to a display) and to issue a notification when the state has changed. The ConcreteObserver maintains a copy of the state of ConcreteSubject and implements the Update() interface of Observer that allows these copies to be kept in step. The ConcreteObserver automatically displays the state and reflects changes whenever the state is updated.
Consequences	The subject only knows the abstract Observer and does not know details of the concrete class. Therefore there is minimal coupling between these objects. Because of this lack of knowledge, optimizations that enhance display performance are impractical. Changes to the subject may cause a set of linked updates to observers to be generated, some of which may not be necessary.