
# Statistics of JavaMelody monitoring taken at 2018-11-15 08:12 from 2018-11-14 16:32 on

#### /unionvms/spatial\_wildfly

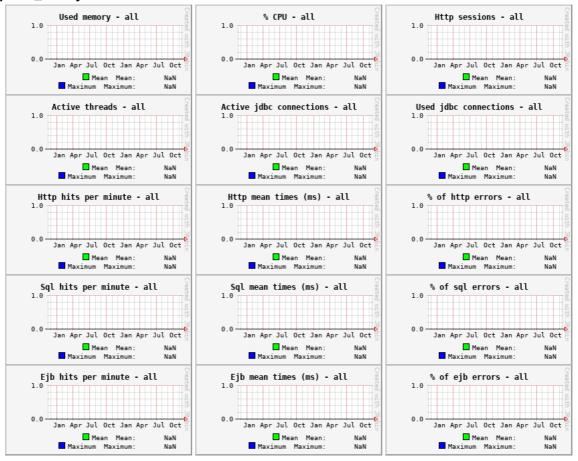

### Statistics http - all

	Request	% of cumulativ e time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of cumulativ e cpu time	Mean cpu time (ms)	% of system error	Mean size (Kb)	Mean hits sql	Mean time sql (ms)
[	http global	100	61 048	291	3 573	94	100	26	0,00	1	6	247
	http warning	0	0	-1	0	-1	0	-1	0,00	0	-1	-1
Ī	http severe	0	0	-1	0	-1	0	-1	0,00	0	-1	-1

64 hits/min on 1 requests

### Statistics sql - all


Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
sql global	100	193 148	6	805	31	0,00
sql warning	0	14	47	96	19	0,00
sql severe	62	3 291	232	805	66	0,00

204 hits/min on 10 000 requests

## 🅜 Statistics ejb - all

Request	% of cumulativ e time		Mean time (ms)		deviation		Mean cpu time (ms)			Mean time sql (ms)
ejb global	100	610 500	86	3 482	130	100	7	0,00	1	74
ejb warning	94	183 144	273	3 482	84	89	21	0,00	3	238
ejb severe	0	0	-1	0	-1	0	-1	0,00	-1	-1

647 hits/min on 9 requests



None



#### Statistics system errors logs - all

Error	Hits
WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.	552 774

589 hits/min on 21 errors

### Monitoring JavaMelody on /unionvms/spatial\_wildfly - all



# X Current requests

#### None




## **System information**

Host:	wildfly@172.17.0.4
Java memory used:	3 712 Mb / 5 978 Mb
Nb of http sessions:	0
Nb of active threads (current http requests):	0
Nb of active jdbc connections:	0
Nb of used jdbc connections (opened if no datasource):	0
System load:	1,39
% System CPU:	1,15




### Threads


Threads on wildfly@172.17.0.4: Number = 368, Maximum = 527, Total started = 9 082 095





2 cache(s) on wildfly@172.17.0.4


### **Detailed statistics**

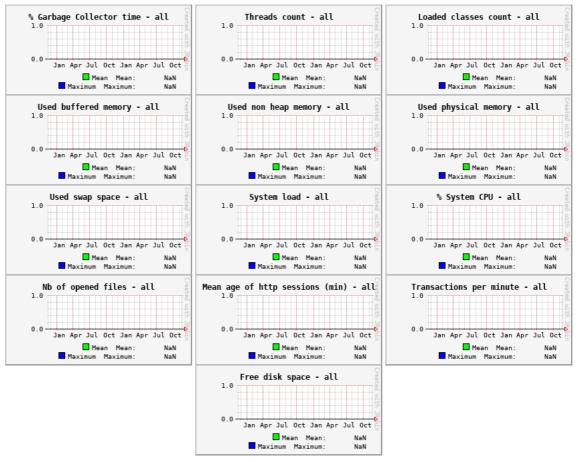


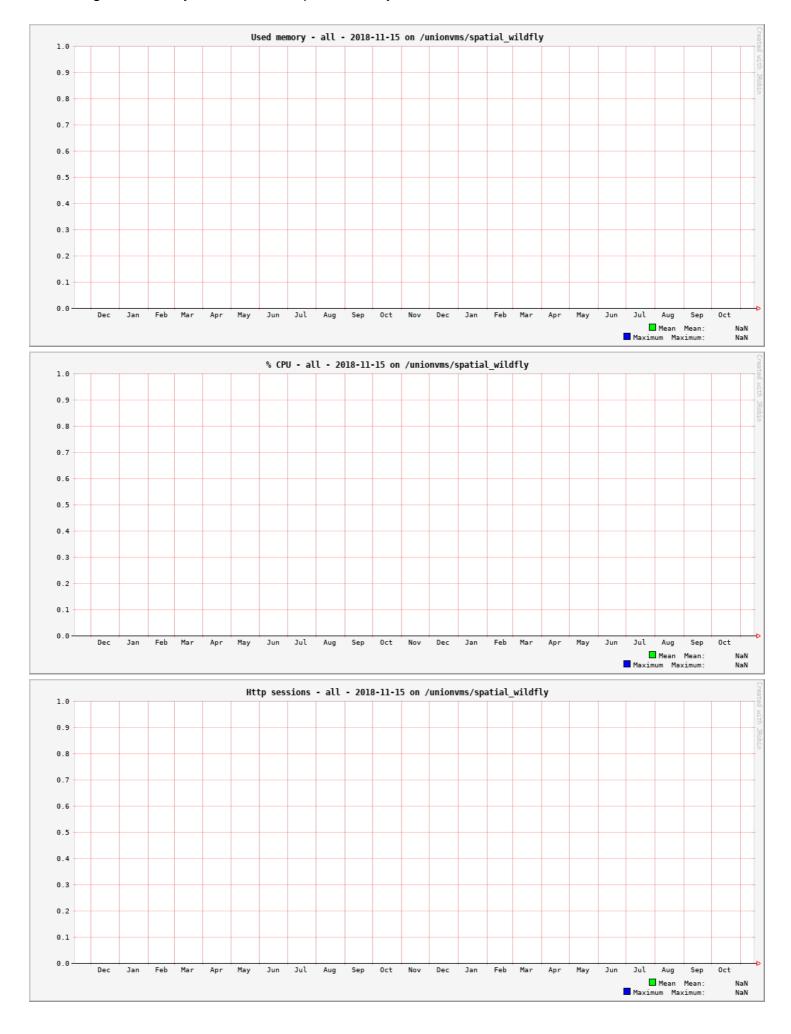

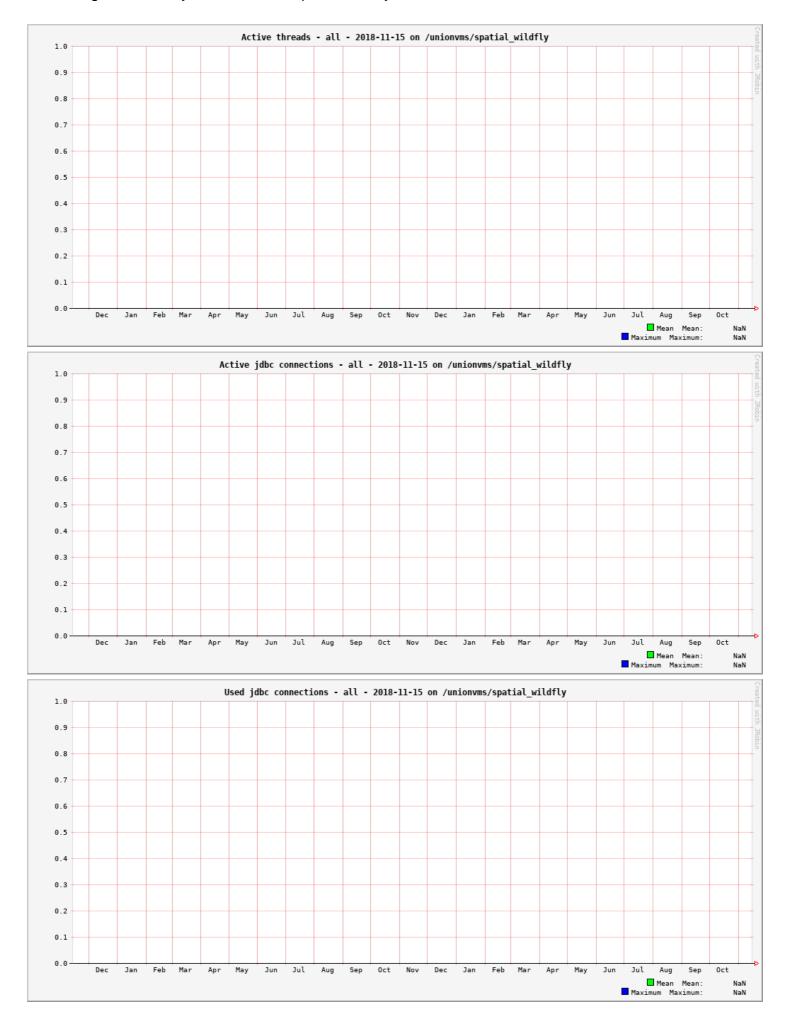

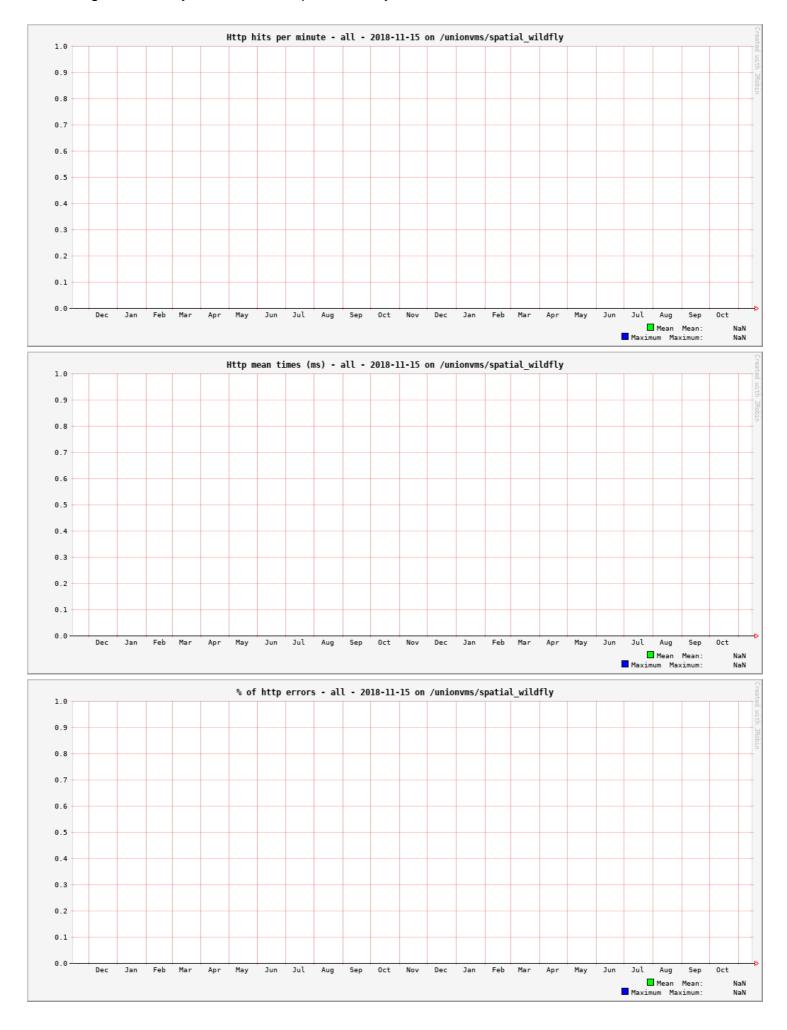

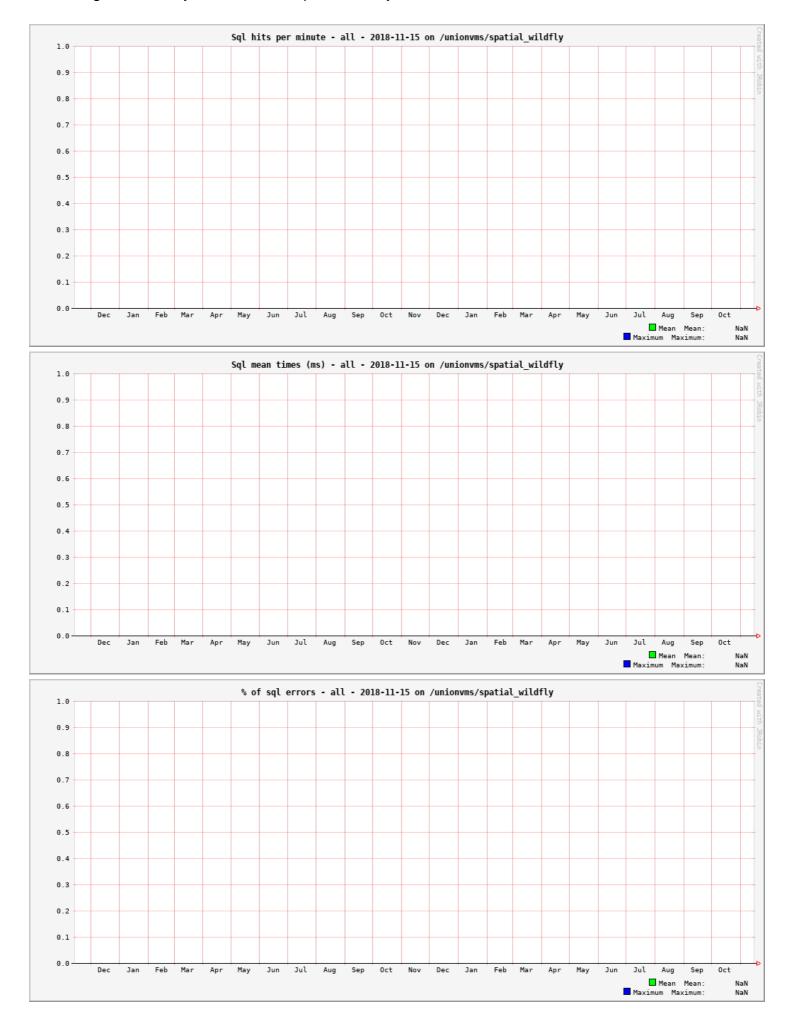

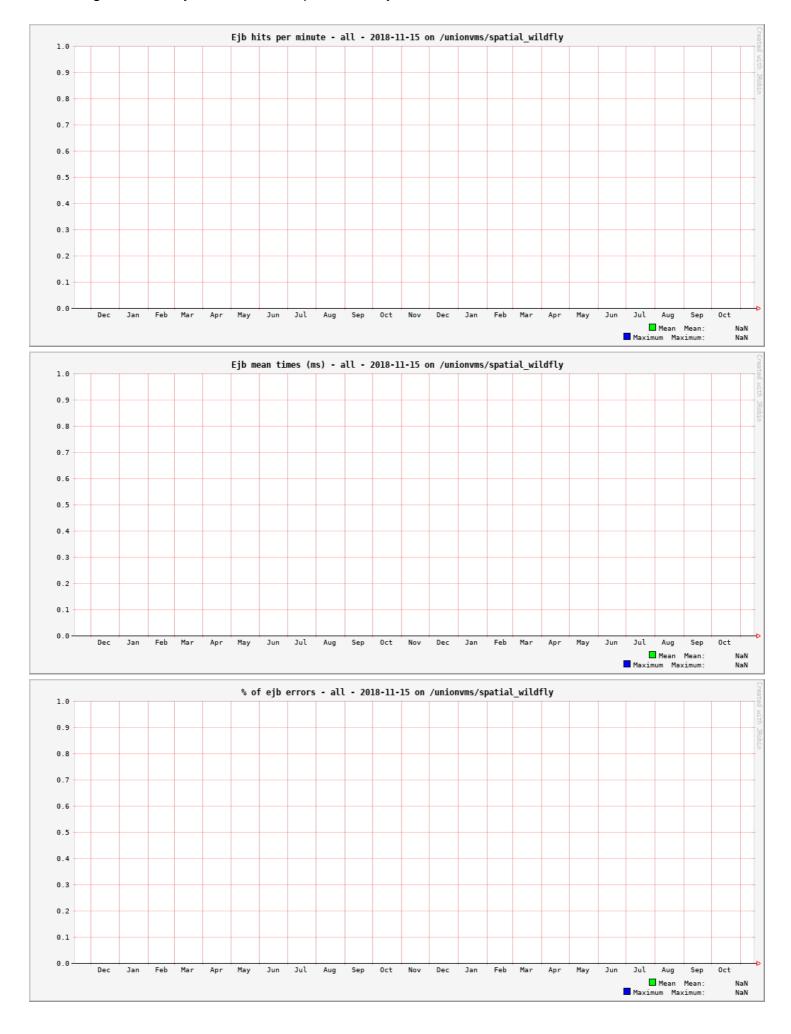



## Detailed statistics http - all

Request	% of cumulativ e time	Hits	Mean time (ms)		Standard deviation		Mean cpu time (ms)		Mean size (Kb)	Mean hits sql	Mean time sql (ms)
/spatialnonsecure/json/getEnrichment POST	100	61 048	291	3 573	94	100	26	0,00	1	6	247

64 hits/min on 1 requests



Detailed statistics sql - all						
Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select arealocatio_id as id1_0_ arealocatio_area_db_table as area_db_2_0_, arealocatio_area_type_desc as area_typ3_0_, arealocatio_is_location as is_locat4_0_, arealocatio_is_system_wide as is_syste5_0_, arealocatio_is_service_layer_id as service_7_0_, arealocatio_type_name as type_nam6_0_from spatial.area_locatio_types arealocatio_where arealocatio_is_location=? and arealocatio_is_system_wide=?	35	183 144	2	275	4	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-8.629216619252123E-5 4.5403549405008566E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.629216619252123E-5 4.5403549405008566E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-8.629216619252123E-5 4.5403549405008566E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINT(-8.629216619252123E-5 4.540354940500856E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	805	805	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.672335752889861E-5.4.536043027024206E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.672335752889861E-5.4.536043027024206E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.6723357528898861E-5.4.536043027024206E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.672335752889861E-5.4.536043027024206E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	802	802	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.684912166867532E-5 4.5347853857048356E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.684912166867532E-5 4.5347853857048356E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.684912166867532E-5 4.5347853857048356E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	719	719	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-7.496441045977406E-5 4.653632497827824E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.496441045977406E-5 4.653632497827824E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.frlmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-7.496441045977406E-5 4.653632497827824E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.496441045977406E-5 4.653632497827824E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	701	701	0	0,00
(WITH candidates AS (SELECT cast(EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez.WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.742404345051183E-5.4.5290361678631906E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.742404345051183E-5.4.5290361678631906E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.742404345051183E-5.4.5290361678631906E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.742404345051183E-5.4.5290361678631906E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	635	635	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.498237676545645E-5 4.6534528347822E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.498237676545645E-5 4.6534528347822E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-7.498237676545645E-5 4.6534528347822E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.498237676545645E-5 4.6534528347822E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM sp	0	1	633	633	0	0,00
(WITH candidates AS (SELECT cast(EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.811574621928385E-5 4.522119140161377E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.811574621928385E-5 4.522119140161377E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.frimo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.811574621928385E-5 4.522119140161377E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.811574621928385E-5 4.522119140161377E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	615	615	0	0,00
(WITH candidates AS (SELECT cast(EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.463203380464985E-5 4.656956264362707E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.463203380464985E-5 4.656956264362707E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.frimo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-7.463203380464985E-5 4.656956264362707E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.463203380464985E-5 4.656956264362707E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	2	298	317	26	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.090950675289558E-5 4.494181534849295E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.090950675289558E-5 4.494181534849295E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-9.090950675289558E-5 4.494181534849295E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.090950675289558E-5 4.494181534849295E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	564	564	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.015492191423518E-5 4.501727383147183E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.015492191423518E-5 4.501727383147183E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.015492191423518E-5 4.501727383147183E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.015492191423518E-5 4.501727383147183E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	561	561	0	0,00
(WITH candidates AS (SELECT cast(EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.737014453346488E-5 4.529575157000064E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.73701445334648E-5 4.529575157000064E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.frmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-8.737014453346488E-5 4.529575157000064E-4)' as TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, parme, geom candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	561	561	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT'.6.938237076989239E-5.4.50945289474514E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.6.938237076989239E-5.4.50945289474514E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT'.6.938237076989239E-5.4.50945289474514E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.6.938237076989239E-5.4.50945289474514E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	554	554	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-7.483864631999734E-5 4.6548901391471945E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.48386463199734E-5 4.6548901391471945E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-7.483864631999734E-5 4.6548901391471945E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.483864631999734E-5 4.6548901391471945E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	550	550	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.811749710703358E-5 4.622101631221589E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.811749710703358E-5 4.622101631221589E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-7.811749710703358E-5 4.622101631221589E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	531	531	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT'.8.653471131923349E-5 4.537929489194095E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.8.65347131323349E-5 4.5379294889194095E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT'.8.65347131923349E-5 4.537929489194095E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, name, geom as closest, stopped to the candidates or	0	1	527	527	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.587431235695012E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.587431235695012E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.587431235695012E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, arme, geom as closest, stopped candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	524	524	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.515206686851803E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.5152066868851803E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.515206686851803E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	515	515	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.447653377486013E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.447653377486013E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.447653377486013E-4.3621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.447653377486013E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	510	510	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.194432021738276E-5 4.5838334002136087E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.194432021738276E-5 4.5838334002136087E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.194432021738276E-5 4.5838334002136087E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	507	507	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8713703998777875E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8713703998777875E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8713703998777875E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8713703998777875E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	504	504	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4367654654207627E-4 3.9665111370273314E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4367654654207627E-4 3.9665111370273314E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4367654654207627E-4 3.9665111370273314E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4367654654207627E-4 3.9665111370273314E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	500	500	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.964113131453732E-5 4.4068652892053197E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.964113131453732E-5 4.4068652892053197E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.964113131453732E-5 4.4068652892053197E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	476	476	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.224974741398338E-5 4.5807791281835507E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.224974741398338E-5 4.5807791281835507E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.224974741398338E-5 4.5807791281835507E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	474	474	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.666918415494035E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.666918415494035E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.666918415494035E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.666918415494035E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	472	472	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.748319503080817E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.748319503080817E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.748319503080817E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.748319503080817E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	470	470	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.862836404678652E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.862836404678652E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-1.862836404678652E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	468	468	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.886745314081785E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.886745314081785E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.886745314081785E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	467	467	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.539896634319535E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.539896634319535E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.539896634319535E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, pame, geom set compared to the cast of the cast	0	1	462	462	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.488886049027099E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.488886049027099E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.488886049027099E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, arme, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.488886049027099E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	461	461	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.603165476012656E-5 4.54296005472602E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.603165476012656E-5 4.54296005472602E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.603165476012656E-5 4.54296005472602E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.603165476012656E-5 4.54296005472602E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	461	461	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4100855014824128E-4 3.9931911008928207E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4100855014824128E-4 3.9931911008928207E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4100855014824128E-4 3.9931911008928207E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4100855014824128E-4 3.9931911008928207E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	457	457	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.311010474207732E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.311010474207732E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.311010474207732E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.311010474207732E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	453	453	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.449710354075787E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.449710354075787E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.449710354075787E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.449710354075787E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	452	452	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0558036762712276E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0558036762712276E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0558036762712276E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0558036762712276E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	452	452	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.4219478375146417E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.4219478375146417E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.4219478375146417E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	452	452	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.861498080316175E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.861498080316175E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.861498080316175E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.861498080316175E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	449	449	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.809575456894067E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.809575456894067E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.809575456894067E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.809575456894067E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	447	447	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.618872270639195E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.618872270639195E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.618872270639195E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.618872270639195E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	443	443	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.3624885142696325E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.362488542696325E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.3624885142696325E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.362485142696325E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	441	441	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.8643772635072093E-4 3.618503795898022E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.8643772635072093E-4 3.618503795898022E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.8643772635072093E-4 3.618503795898022E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.864372635072093E-4 3.618503795898022E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	438	438	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.447644228922311E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.447644228922311E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.447644228922311E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.447644228922311E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	428	428	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.958000013239868E-5 4.507476600988828E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.958000013239868E-5 4.507476600988828E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-8.958000013239868E-5 4.507476600988828E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.958000013239868E-5 4.507476600988828E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	426	426	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.278401629394193E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.278401629394193E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.278401629394193E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.278401629394193E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	422	422	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.25882750476409E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.25882750476409E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.25882750476409E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.25882750476409E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FROM.	0	1	421	421	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2072459103282249E-4 4.196030691997679E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2072459103282249E-4 4.196030691997679E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2072459103282249E-4 4.196030691997679E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2072459103282249E-4 4.196030691997679E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	420	420	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6-962208372229876E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6-962208372229676E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6-962208372229676E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the control	0	1	418	418	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.003791221320707E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.003791221320707E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.003791221320707E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.003791221320707E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	417	417	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.6670128213042984E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.6670128213042984E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.6670128213042984E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	416	416	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.828359394895867E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.82835939489485867E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.82835939489567E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, name, geom	0	1	415	415	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT-(5.432561680712806E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-(5.432561680712806E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-(5.432561680712806E-4.32561680712806E-4.325618680712806E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	413	413	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.93939116401304E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.93939116401304E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.93939116401304E-4.3621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.939393116401304E-4.3621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	413	413	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.509996458203909E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.509996458203909E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.509996458203909E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.509996458203909E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	412	412	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.878651327961007E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.878651327961007E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.878651327961007E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.878651327961007E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	409	409	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.041974195177638E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.041974195177638E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.041974195177638E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.041974195177638E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	408	408	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.565593025727204E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.565593025727204E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.565593025727204E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.565593025727204E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	408	408	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6464368270161107E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6464368270161107E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6464368270161107E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6464368270161107E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	407	407	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7594494640401973E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7594494640401973E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7594494640401973E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	407	407	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.056437071251962E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.056437071251962E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.056437071251962E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.056437071251962E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	406	406	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.443332315558538E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.443332315558538E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.443332315558538E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.443332315558538E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	404	404	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.5772756987026096E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5772756987026096E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.5772756987026096E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	402	402	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.573408368699045E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.573408368699045E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.573408368699045E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.573408368699045E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	402	402	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.968316916161688E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.968316916161688E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.968316916161688E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.968316916161688E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	401	401	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.789013185451432E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.789013185451432E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.789013185451432E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.789013185451432E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	398	398	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.776436771473759E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.776436771473759E-4 3.621288573296032E-4)" AS TEXT), 4326) LIVIE as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-5.776436771473759E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.776436771473759E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.776436771473759E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	398	398	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.453492426832792E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.453492426832792E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.453492426832792E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.453492426832792E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	397	397	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0858880897255285E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0858880897255285E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.085880897255285E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	397	397	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0075549969503063E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0075549969503063E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0075549969503063E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	397	397	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.3358846590141407E-4 4.067391943315665E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.3358846590141407E-4 4.067391943315665E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.3358846590141407E-4 4.067391943315665E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3358846590141407E-4 4.067391943315665E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	396	396	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.586173594297244E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.586173594297244E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.586173594297244E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.586173594297244E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	395	395	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6586584891619867E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6586584891619867E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6586584891619867E-4 3.621288573296032E-32) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6586584891619867E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	393	393	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.647160053525257E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.647160053525257E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.64716005352557E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.647160053525257E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	393	393	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.118973537872235E-5 4.591379248511497E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.118973537872235E-5 4.591379248511497E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-8.118973537872235E-5 4.591379248511497E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.118973537872235E-5 4.591379248511497E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	393	393	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.583402539762028E-5 4.5449363483551097E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.583402539762028E-5 4.5449363483551097E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.583402539762028E-5 4.5449363483551097E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.583402539762028E-5 4.5449363483551097E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	392	392	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.041260117232195E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.041260117232195E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.041260117232195E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the code of the control of the control of the code of the control of the code of the control of the code of the	0	1	392	392	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2430886901645935E-4 4.1601879121692383E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2430886901645935E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2430886901645935E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.243086901645935E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINTAREA" as varchar) as type, gid, code, na	0	1	392	392	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(3.31370542006009E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(3.31370542006009E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial./mo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(3.31370542006009E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.31370542006009E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	391	391	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1178635395583327E-4 4.2854130628571673E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.1178635395583327E-4 4.2854130628571673E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1178635395583327E-4 4.2854130628571673E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1178635395583327E-4 4.2854130628571673E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	391	391	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.545300248869806E-4' 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.545300248869806E-4' 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.545300248869806E-4' 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.545300248869806E-4' 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	390	390	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.672497118819279E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.672497118819279E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.672497118819279E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.672497118819279E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	390	390	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.754598561505952E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.754598561505952E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.754598561505952E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.754598561505952E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	390	390	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.221987429551488E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.221987429551488E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.221987429551488E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.221987429551488E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	389	389	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.661622929599381E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.661622929599581E-4 3.621288573296032E-4) "AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.6616229295999581E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	388	388	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.547177562402754E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.547177562402754E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.547177562402754E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, septimized or candidates or candidat	0	1	388	388	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.278141283372661E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.278141283372661E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.278141283372661E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.278141283372661E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	388	388	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.265924195508634E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.265924195508634E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.265924195508634E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.265924195508634E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	388	388	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0220178730246308E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0220178730246308E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0220178730246308E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	387	387	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0882328580279424E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0882328580279424E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0882328580279424E-4' 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0882328580279424E-4' 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	387	387	0	0,00
(WITH candidates AS (SELECT cast/EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.76743989578701E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.76743989578701E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) LVIION ACLIC (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.76743989578701E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.76743989578701E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	387	387	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(3.4254558414045593E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(3.4254558414045593E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(3.4254558414045593E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4254558414045593E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	387	387	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-7.682392309790147E-5.4.6350373713970955E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-7.682392309790147E-5.4.6350373713970955E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-7.682392309790147E-5.4.6350373713970955E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.682392309790147E-5.4.6350373713970955E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	386	386	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.46003640556131E-4.3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.46003640556131E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.46003640556131E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.46003640556131E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	386	386	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.959693089434142E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.959693089434142E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.959693089434142E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.959693089434142E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	386	386	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(5.971461019656108E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(5.971461019656108E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(5.971461019656108E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(5.971461019656108E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	385	385	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4109838167665324E-4 3.9922927856646994E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4109838167665324E-4 3.9922927856646994E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4109838167665324E-4 3.9922927856646994E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4109838167665324E-4 3.9922927856646994E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	385	385	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.432283037563367E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.432283037563867E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.432283037563867E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	384	384	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.488072990898541E-43.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.488072990989541E-43.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.488072990989541E-43.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.488072990989541E-43.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	384	384	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.934445855668531E-4 3.618503795898022E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.934445855668531E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.934445855668531E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	383	383	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.267446757209787E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.267446757209787E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.267446757209787E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.267446757209787E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	382	382	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3573681171501507E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3573681171501507E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3573681171501507E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	381	381	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(8.562741288227279E-5 4.547002473570623E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(8.562741288227279E-5 4.547002473570623E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(8.562741288227279E-5 4.547002473570623E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.562741288227279E-5 4.547002473570623E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	381	381	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.026348083515809E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.026348083515809E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.026348083515809E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.026348083515809E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	381	381	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.93255939357188E-4.3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.93255939357188E-4.3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rimo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.93255939357188E-4.3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.93255939357188E-4.3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	380	380	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.1734738299271822E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1734738299271822E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.1734738299271822E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	380	380	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.606021787794434E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.606021787794434E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.606021787794434E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.606021787794434E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	380	380	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.542151571093537E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.542151571093537E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.542151571093537E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.542151571093537E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	378	378	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.490952174180575E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.490952174180575E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.490952174180575E-4.3621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.490952174180575E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	378	378	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-8.816964513633102E-5 4.5215801510245035E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.816964513633102E-5 4.5215801510245035E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-8.816964513633102E-5 4.5215801510245035E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.816964513633102E-5 4.5215801510245035E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	378	378	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.286675278571797E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.286675278571797E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.286675278571797E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, strong candidates or	0	1	378	378	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3687675/26947663E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3687675726947663E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3687675726947663E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3687675726947663E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	377	377	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7932261187230914E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.7932261187230914E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7932261187230914E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	376	376	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.745099290903541E-5 4.528766673231143E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.745099290903541E-5 4.528766673231143E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-8.745099290903541E-5 4.528766673231143E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.745099290903541E-5 4.528766673231143E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	376	376	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.734925456783734E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.734925456783734E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.734925456783734E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.734925456783734E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	376	376	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2236896543094634E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.22368966543094634E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2236896543094634E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	375	375	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.187227202337914E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.187227202337914E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.187227202337914E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.187227202337914E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	375	375	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.39186342/4060341E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.39186342/4060341E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.391863424060341E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.391863424060341E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	375	375	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.501462463004772E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.501462463004772E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.501462463004772E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.501462463004772E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	374	374	0	0,00
[WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez.WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2491119768500454E-4") AS 12328573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2491119768500454E-4") AS 1EXT), 4326) LIMIT 30) selected as the standard of th	0	1	374	374	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.16478617362332E-5.4.586797840657243E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.164787617362332E-5.4.586797840657243E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-8.16478617362332E-5.4.586797840657243E-4)' AS TEXT), 4326), LIMIT 50) SELY type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.16478617362332E-5.4.586797840657243E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	374	374	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.73169152/1760904E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.73169152/1760904E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.73169152/1760904E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.73169152/1760904E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	372	372	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.728826061415425E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.7288260614415425E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.728826061415425E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.728826061415425E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	371	371	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1333145624451883E-4 4.269962039915698E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1333145624451883E-4 4.269962039915698E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1333145624451883E-4 4.269962039915698E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1333145624451883E-4 4.269962039915698E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	371	371	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.183355298052497E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.183355298052497E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.183355298052497E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.183355298052497E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	371	371	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.455558551986265E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.455558551986265E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.455585851986265E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and calculated the control of the co	0	1	370	370	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.961593274376347E-5 4.5071172748975796E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.961593274376347E-5 4.5071172748975796E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.961593274376347E-5 4.5071172748975796E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	368	368	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5906560221541387E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5906560221541387E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5906560221541387E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.590650221541387E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	368	368	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST _GeomFromText(CAST ('POINT(-1.2537786420456162E-4 4.1494979603382091E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2537786420456162E-4 4.149497960382091E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2537786420456162E-4 4.149497960382091E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom,	0	1	367	367	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0274031904474967E-4 4.375873411990402E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0274031904474967E-4 4.375873411990402E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0274031904474967E-4 4.375873411990402E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0274031904474967E-4 4.375873411990402E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	367	367	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.90362906714138E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.90362906714138E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.90362906714138E-4); dist code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.90362906714138E-4); AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	367	367	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.389801873188717E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.389801873188717E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.389801873188717E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.389801873188717E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	367	367	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.700609812930369E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.700609812930369E-4 3.62128573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.700609812930369E-4 3.62128573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	367	367	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.252440317683139E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.252440317683139E-4 3.62128573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.252440317683139E-4 3.62128573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	366	366	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.763501031382438E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.763501031382438E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.763501031382438E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT type, gid, code, name, geom as closest, st_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.763501031382438E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	364	364	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2224411614753983E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2224411614753983E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.2224411614753983E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2224411614753983E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	364	364	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.143304159226321E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.143304159226321E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.143304159226321E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	363	363	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.595057767046325E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.595057767046325E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.595057767046325E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st. page of the control of th	0	1	363	363	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.149502534886746E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.149502534686746E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.149502534686746E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	363	363	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3248399553013214E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3248399553013214E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3248399553013214E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	363	363	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.5858096939017446E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.5858096939017446E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.5858096939017446E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.5858096939017446E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	363	363	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-(-7.821631178828673E-5 4.621113484534266E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-(-7.821631178828673E-5 4.621113484534266E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-(-7.821631178828673E-5 4.621113484534266E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st_geom.	0	1	362	362	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.9220445304658305E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9220445304658305E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.9220445304658305E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9220445304658305E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	362	362	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5472673939311664E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5472673939311664E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5472673939311664E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5472673939311664E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	361	361	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.06220458619773E-5.4.497055143706506E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.06220458619773E-5.4.497056143706506E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.06220458619773E-5.4.497056143706506E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.06220458619773E-5.4.497056143706506E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	360	360	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.550061319875639E-4 3.621288573296032E-4) AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.550061319875639E-4 3.621288573296032E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.550061319875639E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.550061319875639E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	360	360	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7187466331058802E-4 3.684529969299682E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7187466331058802E-4 3.684529969299682E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7187466331058802E-4 3.684529969299682E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	360	360	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.795736827236775E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.795736827236775E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.79573682736775E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.795736827236775E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	360	360	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.55399560999836E-4 3.849280992314962E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.55399560999836E-4 3.849280992314962E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.55399560999836E-4 3.849280992314962E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5539956099836E-4 3.849280992314962E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	360	360	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6461764809945763E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6461764809945763E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6461764809945763E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6461764809945763E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	360	360	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.562812822628285E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.562812822628285E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.562812822628285E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the c	0	1	360	360	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.772120283828134E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.772120283828134E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.772120283828134E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SEV geom <> ST_GeomFromText(CAST ('POINT(-4.772120283828134E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	359	359	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.73572936625759E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.73572936625759E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.73572936625759E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.73572936625759E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	359	359	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.297563190637047E-5 4.4754965769593655E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.297563190637047E-5 4.4754965769593655E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.297563190637047E-5 4.475496576959365E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.297563190637047E-5 4.475496576959365E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	359	359	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.858264145293345E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.858264145293345E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.858264145293345E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.858264145293345E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	359	359	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1110454919627264E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1110454919627264E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1110454919627264E-4' 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1110454919627264E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	359	359	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.435966130228758E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.435966130228758E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.435966130228758E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.435966130228758E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	359	359	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.608882673858063E-4 3.7963702221344327E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.608882673858063E-4 3.7963702221344327E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.608882673858063E-4 3.7963702221344327E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	359	359	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.5442039734014573E-4 3.8590726290012095E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.5442039734014573E-4 3.8590726290012095E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5442039734014573E-4 3.8590726290012095E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5442039734014573E-4 3.8590726290012095E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	359	359	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.316045614080653E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.316045614080653E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.316045614080653E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.316045614080653E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	359	359	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.463912884128577E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.463912884128577E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.463912884128577E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.463912884128577E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	358	358	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.536752530825117E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.536752530825117E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.536752530825117E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.536752530825117E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	358	358	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.578438934290114E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-3.578438934290114E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.578438934290114E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	358	358	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.358261858152419E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.358261858152419E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.358261858152419E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.358261858152419E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	357	357	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2418401973305296E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2418401973305296E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2418401973305296E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2418401973305296E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	356	356	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.67610410280131E-5 4.635666192120392E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.67610410280131E-5 4.635666192120392E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-7.67610410280131E-5 4.635666192120392E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.67610410280131E-5 4.635666192120392E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	356	356	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.494994592959113E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.494994592959113E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.494994592959113E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and calculated the control of the control of the calculated as a stopped calculated as	0	1	356	356	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.377315290739455E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.377315290739455E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.377315290739455E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and complete the code of the cast of th	0	1	356	356	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.451426301679316E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.451426301679316E-4 3.621288573296032E-4)' AS TEXT), 4326) LIVE as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.451426301679316E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.451426301679316E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	356	356	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.52678123117139E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.52678123117139E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rimo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.52678123117139E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.52678123117139E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	356	356	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.636119924094289E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.636119924094289E-4 3.621288573296032E-4)' AS TEXT), 4326) LIVIE up as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIVIET (LIWITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.636119924094289E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.636119924094289E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	353	353	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5675647450704164E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5675647450704164E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5675647450704164E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5675647450704164E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	353	353	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.80365572458258E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.80365572458258E-4 3.621288573296032E-4) "AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.80365572458258E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	353	353	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.239513726155521E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.239513726155521E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.239513726155521E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	352	352	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5692669698283922E-4") as 3400963254633938-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.569266969828392E-4") as 38340096325463393E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.569266969828392E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.569266969828392E-4") as 38340096325463393E-4) "AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	352	352	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.694070408483702E-5 4.6338695615369266E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.694070408483702E-5 4.6338695615389266E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rlmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.694070408483702E-5 4.6338695615369266E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	352	352	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.064153434131687E-4 3.621288573296032E-4) 'AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.064153434131687E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-3.064153434131687E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	352	352	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.676827329310458E-5 4.5355938694737564E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.676827329310458E-5 4.5355938694737564E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.676827329310458E-5 4.5355938694737564E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.676827329310458E-5 4.5355938694737564E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	351	351	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.480872745871031E-4 3.9224038564640606E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.480872745871031E-4 3.9224038564640606E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.480872745871031E-4 3.9224038564640606E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.480872745871031E-4 3.92240385644060E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	351	351	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.195226782648429E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.195226782648429E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.195226782648429E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.195226782648429E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	351	351	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.745256082551109E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.745256082551109E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.745256082551109E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.745256082551109E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	350	350	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2203750363219237E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2203750363219237E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2203750363219237E-4.3.621285373296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2203750363219237E-4.3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	350	350	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.384411981484E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.384411981484E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.384411981484E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as Choset, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.384411981484E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM spatia	0	1	349	349	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.539002893317267E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.539002893317267E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.539002893317267E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.539002893317267E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, structured and control of the contro	0	1	349	349	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.753879999278656E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.753879999278656E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-3.753879999278656E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	348	348	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.723961436035625E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.723961436035625E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.723961436036625E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	348	348	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.510176121260732E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.5101761212260732E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.510176121620732E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	348	348	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.766896332334687E-4.3.636380270019031E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.766896332334487E-4.3.636380270019031E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.766896332334687E-4.3.636380270019031E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, arme, geom as closest, stopped candidates or	0	1	348	348	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.630267151901959E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.630267151901959E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.630267151901959E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	348	348	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4533081894941156E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4533081894941156E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4533081894941156E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	348	348	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.566482192447621E-4.3.83679440994435E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.566482192447621E-4.3.83679440994435E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.566482192447621E-4.3.83679440994435E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.566482192447621E-4.3.83679440994435E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	347	347	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.509003737109526E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.509003737109526E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.509003737109526E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	347	347	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.774743695279488E-5 4.5258022327875086E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.774743695279488E-5 4.5258022327875086E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.774743695279485E-5 4.5258022327875086E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.774743695279485E-5 4.5258022327875086E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	347	347	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.19944886448379E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.19944886448379E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.19944886448379E-4 3.621288573296032E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.19944886448379E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	347	347	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.475770645878955E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.475770645878955E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.475770645878955E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.475770645878955E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	347	347	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.663230748547294E-4.3.740045853832597E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.663230748547294E-4.3.740045853832597E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFIMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.663230748547294E-4.3.740045853832597E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.663230748547294E-4.3.740045853832597E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	346	346	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.349840565890952E-5 4.5682925458129383E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.349840565890952E-5 4.5682925458129383E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.349840565890952E-5 4.5682925458129383E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.349840565890952E-5 4.5682925458129383E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	346	346	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2247722069322584E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2247722069322584E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.from WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2247722069322584E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2247722069322584E-3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	346	346	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.486711795217808E-4 3.9165648071632145E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.486711795217808E-4 3.9165648071632145E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.486711795217808E-4 3.9165648071632145E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	346	346	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.0769140854480363E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.0769140854480363E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.0769140854480363E-4 3.621288573296032E-3)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	346	346	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.843711437690608E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.843711437690608E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.843711437690608E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.843711437690608E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	345	345	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.44775693185998E-5 4.5585009091266904E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.44775693185998E-5 4.5585009091266904E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.44775693185998E-5 4.5585009091266904E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.44775693185998E-5 4.5585009091266904E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	345	345	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0416955520287E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0416955520287E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom sclosest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0416955520287E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom scross to complete the control of the control	0	1	344	344	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.20654555228334E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.206545555228334E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.20654555228334E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.206545555228334E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	344	344	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2970820130220284E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2970820130220284E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2970820130220284E-4 3.621288573296032E-3) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2970820130220284E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	344	344	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2648324943221377E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2648324943221377E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2648324943221377E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2648324943221377E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	344	344	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.828718721009516E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.828718721009516E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.828718721009516E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.828718721009516E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	343	343	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.042153858234461E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.042153858234461E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.042153858234461E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.042153858234461E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	343	343	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.965873167767161E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.965873167767161E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.965873167767161E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.965873167767161E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	343	343	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.594078768797496E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.594078768797496E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIMIT dandidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.594078768797496E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.594078768797496E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	342	342	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.606816548704588E-4 3.796460053720856E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.606816548704588E-4 3.796460053720856E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.606816548704588E-4 3.796460053720856E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.606816548704588E-4 3.796460053720856E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	342	342	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.310291821980437E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.310291821980437E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.31029182)980437E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.31029182)980437E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	342	342	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.7155172723649013E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.7155172723649013E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.7155172723649013E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	342	342	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3342722657845766E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3342722657845766E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3342722657845766E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3342722657845766E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	342	342	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.787396217940016E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.787396217940016E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.787396217940016E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	341	341	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.023019742682716E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.023019742682716E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.023019742682716E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.023019742682716E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	341	341	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.549508607859614E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.549508607859614E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.549508607859614E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.549508607859614E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	341	341	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.041165711421931E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.041165711421931E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.041165711421931E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.041165711421931E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	341	341	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.927798322566047E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.927798322566047E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.927798322566047E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.92779832256047E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	341	341	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.845607048350961E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.845607048350961E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.845607048350961E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SEV geom <> ST_GeomFromText(CAST ('POINT(-5.845607048350961E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	341	341	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.5932657107599365E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5932657107599365E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5932657107599365E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5932657107599365E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	341	341	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1447323151172083E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1447323151172083E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.1447323151172083E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1447323151172083E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	340	340	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6076250324602957E-4 3.7956515699519354E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6076250324602957E-4 3.7956515699519354E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "V" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6076250324602957E-4 3.7956515699519354E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6076250324602957E-4 3.7956515699519354E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	340	340	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT-6-972538997997051E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.972538997997051E-4 3.621288573296032E-4)' AS TEXT), 4326). true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.972538997997051E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.97253899797051E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.97253899797051E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom.)	0	1	339	339	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.841025640401953E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.841025640401953E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.841025640401953E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.841025640401953E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st. provided to the control of the control	0	1	339	339	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.649325158770846E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.649325158770846E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.649325158770846E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.649325158770846E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	339	339	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.380899403312231E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.380899403312231E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.380899403312231E-4 3.6212885733296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the co	0	1	339	339	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.611402530935449E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.611402530935449E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.611402530935449E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.611402530935449E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	339	339	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.010717397572131E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.0107177397572131E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.010717397572131E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SEV geom <> ST_GeomFromText(CAST ('POINT-6.010717397572131E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	339	339	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.576471789228753E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.576471789228753E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.576471789228753E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.576471789228753E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	339	339	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5568793674712457E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5568793674712457E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5568793674712457E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5568793674712457E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	338	338	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5480667291231713E-4 3.8552098733294536E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5480667291231713E-4 3.8552098733294536E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.54806672912131713E-4" 4.3 8552098733294536E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5480667291231713E-4" 3.8552098733294536E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5480667291231713E-4" 3.8552098733294536E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5480667291231713E-4" 3.8552098733294536E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5480667291231713E-4" 3.8552098733294536E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5480667291231713E-4" 3.8552098733294536E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geomFromText(CAST ("POINT(-1.5480667291231713E-4" 3.8552098733294536E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geomFromText(CAST ("POINT(-1.5480667291231713E-4" 3.8552098733294536E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geomFromText(CAST ("POINT(-1.5480667291231713E-4" 3.8552098733294536E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geomFromText(CAST ("POINT(-1.548067291231713E-4" 3.8552098733294536E-4)' AS	0	1	338	338	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.9884300299622633E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.9884300299622633E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.9884300299962263E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.988430029962263E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	338	338	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7580928425503156E-4 3.6451837598907335E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7580928425503156E-4 3.6451837598907335E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7580928425503156E-4 3.6451837598907335F-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7580928425503156E-4 3.6451837598907335E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	338	338	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.824227144588918E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.824227144588918E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.824227144588918E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.824227144588918E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	338	338	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.406411557381226E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.406411557381226E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-3.406411557381226E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates or AS ("POINT(-3.406411557381226E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.406411557381226E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	337	337	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-7.756952478372067E-5 4.6275813545584084E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.756952478372067E-5 4.6275813545584084E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-7.756952478372067E-5 4.6275813545584084E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.756952478372067E-5 4.6275813545584084E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	337	337	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6561477806483044E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6561477806483044E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6561477806483044E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	337	337	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.8723722695358723E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.8723722695358723E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.8723722695358723E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	337	337	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0311761146407987E-4 4.3721004877778465E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0311761146407987E-4 4.3721004877778465E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0311761146407987E-4 4.3721004877778465E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0311761146407987E-4 4.3721004877778465E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0311761146407987E-4 4.3721004877778465E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0311761146407987E-4 4.3721004877778465E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0311761146407987E-4 4.3721004877778465E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0311761146407987E-4 4.3721004877778465E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0311761146407987E-4 4.3721004877778465E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0311761146407987E-4 4.3721004877778465E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0311761146407987E-4 4.3721004877778465E-4') AS TEXT), 4326) LIMIT 50) SELECT type	0	1	337	337	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.217788219125381E-5 4.5814977804932704E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.217788219125381E-5 4.5814977804932704E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.217788219125381E-5 4.5814977804932704E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	336	336	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.210313905139785E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.210313905139785E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.210313905139785E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st. page of the control of the candidates or	0	1	336	336	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.986444587773498E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.986444587773498E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.986444587773498E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	335	335	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5840039147698033E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5840039147698033E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5840039147698033E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5840039147698033E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	335	335	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2200918188911341E-4 4.183184783535818E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2200918188911341E-4 4.183184783535818E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2200918188911341E-4 4.183184783535818E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2200918188911341E-4 4.183184783535818E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	334	334	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.665674496941822E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.665674496941822E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.665674496941822E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st_geom.	0	1	334	334	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.841649886818985E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.841649886818985E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.841649886818985E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.841649886818985E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	334	334	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1462640253820635E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1462640253820635E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1462640253820635E-4') AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1462640253820635E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	333	333	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.276793810446482E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.276793810446482E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.276793810446482E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.276793810446482E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	333	333	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0740303279751513E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0740303279751513E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0740303279751513E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	333	333	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.67356594859652E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.67356594859652E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.67356594859652E-4 3.621288573296032E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.67356594859652E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	333	333	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.403725760092569E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.403725760092569E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.403725760092569E-4.3621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	333	333	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.772214689638397E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-5.772214689638397E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-5.772214689638397E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, st. page of the candidates or	0	1	333	333	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3199936270489274E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3199936270489274E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3199936270489274E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	332	332	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6428481401614836E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6428481401614836E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6428481401614836E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	332	332	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.099933828130753E-5 4.493283219493951E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.099933828130753E-5 4.493283219493951E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-9.09993828130753E-5 4.493283219493951E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.09993828130753E-5 4.493283219493951E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	331	331	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8711100538562536E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8711100538562536E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8711100538562536E-4 3.621288573296032E-3) X TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8711100538562536E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	331	331	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4778184739050248E-4 3.9254581284941186E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4778184739050248E-4 3.9254581284941186E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4778184739050248E-4 3.9254581284941186E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4778184739050248E-4 3.9254581284941186E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	331	331	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.364289719119723E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.364289719119723E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.364289719119723E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.364289719119723E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	331	331	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9444978382869673E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9444978382869673E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.9444978382869673E-4 3.621288573296032E-3) X TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	331	331	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.256118836066178E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.256118836066178E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.256118836066178E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.256118836066178E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	331	331	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.652397727864257E-5 4.4380368295930835E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.652397727864257E-5 4.4380368295930835E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.652397727864257E-5 4.4380368295930835E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.652397727864257E-5 4.4380368295930835E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	331	331	0	0,00
(WITH candidates AS (SELECT cast('EE2' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.396709752312735E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.396709752312735E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.396709752312735E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.396709752312735E-4) AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.396709752312735E-4) AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.396709752312735E-4) AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom	0	1	330	330	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0879587891608553E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.0879587891608553E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0879587891608553E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.0879587891608553E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	330	330	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.451691221982701E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.451691221982701E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.451691221982701E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.451691221982701E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	330	330	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.4559041552543596E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.4559041552543596E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.4559041552543596E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	330	330	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.39959350978562E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.39959350978562E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.39959350978562E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.39959350978562E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	330	330	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4062227457606988E-4 3.997053856691799E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4062227457606988E-4 3.997053856691799E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4062227457606988E-4 3.997053856691799E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	330	330	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.918994832781677E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.918994832781677E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.918994832781677E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.918994832781677E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	330	330	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2949306306219927E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2949306306219927E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2949306306219927E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2949306306219927E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	330	330	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7085104131487693E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7085104131487693E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7085104131487693E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7085104131487693E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	330	330	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.624621488457559E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.624621488457559E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.624621488457559E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.624621488457559E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	329	329	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.850628465378329E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.850628465378329E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.850628465378329E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.850628465378329E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	329	329	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.170163786221498E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.170163786221495E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.170163786221495E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-5.170163786221495E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	329	329	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.69468093205518E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.69468093205518E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6946809325518E-4 3.621288573295032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.69468093205518E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	329	329	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.42537515843985E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.42537515843985E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.42537515843985E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	329	329	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.387537787851013E-4 4.0157388145817285E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.387537787851013E-4 4.0157388145817285E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.387537787851013E-4 4.0157388145817285E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	329	329	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.422495975248816E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.422495975248816E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.422495975248816E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.422495975248816E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	329	329	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6977306297393353E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6977306297393353E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6977306297393353E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	328	328	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4408170327630025E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4408170327630025E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4408170327630025E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	328	328	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.462111679278487E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.462111679278487E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.462111679278487E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, part of the candidates or the candidates or the candidates or the candidates as a successive to the candidates or the c	0	1	328	328	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.661074791865407E-4 3.7422018105073113E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.661074791865407E-4 3.7422018105073113E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.661074791865407E-4" 3.7422018105073113E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.661074791865407E-4 3.7422018105073113E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	328	328	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.96192515479888E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.96192515479888E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.96192515479888E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	328	328	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.398955540523034E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.398955540523034E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.398955540523034E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	327	327	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-5.636209755622702E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-5.636209755622702E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.636209755622702E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	327	327	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.619307705435701E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.619307705435701E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.619307705435701E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.619307705435701E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	327	327	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.573323111452483E-4.3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.573323111452483E-4.3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.573323111452483E-4.3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, structured to the control of t	0	1	327	327	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.548543332456339E-5 4.648422269123052E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.548543332456339E-5 4.648422269123052E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-7.548543332456339E-5 4.648422269123052E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.548543332456339E-5 4.648422269123052E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	327	327	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.651481115452734E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.651481115452734E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.651481115452734E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	326	326	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.706273773502173E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.706273773502173E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.706273773502173E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	326	326	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.952681655936158E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.952681655936158E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.952681655936158E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, st. page of the control of the candidates or	0	1	326	326	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.838240863021182E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-5.838240863021182E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-5.838240863021182E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, st. page of the candidates or	0	1	326	326	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.571512758038691E-4.3.83176384428502E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.571512758038691E-4.3.831763844285202E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.571512758038691E-4.3.831763844285202E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.571512758038691E-4.3.831763844285202E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	326	326	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7801015670112436E-4 3.623175035338699E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7801015670112436E-4 3.623175035338699E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7801015670112436E-4 3.623175035338699E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7801015670112436E-4 3.623175035338699E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	326	326	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1620606515370129E-4 4.2412159508346955E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1620606515370129E-4 4.2412159508346955E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1620606515370129E-4 4.2412159508346955E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1620606515370129E-4 4.2412159508346955E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	326	326	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.675641222313897E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.675641222313697E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.675641222313697E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.675641222313697E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	326	326	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.8537634203090445E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.8537634203090445E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.8537634203090445E-4 3.621288573296032E-3") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.8537634203090445E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	325	325	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9761139620061235E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9761139620061235E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9761139620061235E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9761139620061235E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	325	325	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.141399400002264E-4 4.2618772023537147E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.141399400002264E-4 4.2618772023537147E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1413994000002264E-4 4.2618772023537147E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	325	325	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.550240982932463E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.550240982932463E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.550240982932463E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and calculated the stopped and calculated as a stopped as the stopp	0	1	325	325	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2060781004588694E-4.4.19719850198507E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2060781004588694E-4.1.9719850198507E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.2060781004588694E-4.4.19719850198507E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2060781004588694E-4.4.19719850198507E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	325	325	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.8203506660216495E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.8203506660216495E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.820350660216495E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	325	325	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.7008747332337536E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.7008747332337536E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.7008747332337536E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	324	324	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8820695003225126E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8820695003225126E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8820695003225126E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8820695003225126E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	324	324	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3696704622607367E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3696704622607367E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3696704622607367E-4 3.621288573296032E-X) X TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	324	324	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8576353245944607E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8576353245944607E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8576353245944607E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8576353245944607E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	324	324	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.750560717009265E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.750560717009265E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.750560717009265E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.750560717009265E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	323	323	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT'-4.555805963412154E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'-4.555805963412154E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT'-4.555805963412154E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'-4.555805963412154E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	323	323	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.687494409782224E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.687494409782224E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.687494409782224E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the cont	0	1	323	323	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.732760351538145E-4 3.6705162508504294E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.732760351538145E-4 3.6705162508504294E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.732760351538145E-4 3.6705162508504294E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.732760351538145E-4 3.6705162508504294E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar") as type, gid, code, name,	0	1	323	323	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.257314091626642E-5 4.577545193235091E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.257314091626642E-5 4.577545193235091E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-8.257314091626642E-5 4.577545193235091E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	323	323	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0025244313592375E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0025244313592375E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0025244313592375E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0025244313592375E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	323	323	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.4673980166092382E-4 3.93587858577644E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-1.4673980166092382E-4 3.93587858577644E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-1.4673980166092382E-4 3.93587858577644E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-1.4673980166092382E-4 3.93587858577644E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	323	323	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.248038572790953E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.248038572790953E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.248038572790953E-4)', as TEXT), 4326), ame, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.248038572790953E-4)', as TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ame, geom as closest, stopped to the control of the contro	0	1	323	323	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.479799341811939E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.479799341811939E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.479799341811939E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.479799341811939E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	322	322	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.778498322345383E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.778498322345383E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.778498322345383E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.778498322345383E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	322	322	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3798122764075848E-4 4.023464326052463E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3798122764075848E-4 4.023464326052463E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3798122764075848E-4 4.023463426052463E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3798122764075848E-4 4.023464326052463E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	321	321	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.481600546662029E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.481600546662029E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.481600546662029E-4.3621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.481600546662029E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	321	321	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8631150478275896E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8631150478275896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8631150478275896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	321	321	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.129115352019083E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.129115352019083E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT-6.129115352019083E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.129115352019083E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	321	321	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2781275605271062E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2781275605271062E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2781275605271062E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2781275605271062E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	321	321	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.333746999459659E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.333746999459659E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.333746999459659E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.333746999459659E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	320	320	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.246695674146626E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.246695674146626E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.246695674146626E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the co	0	1	320	320	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.063354098939683E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.063354098939683E-4 3.621288573296032E-4)' AS TEXT), 4326); true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.063354098939683E-4 3.621288573296032E-4)' AS TEXT), 4326); LIMIT 50) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.063354098939683E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	320	320	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.7168738938547833E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7168738938547833E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.7168738938547833E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7168738938547833E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	320	320	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.50774152'14299074E-4 3.62'1288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.50774152'14299074E-4 3.62'1288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.50774152'14299074E-4 3.62'1288573296032E-4)' AS TEXT), 4326), true) sed sides from the control of the control	0	1	320	320	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.691375462631342E-5 4.634139056168974E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.691375462631342E-5 4.634139056168974E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-7.691375462631342E-5 4.634139056168974E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.691375462631342E-5 4.634139056168974E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	319	319	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.40793411908237TE-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.40793411908237TE-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-2.40793411908237TE-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.40793411908237TE-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	319	319	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.875785867615527E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.875785867615527E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.875785867615527E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.875785867615527E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	319	319	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.643755604009305E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.643755604009305E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.643755604009305E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and complete the control of the contr	0	1	319	319	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.105844411878536E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.105844411878536E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.105844411878536E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.105844411878536E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	319	319	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.77697576064423E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.77697576064423E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.77697576064423E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.77697576064423E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	319	319	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2455187157135678E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2455187157135678E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2455187157135678E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	318	318	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7718416406791955E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7718416406791955E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7718416406791955E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7718416406791955E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	318	318	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9320158301195575E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9320158301195575E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9320158301195575E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9320158301195575E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	318	318	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8243124018354776E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8243124018354776E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8243124018354776E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8243124018354776E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	318	318	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.254151691004818E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.254151691004818E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.254151691004818E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the control of the co	0	1	318	318	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2786665496975778E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2786665496975778E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2786665496975778E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2786665496975778E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	318	318	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.471090257837831E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.471090257837831E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.471090257837831E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.471090257837831E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	318	318	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.6692631837964485E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6692631837964485E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.6692631837964485E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6692631837964485E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	318	318	0	0,00
(WITH candidates AS (SELECT cast("EE" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.411078222576796E-4 3.621288573296032E+) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.411078222576796E-4 3.621288573296032E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.411078222576796E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.411078222576796E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	318	318	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.322068900766104E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.322068900766104E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.322068900766104E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.322068900766104E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	318	318	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4917423608088774E-4 3.911534241504067E-4") 'AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4917423608088774E-4 3.911534241504067E-4") 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4917423608088774E-4 3.911534241504067E-4") 'AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4917423608088774E-4 3.911534241504067E-4") 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	317	317	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.83275656565062016E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.832756565062016E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8327565655062016E-4 3.621288573296032E-3') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	317	317	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.668099948208944E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.668099948208944E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.668099948208944E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.668099948208944E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	317	317	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.673390859821547E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.673390859821547E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.673390859821547E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.673390859821547E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	317	317	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1314372489122397E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1314372489122397E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1314372489122397E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	317	317	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3013086691392415E-4.3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3013086691392415E-4.3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3013086691392415E-4.3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	316	316	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.445029966034662E-4 3.9582466362925016E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.445029966034662E-4 3.9582466362925016E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.445029966034662E-4 3.9582466362925016E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.445029966034662E-4) 3.9582466362925016E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	316	316	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.958525279564786E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.958525279564786E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.958525279564786E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.958525279564786E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	316	316	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1118448271547317E-4 4.291431775203638E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1118448271547317E-4 4.291431775203638E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1118448271547317E-4 4.291431775203638E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1118448271547317E-4 4.291431775203638E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	316	316	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.123442242883577E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.123442242883577E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.123442242883577E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.123442242883577E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	316	316	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.6420442306876266E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'(4.6420442306876266E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT'(4.6420442306876266E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	316	316	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.98295945292838E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.982)59455292838E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST (POINT(-5.982959455292838E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.982959455292838E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	316	316	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.673759334498897E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.673759334498897E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.673759334498897E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.673759334498897E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	316	316	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3879869454930726E-4 4.015289656904057E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3879869454930726E-4 4.015289656904057E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3879869454930726E-4 4.015289656904057E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3879869454930726E-4 4.015289656904057E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	316	316	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5426007287355957E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5426007287355957E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5426007287355957E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	315	315	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.438925996384501E-4' 3.618503795898022E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.438925996384501E-4'). 63 18503795898022E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.438925996384501E-4') a.618503795898022E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.438925996384501E-4') a.61871, 4326). Live) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	315	315	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0410667313298165E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0410667313298165E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0410667313298165E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0410667313298165E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	315	315	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.126860415245081E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.126860415245081E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.126860415245081E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.126860415245081E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	314	314	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.543036163532102E-4 3.860240438861379E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.543036163532102E-4 3.860240438861379E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.543036163532102E-4 3.86024043861379E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.543036163532102E-4 3.860240438861379E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	314	314	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.907945554787005E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.907945554787005E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.907945554787005E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.907945554787005E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	314	314	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.178149643686455E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.17814964366455E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.178149643686455E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.178149643686455E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	314	314	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.400217756202652E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.400217756202652E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.400217756202652E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.400217756202652E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	314	314	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.989961740227117E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.989961740227117E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.989961740227117E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.989961740227117E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	313	313	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.278931470009628E-4 4.1243451323407974E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.278931470009628E-4 4.1243451323407974E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.2789314700009628E-4 4.1243451323407974E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2789314700009628E-4 4.1243451323407974E-4)' AS TEXT), 4326), tupe) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	313	313	0	0,00
(WITH candidates AS (SELECT cast('EE2' as varchar) as ype, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.486631112253099E-4 3.62128857329603E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.486631112253099E-4 3.62128857329603E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.486631112253099E-4) as TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.486631112253099E-4) as TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.486631112253099E-4) as TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.486631112253099E-4) as TEXT), 4326) LIMIT 60) SELECT (cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	313	313	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.54834537227211E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.54834537227211E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.54834537227211E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.54834537227211E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	313	313	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8418204013121065E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8418204013121065E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8418204013121065E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8418204013121065E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	313	313	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.069911800513755E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.069911800513755E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.069911800513755E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.069911800513755E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	313	313	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.119229309611916E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.119229309611916E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.119229309611916E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.119229309611916E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	313	313	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.244525994619185E-4 4.1587506076770213E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.244525994619185E-4 4.1587506076770213E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.244525994619185E-4 4.1587506076770213E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.244525994619185E-4 4.1587506076770213E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	313	313	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.652549945229974E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.652549945229974E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.652549945229974E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.652549945229974E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	313	313	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2154/205794137125E-4 4.189832316605584E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2154/205794137125E-4 4.189832316605584E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2154/205794137125E-4 4.189832316605584E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	313	313	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.37229844799934E-5.4.566046757551801E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.37229844799934E-5.4.566046757551801E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.37229844799934E-5.4.566046757551801E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.37229844799394E-5.4.566046757551801E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	313	313	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.453299040930413E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.453299040930413E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.453299040930413E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.453299040930413E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	312	312	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.210673231253433E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.210673231253433E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.210673231253433E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.210673231253433E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	312	312	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.164041519443927E-4 3.618503795898022E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.164041519443927E-4 3.618503795898022E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.164041519443927E-4 3.618503795898022E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.164041519443927E-4 3.618503795898022E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	312	312	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.483046999680323E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.483046999680323E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.483046999680323E-4)' AS TEXT), 4326), LIMIT 50) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.483046999680323E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and stopping a	0	1	312	312	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.949627383970151E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.949627383970151E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.949627383970151E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) ELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.949627383970151E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	312	312	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.967409452313867E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.967409452313867E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.967409452313867E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.967409452313867E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	312	312	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.073774556235469E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.073774556235469E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.073774556235469E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50; bistance(geom, ST_GeomFromText(CAST ("POINT(-5.073774556235469E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	311	311	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3411984420359994E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3411984420359994E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3411984420359994E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	311	311	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.956086105452109E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.956086105452109E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.956086105452109E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, arme, geom	0	1	311	311	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7771371265736495E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7771371265736495E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7771371265736495E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7771371265736495E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	311	311	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.539177982092239E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.539177982092239E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.539177982092239E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.539177982092239E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	311	311	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.542874797602684E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.5-42874797602684E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.542874797602684E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.542874797602684E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	311	311	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.655164208117623E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.655164208117623E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.655164208117623E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.655164208117623E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	311	311	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.579885387308408E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.579885387308408E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.579885387308408E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the c	0	1	311	311	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.762234241420968E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.762234241420968E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.762234241420968E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.762234241420968E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	311	311	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1863288870537936E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1863288870537936E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.1863288870537936E-4 3.621288573296032E-4)' AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1863288870537936E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	311	311	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.627046939724683E-4 3.621288573296032E-4)' AS TEXT), 4326); LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.627046939724683E-4 3.621288573296032E-4)' AS TEXT), 4326); true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.627046939724683E-4)' AS TEXT), 4326); LIMIT 50) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.627046939724683E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, standards or the contract of t	0	1	310	310	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.116071483271945E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.116071483271945E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.116071483271945E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.116071483271945E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	310	310	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.781467337064828E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.781467337064828E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.781467337064828E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.781467337064828E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	310	310	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3049871875222802E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3049871875222802E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3049871875222802E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3049871875222802E-4 3.62128857329603E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	310	310	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6674619789463583E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6674619789463583E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6674619789463583E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	310	310	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.471180089366242E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.471180089366242E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.471180089366242E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.471180089366242E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	310	310	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.687773052931162E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.687773052931162E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.687773052931162E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.687773052931162E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	310	310	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3435340617747095E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.34353406177747095E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.34353406177747095E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	310	310	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.885492246965869E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.885492246965869E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.885492246965869E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.885492246965869E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	310	310	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6859581252355179E-4 3.717318477098065E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6859581252355179E-4 3.717318477098065E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6859581252355179E-4 3.717318477098065E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6859581252355179E-4 3.717318477098065E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	310	310	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.905699766576707E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.905699766576707E-4 3.621288573296032E-4)' AS TEXT), 4326); true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.905699766576707E-4 3.621288573296032E-4)' AS TEXT), 4326); LIMIT 50) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.905699766576707E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	309	309	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.662341581826877E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.662341581826877E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.662341581826877E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.662341581826877E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	309	309	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7589150491515763E-4.3 621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7589150491515763E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7589150491515763E-4.3.621288573296032E-3)' AS TEXT), 4326), true) so dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7589150491515763E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	309	309	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.973432738999318E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.973432738999318E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.9734327389999318E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.973432738999318E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	309	309	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.7098670346386513E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.7098670346386513E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.7098670346386513E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.7098670346386513E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	308	308	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.103059634497765E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.103059634497765E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.103059634497765E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.103059634497765E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	308	308	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4968627579283586E-4 3.9064138445129404E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4968627579283586E-4 3.9064138445129404E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4968627579283586E-4 3.9064138445129404E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4968627579283586E-4 3.9064138445129404E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	308	308	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.502171966668366E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.502171966668366E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.502171966668366E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st_geom.	0	1	307	307	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.694676357773328E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.694676357773328E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.694676357773328E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.694676357773328E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	307	307	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3151381502328305E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3151381502328305E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3151381502328305E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3151381502328305E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	307	307	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.163511678837158E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.163511678837158E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.163511678837158E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_GeomFromText(CAST ('POINT(-4.163511678837158E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	307	307	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.714556571243478E-5 4.531820945261201E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.714556571243478E-5 4.531820945261201E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-8.514565671243478E-5 4.531820945261201E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.714556571243478E-5 4.531820945261201E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	306	306	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8529640851170393E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8529640851170393E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8529640851170393E-4-3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8529640851170393E-4-3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	306	306	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7690522890165735E-4 3.634224313344317E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7690522890165735E-4 3.634224313344317E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7690522890165735E-4 3.634224313344317E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7690522890165735E-4 3.634224313344317E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	306	306	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.70671378258053E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.70671378258053E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.70671378258053E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.70671378258053E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	305	305	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.053221433356537E-5 4.49795445906185E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.053221433356537E-5 4.49795445906185E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.053221433356537E-5 4.49795445906185E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.053221433356537E-5 4.49795445906185E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	305	305	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.735733940539442E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.735733940539442E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast("POINT(-3.735733940539442E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates or AS ("POINT(-3.73573940539442E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopped and the control of the contro	0	1	304	304	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2225218444401083E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2225218444401083E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.222518444401083E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	304	304	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6478695571888502E-4 3.7554070451876434E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6478695571888502E-4 3.7554070451876434E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6478695571888502E-4 3.7554070451876434E-4)' AS TEXT), 4326), true) of the control	0	1	304	304	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.155148198131144E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.155148198131144E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.155148198131144E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	304	304	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7952830953128638E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7952830953128638E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7952830953128638E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7952830953128638E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	304	304	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9025419402367343E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9025419402367343E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9025419402367343E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9025419402367343E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	304	304	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.096322269866898-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.096322269866869E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.09632226986689E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st. page of the candidates or	0	1	304	304	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4671285220240)24E-4 3.936148080408488E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4671285220240)24E-4 3.936148080408488E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4671285220240024E-4 3.936148080408488E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4671285220240024E-4 3.936148080408488E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	304	304	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0937034326973684E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0937034326973684E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0937034326973684E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0937034326973684E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	304	304	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.651031957810674E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.651031957810674E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.651031957810674E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	304	304	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.920611800293091E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.920611800293091E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.920611800293091E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	304	304	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.798274981441566E-5 4.623449104254605E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.798274981441566E-5 4.623449104254605E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.798274981441566E-5 4.623449104254605E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.798274981441566E-5 4.623449104254605E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	304	304	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1567697399244104E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1567697399244104E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1567697399244104E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1567697399244104E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	304	304	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1320614953292724E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.1320614953292724E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY GIST LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1320614953292724E-4" 4.3 621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.1320614953292724E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	304	304	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.430944713201391E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.430944713201391E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.430944713201391E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.430944713201391E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	303	303	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.157407709186996E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.157407709186996E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.157407709186996E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.157407709186996E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	303	303	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.173397721244324E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.173397721244324E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.173397721244324E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.173397721244324E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	303	303	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.352687729109027E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.352687729109027E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.352687729109027E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	303	303	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.570174433676215E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-3.570174433676215E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST" ("POINT(-3.570174433676215E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.570174433676215E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	303	303	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0787913989809846E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0787913989809846E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0787913989809846E-4 3.621288573296032E-X)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	303	303	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.358706441512628E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.358706441512628E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.358706441512628E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.358706441512628E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	303	303	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7589957321162863E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7589957321162863E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7589957321162863E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	303	303	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6324276828656973E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6324276828656973E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6324276828656973E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6324276828656973E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	303	303	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.071708431081994E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.071708431081994E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.071708431081994E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped candidates or the control of the candidates or the candida	0	1	302	302	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.543849221569661E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.543849221569661E-4 3.621288573296032E-4)' AS TEXT), 4326) LIVE as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIMIT to A surface as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.543849221569661E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.543849221569661E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	302	302	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.668800303308835E-4 3.734476299036576TE-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.668800303308835E-4 3.7344762990365767E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rimo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.668800303308835E-4 3.734476299036576TE-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.668800303308835E-4 3.734476299036576TE-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	302	302	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.312991342114647E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.312991342114647E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.312991342114647E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.312991342114647E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	302	302	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.703493570403254E-4" 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.703493570403254E-4" 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.703493570403254E-4"), as TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.703493570403254E-4"), as TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	302	302	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.6225370661766795E-4 3.780739536274561E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6225370661766795E-4 3.780739536274561E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.6225370661766795E-4 3.780739536274561E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	302	302	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.468929726874093E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.468929726874093E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.468929726874093E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.468929726874093E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	302	302	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.565871668876143E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.565871668876143E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.565871668876143E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.565871668876143E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	302	302	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.996344353026218E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.996344353026218E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.996344353026218E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.996344353026218E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	302	302	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.491207945920257E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.491207945920257E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.491207945920257E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.491207945920257E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	302	302	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.804005902132525E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.804005902132525E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.80400590213252E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.80400590213252E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	302	302	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.620956692920076E-5 4.4411809330823426E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.620956692920076E-5 4.4411809330823426E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.620956692920076E-5 4.4411809330823426E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	302	302	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8607748538070284E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8607748538070284E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8607748538070284E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8607748538070284E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	301	301	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.732585262763172E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.732585262763172E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.732585262763172E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.732585262763172E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	301	301	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.825574617515096E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.825574617515096E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.825574617515096E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.825574617515096E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	301	301	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.377490379514428E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.377490379514428E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.377490379514428E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.377490379514428E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	301	301	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6250523489722143E-4 3.780200547010466E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6250523489722143E-4 3.780200547010466E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6250523489722143E-4 3.780200547010466E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6250523489722143E-4 3.780200547010466E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	301	301	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9662370681626603E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9662370681626603E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9662370681626603E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	301	301	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0426745502775285E-4 4.360602052094557E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0426745502775285E-4 4.360602052094557E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT '1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0426745502775285E-4 4.360602052094557E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT '1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	301	301	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(3.7367220873519734E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(3.7367220873519734E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(3.7367220873519734E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	301	301	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.63413448190524E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.634134481905524E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.634134481905524E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	301	301	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.399247906517527E-5 4.563351811740214E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.399247906517527E-5 4.563351811740214E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.399247906517527E-5 4.563351811740214E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.399247906517527E-5 4.563351811740214E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	300	300	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0305610167874685E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0305610167874685E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0305610167874685E-4-3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0305610167874685E-4-3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	300	300	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(3.081940076757255E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.081940076757255E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.081940076757255E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.081940076757255E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	300	300	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.978288215815415E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.978288215815415E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.978288215815415E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.978288215815415E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	300	300	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7483057802352645E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7483057802352645E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7483057802352645E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7483057802352645E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	300	300	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.375949520685871E-4 4.0273270817242195E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.375949520685871E-4 4.0273270817242195E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.375949520685871E-4 4.0273270817242195E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	299	299	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.8488364090919407E-4 3.621288573296032E-4)) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.8488364090919407E-4 3.621288573296032E-4)) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.8488364090919407E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	299	299	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1788637216318992E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1788637216318992E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1788637216318992E-4 3.621288573296032E-3) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	299	299	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.410997539612087E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.410997539612087E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.410997539612087E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.410997539612087E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, structured and control of the contro	0	1	299	299	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0676522894579023E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0676522894579023E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0676522894579023E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0676522894579023E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	299	299	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0249914620259274E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0249914620259274E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0249914620259274E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	299	299	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7360886923712385E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7360886923712385E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7360886923712385E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	298	298	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.135143212986386E-5 4.589762281100878E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.135143212986386E-5 4.589762281100878E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-8.135143212986386E-5 4.589762281100878E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.135143212986386E-5 4.589762281100878E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	298	298	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.358167452342156E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.358167452342156E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.358167452342156E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	298	298	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.787108426227376E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.787108426227376E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.787108426227376E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.787108426227376E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	298	298	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4510624012838166E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.4510624012838166E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4510624012838166E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.4510624012838166E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	298	298	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.045742545089089E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.045742545089089E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.0457425450890898E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.045742545089089E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	298	298	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.900934121289022E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.900934121289022E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.900934121289022E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	298	298	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.297738279412019E-5 4.57350277451771E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.297738279412019E-5 4.57350277451771E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-8.297738279412019E-5 4.57350277451771E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.297738279412019E-5 4.57350277451771E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	298	298	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6927944699585285E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6927944699585285E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6927944699585285E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	298	298	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.406505963191488E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.406505963191488E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.406505963191488E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.406505963191488E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	298	298	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.352687729109027E-4 3.618503795898022E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.352687729109027E-4 3.618503795898022E-4)" AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.352687729109027E-4 3.618503795898022E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.352687729109027E-4 3.618503795898022E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	297	297	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5171738319131617E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5171738319131617E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5171738319131617E-4 3.621288573296032E-X)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	297	297	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1577487381732393E-4 4.245527864184124E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1577487381733293E-4 4.245527864184124E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1577487381732393E-4 4.245527864184124E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	297	297	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8710156480459903E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8710156480459903E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8710156480459903E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	297	297	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5906514478722876E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5906514478722876E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5906514478722876E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	297	297	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.143951277052609E-5 4.4888814746853217E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.143951277052609E-5 4.4888814746853217E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.143951277052609E-5 4.4888814746853217E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.143951277052609E-5 4.4888814746853217E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	297	297	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.615180029410603E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.615180029410603E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.615180029410603E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.615180029410603E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	297	297	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4707309317241834E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4707309317241834E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4707309317241834E-4 4.3621288573296032E-X) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4707309317241834E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	297	297	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.622451808930119E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.622451808930119E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.622451808930119E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the control of th	0	1	296	296	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.25325795000255E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.25325795000255E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.25325795000255E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.25325795000255E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	296	296	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.3410096304154728E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3410096304154728E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3410096304154728E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3410096304154728E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	296	296	0	0,00
(WITH candidates AS (SELECT cast)("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.884944109231695E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.884944109231695E-4 3.621288573296032E-4)' AS TEXT), 4326) LIWIT type) as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIMIT (1.9) WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.884944109231695E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.884944109231695E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	296	296	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid. code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5919090892700556E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5919090892700556E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5919090892700556E-4 3.621288573296032E-X) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5919090892700556E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	296	296	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.0816660078901668E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0816660078901668E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.0816660078901668E-4 3.621288573296032E-X)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	296	296	0	0,00
(MITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4115273802188553E-4 3.62128857329603E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4115273802188553E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.411527380218853E-4)') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4115273802188553E-4)') AS TEXT), 4326) LIMIT 50) SELECT type, gid, AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	296	296	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8283502463321646E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8283502463321646E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.828502463321646E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.828502463321646E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	296	296	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6802987389455648E-4 3.722977863480509E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6802987389455648E-4 3.722977863480509E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6802987389455648E-4 3.722977863480509E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6802987389455648E-4 3.722977863480509E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	296	296	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.786596882748012E-5 4.624616914114774E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.786596882748012E-5 4.6246169141114774E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.786596882748012E-5 4.624616914114774E-4)' AS TEXT), 4326) LIMIT 50; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.786596882748012E-5 4.624616914114774E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	296	296	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.870117332761871E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.870117332761871E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.870117332761871E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.870117332761871E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	295	295	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.174669085487647E-5 4.5858096938426984E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.174669085487647E-5 4.5858096938426984E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom SPROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.174669085487647E-5 4.585809638426984E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.174669085487647E-5 4.5858096938426984E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	295	295	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.554283401711001E-4 3.618503795898022E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.554283401711001E-4 3.618503795898022E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.554283401711001E-4 3.618503795898022E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.554283401711001E-4 3.618503795898022E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	295	295	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.069103316758048E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.069103316758048E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.069103316758048E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.069103316758048E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	295	295	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0971216050588735E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.0971216050588735E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0971216050588735E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.0971216050588735E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	295	295	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2367152259291967E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2367152259291967E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.236715225921967E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	295	295	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7447125190987857E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7447125190987857E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7447125190987857E-4 3.621288573296032E-X)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7447125190987857E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	294	294	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.528303792872542E-4 3.874972809493129E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.528303792872542E-4 3.874972809493129E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.528303792872542E-4 3.874972809493129E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.528303792872542E-4 3.874972809493129E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	294	294	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.3290711857003867E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.3290711857003867E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.3290711857003867E-4" 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.3290711857003867E-4" 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	294	294	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.6656699226599714E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.6656699226599714E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.6656699226599714E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	294	294	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.235641821870104E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.235641821870104E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-3.235641821870104E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.235641821870104E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	294	294	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.2800094483419062E-4 4.1232671540670514E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.2800094483419062E-4 4.1232671540670514E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2800094483419062E-4 4.1232671540670514E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2800094483419062E-4 4.1232671540670514E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	294	294	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.690917156425581E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.690917156425581E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.690917156425581E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.690917156425581E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	294	294	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9593246147567906E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9593246147567906E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9593246147567906E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9593246147567906E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	294	294	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2371643835712563E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2371643835712563E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2371643835712563E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	294	294	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.8649116783958287E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.8649116783958287E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.8649116783958287E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.8649116783958287E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	294	294	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.898088660943542E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST") ("POINT(-5.898068660943542E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST") ("POINT(-5.898068660943542E-4"), as TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST") ("POINT(-5.898068660943542E-4"), as TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	294	294	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.057425218064494E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.057425218064494E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.057425218064494E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.057425218064494E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	294	294	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.471269920894655E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.471269920894655E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.471269920894655E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and complete the code, and continued the complete the complete the code, and continued the complete the code of the complete the complete the complete the code, and code is the code of the code, and code of the code, and code of the code of th	0	1	293	293	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.065420224093157E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.065420224093157E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIMIT candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.065420224093157E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.065420224093157E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	293	293	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5203133611257294E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5203133611257294E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5203133611257294E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5203133611257294E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	293	293	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7833446505977766E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7833446505977766E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7833446505977766E-4 3.621288573296032E-X)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	293	293	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.4553697403657397E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.4553697403657397E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.4553697403657397E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	293	293	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.640332857365949E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.640332857365949E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.640332857365949E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.640332857365949E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	293	293	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.813882795975989E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8138827959575989E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.813882795975989E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.813882795975989E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	293	293	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.79359001911859E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.79359001911859E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.79359001911859E-4.3621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.79359001911859E-4.3621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	293	293	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.295020462150405E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.295020462150405E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.295020462150405E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	292	292	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3867338783771567E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3867338783771567E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3867338783771567E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.38673387371567E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	292	292	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3368773801085233E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3368773801085233E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3368773801085233E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3368773801085233E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	292	292	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.657499827856334E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.657499827856334E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.657499827856334E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.657499827856334E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	292	292	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8245727478570115E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8245727478570115E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8245727478570115E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8245727478570115E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	292	292	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.944421729604109E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.944421729604109E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.944421729604109E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.944421729604109E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	292	292	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0533645021585511E-4 4.3499121001801873E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0533645021585511E-4 4.3499121001801873E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0533645021585511E-4 4.3499121001801873E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0533645021585511E-4 4.3499121001801873E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	292	292	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.414312157599826E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.414312157599626E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.414312157599626E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.414312157599626E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	292	292	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2374338781564918E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2374338781564918E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.2374338781564918E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	292	292	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez.WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.4654262972660266E-4 A: 3.621288573296032E-4) 'AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.4654262972660266E-4 A: 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.from WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.4654262972660266E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.4654262972660266E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, as varchar) as type, gid, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	292	292	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7407599318486604E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7407599318486604E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7407599318486604E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7407599318486604E-4 3.62128573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	292	292	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.964359754629712E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.964359754629712E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.964359754629712E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the co	0	1	291	291	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.288580037795852E-5 4.474418598558397E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.288580037795852E-5 4.474418598558397E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-9.288580037795852E-5 4.47441859855397E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.288580037795852E-5 4.474418598558397E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	291	291	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7887253937387912E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7887253937387912E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7887253937387912E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7887253937387912E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	291	291	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.790895073266232E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.790895073266232E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALI (WITH candidates AS (SELECT cast('RPMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.790895073266232E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and complete the cast of t	0	1	291	291	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.0147460935051144E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0147460935051144E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0147460935051144E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0147460935051144E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	291	291	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.8182799665863235E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8182799665863235E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8182799665863235E-4 3.621288573296032E-4)' AS TEXT), 4326), true) os dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	291	291	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.5318117967624594E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5318117967624594E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.5318117967624594E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	291	291	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.75442347273098E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.75442347273098E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.75442347273098E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.75442347273098E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	290	290	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.936866732653803E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.936866732653803E-4 3.621288573296032E-4)' AS TEXT), 4326) LIWI by as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RPMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.936866732653803E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.936866732653803E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	290	290	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.681296034321799E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.681296034321799E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.681296034321799E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.681296034321799E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	290	290	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1615216623665412E-4 4.2437312336006584E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1615216623665412E-4 4.2437312336006584E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1615216623665412E-4 4.2437312336006584E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1615216623665412E-4 4.2437312336006584E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	290	290	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.85710090970584E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50). SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.85710090970584E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.85710090970584E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50). SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.85710090970584E-4 3.621288573296032E-4') AS TEXT), 4326). Tue) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	290	290	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3287027110230354E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3287027110230354E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3287027110230354E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	290	290	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5969350805792733E-4 3.806341521866305E-d)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5969350805792733E-4 3.806341521866305E-d)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5969350805792733E-4 3.806341521866305E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	289	289	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.6158941073560466E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.6158941073560466E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.6158941073560466E-4 3.621288573296032E-3") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	289	289	0	0,00
(WITH candidates AS (SELECT cast('EZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.89535999224563E-4.3.621288573296032E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.89535999224563E-4.3.621288573296032E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.89535999224563E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.89535999224563E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	289	289	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3809800862768404E-4 4.022296516065072E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3809800862769404E-4 4.022296516065072E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3809800862769404E-4 4.022296516065072E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3809800862769404E-4 4.02296516065072E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	289	289	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-8.74599760618766E-5 4.528676841771942E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-8.74599760618766E-5 4.528676841771942E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-8.74599760618766E-5 4.528676841771942E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-8.74599760618766E-5 4.528676841771942E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	289	289	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.514829063610749E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.514829063610749E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.514829063610749E-4"), AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.514829063610749E-4"), AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	289	289	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.753350068671887E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.753350068671887E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.753350068671887E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.753350068671887E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	289	289	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.675093084579523E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.675093084579523E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.675093084579523E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.675093084579523E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	289	289	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1281089080791465E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1281089080791465E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1281089080791465E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	289	289	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.57531770220495E-5 4.5457448321240305E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.57531770220495E-5 4.5457448321240305E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.57531770220495E-5 4.5457448321240305E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.57531770220495E-5 4.5457448321240305E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	289	289	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.188758912602769E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.188758912602769E-4 3.621288573296032E-4)" AS TEXT), 4326) LIVIE as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-5.188758912602769E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SEV geom <-> ST_GeomFromText(CAST ("POINT(-5.188758912602769E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SEV geom <-> ST_GeomFromText(CAST ("POINT(-5.188758912602769E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	289	289	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.973096284294929E-5 4.405966973977198E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.973096284294929E-5 4.405966973977198E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.973096284294929E-5 4.405966973977198E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.973096284294929E-5 4.405966973977198E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	289	289	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2042906184543335E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2042906184543335E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2042906184543335E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	289	289	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.70258153227358E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.70258153227358E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.70258153227358E-4 3.621288573296032E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.70258153227358E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	288	288	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.4356966356435223E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.4356966356435223E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.4356966356435223E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	288	288	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.017804939752972E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-4.017804939752972E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-4.017804939752972E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-4.017804939752972E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	288	288	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.582670164689178E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.582670164689178E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.582670164689178E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.582670164689178E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	288	288	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0032476578683843E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.0032476578883843E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0032476578683843E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.0032476578683843E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	288	288	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.611056927667356E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.611056927667356E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.611056927667356E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.611056927667356E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	288	288	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7388688954701574E-4 3.664407706917536E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7388688954701574E-4 3.664407706917536E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7388688954701574E-4 3.664407706917536E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7388688954701574E-4 3.664407706917536E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	288	288	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.499571426626271E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.499571426626271E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.499571426626271E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.499571426626271E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	288	288	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.5332445269351994E-4 3.8700320754204043E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5332445269351994E-4 3.8700320754204043E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5332445269351994E-4 3.8700320754204043E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5332445269351994E-4 3.8700320754204043E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINT(AREA' as varchar) as type, gid, code, na	0	1	288	288	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7073471775612657E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.7073471775612657E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7073471775612657E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.7073471775612657E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	288	288	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.262676537640251E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.262676537640251E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.262676537640251E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELY geom, ST_GeomFromText(CAST ('POINT(-2.262676537640251E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	288	288	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3299603524208027E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3299603524208027E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3299603524208027E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	288	288	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.0586782851804103E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.0586782851804103E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.0586782851804103E-4 3.621288573296032E-3)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	288	288	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0419558980502332E-4 4.361320704404276E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0419558980502332E-4 4.361320704404276E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0419558980502332E-4 4.361320704404276E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	287	287	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.062815109769211E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-5.062815109769211E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-5.062815109769211E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, name, geom	0	1	287	287	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.019251392771266E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.019251392771266E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.019251392771266E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.019251392771266E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	287	287	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.68956510921755E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.68956510921755E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.68956510921755E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.68956510921755E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	287	287	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5549929053745944E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5549929053745944E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5549929053745944E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	287	287	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.348829547669164E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.348829547669164E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.348829547669164E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.348829547669164E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	287	287	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1090600497739612E-4 4.294216552601648E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1090600497739612E-4 4.294216552601648E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1090600497739612E-4 4.2942165526101648E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1090600497739612E-4 4.294216552601648E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	287	287	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.107272567769425E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.107272567769425E-4 3.618503795898022E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.107272567769425E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SEV geom <>> ST_GeomFromText(CAST ('POINT(-3.107272567769425E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	287	287	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2511872505672233E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2511872505672233E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2511872505672233E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2511872505672233E-4' 3.621288573296003E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	286	286	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.179308304992'1077E-4 4.223968297309761E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.179308304992'1077E-4 4.223968297309761E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.179308304992'1077E-4 4.223968297309761E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.179308304992'1077E-4 4.223968297309761E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	286	286	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0118669103140802E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0118669103140802E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0118669103140802E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	286	286	0	0,00
(MTH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.egz WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5367571051069684E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5367571051069884E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.from WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5367571051069684E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5367571051069684E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	286	286	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.348645310330488E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.348645310330489E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.348645310330489E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.348645310330489E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	286	286	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7457052401931694E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7457052401931694E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7457052401931694E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7457052401931694E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	285	285	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.034792247186534E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.034792247186534E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-6.034792247186534E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.034792247186534E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	285	285	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9553720275066647E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9553720275066647E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9553720275066647E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9553720275066647E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	285	285	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1847880282252368E-4 4.2184885742273855E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1847880282252368E-4 4.2184885742273855E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1847880282252386E-4 4.218485742273855E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1847880282252368E-4 4.2184885742273855E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	285	285	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.500653979249065E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.500653979249065E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.500653979249065E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st_geom.	0	1	285	285	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8226862857603607E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8226862857603607E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8226862857603607E-4.3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8226862857603607E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	285	285	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.919268901648763E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.919268901648763E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.919268901648763E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the control of the c	0	1	285	285	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.548354520835813E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.548354520835813E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.548354520835813E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	285	285	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2632155268107227E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2632155268107227E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2632155268107227E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.7671704012017736E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.7671704012017736E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.7671704012017736E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.7671704012017736E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	284	284	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.2225172701582567E-4 4.180759332229056E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2225172701582567E-4 4.180759332229056E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.2225172701582567E-4 4.180759332229056E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2225172701582567E-4 4.180759332229056E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9816835167676643E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9816835167676643E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9816835167676643E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.948895008897302E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.948895008897302E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.948895008897302E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.948895008897302E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.268609992797291E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.268609992797291E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.268609992797291E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.268609992797291E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.9084708211119234E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.9084708211119234E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.9084708211119234E-4 3.621288573296032E-3") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.290169559616159E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.290169559616159E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.290169559616159E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.290169559616159E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.696037553545062E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.696037553545062E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.696037553545062E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.696037853545062E-4)' AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.696037853545062E-4)' AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.696037853545062E-4)' AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2965430238515566E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2965430238515566E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2966430238515566E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2965430238515566E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8933791243387157E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8933791243387157E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8933791243387157E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8933791243387157E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8604246762570824E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8604246762570824E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8604246762570824E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8604246762570824E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.662454284764546E-5 4.537031173838751E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.662454284764546E-5 4.537031173838751E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-8.662454284764546E-5 4.537031173838751E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.662454284764546E-5 4.537031173838751E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4666032556990847E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4666032556990847E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4666032556990847E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.196749344349581E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.196749344349581E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.196749344349581E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.196749344349581E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	284	284	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.050773110680158E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.050773110680158E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.050773110680158E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.050773110680158E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.836165589304004E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.836165589304004E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.836165589304004E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.836165589304004E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	284	284	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.382166193273701E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.382166193273701E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.382166193273701E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.382166193273701E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	283	283	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.778848499895328E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.778848499895328E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.778848499895328E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.778848499895328E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	283	283	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.69918165703948E-4-3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.69918165703948E-4-3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.69918165703948E-4-3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.69918165703948E-4-3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	283	283	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.233746211209751E-4 4.169530391177814E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.233746211209751E-4 4.169530391177814E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.233746211209751E-4 4.169530391177814E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.233746211209751E-4 4.169530391177814E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	283	283	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0378327963069855E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0378327963069855E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0378327963069855E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	283	283	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.641235746931919E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.641235746931919E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-6.41235746931919E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.641235746931919E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	283	283	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8422787075178686E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8422787075178686E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8422787075178686E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8422787075178686E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	283	283	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.307336530106545E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.307336530106545E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.307336530106545E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.307336530106545E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	283	283	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.614102051069659E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.614102051069659E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.614102051069659E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.614102051069659E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	283	283	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.8708359849891665E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8708359849891665E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.8708359849891665E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	283	283	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.864372689225357E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.864372689225357E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.864372689225357E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.864372689225357E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	282	282	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.50864898527773E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.50864898527773E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.50864898527773E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.50864898527773E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	282	282	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3685924839197936E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3685924839197936E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3685924839197936E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	282	282	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.628663907236098E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.628663907236098E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.628663907236098E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	282	282	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4392853224981486E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4392853224981486E-4 3.621288573296032E-4)' AS TEXT), 4326), True) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4392853224981486E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4392853224981486E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	282	282	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1625189577427754E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1625189577427754E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1625189577427754E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	282	282	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.79465427461398E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.79465427461398E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.79465427461398E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	282	282	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.832392665110702E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.832392665110702E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.832392665110702E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.832392665110702E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	282	282	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3896883188147512E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3896983188147512E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3896883188147512E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3896983188147512E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	282	282	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.712759940675238E-5 4.5320006083068257E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.712759940675238E-5 4.5320006083068257E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.712759940675238E-5 4.5320006083068257E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom, as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.712759940675238E-5 4.5320006083068257E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	282	282	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6528102912515076E-4 3.7504663111149187E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6528102912515076E-4 3.7504663111149187E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6528102912515076E-4 3.7504663111149187E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6528102912515076E-4 3.7504663111149187E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6528102912515076E-4 3.7504663111149187E-4)' AS TEXT), 4326), LIMIT 50), gid, code, na	0	1	281	281	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.648417694923024E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.648417694923024E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.648417694923024E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.648417694923024E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	281	281	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.97603785332365E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.9760378533233265E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.976037853323265E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.976037853323265E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	281	281	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.201604821165678E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.201604821165678E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.201604821165678E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.201604821165678E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	281	281	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.581946938180031E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.581946938180031E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.581946938180031E-4.3621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.581946938180031E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	281	281	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.2445397174647385E-4 3.618503795898022E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.2445397174647385E-4 3.618503795898022E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.2445397174647385E-4 3.618503795898022E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	281	281	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3250287669218486E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3250287669218486E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3250287669218486E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	280	280	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6070951918535266E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6070951918535266E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6070951918535266E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	280	280	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6281066209382206E-4 3.775169981478541E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6281066209382206E-4 3.775169981478541E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6281066209382206E-4 3.775169981478541E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	280	280	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4175552411861597E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4175552411861597E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4175552411861597E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	280	280	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.832410962238106E-5 4.6200355061332893E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.832410962238106E-5 4.6200355061332983E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.832410962238106E-5 4.6200355061332983E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	280	280	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.457790617351011E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.457790617351011E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.457790617351011E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.457790617351011E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	280	280	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.632611920204372E-4 3.618503795898022E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.632611920204372E-4 3.618503795898022E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.632611920204372E-4 3.618503795898022E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.632611920204372E-4 3.618503795898022E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	280	280	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.64303695/178201E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.64303695/178201E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.64303695178201E-4 3.621288573296032E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.64303695178201E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	280	280	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.693867874017621E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.693867874017621E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.693867874017621E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.693867874017621E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	280	280	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.365717875010611E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.365717875010611E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.365717875010611E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.365717875010611E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	280	280	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.715077263286544E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.715077263286544E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.715077263286544E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.715077263286544E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	280	280	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.10999038503104E-5 4.5922775638668407E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.10999038503104E-5 4.5922775638668407E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.10999038503104E-5 4.5922775638668407E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.10999038503104E-5 4.5922775638668407E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	280	280	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7515397152580)44E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7515397152580)44E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7515397152580)44E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	279	279	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.1640460937257784E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1640460937257784E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.1640460937257784E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	279	279	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.738986172689678E-5 4.629377985141874E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.738986172689678E-5 4.629377985141874E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-7.738986172689678E-5 4.629377985141874E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.738986172689678E-5 4.629377985141874E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	279	279	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.646284609650393E-5.4.538648141376592E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.646284609650393E-5.4.538648141376592E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.646284609650393E-5.4538648141376592E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.646284609650393E-5.4538648141376592E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	279	279	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1172484417050024E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1172484417050024E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1172484417050024E-4.3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	279	279	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.986921191106665E-5 4.604584483191829E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.986921191106665E-5 4.604584483191829E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-7.986921191106665E-5 4.604584483191829E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.986921191106665E-5 4.604584483191829E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	279	279	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.658308311612042E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.658308311612042E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist 'FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.658308311612042E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.658308311612042E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	279	279	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4125246755950896E+4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4125246755950896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4125246755950896E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	279	279	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4173664295656325E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4173664295656325E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4173664295656325E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4173664295656325E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	279	279	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7195642654252905E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7195642552905E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7195642654252905E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.719564265425905E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	279	279	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.243996154012416E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.243996154012416E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('POINT(-3.243996154012416E-4) as (21288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates of the state	0	1	278	278	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.48761925906563E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.48761925906563E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.48761925906563E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.48761925906563E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	278	278	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.559924490873549E-4' 3.843352111554915E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.559924490873549E-4' 3.843352111554915E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.559924490873549E-4' 3.843352111554915E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.559924490873549E-4' 3.843352111554915E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	278	278	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3953577051047037E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3953577051047037E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3953577051047037E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	278	278	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.923940141126184E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.923940141126184E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.923940141126184E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	278	278	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2525210006478487E-4 4.150755601701461E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2525210006478487E-4 4.150755601701461E-4)" AS TEXT), 4326), True) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.25252100006478487E-4 4.150755601701461E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2525210006478487E-4 4.150755601701461E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	278	278	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.500025158550182E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.500025158550182E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.500025158550182E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.500025158550182E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	278	278	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.298788812061855E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.298788812061855E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFIMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.298788812061855E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.298788812061855E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	277	277	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2822689593977566E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2822689593977596E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2822689593977596E-4 3.61805795898022E-4)' AS TEXT), 4326). IMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2822689593977596E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	277	277	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-(2.280463180265817E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-(2.280463180265817E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-(2.280463180265817E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and calculated or control of the control of the calculated or calculated	0	1	277	277	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9840191365063747E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9840191365063747E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9840191365063747E-4.3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	277	277	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8903340009364116E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8903340009364116E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8903340009364116E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	277	277	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6225507890222336E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6225507890222336E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6225507890222336E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6225507890222336E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	277	277	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.361855119288897E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.36185511928897E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.361855119288897E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st. pistance(geom, ST_GeomFromText(CAST ('POINT(-3.361855119288897E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	277	277	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.082748560512962E-4') AS 1254. AS 1	0	1	276	276	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.832114021961764E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.832141021961764E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.832114021961764E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.832114021961764E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	276	276	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as ype, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.207008435715947E-5 4.5825757587670163E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.207008435715947E-5 4.5825757587670163E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.from WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.207008435715947E-5 4.5825767587670163E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, as varchar) as upe, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.207008435715947E-5 4.5825767587670163E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	275	275	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.28468983638303E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.28468983638303E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.2846898363303E-4') AS 21288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.28468983638303E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	275	275	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.00245289695823E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.00245289695823E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.00245289695823E-4) Se1248573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.00245289695823E-4) 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	275	275	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.713105543943333E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.713105543943333E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.713105543943333E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.713105543943333E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	275	275	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8352581254561825E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8352581254561825E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8352581254561825E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8352581254561825E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	275	275	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3416475996780593E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3416475996780593E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3416475996780593E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3416475996780593E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	275	275	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.564779967689646E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.564779967689646E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.564779967689646E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st_geom.	0	1	275	275	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0440311717674104E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0440311717674104E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.044031171674104E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0440311717674104E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	275	275	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.498663962778449E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.498663962778449E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.498663962778449E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and candidates or code and candidates or can	0	1	275	275	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7936752763651513E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7936752763651513E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7936752763651513E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	275	275	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1910808094959244E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1910808094959244E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1910808094959244E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	275	275	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.123442242883577E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.123442242883577E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.123442242883577E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.123442242883577E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	275	275	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.8347282848494134E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8347282848494134E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.83472828448494134E-4 3.621288573296032E-X)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	275	275	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.6910876709187016E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.6910876709187016E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.6910876709187016E-4 3.621288573296032E-3") X TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	275	275	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.050768536398307E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.050768536398307E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.050768536398307E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.050768536398307E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	275	275	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.36472972819808E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.36472972819808E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.36472972819808E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.36472972819808E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	274	274	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0584042163133226E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0584042163133226E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0584042163133226E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	274	274	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.526058004662243E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.526058004662243E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.526058004662243E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.526058004662243E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	274	274	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.322414504034199E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.322414504034199E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.322414504034199E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.322414504034199E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	274	274	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.887738035176168E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.887738035176168E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.887738035176168E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.887738035176168E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	274	274	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.810388514931626E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.810388514931626E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.810388514931626E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.810388514931626E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	274	274	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.701058970572429E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.701058970572429E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.701058970572429E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.701058970572429E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	274	274	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3227692558659952E-4 4.080507346536796E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3227692558659952E-4 4.080507346536796E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3227692558659952E-4 4.080507346536796E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	274	274	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1280282251144376E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1280282251444376E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1280282251144376E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	273	273	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.400563359470746E-4 4.002713242947021E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.400563359470746E-4 4.002713242947021E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.400563359470746E-4 4.002713242947021E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.400563359470746E-4 4.002713242947021E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	273	273	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.7029454326690793E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7029454326690793E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.7029454326690793E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	273	273	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.297994051151702E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.297994051151702E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.297994051151702E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.297994051151702E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	273	273	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8965232278331338E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.896523227831338E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8965232278331338E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	273	273	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.902304465624458E-5 4.5130461557848486E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST) ("POINT(-8.902304465624458E-5 4.5130461557848486E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.902304465624458E-5 4.5130461557848486E-X)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	273	273	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.889170765348908E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.889170765348908E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.889170765348908E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.889170765348908E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, structured or candidate or candidates or candidate	0	1	273	273	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.517268237723426E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.517268237723426E-4 3.62128573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.517268237723426E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.517268237723426E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	273	273	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6617880183745544E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6617890183745544E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6617890183745544E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	273	273	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.974425460093702E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.974425460093702E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.974425460093702E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, goom	0	1	273	273	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.3435203389291562E-4 4.059756263431354E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3435203389291562E-4 4.059756263431354E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.3435203389291562E-4 4.059756263431354E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	273	273	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-5.724963305693711E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.724963305693711E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.724963305693711E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.724963305693711E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	273	273	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6353022917748795E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6353022917748795E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6353022917748795E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	272	272	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-5.714902174511573E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.714902174511573E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.714902174511573E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.714902174511573E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	272	272	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.584462220975566E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.584462220975566E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.584462220975566E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.584462220975566E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	272	272	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8386762978176877E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8386762978176877E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8386762978176877E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8386762978176877E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	272	272	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1610725047244815E-4 4.2422040976492403E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1610725047244815E-4 4.2422040976492403E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1610725047244815E-4 4.2422040976492403E-4') AS TEXT), 4326), tIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1610725047244815E-4 4.2422040976492403E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	272	272	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1461604710080975E-4 4.2571161313266145E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1461604710080975E-4 4.2571161313266145E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1461604710080975E-4 4.2571161313266145E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1461604710080975E-4 4.2571161313266145E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	272	272	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.453209209402001E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.453209209402001E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.453209209402001E-4' 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.453209209402001E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	272	272	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.28738935651724E-4.3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.28738935651724E-4.3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.28738935651724E-4.3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	272	272	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4603911573931062E-4 3.94288544937455E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4603911573931062E-4 3.942885444937455E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4603911573931062E-4 3.942885444937455E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	272	272	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.650582800168614E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.650582800168614E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.650582800168614E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.650582800168614E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	271	271	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.822416791175124E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.822416791175124E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.822416791175124E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.822416791175124E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	271	271	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.238705242399814E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.238705242399814E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.238705242399814E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and candidates or the	0	1	271	271	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.478824917844961E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.478824917844961E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.478824917844961E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and complete the control of the control of the cast of the control	0	1	271	271	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.033251388357976E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.033251388357976E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.033251388357976E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and the control of the	0	1	271	271	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7995950086766374E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.7995950086766374E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7995950086766374E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	271	271	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8181947093397627E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8181947093397627E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8181947093397627E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8181947093397627E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	271	271	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.103319980519299E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.103319980519299E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.103319980519299E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.103319980519299E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	271	271	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5709737688682189E-4 3.83230283354929FE-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5709737688682189E-4 3.832302833549297E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5709737688682189E-4 3.83230283354929FE-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	271	271	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1776913374806926E-4 4.227561558476692E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1776913374806926E-4 4.227561558476692E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1776913374806926E-4 4.227561558476692E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	271	271	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4932694967918805E-4 3.910007105552649E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4932694967918805E-4 3.910007105552649E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4932694967918805E-4 3.910007105552649E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4932694967918805E-4 3.91000710552649E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	270	270	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7995188999937785E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7995188999937785E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7995188999937785E-4 3.621288573296032E-X)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	270	270	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9092838791494824E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9092838791494824E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9092838791494824E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9092838791494824E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	270	270	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4729767199344824E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4729767199344824E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4729767199344824E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4729767199344824E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	270	270	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.666945861185144E-5 4.536582016288301E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.666945861185144E-5 4.536582016288301E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.666945861185144E-5 4.536582016288301E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.666945861185144E-5 4.536582016288301E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	270	270	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.79530139244027E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.79530139244027E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.79530139244027E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	270	270	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.12623616882805E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.12623616882805E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.12623616882805E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	270	270	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.518880630952989E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.518880630952989E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-3.518880630952989E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, arme, geom	0	1	269	269	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2415661284634422E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.241566128463442E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.24156612846334422E-4 3.621288573296032E-4)' AS TEXT), 4326), true) SelECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2415661284634422E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	269	269	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.121385266293805E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.121385266293805E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.121385266293805E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	269	269	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.52321541572602E-5.4.550955060828802E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.52321541572602E-5.4.550955060828802E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.52321541572602E-5.4.550955060828802E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.52321541572602E-5.4.550955060828802E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	269	269	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.51753315802681E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.51753315802681E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.51753315802681E-4")) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.51753315802681E-4")) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.51753315802681E-4")) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	269	269	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.479889173340351E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.479889173340351E-4.3.62128573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.479889173340351E-4.3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.479889173340351E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	269	269	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.562983337121407E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.562983337121407E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.562983337121407E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.562983337121407E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	269	269	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.3681387519958823E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3681387519958823E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.3681387519958823E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	269	269	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.0379317763991E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.0379317763991E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.0379317763991E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as Closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.0379317763991E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FROM sp	0	1	269	269	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.170253617749906E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.170253617749906E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.170253617749906E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.170253617749906E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	269	269	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.9890588506611465E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.9890588506611465E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.9890588506611465E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.9890588506611465E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	268	268	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.486460597759978E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.486460597759978E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.486460597759978E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.486460597759978E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	268	268	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9313870094206737E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9313870094206737E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9313870094206737E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9313870094206737E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	268	268	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.3682377320879975E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.3682377320879975E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.3682377320879975E-4 3.62128873296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	268	268	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.810383940649775E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.810383940649775E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.810383940649775E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.810383940649775E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	268	268	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.476745069845933E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.476745069845933E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.476745069845933E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.476745069845933E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	268	268	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.476399466577839E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.476399466577839E-4.3.621288573296032E-4)' AS TEXT), 4326). true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.476399466577839E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.476399466577839E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	268	268	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3880006683386265E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3880006683386265E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3880006683386265E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	268	268	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.534161139346724E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.534161139346724E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.534161139346724E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.534161139346724E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	268	268	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.145545373154768E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.145545373154768E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.145545373154768E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.145545373154768E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	268	268	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4007567453731235E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.4007567433731235E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4007567453731235E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	268	268	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.9853711837144056E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.9853714837144056E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.9853711837144056E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	268	268	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.602433100939807E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.602433100939807E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-6.602433100939807E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.602433100939807E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	267	267	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.741132980807862E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.741132980807862E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.741132980807862E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.741132980807862E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	267	267	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3078617964314625E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3078617964314625E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3078617964314625E-4-3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3078617964314625E-4-3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	267	267	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.400927259866245E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.400927259866245E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.400927259866245E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.400927259866245E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	267	267	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.361500367457101E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.361500367457101E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.361500367457101E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SEV geom <> ST_GeomFromText(CAST ('POINT(-4.361500367457101E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	267	267	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.740485862981573E-4 3.6627907393796947E-4)) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.740485862981573E-4 3.66279073939796947E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.740485862981573E-4 3.6627907393796947E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.740485862981573E-4 3.6627907393796947E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	267	267	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2447056576760088E-4 4.158570944758619E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.24470565760088E-4 4.158570944758619E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2447056576760088E-4 4.158570944758619E-4)' AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2447056576760088E-4 4.158570944758619E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	267	267	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.54297835197665E-5 4.550955060828802E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.5429783519766E-5 4.550955060828802E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.54297835197665E-5 4.550955060828802E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.54297835197665E-5 4.550955060828802E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	267	267	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.353505361428437E-4.36.21288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.353505361428437E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.353505361428437E-4.3621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, goom	0	1	266	266	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.001011018221788E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.001011018221788E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.001011018221788E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped candidates or the control of the contro	0	1	266	266	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.653008251435738E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.653008251435736E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.653008251435736E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.653008251435736E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	266	266	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.609529791684352E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.609529791684352E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.609529791684352E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the control of th	0	1	266	266	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.325410964444753E-5 4.4707355059322654E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.325410964444753E-5 4.4707355059322654E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.325410964444753E-5 4.4707355059322654E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	266	266	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2789360442828141E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2789360442828141E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2789360442828141E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	266	266	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.690732919086905E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.690732919086905E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.690732919086905E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.690732919086905E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	266	266	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.899685628454956E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.899685628454956E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.899685628454956E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, structured to the control of	0	1	266	266	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.390237307985223E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.390237307985223E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.390237307985223E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.390237307985223E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	266	266	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.371107766715328E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.371107766715328E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.371107766715328E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.371107766715328E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	266	266	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4709014462173042E-4 3.9323751561959325E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4709014462173042E-4 3.9323751561959325E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4709014462173042E-4 3.9323751651959325E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4709014462173042E-4 3.9323751561959325E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	266	266	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3046370099723353E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3046370099723353E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3046370099723353E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	266	266	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.6437464554456034E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6437464554456034E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.6437464554456034E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	266	266	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.74992732202853E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.74992732202853E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.74992732202853E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.74992732202853E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	266	266	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.061373231032768E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.061373231032768E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.061373231032768E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.061373231032768E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	266	266	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.449252047870024E-4") AS 125.4545294965E-4)" AS 125.4545459459E6.45" AS 125.4545459459E6.45" AS 125.45459459E6.45" AS 125.45459E0.455E0.45459E0.	0	1	265	265	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.013142848839253E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.013142848839253E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.013142848839253E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.01314284839253E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	265	265	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.78163327772760)986E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7816332772760)986E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7816332772760)986E-4 3.621288573296032E-30) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7816332772760)986E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	265	265	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.538198983843411E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.538198983843411E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.538198983843411E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.538198983843411E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	265	265	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4728868884060696E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4728868884060696E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4728868884060696E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4728868884060696E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	265	265	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.243910896765853E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2439108967658553E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2439108967658553E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	265	265	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.683092664890038E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.683092664890038E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.683092664890038E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.683092664890038E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	265	265	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.988061555284913E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.988061555284913E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.988061555284913E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.988061555284913E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	265	265	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0299276218067337E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0299276218067337E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0299276218067337E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	265	265	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.890626366930905E-5 4.514213965645018E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.890626366930905E-5 4.514213965645018E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.890626366930905E-5 4.514213965645018E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.890626366930905E-5 4.514213965645018E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	265	265	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.2712059585575348E-4 4.132070643811532E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2712059585575348E-4 4.132070643811532E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.2712059585575348E-4 4.132070643811532E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	265	265	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1984424205438536E-4 4.204834181869382E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1984424205438536E-4 4.204834181869382E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1984424205438536E-4 4.204834181869382E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	264	264	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6742846008238154E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6742846008238154E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6742846008238154E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	264	264	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.856737009310342E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.856737009310342E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.856737009310342E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, pame, geom set compared to the cast of the cast	0	1	264	264	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.619047359414167E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.619047359414167E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.619047359414167E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.619047359414167E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	264	264	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3413643822472696E-4 4.061912220106068E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3413643822472696E-4 4.061912220106068E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3413643822472696E-4 4.061912220106068E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3413643822472696E-4 4.061912220106068E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	264	264	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6776037930932064E-4 3.725672809292096E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6776037930932064E-4 3.725672809292096E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6776037930932064E-4 3.725672809292096E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	264	264	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.941542546413075E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.941542546413075E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.941542546413075E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.941542546413075E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	264	264	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.86184825786612E-4.3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.86184825786612E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.86184825786612E-4.3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.86184825786612E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	264	264	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4039769575504E-4.3.9992996448257143E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4039769575504E-4.3.9992996448257143E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.4039769575504E-4.3.9992996448257143E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4039769575504E-4.3.9992996448257143E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	264	264	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6171471744719625E-4 3.7861294278977356E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.617147174719625E-4 3.7861294278977356E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6171471744719625E-4 3.7861294278977356E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6171471744719625E-4 3.7861294278977356E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	264	264	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.938209631298131E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.938209631298131E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.938209631298131E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.938209631298131E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	264	264	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.373093208904094E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.373093208904094E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.373093208904094E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.373093208904094E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	264	264	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.838222565893777E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.838222565893777E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.838222565893777E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.838222565893777E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	263	263	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.07054519549449E-4', 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.07054519549449E-4', 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.07054519549449E-4'), ST_EXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.07054519549449E-4'), AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	263	263	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.634314144962348E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.634314144962348E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.634314144962348E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.634314144962348E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	263	263	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.898607650114013E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.898607650114013E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.898607650114013E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.898607650114013E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	263	263	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1503825528434593E-4 4.25289404956361E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1503825528434593E-4 4.25289404956361E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.1503825528434593E-4 4.25289404956361E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1503825528434593E-4 4.25289404956361E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	263	263	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0375541531580474E-4 4.367698742841995E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0375541531580474E-4 4.367698742841995E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0375541531580474E-4 4.367698742841995E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	263	263	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8800079494508886E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8800079494508886E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8800079494508886E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	262	262	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.347868846547739E-5 4.468489717671128E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.347868846547739E-5 4.468489717671128E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-9.347868846547739E-5 4.468489717671128E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.347868846547739E-5 4.468489717671128E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	262	262	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.701602534024752E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.701602534024752E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.701602534024752E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.701602534024752E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	262	262	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7162404988740484E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7162404988740484E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7162404988740484E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7162404988740484E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	262	262	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.830061619653843E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.830061619653843E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.830061619653843E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.830061619653843E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	262	262	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.555347657206391E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.555347657206391E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.555347657206391E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.555347657206391E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	262	262	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.073495913086531E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.073495913086531E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.073495913086531E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.073495913086531E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	262	262	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.7830705817306895E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7830705817306895E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.7830705817306895E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	262	262	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.640063362780713E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.640063362780713E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.640063362780713E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.640063362780713E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	261	261	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1794072850842227E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.1794072850842227E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1794072850842227E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.1794072850842227E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	261	261	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.460674374823896E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.460674374823896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.460674374823896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.460674374823896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	261	261	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.102430813798881E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.102430813798881E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.102430813798881E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.102430813798881E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	261	261	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2477599296420151E-4 4.155516672728561E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2477599296420151E-4 4.155516672728561E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2477599296420151E-4 4.155516672728561E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2477599296420151E-4 4.155516672728561E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	261	261	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.73629122683732E-5 4.629647479646699E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.73629122683732E-5 4.629647479646699E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-7.73629122683732E-5 4.629647479646699E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.73629122683732E-5 4.629647479646699E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	261	261	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.929051389681963E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.929051389681963E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.929051389681963E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.929051389681963E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	261	261	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.357183879811475E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.357183879811475E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.357183879811475E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.357183879811475E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	261	261	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2601566805628647E-4 4.14311992181715E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2601566805628647E-4 4.14311992181715E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.2601566805628647E-4.14311992181715E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2601566805628647E-4.4.14311992181715E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	261	261	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.608792842329651E-4 3.7944837600917665E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.608792842329651E-4 3.7944837600917665E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.608792842329651E-4 3.7944837600917665E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.2464261795613904E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.2464261795613904E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.2464261795613904E-4 3.621288573296032E-4)" AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.2464261795613904E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.490323353481691E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.490323353481691E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.490323353481691E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.490323353481691E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	260	260	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.477562702165343E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.477562702165343E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.477562702165343E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.477562702165343E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez.WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0176207024142966E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.0176207024142966E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.frmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0176207024142966E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.0176207024142966E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.876225876693884E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.876225876693884E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.876225876693884E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.876225876693884E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.038551448534282E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.03855144853428E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.03855144853428E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the control of the cont	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.988075278130466E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.988075278130466E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.988075278130466E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.988075278130466E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.767557173006529E-5 4.5265208850972283E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.767557173006529E-5 4.5265208850972283E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.767557173006529E-5 4.5265208850972283E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.676974972394323E-4) 3.7263016300153923E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.676974972394323E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.676974972394323E-4-3.7263016300153932E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.676974972394323E-4) 3.7263016300153932E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0806732867957842E-4 4.3245796092204915E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0806732867957842E-4 4.3245796092204915E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0806732867957842E-4 4.3245796092204915E-4 AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0806732867957842E-4 4.3245796092204915E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.949016860398673E-5 4.508374916344172E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.949016860398673E-5 4.508374916344172E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.949016860398673E-5 4.508374916344172E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.949016860398673E-5 4.508374916344172E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.882366440598856E-5 4.415039958226504E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.882366440598856E-5 4.415039958226504E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.882366440598856E-5 4.415039958226504E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.882366440598856E-5 4.415039958226504E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2692342392143232E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2692342392143232E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2692342392143232E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3152279817612427E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3152279817612427E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3152279817612427E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.220199947546952E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.22019947546952E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.220199947546952E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	260	260	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.27077509804288E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.27077509804288E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.27077509804288E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.27077509804288E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.9424317131334927E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.942431713133492TE-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.942431713133492TE-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	260	260	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.246776357111335E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.246776357111335E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.246776357111335E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0680161898534014E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.0680161898534014E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0680161898534014E-4 3.621288573296032E-3)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.0680161898534014E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.187141945091353E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.187141945091353E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.187141945091353E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.187141945091353E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1075329137909581E-4 4.295743688553066E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1075329137909581E-4 4.295743688553066E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1075329137909581E-4 4.295743688553066E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1075329137909581E-4 4.295743688553066E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4865458550065376E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4865458550065376E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.486545850066376E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4865458550065376E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9352451908605363E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9352451908605363E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9352451908605363E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8854739498384637E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8854739498384637E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8854739498384637E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8854739498384637E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.674379006634078E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.674379006634078E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.674379006634078E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.579063180707146E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.579063180707146E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.579063180707146E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7895338774944988E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.789533877494498E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7895338774944988E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1514605311844025E-4 4.2518160711626417E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1514605311844025E-4 4.2518160711626417E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1514605311844025E-4 4.2518160711626417E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1514605311844025E-4 4.2518160711626417E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	259	259	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.1963762953903786E-4 4.2069003069576726E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1963762953903786E-4 4.2069003069576726E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.1963762953903786E-4 4.2069003069576726E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1963762953903786E-4 4.2069003069576726E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1192110124845118E-4 4.284065589951374E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1192110124845118E-4 4.284065589951374E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1192110124845118E-4 4.284065589951374E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-6.038744834436659E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.038744834436659E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-6.038744834436659E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.147166914948034E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.147166914948034E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.147166914948034E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.147166914948034E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.079797842920922E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.079797842920922E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.079797842920922E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.079797842920922E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	259	259	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.527706992146616E-5 4.5505059031511306E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.527706992146616E-5 4.5505059031511306E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.527706992146616E-5 4.5505059031511306E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.527706992146616E-5 4.5505059031511306E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.645992243655902E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.645992243655902E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.645992243655902E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.645992243655902E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.6969267202654793E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.6969267202654793E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.6969267202654793E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.6969267202654793E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5327192606102815E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5327192606102815E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5327192606102815E-4 3.621288573296032E-X) X S TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5327192606102815E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.934445855668531E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.934445855668531E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.934445855668531E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the control of the	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0831033123447582E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0831033123447582E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0831033123447582E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0831033123447582E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.016821367222292E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.016821367222292E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.016821367222292E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.016821367222292E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4636296668977875E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.463629666897787785E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.463629666977875E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4636296666977875E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	258	258	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.4725275622924225E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4725275622924225E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.4725275622924225E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.826113606685588E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.826113606685588E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.82611360685588E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.82611360685568E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.197562402387139E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.197562402387139E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.197562402387139E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.197562402387139E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.61787954954812E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.617879549544812E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.617879549544812E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.617879549544812E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.7846875492421047E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7846875492421047E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.7846875492421047E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.476040140464191E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.476040140464191E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.476040140464191E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.476040140464191E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.567120161710208E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.567120161710208E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.567120161710208E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.567120161710208E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.58967702390531E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.58967702390531E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.58967702390531E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.58967702390531E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.831409092580023E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.831409092580023E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.831409092580023E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.831409092580023E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1757196181374807E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1757196181374807E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1757196181374807E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1757196181374807E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	258	258	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3475627577076943E-4 4.0557138447139734E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3475627577076943E-4 4.0557138447139734E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3475627577076943E-4 4.0557138447139734E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3475627577076943E-4 4.0557138447139734E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7829853244841284E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7829853244841284E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7829853244841284E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.598750008274918E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.598750008274918E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.598750008274918E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.598750008274918E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	257	257	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5186918193324628E-4 3.88458478300653E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5186918193324628E-4 3.88458478300653E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.5186918193324628E-4 3.88458478300653E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st. pistance(geom, ST_GeomFromText(CAST ('POINT(-1.5186918193324628E-4 3.88458478300653E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.3900667934921016E-4 3.618503795898022E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.3900667934921016E-4 3.618503795898022E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.3900667934921016E-4 3.618503795898022E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2324885698119834E-4 4.1707880326244065E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2324885698119834E-4 4.1707880326244065E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2324885698119834E-4 4.1707880326244065E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2324885698119834E-4 4.1707880326244065E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.687305598161697E-4 3.715971004192272E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.687305598161697E-4 3.715971004192272E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.687305598161697E-4 3.715971004192272E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.687305598161697E-4 3.715971004192272E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.889071785256793E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.889071785256793E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.889071785256793E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.889071785256793E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8707415791788034E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8707415791789034E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8707415791789034E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8707415791789034E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1246907357176409E-4 4.2785858666145545E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1246907357176409E-4 4.2785858666145545E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1246907357176409E-4 4.2785858666145545E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1246907357176409E-4 4.2785858666145545E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0491515688868916E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0491515688868916E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0491515688868916E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.049151568868916E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.275347357428187E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.275347357428187E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.275347357428187E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped candidates or distance (geom, ST_GeomFromText(CAST ('POINT(-3.275347357428187E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2275615585948796E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2275615585948796E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2275615585948796E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.2387859253645224E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.2387859253645224E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.2387859253465224E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.371381835582416E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.371381835582416E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.371381835582416E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.371381835582416E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.186858727660563E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.186858727660563E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.186858727660563E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT type, gid, code, name, geom as closest, name, geom as closest, st. Distance(geom, ST_GeomFromText(CAST ('POINT(-2.186858727660563E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	257	257	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.120217456424448E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.120217456424448E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.120217456424448E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.120217456424448E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.516729248552954E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.516729248552954E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-4.516729248552954E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3533165498079104E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3533165498079104E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3533165498079104E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4731472344276032E-4 3.930129367934795E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4731472344276032E-4 3.930129367934795E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4731472344276032E-4 3.930129367934795E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	257	257	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.109617336071839E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.109617336071839E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.109617336071839E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.109617336071839E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	256	256	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.147544538189089E-5 4.488522148594073E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.147544538189089E-5 4.488522148594073E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.147544538189089E-5 4.488522148594073E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.147544538189089E-5 4.488522148594073E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	256	256	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.204021123869097E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.204021123869097E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.204021123869097E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.204021123869097E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	256	256	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3658929637855835E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3658929637855835E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3658929637855835E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	256	256	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.069462642871695E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.069462642871695E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.069462642871695E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.069462642871695E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	256	256	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.624607765612006E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.624607765612006E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.624607765612006E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopped candidates or	0	1	256	256	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.2192970579809806E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.2192970579809806E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.2192970579809806E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	256	256	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.939646935752722E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.939646935752722E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.939646935752722E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.939646935752722E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	256	256	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.643575940952482E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.643575940952482E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.643575940952482E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.643575940952482E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	256	256	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.3262726854740614E-4 4.0770039168290664E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3262726854740614E-4 4.0770039168290664E-4)' AS TEXT), 4326), LIWI to as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.3262726854740614E-4 4.0770039168290664E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3262726854740614E-4 4.0770039168290664E-4)' AS TEXT), 4326), LIVIL by as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	256	256	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez.WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.905775875259565E-4.3.621288573296032E-4)" AS TEXT), 4325) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.905775875259565E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmow WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.905775875259565E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.905775875259565E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT ("POINT(-1.905775875259565E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) AS TEXT ("POINT(-1.905775875259565E-4.3.621288573296032E-4)" AS TEXT ("POINT(-1.90577587525956E-4.3.621288573296032E-4)" AS TEXT ("POINT(-1.9057587575955956E-4.3.621288573296032E-4)" AS TEXT	0	1	256	256	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.500554999156951E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.500554999156951E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.500554999156951E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, standard conditions are considered to the conditions of the condi	0	1	256	256	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.719115107783231E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.719115107783231E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.719115107783231E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.719115107783231E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, standard as the contract of the	0	1	256	256	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.128122630924TE-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.128122630924TE-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.128122630924TE-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.1281226309247E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as Company (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM sp	0	1	256	256	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.509452894751586E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.509452894751586E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.509452894751586E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, good	0	1	256	256	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.084545191081201E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.084545191081201E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.084545191081201E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, goom	0	1	255	255	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9031753352174697E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9031753352174697E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9031753352174697E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9031753352174697E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	255	255	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0440220232037079E-4 4.359254579188763E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0440220232037079E-4 4.359254579188763E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0440220232037079E-4 4.359254579188763E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	255	255	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.063349524657831E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.063349524657831E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.063349524657831E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.063349524657831E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	255	255	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.344347119812269E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.344347119812269E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.344347119812269E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.344347119812269E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	255	255	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.720727501012794E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7207275501012794E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.720727501012794E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.720727501012794E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	255	255	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.775609990590646E-4.3.627666611733751E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.775609990590646E-4.3.627666611733751E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.775609990590646E-4.3.627666611733751E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.775609990590646E-4.3.627666611733751E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	255	255	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.420075098263545E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.42007509826345E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-5.42007509826345E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates or AS ("POINT(-5.42007509826345E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.420075098263545E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	255	255	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5449226256287533E-4 3.858353976818712E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5449226256287533E-4 3.858353976818712E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5449226256287533E-4 3.858353976818712E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	255	255	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.760626422473254E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.760626422473254E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.760626422473254E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the c	0	1	255	255	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4922859242612004E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4922859242612004E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4922859242612004E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	255	255	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.866164745511745E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.866164745511745E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.866164745511745E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.866164745511745E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	255	255	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6535380920425055E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6535380920425055E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6535380920425055E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	255	255	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5235427218667085E-4 3.8797338805202287E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5235427218667085E-4 3.8797338805202287E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5235427218667085E-4 3.8797338805202287E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5235427218667085E-4 3.8797338805202287E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	255	255	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.878027081543974E-4 3.618503795898022E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.878027081543974E-4 3.618503795898022E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.878027081543974E-4 3.618503795898022E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.878027081543974E-4 3.618503795898022E-4") AS TEXT), 4326). LIWIT type as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	254	254	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4935389913771165E-4 3.9097376109206017E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4935389913771165E-4 3.9097376109206017E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4935389913771165E-4 3.9097376109206017E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4935389913771165E-4 3.9097376109206017E-4)" AS TEXT), 326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	254	254	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.7783140850067076E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7783140850067076E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.7783140850067076E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	254	254	0	0,00
(WITH candidates AS (SELECT cast("POINT(-3.088497778331327E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.088497778331327E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.088497778331327E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 30; Let Compare the strength of the stren	0	1	254	254	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.283890501191025E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.283890501191025E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.t/mo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.283890501191025E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.283890501191025E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	254	254	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4208652848918471E-4.3.9824113175192504E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4208652848918471E-4.3.9824113175192504E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4208652848918471E-4.3.9824113175192504E-4)' AS TEXT), 4326), tune) of the state	0	1	254	254	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.92015806836918E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.92015806836918E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.92015806836918E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.92015806836918E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	254	254	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8487465775635285E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8487465775635285E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8487465775635285E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	254	254	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.178967276005864E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.178967276005864E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.178967276005864E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.178967276005864E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	254	254	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.571602589567103E-4 3.831674012826001E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.571602589567103E-4 3.831674012826001E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.571602589567103E-4 3.831674012826001E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.571602589567103E-4 3.831674012826001E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6153551181855745E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.615355745E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6153551181855745E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0540923029495495-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.054092302949549E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.054092302949549E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.054092302949549E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.2284552995971483E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.2284552995971483E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.2284552995971483E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.643741881163752E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.643741881163752E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.643741881163752E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.643741881163752E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3819728073713232E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3819728073713232E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3819728073713232E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1392434433203771E-4 4.264033159028429E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1392434433203771E-4 4.264033159028429E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom RROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1392434433203771E-4 4.264033159028429E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1392434433203771E-4 4.264033159028429E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.014845073597229E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.014845073597229E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.014845073597229E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50; did. code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.014845073597229E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.766995312426801E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.766995312426801E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.766995312426801E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.766995312426801E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8879039753874376E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8879039753874376E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8879039753874376E-4 3.621288573296032E-4)' AS TEXT), 4326), true) so dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	253	253	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.093092909125891E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.093092909125891E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-(6.093092909125891E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.093092909125891E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.477108970241432E-4.3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.477108970241432E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-3.477108970241432E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0627968126418058E-4 4.3404797897124105E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0627968126418058E-4 4.3404797897124105E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0627968126418058E-4 4.3404797897124105E-4") AS TEXT), 4326), true) os dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS ("SELECT" cast("POINT(-1.0627968126418058E-4 4.3404797897124105E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.554099164372326E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.554099164372326E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.554099164372326E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.554099164372326E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopped to the control of the control	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7330298461233813E-4.3.670246756218382E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7330298461233813E-4.3.670246756218382E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.733029846123381E-4.3.670246756218382E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.467416313736643E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-5.467416313736643E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-5.467416313736643E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-5.467416313736643E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.771926897925756E-4 3.631349704487105E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.771926897925756E-4 3.631349704487105E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.771926897925756E-4 3.631349704487105E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.771926897925756E-4 3.631349704487105E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	253	253	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8019306284153483E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8019306284153483E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8019306284153483E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8019306284153483E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.871204459666517E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.871204459666517E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.871204459666517E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.871204459666517E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.995446037742098E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-5.995446037742098E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-5.995446037742098E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.092540197109865E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.092540197109865E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-3.092540197109865E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7382400747712742E-4 3.665036527640832E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7382400747712742E-4 3.665036527640832E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7382400747712742E-4 3.665036527640832E-4)' AS TEXT), 4326), true) SelLECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7382400747712742E-4 3.665036527640832E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.483496157322384E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.483496157322384E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.483496157322384E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	252	252	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.922498262389742E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.922498262389742E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.922498262389742E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.922498262389742E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2823450680806168E-4 4.1209315343467126E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2823450680806168E-4 4.1209315343467126E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/fmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.282345068006168E-4 4.1209315343467126E-4") AS TEXT), 4326), true) os dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2823450680806168E-4 4.1209315343467126E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.445843024072221E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.445843024072221E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.445843024072221E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.532440617461343E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.532440617461343E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.532440617461343E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1371864667306047E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1371864667306047E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1371864667306047E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1371864667306047E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.91819092330782E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.91819092330782E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.91819092330782E-4), SE1288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.91819092330782E-4), AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2700472972518825E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2700472972518825E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2700472972518825E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.988605118737236E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.988605118737236E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.988605118737236E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.988605118737236E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.476844049938047E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.476844049938047E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.476840409938047E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.476844049938047E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5020821351399546E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5020821351399546E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5020821351399546E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5020821351399546E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.844879247559964E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.844879247559964E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.844879247559964E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.844879247559964E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	252	252	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.775444050379376E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.775444050379376E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.775444050379376E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.775444050379376E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	251	251	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.888806864953408E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.888806864953408E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.888806864953408E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.888806864953408E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	251	251	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2413956139703213E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2413956139703213E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist IMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2413956139703213E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	251	251	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.048621728280122E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.04862172828012E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.048621728280122E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.04862172828012E-4'), AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	251	251	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(3.201954998715622E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(3.201954998715622E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(3.201954998715622E-4)', AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.201954998715622E-4)', AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	251	251	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.9424271388516413E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9424271388516413E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.9424271388516413E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	251	251	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2144370068830324E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2144370068830324E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2144370068830324E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2144370068830324E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	251	251	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4820451300222373E-4 3.61850379589802EE-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4820451300222373E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4820451300222373E-4 3.61850379589802E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	251	251	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(8.307619747537334E-5 4.572514627703165E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(8.307619747537334E-5 4.572514627703165E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(8.307619747537334E-5 4.572514627703165E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.307619747537334E-5 4.572514627703165E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	251	251	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.3004910368198314E-4 4.1027855654664344E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3004910368198314E-4 4.1027855654664344E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.3004910368198314E-4 4.102785565466464344-Y AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3004910368198314E-4 4.1027855654664544E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	251	251	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-9.505972336552778E-5 4.45267936863841E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.505972336552778E-5 4.45267936863841E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-9.505972336552778E-5 4.45267936863841E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.505972336552778E-5 4.45267936863841E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	251	251	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.7453459140795206E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7453459140795206E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7453459140795206E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.745459140795206E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	251	251	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.389348141264805E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.389348141264805E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.389348141264805E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.389348141264805E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.150131355385629E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.150131355385629E-4 3.621288573296032E-4)' AS TEXT), 4326), LIVIE up as dist FROM candidates ORDER BY dist LIMIT 1) LVIION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.150131355385629E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.150131355385629E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast/EEZ' as varchar) as type, gid. code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.69676535433606E-5 4.633600066904879E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.69676535433606E-5 4.633600066904879E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.69676535433606E-5 4.633600066904879E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.69676535433606E-5 4.633600066904879E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	250	250	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.4712607723309522E-4 3.932015830104684E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4712607723309522E-4 3.932015830104684E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.4712607723309522E-4 3.932015830104684E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.220725213871869E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.220725213871869E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.220725213871869E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.220725213871869E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0642432656600993E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.0642432656600993E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0642432656600993E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.0642432656600993E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6702376077634264E-4 3.733038994671582E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6702376077634264E-4 3.733038994671582E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6702376077634264E-4 3.733038994671582E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.090/2000030893026E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.090/2000030893026E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.090/2000030893026E-4 3.621288573296032E-3") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.194148804307484E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.194148804307484E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.194148804307484E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.194148804307484E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.807958489382652E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.807958489382652E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.807958489382652E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.807958489382652E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9773716034038907E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9773716034038907E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9773716034038907E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9773716034038907E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9874373088678807E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9874373088678807E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9874373088678807E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9874373088678807E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.21336360282394E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.21336360282394E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.21336360282394E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.21336360282394E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.360606626454833E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.360606626454833E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.360606626454833E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.36060626454833E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.644195613087663E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.644195613087663E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.644195613087663E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.644195613087663E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.317833096085189E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.317833096085189E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.317833096085189E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.317833096085189E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	250	250	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1764336960829255E-4 4.2268429062941945E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1764336960829255E-4 4.2268429062941945E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1764336960829255E-4 4.2268429062941945E-4), AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1764336960829255E-4 4.2268429062941945E-4))' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	250	250	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8137883901657258E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8137883901657258E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8137883901657258E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.406132914232287E-4 3.997143688151E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.406132914232287E-4 3.997143688151E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.nfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.406132914232287E-4 3.997143688151E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.406132914232287E-4 3.997143688151E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM spatia	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1130172113059385E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1130172113059385E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1130172113059385E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.601624617184099E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.601624617184099E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.601624617184099E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.167554097615598E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-4.167554097615696E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.167554097615696E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.519145551256374E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.519145551256374E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.519145551256374E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.519145551256374E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(3.5294807513056E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.5294807513056E-4.6.261288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom srOM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.5294807513056E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.5294807513056E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom srOM sp	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.547721125855077E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.547721125855077E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.547721125855077E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.547721125855077E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.943429008509727E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.943429008509727E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.943429008509727E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and calculated the control of the control of the calculated as a stopped calculated as a	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.229452594973383E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.229452594973383E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.229452594973383E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.229452594973383E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.784450074629827E-5 4.4248315949127514E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-9.784450074629827E-5 4.4248315949127514E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.784450074629827E-5 4.42483159449127514E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0665743111169589E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.066574311169589E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0665743111169589E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0665743111169589E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	249	249	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.225481710595851E-4 4.1777948917854214E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.225481710595851E-4 4.1777948917854214E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.225481710595851E-4 4.1777948917854214E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.225481710595851E-4 4.1777948917854214E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8170268994704074E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8170268994704074E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8170268994704074E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6166081853014906E-4 3.7866684170346083E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6166081853014906E-4 3.7866684170346083E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6166081853014906E-4 3.7866684170346083E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-1.6166081853014906E-4 3.7866684170346083E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2757066835418353E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2757066835418353E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2757066835418353E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.801310956280167E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.801310956280167E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.801310956280167E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.801310956280167E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.109428524451311E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.109428524451311E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.109428524451311E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.109428524451311E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7260275611891E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7260275611891E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.7260275611891E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as Closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7260275611891E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM sp	0	1	249	249	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.988070703848616E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.988070703848616E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.988070703848616E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.988070703848616E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	248	248	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2174014473206268E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2174014473206268E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2174014473206268E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	248	248	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.004514447829855E-4 3.618503795898022E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.00451444782985E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.004514447829855E-4 3.618503795898022E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.004514447829855E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	248	248	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.64393526706613E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.64393526706613E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.64393526706613E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.64393526706613E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	248	248	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1574838178698544E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.1574838178698544E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1574838178698544E-4 3.621288573296032E-3") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	248	248	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.608002655701349E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.608002655701349E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.608002655701349E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.608002655701349E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	248	248	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.216516854882062E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.216516854882062E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.216516854882062E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.216516854882062E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	248	248	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3881666085498965E-4 4.0151099938584323E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3881666085498965E-4 4.0151099938584323E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3881666085499865E-4 4.0151099938584323E-4") AS TEXT), 4326), true) of the complex	0	1	248	248	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8110)880185952185E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.8110)80185952185E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8110)80185952185E-4 3.621288573296032E-4")" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.8110)80185952185E-4 3.621288573296032E-4")" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	248	248	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8788309910178305E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.8788309910178305E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.87883099101178305E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.8788309910178305E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	248	248	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.606295856661522E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.606295856661522E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.606295856661522E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.606295856661522E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	248	248	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.547725700136929E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.547725700136929E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.547725700136929E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.547725700136929E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	248	248	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4640833986216985E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4640833986216985E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4640833986216985E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4640833986216985E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	247	247	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8244874906104504E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8244874906104504E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8248474906104504E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8244874906104504E-4' 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	247	247	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-(2.69934759725075E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-(2.69934759725075E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-(2.69934759725075E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-(2.69934759725075E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	247	247	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0927198601666877E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.0927198601666877E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0927198601666877E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.0927198601666877E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	247	247	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3929322538375817E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3929322538375817E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3929322538375817E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	247	247	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9236523494135433E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9236523494135433E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9236523494135433E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	247	247	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.834737433413115E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.834737433413115E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.834737433413115E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	247	247	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.479000066199345E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4790000066199345E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.4790000066199345E-4 3.621288573296032E-X)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	247	247	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.747052713119348E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.747052713119348E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.747052713119348E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.747052713119348E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	247	247	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0390858634229022E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0390858634229022E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0390858634229022E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	247	247	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2980701598345602E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2980701598345602E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2980701598345602E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	247	247	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.686685926026516E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.686685926026516E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.6866859260326516E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.686685926026516E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	247	247	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.551848801880176E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.551848801880176E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.551848801880176E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.551848801880176E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	247	247	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.458504695296455E-4 3.9447719071073443E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST) ("POINT(-1.458504695296455E-4 3.9447719071073443E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.458504695296455E-4 3.9447719071073443E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	247	247	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1422078837579714E-4 4.2610687185847944E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1422078837579714E-4 4.2610687185847944E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1422078837579714E-4 4.2610687185847944F-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1422078837579714E-4 4.2610687185847944E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	247	247	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.632333277055434E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.632333277055434E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.632333277055434E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.632333277055434E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	246	246	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3850270793373296E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3850270793373296E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3850270793373296E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	246	246	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1894684162663613E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.1894684162663613E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1894684162663613E-4 4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	246	246	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-(-7.721918182291407E-5 4.631084784138916E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-(-7.721918182291407E-5 4.631084784138916E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-(-7.721918182291407E-5 4.631084784138916E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-(-7.721918182291407E-5 4.631084784138916E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	246	246	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.168627501674788E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.168627501674788E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.168627501674788E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.168627501674788E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	246	246	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.823130869120569E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.823130869120569E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.823130869120569E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.823130869120569E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	246	246	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.4862672118575993E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.4862672118575993E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.4862672118575993E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	246	246	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9502470561053323E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9502470561053323E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9502470561053323E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9502470561053323E-4 3.62128573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	246	246	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-(7-468593272'169702E-5 4.656417275098612E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-(7-468593272'169702E-5 4.656417275098612E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-7-468593272'169702E-5 4.656417275098612E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and calculated the control of the control of the calculated as a control of the calculated as a calcul	0	1	246	246	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.690723770523203E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.690723770523203E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.69072377652303E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.690723770523203E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	246	246	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1469735290456562E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1469735290456562E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1469735290456562E-4 3.621288573296032E-4)' AS TEXT), 4326), true) so dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	246	246	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.1443638404398584E-4 4.25891276191008E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.14436384043998584E-4 4.25891276191008E-4)' AS TEXT), 4326) LIVIE yea as dist FROM candidates ORDER BY dist LIMIT 1) LIVION LIVIT candidates AS (SELECT cast('RPMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.1443638404398584E-4 4.25891276191008E-4)' AS TEXT), 4326) LIMIT 50) SELY geom <>> ST_GeomFromText(CAST ('POINT(-1.1443638404398584E-4 4.25891276191008E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	246	246	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.48753400181907E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.48753400181907E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.48753400181907E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.48753400181907E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	246	246	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1478718443297757E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1478718443297757E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1478718443297757E-4 3.618503795898022E-4)' AS TEXT), 4326), true) os dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	246	246	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0510426052653935E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0510426052653935E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0510426052653935E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0510426052653935E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	246	246	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.779760538025001E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.779760538025001E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.779760538025001E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.779760538025001E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0545323120279063E-4 4.3487442903200184E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0545323120279063E-4 4.3487442903200184E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0545323120279063E-4 4.3487442903200184E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0545323120279063E-4 4.3487442903200184E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.818114026375053E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-4.818114026375053E-4.3.621288573296032E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-4.818114026375053E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	245	245	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.659826299031342E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.659826299031342E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.659826299031342E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.659826299031342E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.3335627621209836E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.3335627621209836E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.3335627621209836E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.199969556526857E-4 4.203307045917964E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.199969556526857E-4 4.203307045917964E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.199969556526857E-4 4.203307045917964E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.199969556526857E-4 4.203307045917964E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.007564145514009E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.007564145514009E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.007564145514009E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0866067419528244E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0866067419528244E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0866067419528244E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.134859995555597E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.134859995555597E-4 3.62128873296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.13485999555597E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7228788834128302E-4 3.6803977189958783E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7228788834128302E-4 3.6803977189958783E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7228788834128302E-4 3.6803977189958783E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7228788834128302E-4 3.6803977189958783E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.147616072590093E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.147616072590093E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.147616072590093E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.147616072590093E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.36231342549466E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.36231342549466E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.36231342549466E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.36231342549466E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.946838032307529E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.946838032307529E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.946838032307529E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.0577799698962905E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.0577799698962905E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.05777996989862905E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1334987997838635E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1334987997838635E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.1334987997838635E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1334987997838635E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.920436711518119E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.920436711518119E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.920436711518119E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.920436711518119E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	245	245	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.117342847515266E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.117342847515266E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIMIT to the control of the contro	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8994876682707282E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8994876682707282E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8994876682707282E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6994328544973105E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6994328544973105E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6994328544973105E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6994328544973105E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	245	245	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2471311089431317E-4 4.1561454934518578E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST) ("POINT(-1.2471311089431317E-4 4.1561454934518574E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "V" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2471311089431317E-4 4.1561454934518574E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2471311089431317E-4 4.1561454934518574E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1415836373409392E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1415836373409392E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1415836373409392E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2412966338782058E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2412966338782058E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2412966338782058E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9779105925743623E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9779105925743623E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9779105925743623E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9779105925743623E-4 3.62128573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4420655255970678E-4 3.961211076736136E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4420655255970678E-4 3.961211076736136E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4420655255970678E-4 3.9961211076736136E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4420655255970678E-4 3.961211076736136E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.271574433234885E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.271574433234885E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.271574433234885E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.271574433234885E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3565504848307406E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3565504848307406E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3565504848307406E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.8737105938983487E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8737105938983487E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.8737105938983487E-4' 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8737105938983487E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4338010249831683E-4 3.969475577470966E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4338010249831683E-4 3.969475577470966E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4338010249831683E-4 3.969475577470966E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4338010249831683E-4 3.969475577470966E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9814185964642797E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9814185964642797E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9814185964642797E-4.3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9814185964642797E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	244	244	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.166377139182638E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.166377139182638E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.166377139182638E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.166377139182638E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.165038814820162E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.165038814820162E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.165038814820162E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.165038814820162E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.11428857554926E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.11428857554926E-4 3.621288573296032E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.11428857554926E-4 3.621288573296032E-4) AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.11428857554926E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.251097419038811E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.251097419038811E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.251097419038811E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.251097419038811E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.69)638513276642E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.69)638513276642E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.69)638513276642E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.69)638513276642E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5307292441396646E-4 3.872547358313589E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5307292441396646E-4 3.872547358313589E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5307292441396646E-4 3.872547358313589E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8614935060343233E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.861493506034323E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8614935060343233E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.993469744117034E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.993469744117034E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.993469744117034E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, goom	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.63368532/42634643E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.6336853242634643E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.6336853242634643E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.699172508475777E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.699172508475777E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.699172508475777E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.699172508475777E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.478191522864226E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.478191522864226E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.478191522864226E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.478191522864226E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.302229855832618E-5 4.573053616712816E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.302229855832618E-5 4.573053616712816E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.302229855832618E-5 4.573053616712816E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.302229855832618E-5 4.573053616712816E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	244	244	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.980439598215451E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.980439598215451E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.980439598215451E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.980439598215451E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	243	243	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.434528825774168E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.434528825774166E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.434528825774166E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.434528825774166E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	243	243	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.189477564830064E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.189477564830064E-4.3.621288573296032E-4)' AS TEXT), 4326). true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.189477564830064E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.189477564830064E-4.3.621288573296032E-4)' AS TEXT), 4326). Live) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	243	243	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.7101273806601846E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7101273806601846E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.7101273806601846E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	243	243	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.423394290532936E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.423394290532936E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.423394290532936E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.423394290532936E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	243	243	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.728996575908546E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.728996575908546E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.728996575908546E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.728996575908546E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	243	243	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4227517469884982E-4 3.980524855349362E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4227517469884982E-4 3.980524855349362E-4)") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4227517469884982E-4 3.980524855349362E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	243	243	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4850994019882445E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4850994019882445E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4850994019882445E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	243	243	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.275621426295274E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.275621426295274E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.275621426295274E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.275621426295274E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	243	243	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4071256353266695E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4071256353266695E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4071256353266695E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, code,	0	1	243	243	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3108216625872058E-4 4.092454939770536E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3108216625872058E-4 4.092454939770536E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3108216625872058E-4 4.092454939770536E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3108216625872058E-4 4.092454939770536E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4596816537295133E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4596816537295133E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4596816537295133E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5648697992180575E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5648697992180575E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5648697992180575E-4 3.621288573296032E-X)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5648697992180575E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.644105781559251E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.644105781559251E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.644105781559251E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.644105781559251E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	242	242	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.6683557199486265E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.6683557199486265E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.6683557199486265E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY ("POINT(-2.6683557199486265E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3705596289811538E-4 4.0327169733473935E-4)' AS TEXT, 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3705596289811538E-4 4.0327169733473935E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3705596289811538E-4 4.0327169733473935E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RPORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3705596289811538E-4 4.0327169733473935E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7042837570315563E-4 3.698992845426607E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7042837570315563E-4 3.698992845426607E-4") "AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7042837570315563E-4 3.698992845426607E-4")" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7042837570315563E-4 3.698992845426607E-4")" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7624047559140893E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7624047559140893E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7624047559140893E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7624047559140893E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.8690439287027796E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.8690439287027796E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.from WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.8690439287027796E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.8690439287027796E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.085901812571082E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.085901812571082E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.085901812571082E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.085901812571082E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.71039687524542E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.71039687524542E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.71039687524542E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.71039687524542E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.804814385882336E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8048143858882336E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.804814385882336E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.402018961052742E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-5.402018961052742E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-5.402018961052742E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.402018961052742E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.800866372919959E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.800866372919959E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.800866372919959E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.800866372919959E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2822689593977596E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2822689593977596E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2822689593977596E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9551877901679897E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9551877901679897E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9551877901679897E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3958114370286145E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3958114370286145E-4 3.621288573299032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3958114370286145E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3958114370286145E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	242	242	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.950799768121358E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.950799768121358E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.950799768121358E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.950799768121358E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.943882740433638E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.943882740433638E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.943882740433638E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2666291248903765E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2666291248903765E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2666291248903765E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2666291248903765E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9082059008085393E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9082059008085393E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9082059008085393E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9082059008085393E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	242	242	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6810173911728607E-4 3.7222592111707894E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6810173911728607E-4 3.7222592111707894E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6810173911728607E-4 3.7222592111707894E-4)" AS TEXT), 4326), tIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6810173911728607E-4 3.7222592111707894E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.744007589717044E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.744007589717044E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.744007589717044E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.744007589717044E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7424713051703384E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7424713051703384E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7424713051703384E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.154263605692579E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.154263605692579E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.154263605692579E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.154263605692579E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.950615530782683E-4 3.618503795898022E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.950615530782683E-4 3.618503795898022E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.950615530782683E-4 3.618503795898022E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.950615530782683E-4 3.618503795898022E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6412220240863656E-4 3.7640308718864994E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.641222024086365E-4 3.7640308718864994E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.641222024086365E-4 3.7640308718864994E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.641222024086365E-4 3.7640308718864994E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9109952524711604E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9109952524711604E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9109952524711604E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9109952524711604E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.57862774591064E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.57862774591064E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.57862774591064E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.57862774591064E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.89618219884689E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.89618219884689E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.89618219884689E-4) as 621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	241	241	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.719474433896879E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.719474433896879E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.719474433896879E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELY geom <>> ST_GeomFromText(CAST ('POINT(-3.719474433896879E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.242998858636182E-4 4.1602777437556613E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.24299885636182E-4 4.1602777437556613E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.242998858636182E-4 4.1602777437556613E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.242998858636182E-4 4.1602777437556613E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1300852017042094E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1300852017042094E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1300852017042094E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.915482254609907E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.915482254609907E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.915482254609907E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT type, gid, code, name, geom as closest, as the candidates or	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7124584261170436E-4 3.6908181762782E-4') 'AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7124584261170436E-4 3.6908181762782E-4)' 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER gyeom <> ST_GeomFromText(CAST ('POINT(-1.7124584261170436E-4 3.6908181762782E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7124584261170436E-4 3.6908181762782E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5372016884671767E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5372016884671767E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5372016884671767E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5372016884671767E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1583775588721227E-4 4.244899043460828E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1583775588721227E-4 4.244899043460828E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1583775588721227E-4 4.24489904346082E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.103418960811413E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.103418960611413E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.103418960611413E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7663573431642154E-4 3.636919259283126E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7663573431642154E-4 3.636919259283126E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7663573431642154E-4 3.636919259283126E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7663573431642154E-4 3.636919259283126E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5887604114937857E-4.3.8145161908874895E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5887604114937857E-4.3.8145161908874895E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5887604114937857E-4.3.8145161908874895E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5887604114937857E-4.3.8145161908874895E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	241	241	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.8263693784252506E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8263693784252506E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.8263693784252506E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast(FEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.507045740611869E-5 4.552572028366644E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.507045740611869E-5 4.552572028366644E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.507045740611869E-5 4.552572028366644E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.507045740611869E-5 4.552572028366644E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8806321958679207E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8806321958679207E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8806321958679207E-4.3.621288573296032E-4)' AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8806321958679207E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	240	240	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.372010656281299E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.372010656281299E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.372010656281299E-43.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.372010656281299E-43.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.749293927047796E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.749293927047796E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST (POINT(-2.749293927047796E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.749293927047796E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-6.097584485546487E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.097584485546487E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-6.09758448564687E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.097584485546487E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.287734959785334E-4 4.115541642596317E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.287734959785334E-4 4.115541642596317E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.287734959785334E-4 4.115541642596317E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and complete the code, and continued the complete the complete the code, and code the code, and code the code of the code, and code of the code of	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8336411579447672E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8336411579447672E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8336411579447672E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8336411579447672E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.985847787047574E-5 4.5046918237180396E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.985847787047574E-5 4.5046918237180396E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.985847787047574E-5 4.5046918237180396E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.621468236399439E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.621468236399439E-4 3.621288573296032E-4)' AS TEXT), 4326) t.upe) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.621468236399439E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, rame, geom as closest, ra	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7147133628910443E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7147133628910443E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7147133628910443E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7147133628910443E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2029339969644511E-4 4.200342605474329E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2029339969644511E-4 4.200342605474329E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2029339969644511E-4 4.200342605474329E-4)' AS TEXT), 3226) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2029339969644511E-4 4.200342605474329E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.700075398041748E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.700075398041748E-4 3.621288573296032E-4)' AS TEXT), 4326); true) as dist FROM candidates ORDER BY dist LIMIT 1) LIVION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.700075398041748E-4 3.621288573296032E-4)' AS TEXT), 4326); LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.700075398041748E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.9838440477314025E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9838440477314025E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.9838440477314025E-4-3 .621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9838440477314025E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.3353456698436686E-4 4.0679309325797607E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3353456698436686E-4 4.0679309325797607E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3353456698436686E-4 4.0679309325797607E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3353456698436686E-4 4.0679309325797607E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8336503065084697E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8336503065084697E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8336503065084697E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	240	240	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.5245354429610914E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5245354429610914E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.5245354429610914E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.524535429610914E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	240	240	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.651570946981145E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.651570946981145E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.651570946981145E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.651570946981145E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.089050490347351E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.089050490347351E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.089050490347351E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.089050490347351E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6958487419245356E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6958487419245356E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.695848741924536E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5077369471480557E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5077369471480557E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5077369471480557E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.682104518077506E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.682104518077506E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.682104518077506E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.682104518077506E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3174737699715412E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3174737699715412E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3174737699715412E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.317038335175036E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.317038335175036E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.317038335175036E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.317038335175036E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9596'793665885877E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9596'793665885877E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9596'793665885877E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.281734544509138E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.281734544509138E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.281734544509138E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.281734544509138E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.944350195203104E-5 4.410817876463499E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.944350195203104E-5 4.410817876463499E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-9.944350195203104E-5 4.410817876463499E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.944350195203104E-5 4.410817876463499E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2592583652787454E-4 4.144018237045271E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2592583652787454E-4 4.144018237045271E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2592583652787454E-4 4.144018237045271E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2592583652787454E-4 4.144018237045271E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.387915411092066E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.387915411092066E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.387915411092066E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.387915411092066E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	239	239	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.944691224189345E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.944691224189345E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.944691224189345E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.944691224189345E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez.WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5752948307956955E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.5752948307956955E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.frmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5752948307956955E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.5752948307956955E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.488077565271393E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.488077565271393E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.488077565271393E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.488077565271393E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.655505237103866E-4 3.747771365303332E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.655505237103866E-4 3.747771365303332E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.65550523710386E-4 3.747771365303332E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.65550523710386E-4 3.747771365303332E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	239	239	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4092815920085598E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4092815920085569E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.409281592008559E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.409281592008559E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6-905884003915381E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6-905884003915381E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6-905884003915381E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the control	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.300410353855122E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.300410353855122E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.300410353855122E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.417361855283781E-4.3.985914747099758E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.417361855283781E-4.3.985914747099758E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.417361855283781E-4.3.985914747099758E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and candidates or	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8498108330588186E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8498108330589186E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8498108330589186E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8498108330589186E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.629014084786043E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.629014084786043E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.629014084786043E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.629014084786043E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8711054795744025E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8711054795744025E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8711054795744025E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6568618585937476E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6568618585937476E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6568618585937476E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2501899551909888E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.250189955199988E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2501899551909888E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	238	238	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.927699342473933E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.927699342473933E-4 3.621288573296032E-4)' AS TEXT), 4326). true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION DELECT type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.927699342473933E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.927699342473933E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.22817665644821E-4.4.1750999459738345E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.22817665644821E-4.4.1750999459738345E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-1.22817665644821E-4.1750999459738345E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.22817665644821E-4.1750999459738345E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.229984724927723E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.22984724927723E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.229984724927723E-4)"), as TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.229984724927723E-4).621288573296032E-4"), as TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.828161434711638E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.828161434711638E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.828161434711638E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.828161434711638E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3690370672800018E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3690370672800018E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.3690370672800018E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3690370672800018E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8825993409292812E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8825993409292812E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8825993409292812E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8825993409292812E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6867757575549274E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.686775755549274E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.68677575549274E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	238	238	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.899950548758343E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.899950548758343E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.899950548758343E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.899950548758343E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.2362752168508395E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.2362752168508395E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.2362752168508395E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, as warchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.2362752168508395E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.348375815745253E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.348375815745253E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.348375815745253E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.348375815745253E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.354138756409172E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.354138756409172E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.354138756409172E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SEV geom <> ST_GeomFromText(CAST ('POINT(-5.354138756409172E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.8009424816028163E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8009424816028163E-4) 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8009424816028163E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8009424816028163E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.98772052629867E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.98772052629867E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.98772052629867E-4 3.621288573296032E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.98772052629867E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	237	237	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.490489293692961E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.490489293692961E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.490489293692961E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.490489293692961E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.94217594139381E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.94217594139381E-4 3.621288573296032E-4) "AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.942175941393381E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.830156025464106E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-5.830156025464106E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-5.830156025464106E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.893204035563743E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.893204035563743E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.893204035563743E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.893204035563743E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopping the control of	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.716519142022987E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.716519142022987E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.716519142022987E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.716519142022987E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8281705832753413E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8281705832753413E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8281705832753413E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8281705832753413E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4396400743299452E-4 3.963636528042898E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4396400743299452E-4 3.963636528042898E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4396400743299452E-4 3.963636528042898E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4396400743299452E-4 3.963636528042898E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.095962943753222E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.095962943753222E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.09596294375322E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the code, and the code of the code of the code of the code, and the code of the code, and code of the code, and code of the code of th	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7449865879658734E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7449865879658734E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7449865879568734E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.74498658734E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.509897478111794E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-3.509897478111794E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-3.509897478111794E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.88566733574084E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.88566733574084E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.88566733574084E-4) Se1288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-7.734494596269079E-5 4.6318034363214134E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.734494596269079E-5 4.6318034363214134E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-7.734494596269079E-5 4.6318034363214134E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.734494596269079E-5 4.6318034363214134E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	237	237	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2616031335811586E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2616031335811586E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2616031335811586E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	237	237	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7978927839186616E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7978927839186616E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7978827839186616E-4 4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	236	236	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1001713027430296E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1001713027430296E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1001713027430296E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	236	236	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.924285743942784E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.924285743942784E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9242857443942784E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	236	236	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2556651041422672E-4 4.1476114982122024E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.25566561041422672E-4 4.1476114982122024E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2556651041422672E-4 4.1476114982122024E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO") as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2556651041422672E-4 4.1476114982122024E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, na	0	1	236	236	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2500102921341658E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2500102921341658E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2500102921341658E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	236	236	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2755224462031595E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2755224462031595E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2755224462031595E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	236	236	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.07978)26863907E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.07979326863907E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.07979326863907E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.07979326863907E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	236	236	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6416711817284253E-4 3.76160542070696E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.641671817284253E-4 3.76160542070696E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.6416711817284253E-4 3.76160542070696E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom mas closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6416711817284253E-4 3.76160542070696E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	236	236	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.89805951237984E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.89805951237984E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.89805951237984E-4 3.621288573296032E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.89805951237984E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	236	236	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4216783429294061E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4216783429294061E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4216783429294061E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	236	236	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.191983699061896E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-3.191983699061896E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST" ("POINT(-3.191983699061896E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-3.191983699061896E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	236	236	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0493266576618644E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0493266576618644E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0493266576618644E-4 3.621288573296032E-3') AS TEXT), 4326), true) so dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	236	236	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.631448684616868E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.631448684616868E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.631448684616868E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.631448684616868E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	235	235	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.4250021094806483E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.4250021094806483E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY GIST LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.4250021094806483E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.4250021094806483E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8786604765247094E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8786604765247094E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8786604765247094E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.688634363097564E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.688634363097564E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.688634363097564E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.688634363097564E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.917642785573645E-4') AS 1EX.), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.917642785573645E-4') AS 1EX.), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.917642785573645E-4') AS 1EX.), 4326), true) as dist FROM candidates ORDER BY deom, ST_GeomFromText(CAST ('POINT(-3.917642785573645E-4') AS 1EX.), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1603630010608886E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.1603630010608886E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfm WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.160363001060886E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.1603630010608886E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.863119622109442E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-4.863119622109442E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rimo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST" (POINT(-4.863119622109442E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-4.863119622109442E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.988425455680413E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.988425455680413E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.988425455680413E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.988425455680413E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.320802110804635E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.320802110804635E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.320802110804635E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.320802110804635E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.971182376507169E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.971182376507169E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.971182376507169E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.971182376507169E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.128463659910943E-4 4.274812942401999E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.128463569910943E-4 4.274812942401999E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.128463659910943E-4 4.274812942401999E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.128463659910943E-4 4.274812942401999E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.428590796335275E-4.3.974685806048516E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-1.4285907963335275E-4.3.9746858060448516E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.428590796335275E-4.3.974685806048516E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.428590796335275E-4.3.974685806048516E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4931796652634685E-4 3.910096937139072E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4931796652634685E-4 3.910096937139072E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4931796652634685E-4 3.910096937139072E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST. GeomFromText(CAST ('POINT(-2.2397694978952028E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-2.2397694978952028E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST. GeomFromText(CAST ('POINT(-2.2397694978952028E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-2.2397694978952028E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	235	235	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4642539131148202E-4 3.9390226892656993E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4642539131148202E-4 3.93902268926569993E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.46425391311148202E-4" 3.9390226892656993E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4642539131148202E-4 3.9390226892656993E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, nam.	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5147/483806460394E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5147483806460394E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5147483806460394E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5147483806460394E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5255190154917712E-4 3.877757586891139E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5255190154917712E-4 3.877757586891139E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5255190154917712E-4' 3.877757586891139E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5255190154917712E-4' 3.877757586891139E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.112941102623081E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.112941102623081E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.112941102623081E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.112941102623081E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.372095913527859E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.37209513527859E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.372095913527859E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.027345378892044E-5 4.6005420644744486E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.027345378892044E-5 4.6005420644744486E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rlmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.027345378892044E-5 4.6005420644744486E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.027345378892044E-5 4.6005420644744486E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.562448922232786E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-3.562448922232786E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-3.562448922232786E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1502028897866353E-4 4.253073712609234E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1502028897866353E-4 4.253073712609234E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1502028897866353E-4 4.253073712609234E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1502028897866353E-4 4.253073712609234E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.055628587496255E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.055628587496255E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.055628587496255E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, standard as the control of the candidates or the cast of the cast of the candidates or the cast of the cast	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.346592908022568E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.346592908022568E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.346592908022568E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and complete the control of the control of the cast of the control	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.848742003281678E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.848742003281678E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.848742003281678E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.848742003281678E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5582176918337219E-4 3.845058910551957E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5582176918337219E-4 3.845058910551957E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5582176918337219E-4" 3.845058910551957E-4)" AS TEXT), 4329. LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5582176918337219E-4" 3.84505891055195F-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4637286467899014E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4637286467899014E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4637286467899014E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4637286467899014E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	235	235	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.4303965754672167E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4309365754672167E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4303965754672167E-4 3.621288573296032E-4)' AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4303965754672167E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.24291'3601'389621E-4' 3.621288573296032E-4') AS TEXT), 4325) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.24291'3601'389621E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmow WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.24291'3601'389621E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.24291'3601'389621E-4') AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.24291'3601'389621E-4') AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.24291'3601'389621E-4') AS TEXT), 4326) LIMIT 60) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.24291'3601'389621E-4') AS TEXT), 4326) LIMIT 60) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.24291'3601'389621E-4') AS TEXT), 4326) LIMIT 60) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.24291'3601'389621E-4') AS TEXT), 4326) LIMIT 60) SELECT (type, gid, code, name, geom.	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.547258245367464E-4.3.856018356971152E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.547258245367464E-4.3.856018356971152E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.547258245367464E-4.3.856018356971152E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.547258245367464E-4.3.856018356971152E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.015204399710876E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.015204399710876E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.015204399710876E-4)', as TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.015204399710876E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	235	235	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.118146756989122E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.118146756989122E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.118146756989122E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.60907148547859E-4-3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.60907148547859E-4-3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.60907148547859E-4)) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.60907148547859E-4)) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.60907148547859E-4)) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.60907148547859E-4)) SELECT type, gid, code, name, geom FRO	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7177630605752E+4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7177630605752E+4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.7177630605752E+4)) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7177630605752E+4)) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7177630605752E+4)) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM sp	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.591554337438259E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.591554337438259E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.591554337438259E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, good	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1219059583368703E-4 4.2813706440125645E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1219059583368703E-4 4.2813706440125645E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1219059583368703E-4 4.2813706440125645E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1219059583368703E-4 4.2813706440125645E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5580471773406E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5580471773406E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.558047177406E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5580471773406E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM sp	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.80103688741308E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.80103688741308E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.80103688741308E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.80103688741308E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.307592301846227E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.307592301846227E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.307592301846227E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped candidates or the control of the cont	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4490723848132E-4 3.954204217575121E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4490723848132E-4 3.954204217575121E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.4490723848132E-4 3.954204217575121E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4490723848132E-4 3.954204217575121E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM sp	0	1	234	234	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-8.110888700315159E-5 4.5921877322804177E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.110888700315159E-5 4.5921877322804177E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-8.110888700315159E-5 4.5921877322804177E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.110888700315159E-5 4.5921877322804177E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.889251448313617E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.889251448313617E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.889251448313617E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.889251448313617E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.1638572821052521E-4 4.2394193202512304E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1638572821052521E-4 4.2394193202512304E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.1638572821052521E-4 4.2394193202512304E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO") as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1638572821052521E-4 4.2394193202512304E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.178607949892218E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.178607949892218E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.178607949892218E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.178607949892218E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.650115345399149E-4 3.753161256926506E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.650115345399149E-4 3.753161256926506E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.650115345399149E-4 3.753161256926506E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.650115345399149E-4 3.753161256926506E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6813006086036507E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6813006086036507E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6813006086036507E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4797947675300878E-4 3.923481834865029E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4797947675300878E-4 3.923481834865029E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4797947675300878E-4 3.923481834865029E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	234	234	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5573193765496023E-4 3.845957225780079E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5573193765496023E-4 3.845957225780079E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5573193765496023E-4 3.845957225780079E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5573193765496023E-4 3.845957225780079E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.3017624010631525E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.3017624010631525E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.3017624010631525E-4 3.621288573296032E-X)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.657036947368721E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.657036947368721E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.657036947368721E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.657036947368721E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3194500635966044E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3194500635966044E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3194500635966044E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0716094509898795E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0716094509898795E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0716094509898795E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.866793566210629E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.866793566210629E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.866793566210629E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.866793566210629E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	233	233	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.431734899829693E-4 3.9715417025592566E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.431734899829693E-4 3.9715417025592566E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4317348998296993E-4 3.9715417025592566E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.431734899829693E-4 3.9715417025592566E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast("EE" as varchar) as type, gid, code, name geom FROM spatial.ee" WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-7.824326124681033E-5.4.6208439899022186E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.824326124681033E-5.4.6208439899022186E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.from LHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-7.824326124681033E-5.4.6208439899022186E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, 21/AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5083611935650884E-4 3.8949154088296505E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5083611935650884E-4 3.8949154088296505E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5083611935650884E-4 3.8949154088296505E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5083611935650884E-4 3.8949154088296505E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.286845793064917E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.286845793064917E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.286845793064917E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.286845793064917E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0674680521192273E-4 4.335808550271734E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0674680521192273E-4 4.335808550271734E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.067480521192273E-4 4.335808550271734E-4) XS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0674680521192273E-4 4.335808550271734E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8128048176350454E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8128048176350454E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8128048176350454E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8128048176350454E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6888327341447004E-4 3.7144438682408537E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6888327341447004E-4 3.7144438682408537E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6888327341447004E-4 3.7144438682408537E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6888327341447004E-4 3.7144438682408537E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.038470765569573E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.038470765569573E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.038470765569573E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.038470765569573E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.502989589887777E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.502989598987777E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.50298598987777E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.50298959887777E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8682354449470714E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8682354449470714E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.868254449470714E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.868254449470714E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3932961542330805E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3932961542330805E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3932961542330805E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9460/295485518215E-4 3.6212885732960/32E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9460/295485518215E-4 3.6212885732960/32E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.9460/295485518215E-4 3.6212885732960/32E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9460/295485518215E-4 3.6212885732960/32E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.548789955632319E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.548789955632319E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-2.548789955632319E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.548789955632319E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	233	233	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.049704280902918E-4.3.621288573296032E-4)' AS TEXT), 4326); LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.049704280902918E-4.3.621288573296032E-4)' AS TEXT), 4326); true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.049704280902918E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.049704280902918E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and the stopped candidates or the stopped code, name, geom as closest, stopped candidates or the stopped candidates	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.462102530714788E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.462102530714785E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.462102530714785E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.462102530714785E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.87084970783472E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.87084970783472E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.87084970783472E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.87084970783472E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	233	233	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.879644049055389E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.879644049055339E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.879644049055389E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.879644049055389E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4670524133411435E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4670524133411435E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfm WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.4670524133411435E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4670524133411435E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.997512162895573E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.997512162895573E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.997512162895573E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.997512162895573E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3603234090240427E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.360323409024042TE-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.360323409024042TE-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0385422999705787E-4 4.36473430239883605E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0385422999705787E-4 4.3647343023983605E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.from WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.0385422999705787E-4 4.3647343023983605E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0385422999705787E-4 4.3647343023983605E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.560921786249783E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.560921786249783E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.560921786249783E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.560921786249783E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7115738336784776E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7115738336784776E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7115738336784776E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom,	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.4005770823163E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4005770823163E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL ("WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.frmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.4005770823163E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM sp	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.593284007887343E-5 4.543948201540565E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.593284007887343E-5 4.543948201540565E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIMIT to ANDIGIDATE BY GEOMETRIC AST ('POINT(-8.593284007887343E-5 4.543948201540565E-4)' AS TEXT), 4326), true) as dist FROM candidates AS (SELECT cast('POINT(-8.593284007887343E-5 4.543948201540565E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.593284007887343E-5 4.543948201540565E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.08634182'16494'395E-4').es TexT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.08634182'16494'395E-4').es TexT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.08634182'16494395E-4')). AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.08634182'16494395E-4')). AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	232	232	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.2942972356412579E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2942972356412579E-4) 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist IMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2942972356412579E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2942972356412579E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.193959992868958E-4 3.621288573296032E-4) AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.19395992686958E-4 3.621288573296032E-4) "AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-3.193959992686958E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.193959992686958E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.366984664972081E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.366)84664972081E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.366984664972081E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.366984664972081E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.8387707036279504E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.8387707036279504E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.8387707036279504E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.072966072479763E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.072966072479763E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.072966072479763E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7121889315318075E-4 3.6910876709102475E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7121889315318075E-4 3.6910876709102475E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7121889315318075E-4 3.6910876709102475E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7121889315318075E-4 3.6910876709102475E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3232229877899062E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.323229877899062E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.323229877899062E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.959782920962552E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-5.959782920962552E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-5.9597829920962552E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.959782920962552E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4820451300222373E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4820451300222373E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4820451300222373E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4820451300222373E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1171448873310368E-4 4.2861317150396646E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1171448873310368E-4 4.2861317150396646E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1171444873310368E-4 4.2861317150396646E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1171448873310368E-4 4.2861317150396646E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1059250948432457E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.1059250948432457E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1059250948432457E-4" -43.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.1059250948432457E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.529206682438513E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.529206682438513E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.529206682438513E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELCT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.529206682438513E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4112670341973226E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4112670341973226E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rlmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4112670341973226E-4 3.621288573296032E-4)' AS TEXT), 4326); LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4112670341973226E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	232	232	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.5464497616117563E-4 3.856826840740072E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5464497616117563E-4 3.856826840740072E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.5464497616117563E-4 3.856826840740072E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	232	232	0	0,00
(MITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.477226247460952E-5.4.4555539776228436E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.477226247460952E-5.4.4555539776228436E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.from WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-9.477226247460952E-5.4.4555539776228436E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	232	232	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.875880273425789E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.875880273425789E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.875880273425789E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.875880273425789E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.440646518269882E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.440646518269882E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.440646518269882E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.440646518269882E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7775954327794116E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.777954327794116E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7775954327794116E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7863989225637827E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7863989225637827E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7863989225637827E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1439238313615007E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1439238313615007E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1439238313615007E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.522653555146291E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.522653555146291E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.522653555146291E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.522653555146291E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0138477782209945E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0138477782209945E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0138477782209945E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, code,	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0646832747384569E-4 4.3385933276697444E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0646832747384569E-4 4.3385933276697444E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0646832747384569E-4 4.3385933276697444E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0646832747384569E-4 4.3385933276697444E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4468357451666035E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4468357451666035E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4468357451666035E-4 3.618603795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4468357451666035E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3438842393246553E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3438842393246553E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3438842393246553E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.369311136147089E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.369311136147089E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.369311136147089E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.369311136147089E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	231	231	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-8.198923598158874E-5 4.5833842425359366E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.198923598158874E-5 4.58338424255359366E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-8.198923598158874E-5 4.5833842425359366E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.198923598158874E-5 4.5833842425359366E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.9597737723988505E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.9597737723988505E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.9597737723988505E-4 3.621288573296032E-4")" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.922394708015776E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.922394708015776E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.922394708015776E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.922394708015776E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.942894593621108E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.942994593621108E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.942894593621108E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.942894593621108E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.58067557393671E-4 3.822601028449473E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.58067557393671E-4 3.822601028449473E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.58067557393671E-4 3.822601028449473E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.58067557393671E-4 3.822601028449473E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4407180526708883E-4 3.962558549769152E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4407180526708883E-4 3.962558549769152E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4407180526708883E-4 3.962558549769152E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9999193170352906E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9999193170352906E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9999193170352906E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.079447665370975E-5 4.595331835769676E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.079447665370975E-5 4.595331835769676E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-8.079447665370975E-5 4.595331835769676E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.079447665370975E-5 4.595331835769676E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.857990076426258E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.857990076426258E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.857990076426258E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.857990076426258E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.418538813716839E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.418538813716839E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.418538813716839E-4.3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.418538813716839E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7770472950452376E-4 3,6262293073687566E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7770472950452376E-4 3,6262293073687564E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7770472950452376E-4 3,6262293073687564E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7770472950452376E-4 3,6262293073687564E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4819598727756773E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4819598727756773E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4819598727756773E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	231	231	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.723427021147005E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.723427021147005E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.723427021147005E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.723427021147005E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-6.011076723685778E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.011076723685778E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-6.011076723685778E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SEV geom <-> ST_GeomFromText(CAST ('POINT(-6.011076723685778E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5964950715009164E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5964950715009164E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5964950715009164E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0159945863391789E-4 4.3872820159600464E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0159945863391789E-4 4.3872820159600464E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0159945863391789E-4 4.3872820159600464E-4)" AS TEXT), 4326), true) of the control	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.557328525113305E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.557328525113305E-4 3.62128573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.557328525113305E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT type, gid, code, name, geom as closest, st. Distance(geom, ST_GeomFromText(CAST ("POINT(-3.557328525113305E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3755901945722233E-4 4.027686407815468E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3755901945722233E-4 4.027686407815468E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.3755901945722233E-4 4.027686407815468E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3755901945722233E-4 4.027686407815468E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.784238391600045E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.784238391600045E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.784238391600045E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.784238391600045E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.225859333836903E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.225859333836903E-4 3.62128873296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.225859333386903E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.225859333836903E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.170154637657791E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.170154637657791E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.170154637657791E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5564210612654828E-4 3.846855541135423E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5564210612654828E-4 3.846855541135423E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5564210612654828E-4 3.846855541135422E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5564210612654828E-4 3.846855541135423E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.226398323007376E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.226398323007376E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.226398323007376E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopped and calculated the stopped candidates or cast ("POINT(-5.226398323007376E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.345595612646334E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.345595612646334E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.345595612646334E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.399234183671971E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.399234183671971E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.399234183671971E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.399234183671971E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8176511458874398E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8176511458874398E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8176511458874398E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8176511458874398E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	230	230	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-7.955480156162483E-5.4.607728586681088E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.955480156162483E-5.4.607728586881088E-4)" AS TEXT), 4326) LIVIE up as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-7.955480156162483E-5.4.607728586681088E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.955480156162483E-5.4.607728586681088E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.866618477435656E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.866618477435656E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.866618477435656E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.86661847743565E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.249475877245545E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.249475877245545E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.249475877245545E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.249475877245545E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5801411590480896E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5801411590480896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5801411590480896E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.319813963992104E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.319813963992104E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-3.319813963992104E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.319813963992104E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.4586843583532788E-4 3.94459224406172E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.4586843583532788E-4 3.94459224406172E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-1.458684358352788E-4 3.94459224406172E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.458684358353788E-4 3.94459224406172E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.208881174967045E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.208881174967045E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.208881174967045E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.208881174967045E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.424207348570494E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.424207348570494E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.424207348570494E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.424207348570494E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.633150909374845E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.633150909374845E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.633150909374485E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and cast of the control of the control of the cast of the control of the cast of the ca	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.494994592959113E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.494994592959113E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.494994592959113E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.494994592959113E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	230	230	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.633694472827167E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.633694472827167E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.633694472827167E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.633694472827167E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.6134640818070723E-4 3.7898125205238674E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6134640818070723E-4 3.7898125205238674E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.6134640818070723E-4 3.7898125205238674E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6134640818070723E-4 3.7898125205238674E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINTAREA' as varchar) as type, gid, code, na	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4391954909697364E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4391954909697364E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4391954909697364E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4391954909697364E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	229	229	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.971910177298167E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.971910177298167E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.971910177298167E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.971910177298167E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1648454289177836E-4 4.2384311734366856E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1648454289177836E-4 4.2384311734366856E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1648454289177836E-4 4.238431173436685E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1648454289177836E-4 4.2384311734366856E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.41538556158718E-4 3.987891040728848E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.415385561658718E-4 3.987891040728848E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.415385561658718E-4 3.987891040728848E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.415385561658718E-4 3.987891040728848E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6537223293811804E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6537223293811804E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6537223293811804E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.006486167173066E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.006486167173066E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.006486167173066E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the co	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7651088503301496E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7651088503301496E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7651088503301496E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.057510475311055E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.057510475311055E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.057510475311055E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6674528303826559E-4.3.73582377194237E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6674528303826559E-4.3.73582377194237E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.6674528303826559E-4.3.73582377194237E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6674528303826559E-4.3.73582377194237E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.676624794844377E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.676624794844377E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.676624794844377E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the co	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0576764155223245E-4 4.3456001868307593E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0576764155223245E-4 4.3456001868307593E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0576764155223245E-4 4.3456001868307593E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0576764155223245E-4 4.3456001868307593E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2880181772161246E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2880181772161246E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2880181772161246E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3004956111016828E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3004956111016828E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3004956111016828E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0287643862192294E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0287643862192294E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0287643862192294E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	229	229	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.6162488591878432E-4 3.7870277432530794E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6162485991878432E-4 3.7870277432530794E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6162488591878432E-4 3.7870277432530794E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6162488591878432E-4 3.7870277432530794E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3088590918076967E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3088590918076967E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3088590918076967E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3088590918076967E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9678586099559267E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9678586099559267E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9678586099559267E-4 3.621288573296032E-X) X = TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.489137246484931E-4.3.914139355856453E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.489137246484931E-4.3.914139355856453E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.489137246484931E-4.3.914139355856453E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.489137246484931E-4.3.914139355856453E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8395746131018075E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8395746131018075E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8395746131018075E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8395746131018075E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8565527719716664E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.8565527719716664E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8565527719716664E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.224076426114218E-5 4.580868959769974E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.224076426114218E-5 4.580868959769974E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-8.224076426114218E-5 4.580868959769974E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.224076426114218E-5 4.580868959769974E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6394391163636815E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6394391163636815E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6394391163636815E-4 3.621288573296032E-30') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.405791885246045E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.405791885246045E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.405791885246045E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.405791885246045E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4073007241016423E-4 3.995975878290831E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4073007241016423E-4 3.995975878290831E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4073007241016423E-4 3.995975878290831E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4073007241016423E-4 3.995975878290831E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.426533819745503E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.426533819745503E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.426533819745503E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.426533819745503E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	229	229	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.776247959853232E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.77624795983232E-4 3.621288573296032E-4)' AS TEXT), 4326) LIWIT type as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIWITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.776247959853232E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.776247959853232E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.03675939322478935E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0367593922478935E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0367593922478935E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0367593922478935E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	228	228	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.883592062023664E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.883592062023664E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.883592062023664E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.883592062023664E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.814094479005772E-5 4.421867154469117E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.814094479005772E-5 4.421867154469117E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-9.814094479005772E-5 4.421867154469117E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.814094479005772E-5 4.421867154469117E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.9126076457007246E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.9126076457007246E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.9126076457007246E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.255948321573057E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.255948321573057E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.255948321573057E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.255948321573057E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.965532138780918E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.965532138780918E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.965532138780918E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.965532138780918E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.404983401490338E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.404983401490338E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.404983401490338E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.404983401490338E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.989413602492943E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.989413602492943E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.98941360249249245-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopped and control of the c	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3925775020057845E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3925775020057845E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3925775020057845E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3925775020057845E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9165648072327016E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9165648072327016E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9165648072327016E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9165648072327016E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.762413904477792E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.762413904477792E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.762413904477792E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.916650064479262E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.916650064479262E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.916650064479262E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, name, geom	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2496509660205173E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2496509660205173E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2496509660205173E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.79295662/41378535E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.79295662/41378553E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.79295662/41378553E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	228	228	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.126766009434819E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.126766009434819E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.1267660094344819E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.126766009434819E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0130392944652864E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0130392944652864E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0130392944652864E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1255981995654625E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.1255981995654625E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1255981995654625E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4070312295164065E-4 3.9962453729228787E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4070312295164065E-4 3.9962453729228787E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4070312295164065E-4 3.99624537292287872-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4070312295164065E-4 3.9962453729228787E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5092732316947626E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5092733216947626E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5092732316947626E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.8407378486893114E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.8407378486893114E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.8407378486893114E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.999124556125137E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.999124556125137E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST (POINT(-4.999124556125137E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.999124556125137E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	228	228	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.135758310839717E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-5.135758310839717E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-5.135758310839717E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-5.135758310839717E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.041794532120814E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.041794532120814E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.041794532120814E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.041794532120814E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.9281439258341407E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.9281439258341407E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.9281439258341407E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.9281439258341407E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.760078284739081E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.760078284739081E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.760078284739081E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.760078284739081E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.6606302085051985E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6606302085051985E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6606302085051985E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6606302085051985E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.707380289975624E-4 3.695938573396549E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.707330289975624E-4 3.695938573396549E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmc WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.707380289975624E-4 3.695938573396549E-3)' AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7073380289975624E-4 3.695938573396549E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	227	227	0	0,00

Request	% of cumulative	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1027718427851245E-4 4.300504759580166E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1027718427851245E-4 4.300504759580166E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY is LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmc WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1027718427851245E-4 4.300504759580166E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1027718427851245E-4 4.300504759580166E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	<b>time</b> 0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2102149250476707E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2102149250476707E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2102149250476707E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2102149250476707E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.766016314177972E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.766016314177972E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.766016314177972E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.766016314177972E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3860198004317124E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3860198004317124E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3860198004317124E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3860198004317124E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.927282204804832E-5 4.4105483819586734E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.927282204804832E-5 4.4105483819586734E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.927282204804832E-5 4.4105483819586734E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.927282204804832E-5 4.4105483819586734E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0957695578508435E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0957695578508435E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0957695578508435E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.656138632084601E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.656138632084601E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.656138632084601E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.656138632084601E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.237159809289405E-4 4.1661167930565074E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.237159809289405E-4 4.1661167930565074E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.237159809289405E-4 4.1661167930565074E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.237159809289405E-4 4.1661167930565074E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1017882702544443E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1017882702544443E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1017882702544443E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2389701627031985E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2389701627031985E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2389701627031985E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom,	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST _GeomFromText(CAST ('POINT(-3.2042906184543335E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST _Distance(geom, ST _GeomFromText(CAST ('POINT(-3.2042906184543335E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST _GeomFromText(CAST ('POINT(-3.2042906184543335E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST _GeomFromText(CAST ('POINT(-1.5556125775097751E-4 3.847664024904343E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST _Distance(geom, ST _GeomFromText(CAST ('POINT(-1.5556125775097751E-4 3.847664024904343E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST _GeomFromText(CAST ('POINT(-1.5556125775097751E-4 3.847664024904343E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST _Distance(geom, ST _GeomFromText(CAST ('POINT(-1.5556125775097751E-4 3.847664024904343E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.97871907633007E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.97871907633007E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.97871907633007E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	227	227	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.778579005310092E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.778579005310092E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.778579005310092E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.778579005310092E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.635297717493028E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.63529717493028E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-2.635297717493028E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.635297717493028E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.785671121772785E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.785671121772785E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.785671121772785E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.785671121772785E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.543234123716331E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.543234123716331E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.543234123716331E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the control of the co	0	1	227	227	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.759189118018665E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.759189118018665E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.759189118018665E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the control of the co	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.136297300010188E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.136297300010188E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.136297300010188E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.101074192309E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.101074192309E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.101074192309E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM spatial	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.37488069090863E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.37488069090863E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.37488069090863E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.37488069090863E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.78298075020278E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.782980750202278E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.782980750202278E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and candidates or the control of the c	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.712826900794394E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.712826900794394E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.712826900794394E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.712826900794394E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2576459720491816E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2576459720491816E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2576459720491816E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.458868595691954E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.458868595691954E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.45886595691954E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.45886595691954E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4503300262109673E-4 3.9529465761285287E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4503300262109673E-4 3.9529465761285287E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4503300262109673E-4 3.9529465761285287E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4503300262109673E-4 3.9529465761285287E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	226	226	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2793806276430227E-4 4.1238959747903477E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2793806276430227E-4 4.1238959747903477E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2793806276430227E-4 4.1238959747903477E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2793806276430227E-4 4.1238959747903477E-4)' AS TEXT), 4326), ture) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	226	226	0	0,00
(MTH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT-C3-3337332766144047E-4, 3-621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-(2-3337332766144047E-4, 3-621288573296032E-4)') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT-(2-3337332766141047E-4-3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-(2-3337332766141047E-4-3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8763111339404446E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8763111339404446E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8763111339404446E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.036305660323982E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.036305660323982E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.036305660323982E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopping the complex of the control of the c	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2330321332643066E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2330321332643066E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2330321332643066E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.970922030485636E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.970922030485636E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.970922030485636E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.970922030485636E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3513402561828477E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3513402561828477E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3513402561828477E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3513402561828477E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6909034335800266E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6909034335800266E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6909034335800266E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.793854939421974E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.793854939421974E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.793854939421974E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st_geom	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5723212417943986E-4 3.830955360516281E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5723212417943986E-4 3.830955360516281E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5723212417943986E-4 3.830955360516281E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5723212417943986E-4 3.830955360516281E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.927353739205839E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.927353739205839E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.927353739205839E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st_geom.	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.63342040396008E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.63342040396008E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.63342040396008E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.63342040396003E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.683353010911571E-4 3.719923591450451E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.683353010911571E-4 3.719923591450451E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.683353010911571E-4 3.719923591450451E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the control of the	0	1	226	226	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.593804699930409E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.593804699930409E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.593804699930409E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.593804699930409E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.813707707201016E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.813707707201016E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.813707707201016E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.845238573673612E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-3.845238573673612E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-3.845238573612E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-3.845238573673612E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0576003068394667E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0576003068394667E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0576003068394667E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	226	226	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.620381109494793E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.620381109494793E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.620381109494793E-4' 3.7828954928220536E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.620381109494793E-4' 3.7828954928220536E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.786493328374046E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.786493328374046E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.786493328374046E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.786493328374046E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.190820463474392E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.190820463474392E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.190820463474392E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.190820463474392E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6962887510028923E-4 3.7069878514021666E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6962887510028923E-4 3.7069878514021666E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6962887510028923E-4 3.7069878514021666E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6962887510028923E-4 3.7069878514021666E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.552127445029114E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-5.552127445029114E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-5.552127445029114E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-5.552127445029114E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.735464445954206E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-3.735464445954206E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-3.7354644445954206E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.455190077308915E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.455190077308915E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-3.455190077308915E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.451956142286085E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.451956142286085E-4.3.621288573296032E-4)) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-3.451956142286085E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-3.451956142286085E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.648691763790112E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-4.648691763790112E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-4.648691763790112E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.445214203373337E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.44521420337337E-4 3.621288573296032E-4)" AS TEXT), 4326). true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-2.44521420337337E-4 3.621288573296032E-4)" AS TEXT), 4326). ELECT type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.4452142033733373-4 4.3621288573296032E-4)" AS TEXT), 4326). Italit 50) SELCECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.445214203373337E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.36301378059455E-4 4.040262821772504E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.36301378059455E-4 4.040262821772504E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.36301378059455E-4 4.040262821772504E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.36301378059455E-4 4.040262821772504E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.704193925503144E-4 3.699082676885808E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-1.704193925503144E-4 3.699082676885808E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.704193925503144E-4 3.699082676885808E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.704193925503144E-4 3.699082676885808E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.800421789559749E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.800421789559749E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.800421789559749E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.800421789559749E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.406681051966461E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.40668105196461E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-3.406681051966461E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.406681051966461E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.893033521070621E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.893033521070621E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.893033521070621E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.485638391158716E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.485638391158716E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.485638391158716E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped as closest,	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast("EZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3433452501541834E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3433452501541834E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3433452501541834E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3433452501541834E-3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3433452501541834E-3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) GEOMER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.227116975234672E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.227116975234672E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.227116975234672E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and candidates or the	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6573018676721053E-4 3.7459747347198667E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6573018676721053E-4 3.7459747347198667E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6573018676721053E-4 3.74597473471986674") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6573018676721053E-4 3.7459747347198667E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.071600302426177E-4 4.33167629996793E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.071600302426177E-4 4.33167629996793E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.071600302426177E-4 4.33167629996793E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.071600302426177E-4 4.33167629996793E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1381746135431357E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.1381746135431357E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1381746135431357E-4" 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.1381746135431357E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2270986781072663E-4 4.1761779242475804E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2270986781072663E-4 4.1761779242475804E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rimo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2270986781072663E-4 4.1761779242475804E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2270986781072663E-4 4.1761779242475804E-4') AS TEXT), 4326) LIMIT 50) SELECT cast('PORTAREA' as varchar) as type, gid, code, name.	0	1	225	225	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.4351484979093475E-4 3.9681281044379505E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4351484979093475E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4351484979093475E-4' 3.9881281044379505E' A) ST_EXT_N 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4351484979093475E-4') 3.9681281044379505E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.680941282490002E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.680941282490002E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.680941282490002E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.680941282490002E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.623704876046035E-4 3.7795717264143923E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.62370487604603SE-4 3.7795717264143923E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.623704876046035E-4 3.7795717264143923E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.901657347798168E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.901657347798168E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.901657347798168E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.901657347798168E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2443600544079147E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2443600544079147E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2443600544079147E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2443600544079147E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.929235627020638E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-4.929235627020638E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.929235627020638E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	225	225	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3425367663984764E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3425367663984764E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3425367663984764E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.55427882742915E-4.3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.55427882742915E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.55427882742915E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.55427882742915E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3811643236156156E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3811643236156156E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3811643236156156E-4 3.621288573296032E-X)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9663314739729226E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9663314739729226E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9663314739729226E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9663314739729226E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-(6.051950069113217E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-(6.051950069113217E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-(6.051950069113217E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and control of the co	0	1	224	224	0	0,00
(WTH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.050503616094923E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.05503616094923E-4.3.621288573296032E-4)' AS TEXT), 4326) LIWIT tup as dist FROM candidates ORDER BY dist LIMIT 1) JUNION ALIC (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.05503616094923E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.050503616094923E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7395022904508923E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7395022904508923E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7395022904508923E-4 3.621288573296032F-3) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7395022904508923E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	224	224	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.211845615404639E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.211845615404639E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.211845615404639E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.211845615404639E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7615064406299697E-4 3.641770161769427E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.7615064406299697E-4 3.641770161769427E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7615064406299697E-4 3.641770161769427E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7615064406299697E-4 3.641770161769427E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1437441683046773E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1437441683046773E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1437441683046773E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1611623362528935E-4 4.242114266190039E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1611623362528935E-4 4.242114266190039E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1611623362528935E-4 4.242114266190039E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1611623362528935E-4 4.242114266190039E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.598031356047622E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.598031356047622E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.598031356047622E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.598031356047622E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.638540801079561E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.638540801079561E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.638540801079561E-4)', as C12288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.638540801079561E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4011023486412176E-4 4.002174253810148E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4011023486412176E-4 4.002174253810148E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4011023486412176E-4 4.002174253810148E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4011023486412176E-4 4.002174253810148E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2364457313439606E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2364457313439606E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2364457313439606E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2364457313439606E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.516455179685867E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.516455179685867E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.516455179685867E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.516455179685867E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1263077032290563E-4 4.2769688990767135E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1263077032290563E-4 4.2769688990767135E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1263077032290563E-4 4.2769688990767135E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1263077032290563E-4 4.2769688990767135E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.107272567769425E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.107272567769425E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.107275667769425E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.10727567769425E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7949237691992158E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7949237691992158E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7949237691992158E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.870566490403931E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.870566490403931E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.870566490403931E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.870566490403931E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	224	224	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.2625821318299873E-4 4.1406944706376105E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2625821318299873E-4 4.1406944706376105E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2625821318299873E-4 4.1406944706376105E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2625821318299873E-4 4.1406944706376105E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.496243085793178E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.496243085793178E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-3.496243085793178E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.496243085793178E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.8353479569845944E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.8353479569845944E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.8353479569845944E-4 3.621288573296032E-3)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.70429747987711E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.70429747987711E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-4.70429747987711E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.70429747987711E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4980397163614165E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4980397163614165E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4980397163614165E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4980397163614165E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.199700061941621E-4 4.2035765404227894E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.199700061941621E-4 4.2035765404227894E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.199700061941621E-4 4.2035765404227894E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.199700061941621E-4 4.2035765404227894E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	224	224	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3910549403046338-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.391054940304633E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.391054940304633E-43.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.391054940304633E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	223	223	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7539605922433656E-4 3.6493160101945375E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7539605922433656E-4 3.6493160101945375E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7539605922433656E-4 3.6493160101945375E-4") AS TEXT), 4326), turle) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7539605922433656E-4 3.6493160101945375E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	223	223	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6549799707789485E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6549799707789485E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6549799707789485E-4 3.621288573296032E-X)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	223	223	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0465510288447966E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0465510288447966E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0465510288447966E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0465510288447966E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	223	223	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8970713655673075E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8970713655673075E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8970713655673075E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8970713655673075E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	223	223	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.453568535515649E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.453568535515649E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIMIT to AND distance (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.453568535515649E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and calculated the stopped and calculated as a succession of the stopped as a succession of the stopped as a succession of the stoppe	0	1	223	223	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.04206402670605E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.04206402670605E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.04206402670605E-4) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.04206402670605E-4) 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	223	223	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.69046342/4501669E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.69046342/4501669E-4 3.621288573296032E-4)' AS TEXT), 4326), tupe) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.69046342/4501669E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.69046342/4501669E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the control of the co	0	1	223	223	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.324125877355877E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.324125877355877E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-3.324125877355877E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	223	223	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5202326781610194E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5202326781610194E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5202326781610194E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	223	223	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.062280694880591E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.062280694880591E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.062280694880591E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, pame, geom set complete the complete set of the cast of the ca	0	1	223	223	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7967249740493063E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.796724974093063E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7967249740493063E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	223	223	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.145531650309214E-4 4.257744952049911E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.145531650309214E-4 4.257744952049911E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.145531650309214E-4 4.257744952049911E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT tast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	223	223	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.088937787409884E-4 4.3143388149837945E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.088937787409884E-4 4.3143388149837945E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.088937787409884E-4 4.3143388149837945E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	223	223	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.958071547640875E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.958071547640875E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.958071547640875E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.958071547640875E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.886372265122583E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.886372265122583E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.886372265122583E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.084895368631146E-4 4.31838123382839TE-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.084895368631146E-4 4.31838123382839TE-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.084895368631146E-4 4.318381233828397E-4)' AS TEXT), 4326). LIMIT 50; BSELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.084895368631146E-4 4.318381233828397E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1368225663351056E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1368256361365E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1368225663351056E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1247897158097554E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1247897158097554E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1247897158097554E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.112402113452609E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.112402113452609E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.112402113452609E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.112402113452609E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	222	222	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1500278010116628E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1500278010116628E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.15002780101116628E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.18469819669968249E-4 4.218578405686566E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1846981966998249E-4 4.218578405686566E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast( RFMO' as varchar) as type, gid, code, name, geom FROM spatial.from WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1846981966986249E-4 4.2185784056865866E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1846981966968249E-4 4.218578405686566E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0959583694713693E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0959583694713693E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0959583694713693E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0959583694713693E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.134770164027185E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.134770164027185E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.134770164027185E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.143124496169496E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.143124496169496E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.143124496169496E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.143124496169496E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0087273811015133E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0087273811015133E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0087273811015133E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.879365405906451E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.879365405906451E-4 3.621288573296032E-4)' AS TEXT), 4326) LIVUP as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.879365405906451E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.879365405906451E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.4639083098467263E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4639083098467263E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4639083098467263E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4639083098467263E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1737387502305669E-4 4.2295378521057815E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1737387502305669E-4 4.2295378521057815E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1737387502305669E-4 4.2295378521057815E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1737387502305669E-4 4.2295378521057815E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.000197960184229E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.000197960184229E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.000197960184229E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the co	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.610517938496884E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.610517938496884E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.610517938496884E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.3521533142204067E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.3521533142204067E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.3521533142204067E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.3521533142204067E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	222	222	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7729196190201386E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7729196190201386E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7729196190201386E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	222	222	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.1065493412602778E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1065493412602778E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.1065493412602778E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.525083580e95265E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.525083580695265E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST (POINT(-4.525083580695265E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.525083580695265E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.205935031656855E-5 4.482683099166005E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.205935031656855E-5 4.482683099166005E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-9.205935031656855E-5 4.482683099166005E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.205935031656855E-5 4.482683099166005E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7362637811462112E-4 3.667012821269922E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7362637811462112E-4 3.667012821269922E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7362637811462112E-4 3.667012821269922E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1020531905578288E-4 4.3012234118898853E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1020531905578288E-4 4.3012234118988853E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1020531905578288E-4 4.3012234118898853E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1020531905578288E-4 4.3012234118898853E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.997044708126108E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.947)4A708126108E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.997044708126108E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.997044708126108E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.821886950568356E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.821886950568356E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.821886950568356E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.821886950568356E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.493992723301027E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.493992723301027E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.493992723301027E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.493992723301027E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1414983800943783E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1414983800943783E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1414983800943783E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1414983800943783E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.604787017805923E-5 4.4427979006201836E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.604787017805923E-5 4.4427979006201836E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.604787017805923E-5 4.4427979006201836E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.604787017805923E-5 4.4427979006201836E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.972718661053874E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.972718661053874E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.972718661053874E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.972718661053874E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6822750325706277E-4 3.7210015698514195E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6822750325706277E-4 3.7210015698514195E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6822750325706277E-4 3.7210015698514195E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6822750325706277E-4 3.7210015698514195E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.730698800666521E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.730698800666521E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.730698800666521E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.730698800666521E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	221	221	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.886291582157874E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.886291582157874E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.886291582157874E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.886291582157874E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.055174855572344E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.05174855572344E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-4.055174855572344E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.055174855572344E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.580065050365231E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.580065050365231E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.580065050365231E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.580065050365231E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.862661315903679E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.862661315903679E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.862661315903679E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.862661315903679E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0213844780438959E-4 4.383868417965962E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0213844780438959E-4 4.383868417965962E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0213844780438959E-4 4.383868417965962E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7594494640401973E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7594494640401973E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7594494640401973E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7594494640401973E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.691437848468647E-4 3.711838753888468E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.691437848468647E-4 3.711838753888468E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.691437848468647E-4 3.711838753888468E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.691437848468647E-4 3.711838753888468E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.47629591'2203873E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.47629591'2203873E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.47629591'2203873E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2140776807693847E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2140776807693847E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2140776807693847E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.124709032845047E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.124709032845047E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.124709032845047E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and candidates or distance of the candidates or distance or dis	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.061004756355418E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.061)04756355418E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.061004756355418E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.061004756355418E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.805452355150821E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-5.805452355150821E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-5.805452355150821E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-5.805452355150821E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.986175093188262E-4.3.618503795898022E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.986175093188262E-4.3.618503795898022E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.986175093188262E-4.3.618503795898022E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.986175093188262E-4.3.618503795898022E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	221	221	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.02005072796327E-4 3.621288573296032E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.02005072796327E-4 3.621288573296032E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.02005072796327E-4) AS 12288573296032E-4) AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.02005072796327E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.594240134726915E-4 3.809036467677892E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.594240134726915E-4 3.809036467677892E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.594240134726915E-4 3.809036467677892E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.594240134726915E-4 3.809036467677892E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	221	221	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.533797238951225E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.533797238951225E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.533797238951225E-4.3621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.533797238951225E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.4349688348525236E-4 3.9683077674835745E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4349688348525236E-4 3.9683077674835745E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.4349688348525236E-4 3.9683077674835745E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4349688348525236E-4 3.9683077674835745E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.336437371030167E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.336437371030167E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.336437371030167E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.336437371030167E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.90238057/4307316E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.90238057/4307316E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.902380574307316E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.902380574307316E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8643772635072093E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8643772635072093E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8643772635072093E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.209325758327253E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.209325758327253E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.209325758327253E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.209325758327253E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.585724436655184E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.585724436655184E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.585724436655184E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.585724436655184E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.353855538978382E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.353855538978382E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.353855538978382E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the co	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.94495614449273E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.94495614449273E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.94495614449273E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped or the control of the c	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.110142602396756E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.110142602396756E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.110142602396756E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.110142602396756E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.918640080949879E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.918640080949879E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.918640080949879E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50; bitsance(geom, ST_GeomFromText(CAST ('POINT(-5.918640080949879E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stored that the control of the co	0	1	220	220	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.439748202985763E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.439748202985763E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.439748202985763E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SEV geom <-> ST_GeomFromText(CAST ('POINT(-5.439748202985763E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.753601266129718E-4 3.649675336285786E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-1.753601266129718E-4 3.649675336285786E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-1.753601266129718E-4 3.649675336285786E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-1.753601266129718E-4 3.649675336285786E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5997198579600436E-4 3.80355674444682947E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.59971985799600436E-4 3.8035567444682947E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5997198579600436E-4 3.80355674444682947E-4)" AS TEXT), 4326), true) os dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-1.5997198579600436E-4 3.8035567444682947E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.71813153525255E-4.3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.71813153525255E-4.3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-4.7181315352555E-4.3.621288573296032E-4) 'AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.7181315352555E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.59927'9848881687E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.59927'9848881687E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.59927'9848881687E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.59927'9848881687E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.09145764448707E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.09145764448707E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.09145764448707E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.09145764448707E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.765283939105123E-4' 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.765283939105123E-4' 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.765283939105123E-4' 3.621288573296032E-4') 'AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.765283939105123E-4' 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2224320129116958E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2224320129116958E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2224320129116958E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.877658606866238E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.877658606866238E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.87765860686628E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.877658606866623E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.3986951945015E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.3986951945015E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom s ROM spatial.frmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.3986951945015E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.3986951945015E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.3986951945015E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM sp	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1045776219170665E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1045776219170665E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.10457762191970665E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1045776219170665E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	220	220	0	0,00
(WITH candidates AS (SELECT cast)("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.139153611791965E-4 4.264122990614852E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.139153611791965E-4 4.264122990614852E-4)' AS TEXT), 4326) LIWIT by as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast)("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.139153611791965E-4 4.264122990614852E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.139153611791965E-4 4.264122990614852E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7849524695454894E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7849524695454894E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7849524695454894E-4 3.621288573296032E-3)' AS TEXT), 4326), true) so dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7849524695454894E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	219	219	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.648772446754821E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.648772446754821E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.648772446754821E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.648772446754821E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4701066853071507E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.4701066853071507E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4701066853071507E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6300068058804255E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6300068058804255E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6300068058804255E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.224417455100462E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.224417455100462E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.224417455100462E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.891057227445559E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.891057227445559E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.891057227445559E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, arme, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.891057227445559E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.387466253450006E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.387466253450006E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.387466253450006E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.949447720913328E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.949447720913328E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.949447720913328E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.949447720913328E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5867841178687227E-4") as 16492484516579E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5867841178687227E-4") as 16492484516579E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5867841178687227E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5867841178687227E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.59397521442353E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.59397521442353E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.59397521442353E-4) Se1288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.59397521442353E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.564429790139701E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.564429790139701E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.564429790139701E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2784960352044564E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.278496035204456E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2784960352044564E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.000117277219519E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.000117277219519E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.000117277219519E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.000117277219519E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.649590079074232E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.649590079074232E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.649590079074232E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.649590079074232E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	219	219	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.602060051980606E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.602060051980606E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.602060051980606E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.602060051980606E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.94098983439705E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.94098983439705E-4.3.621288573296032E-4) "AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.94098983439705E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.94098983439705E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1474181124058648E-4 4.2558584900072446E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1474181124058648E-4 4.2558584900072446E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1474181124058648E-4 4.2558584900072446E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RONT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.220554699378747E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.220554699378747E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.220554699378747E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.220554699378747E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopping the control of	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.011157406650487E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.011157406650487E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.011157406650487E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.011157406650487E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1252342991699642E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1252342991699642E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1252342991699642E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1252342991699642E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0472559582265383E-4 4.356020644113081E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0472559582265383E-4 4.356020644113081E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0472559582265383E-4 4.356020644113081E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0472559582265383E-4 4.356020644113081E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.903898561726616E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.903898561726616E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.903898561726616E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the control of the con	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6421249136523365E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6421249136523365E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6421249136523365E-4 3.621288573296032E-3) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6421249136523365E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7553126394513965E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7553126394513965E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7553126394513965E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.816771127730725E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.816771127730725E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.816771127730725E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.234828763832545E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-2.234828763832545E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-2.234828763832545E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, st. page 1.00 for the condition of the candidates or the candida	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.882518657964572E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.882518657964572E-4 3.621288573296032E-4)") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-3.882518657964572E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.882518657964572E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	219	219	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1776060802341322E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1776060802341322E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1776060802341322E-4' 4.3621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6333305724316677E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.633330572431667TE-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6333305724316677E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.759260652419671E-4 3.644015949903342E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.759260652419671E-4 3.644015949903342E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.759260652419671E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.759260652419671E-4 3.644015949903342E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.953404882445304E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.953404882445304E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.953404882445304E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.953404882445304E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	219	219	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.96353754802845E-4" 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.96353754802845E-4" 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.96353754802845E-4" 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.96353754802845E-4" 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5501328542766465E-4") AS 12517, 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5501328542766465E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5501328542766465E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5501328542766465E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5873231070391949E-4 3.8179297890087957E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5873231070391949E-4 3.8179297890087957E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5873231070391949E-4 3.8179297890087957E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5873231070391949E-4 3.8179297890087957E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.748121542896588E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.748121542896588E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.748121542896588E-4') AS TEXT), 4326), true) as dist FROM candidates AS (SELECT cast('RFMO') as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.748121542896588E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.731521007267782E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.731521007267782E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.731521007267782E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-5.731521007267782E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.277682977166898E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.277682977166898E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.277682977166898E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the co	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.7847728064886652E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7847728064886652E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.7847728064886652E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7847728064886652E-4' 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-9.78355175934571E-5 4.424921426499175E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.78355175934571E-5 4.424921426499175E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-9.78355175934571E-5 4.424921426499175E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.78355175934571E-5 4.424921426499175E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8542217265148074E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8542217265148074E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8542217265148074E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8542217265148074E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	218	218	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.220994708457105E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.220994708457105E-4 3.621288573296032E-4)" AS TEXT), 4326) LIVIE up as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIVIETH (and titled as AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.220994708457105E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.220994708457105E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.122103918521098E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.122103918521098E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.122103918521098E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.122103918521098E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.916030392344082E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.916030392344082E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.91603039244082E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.916030392344082E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.260974312882275E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.260974312882275E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.260974312882275E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.260974312882275E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.2410317135748214E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.2410317135748214E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.2410317135748214E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.831858250222081E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-4.831858250222081E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-4.831858250222081E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-4.831858250222081E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1151823165515284E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1151823165515284E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1151823165515284E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1151823165515284E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.891147058973971E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.891147058973971E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.891147058973971E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.891147058973971E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0567781002382052E-4 4.346498502186103E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0567781002382052E-4 4.346498502186103E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0567781002382052E-4 4.3346498502186103E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0567781002382052E-4 4.346498502186103E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.43210337/4507044E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.432103374507044E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.43210337/4507044E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and complete the code, and continued the complete the complete the code, and code the code and code the code of the code, and code of the code of	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.393664628910431E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.393664628910431E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.393664628910431E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.381088214932758E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.381088214932758E-4 3.621288573296032E-4)' AS TEXT), 4326) LIVE as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIMIT (andidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.381088214932758E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.381088214932758E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.73708141'346562'16E-4 3.621'288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.73708141'346562'16E-4 3.621'288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7370814'1346562'16E-4 3.621'288573296032E-3') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7370814'1346562'16E-4 3.621'288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	218	218	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.358612035702364E-4 4.0446645667083556E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.358612035702364E-4 4.0446645667083556E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.358612035702364E-4 4.0446645667083556E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.358612035702364E-4 4.0446645667083556E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.357027088163909E-5 4.5675738935032186E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.357027088163909E-5 4.5675738935032186E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.357027088163909E-5 4.5675738935032186E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.357027088163909E-5 4.5675738935032186E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5148336378926005E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5148336378926005E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5148336378926005E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.514836378926005E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.933533817538858E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.933533817538858E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.93353817538858E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.933533817538858E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.754778224562776E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.754778224562776E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.754778224562776E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.754778224562776E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	218	218	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9985764183909625E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9985764183909625E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9985764183909625E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1460752137615366E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1460752137615366E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1460752137615366E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.8679568017981331E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.8679568017981331E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.8679568017981331E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.8679568017981331E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.892674194956974E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.892674194956974E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.892674194956974E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.892674194956974E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.085528763611881E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.085528763611881E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.085528763611881E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_GeomFromText(CAST ('POINT(-2.085528763611881E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7861340022603983E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7861340022603983E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7861340022603983E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7861340022603983E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.7474028906692935E-4 3.655873711677881E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7474028906692935E-4 3.6558737116777881E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.7474028906692935E-4 3.655873711677881E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-1.7474028906692935E-4 3.655873711677881E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0182403745494777E-4 4.385036227826131E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0182403745494777E-4 4.385036227826131E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0182403745494777E-4 4.385036227826131E-4)' AS TEXT), 4326), true) so StelECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0182403745494777E-4 4.385036227826131E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	217	217	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.6187687162652294E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6187687162652294E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.6187687162652294E-4 3.621288573296032E-3)' AS TEXT), 4326), true) so dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.001356621489882E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.001356621489882E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.001356621489882E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.001356621489882E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4292333398797125E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4292333398797125E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4292333398797125E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6435713666706307E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6435713666706307E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6435713666706307E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.6986243707416032E-4 3.704652231681828E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6986243707416032E-4 3.704652231681828E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.6986243707416032E-4 3.704652231681828E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5977527128986834E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5977527712886834E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5977527128986834E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.8966130593615457E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8966130593615457E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.8966130593615457E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.7412889210191314E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.7412899210191314E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.7412898210191314E-4 3.621288573296032E-3)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.741289210191314E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.867157466606128E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.867157466606128E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.867157466606128E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.867157466606128E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4887592123809715E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4687592123809715E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4867592123809715E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4687592123809715E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6263099903699813E-4 3,7769666120620064E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6263099903699813E-4 3,7769666120620064E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.6263099903699813E-4 3,7769666120620064E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6263099903699813E-4 3,7769666120620064E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	217	217	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.698004698606422E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.698004698606422E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.698004698606422E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.698004698606422E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.910002531376778E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.910002531376778E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.910002531376778E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.910002531376778E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	216	216	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.019785807659886E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.019785807659886E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.019785807659886E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the control of the	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.4117024689938278E-4 3.9915741333549796E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.4117024689938278E-4 3.9915741333549796E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.4117024689938278E-4 3.9915741333549796E-4)" AS TEXT), 4326), true) os dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-1.411702468938278E-4 3.9915741333549796E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4708253375344456E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.4708253375344445E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4708253375344456E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.05687708033032E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.05687708033032E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.05687708033032E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.05687708033032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.274453616425919E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.274453616425919E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.274453616425919E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.274453616425919E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.52588291588727E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.52588291588727E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.52588291588727E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.52588291588727E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6379880890635357E-4 3.765288513333092E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6379880890635357E-4 3.765288513333092E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6379880890635357E-4 3.765288513333092E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6379880890635357E-4 3.765288513333092E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6328722662259055E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6328722662259055E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6328722662259055E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8721834579153457E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8721834579153457E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8721834579153457E-4 3.621288573296032E-3) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8721834579153457E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.987895615073643E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.987895615073643E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.987895615073643E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.987895615073643E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.427162640444387E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.427162640444387E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-3.427162640444387E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4878887536508656E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4878887536508656E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.487887536508656E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.610953373293389E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.610953373293389E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.610953373293389E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	216	216	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2204557192866334E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2204557192866334E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2204557192866334E-4' 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2204557192866334E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.796630568239043E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.796630568239043E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.796630568239043E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.796630568239043E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7722907983212554E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7722907983212554E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7722907983212554E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.6316191991099897E-4 3.621288573296032E-4)") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.6316191991099897E-4 3.621288573296032E-4)") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.6316191991099897E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2286258140)902694E-4 4.1746507882961623E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2286258140)902694E-4 4.1746507882961623E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2286258140902694E-4 4.1746507882961623E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2286258140902694E-4 4.1746507882961623E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7634873085368843E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7634873085368843E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7634873085368843E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1067290043171022E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.106729004317102E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.106729004317102E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.182376299803668E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.182376299803668E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.182376299803668E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.182376299803668E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5754790681343705E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5754790681343705E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5754790681343705E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5754790681343705E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.216876180995709E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.216876180995709E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.216876180995709E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.216876180995709E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.840037493589421E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.840037493589421E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.840037493589421E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SEV geom <> ST_GeomFromText(CAST ('POINT(-5.840037493589421E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0108833377834E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0108833377834E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.frmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.0108833377834E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0108833377834E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM sp	0	1	216	216	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.90227701993335E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.90227701993335E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.90227701993335E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.90227701993335E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	216	216	0	0,00

Request	% of	Hits	Mean time	Max time	Standard	% of system
	cumulative time		(ms)	(ms)	deviation	error
[WITH candidates AS (SELECT cast(EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.2940323153378734E-4 3.621288573296032E-4)' AS TEXT), 4326. JIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.2940323153378734E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.2940323153378734E-4 3.62128573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	215	215	0	0,00
[WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez.WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7757988022111725E-4 3.62128573296032E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.7757988022111725E-4 3.621288573296032E-4)) AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast(RFMO as varchar) as type, gid, code, name, geom FROM spatial.rfmo HRER enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7757988022111725E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.7757988022111725E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.150396275689013E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.150396275689013E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.150396275689013E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.150396275689013E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.773193687887226E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.773193687887226E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.frmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.773193687887226E-4 3.621288573296032E-4') as TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, game, geom	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.150921542013931E-4 4.252355060299515E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.150921542013931E-4 4.252355060299515E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.150921542013931E-4 4.252355060299515E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, goom	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.557786831319068E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.557786831319068E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.557786831319068E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, goom	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.259797354449217E-4 4.1434792479083985E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.259797354449217E-4 4.1434792479083985E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.259797354449217E-4 4.1434792479083985E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.259797354449217E-4 4.1434792479083985E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.551934059126737E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.551934059126737E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.551934059126737E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, goom	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.849200309487441E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.849200309487441E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rlmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.849200309487441E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.442528406084681E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.442528406084881E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.442528406084681E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.845498919695145E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.845498919695145E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.frmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.845498919695145E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.628749164482659E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.628749164482659E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.628749164482659E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.628749164482659E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	215	215	0	0,00
[WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez.WHERE enabled = "Y ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5:281554881452315E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5:281554881452315E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y ORDER BY geom -> ST_GeomFromText(CAST ("POINT(-5:281554881452315E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5:281554881452315E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5:281554881452315E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) as distanced geom.	0	1	215	215	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.9110759354358699E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9110759354358699E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.9110759354358699E-4 3.621288573296032E-4)' AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9110759354358699E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	215	215	0	0,00
[WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez.WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1252388734518153E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1252388734518153E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1252388734518153E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1252388734518153E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.1243359838858444E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.124335983858444E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.124335983858444E-4 3.621288573296032E-4)' AS TEXT), 4326). IMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.124335983885444E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7020425431031084E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7020425431031084E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7020425431031084E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.825111737027483E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.825111737027483E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.825111737027483E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.825111737027483E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.0696377316466677E-4.3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.0696377316466677E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.from WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.0696377316466677E-4.3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.0696377316466677E-4.3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, as varchar) as type, gid, code, name,	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4995577037807173E-4.3.003718898574131E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4995577037807173E-4.3.903718898574131E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4995577037807173E-4.3.903718898574131E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4995577037807173E-4.3.903718898574131E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.1865039758287664E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1865039758287664E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.1865039758287664E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5920034950803184E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5920034950803184E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5920034950803184E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5920034950803184E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.013322511896076E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.013322511896076E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.013322511896076E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.013322511896076E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.68416606894913E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.68416606894913E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.68416606894913E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.68416606894913E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.278760955507842E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.278760955507842E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.278760955507842E-4) a.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.278760955507842E-4) a.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2108483200284056E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2108483200284056E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2108483200284056E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	215	215	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.6772536155432614E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.6772536155432614E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.6772536155432614E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7980678726936338E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7980678338E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7980678726936338E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5561652895258003E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5561652895258003E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5561652895258003E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	215	215	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0898452512575066E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.089845251257506E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0898452512575066E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.896168476001337E-4 3.621288573296032E-4') 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.896168476001337E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.896168476001337E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.448731355826958E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.448731355826958E-4 3.62128873296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.448731355826958E-4 3.621288573296032E-4') 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.448731355826958E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0067419389127479E-4 4.3965346633821986E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0067419389127479E-4 4.3965346633821986E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0067419389127479E-4 4.3965346633821986E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RDC), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RDRTAREA' as varchar) as type, gid, code, na	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.586883097960837E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.586883097960837E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.586883097960837E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.586883097960837E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.425914147610322E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.425914147610322E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.425914147610322E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.425914147610322E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, struck and struck as the control of	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6626110764121126E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6626110764121126E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6626110764121126E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST. GeomFromText(CAST ('POINT(-1.6526306281946834E-4 3.7506459741605433E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6526306281946834E-4 3.7506459741605433E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6526306281946834E-4 4.3.7506459741605433E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6526306281946834E-4 3.7506459741605433E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0360270171750442E-4 4.3672495852915453E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0360270171750442E-4 4.3672495852915453E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0360270171750442E-4 4.3672495852915453E-4). AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0360270171750442E-4 4.3672495852915453E-4). AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5697'298503160055E-4 3.621'288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5697'298503160055E-4 3.621'288573299032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5697'298503160055E-4 3.621'288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5697'298503160055E-4 3.621'2885732'96032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	214	214	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.860330270446819E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.860330270446819E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.860330270446819E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.860330270446819E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.172858732073852E-4 3.621288573296032E-4) 'AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.172858732073852E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.172858732073852E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.172858732073852E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.764758672780206E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.764758672780206E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.764758672780206E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.764758672780206E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.500285504571716E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.500285504571716E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.500285504571716E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.500285504571716E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4113522914438826E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4113522914438826E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4113522914438826E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4113522914438826E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.413324010787094E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.413324010787094E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.413324010787094E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.413324010787094E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.979172808253981E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.979172808253981E-4 3.621288573296032E-4)' AS TEXT), 4326); true) as dist FROM candidates ORDER BY dist LIMIT 1) LVION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.979172808253981E-4 3.621288573296032E-4)' AS TEXT), 4326); LUILT by c.gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.979172808253981E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1288229860245908E-4 4.2744536163107506E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1288229860245908E-4 4.2744536163107506E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.1288229860245908E-4 4.2744536163107506E-14)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1288229860245908E-4 4.2744536163107506E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.908309455182505E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.908309455182505E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.908309455182505E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.908309455182505E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.203387728883623E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2033877288883623E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2033877288883623E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.20338772888863623E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0537238282721987E-4 4.3495527740889387E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0537238282721987E-4 4.3495527740889387E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0537238282721987E-4 4.3495527740889387E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0537238282721987E-4 4.3495527740889387E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0980153460611423E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0980153460611423E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0980153460611423E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0980153460611423E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	214	214	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.709781777392091E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.709781777392091E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.709781777392091E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	214	214	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.137810713147637E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.137810713147637E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.137810713147637E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SEV geom <> ST_GeomFromText(CAST ('POINT(-2.137810713147637E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.550690140574523E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.550690140574523E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.550690140574523E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.550690140574523E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.133763720087248E-4 4.2695128822380264E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.133763720087248E-4 4.2695128822380264E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.133763720087248E-4 4.2695128822380264E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.133763720087248E-4 4.2695128822380264E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.188471120890127E-4 4.2167817751031215E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.188471120890127E-4 4.2167817751031215E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.188471120890127E-4 4.2167817751031215E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.188471120890127E-4 4.2167817751031215E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3140693204555896E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3140693204555896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3140693204555896E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3140693204555896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.824137313060505E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.824137313060505E-4 3.621288573296032E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.824137313060505E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.824137313060505E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1416688945875E-4.22616077078488896E-4') 'AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1416689945875E-4.2616077078488896E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.14166898945875E-4.261607707848896E-4') 'AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.141668945875E-4.261607707848896E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7511895377081494E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7511895377081494E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7511895377081494E-4 3.61850379589802E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7511895377081494E-4 3.61850379589802E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.850174733454418E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.850174733454418E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.850174733454418E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.850174733454418E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.049699706621067E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.049699706621067E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.049699706621067E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the control of the con	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.61087269032868E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.61087269032868E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.61087269032868E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.61087269032868E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0171715447772237E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.017171544772237E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.017171544772237E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the state of the st	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6299930830348714E-4 3.773283519308652E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6299930830348714E-4 3.773283519308652E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.629930830348714E-4 3.773283519308652E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6299930830348714E-4 3.773283519308652E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	213	213	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.0832921239652845E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.0832921239652845E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY GIST LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.0832921239652845E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.0832921239652845E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7852311126944274E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7852311126944274E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7852311126944274E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.428680627863887E-4 3.9745959745893147E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.428680627863687E-4 3.9745959745893147E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.428680627863687E-4 3.9745959745893147E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.428680627863687E-4 3.9745959745893147E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1070076474660405E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1070076474660405E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1070076474660405E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6864072828775775E-4 3.7168693195476155E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6864072828775775E-4 3.7168693195476155E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "V" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6864072828775775E-4 3.7168693195476155E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6864072828775775E-4 3.7168693195476155E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, na	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast("EE2" as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = "Y ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(2.875417392938176E-4.3 6.21288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.875417392938176E-4.3.621288573296032E-4)" AS TEXT), 4326). true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y ORDER BY geom <-> ST_GeomFromText(CAST (CAST ("POINT(-2.875417392938176E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.875417392938176E-4.3.621288573296032E-4)" AS TEXT), 4326). LIWIT type as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0644183544350723E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0644183544350723E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0644183544350732E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0644183544350723E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.133243028044182E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.133243028044182E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.133243028044182E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.133243028044182E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.799523474275632E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.799523474275632E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.799523474275632E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.799523474275632E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.724514148051651E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.724514148051651E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.724514148051651E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and complete the control of the control of the cast of the control	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.778502896627234E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.778502896627234E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.778502896627234E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.778502896627234E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3142444092305624E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.3142444092305624E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3142444092305624E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	213	213	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1141804468934426E-4 4.289096155483299E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1141804468934426E-4 4.289096155483299E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rlmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1141804468934426E-4 4.289096155483299E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1141804468934426E-4 4.289096155483299E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	212	212	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.917400736679516E-5 4.4115365286459963E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.917400736679516E-5 4.4115365286459963E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.917400736679516E-5 4.4115365286459963E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7486696806307633E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7486696806307633E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.748669806307633E-4 3.61850379589802E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1804761148614631E-4 4.2228004874495916E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1804761148614631E-4 4.2228004874495916E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1804761148614631E-4 4.2228004874495916E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RDIA'), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4750428450879564E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4750428450879564E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4750428450879564E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4355215468685496E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.4355215468685496E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4355215468685496E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7005199814019575E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.7005199814019575E-4 3.621288573299032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast(RFMO' as varchar) as type, gid, code, name, geom FROM spatial.from WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7005199814019575E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.7005199814019575E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.522833218203115E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.522833218203115E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.522833218203115E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and candidates or the	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1128329739672633E-4 4.2904436283890926E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1128329739672633E-4 4.2904436283890926E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1128329739672633E-4 4.2904436283890926E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1128329739672633E-4 4.2904436283890926E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1128329739672633E-4 4.2904436283890926E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1128329739672633E-4 4.2904436283890926E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.112832973967263E-4 4.2904436283890926E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.112832973967263E-4 4.2904436283890926E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.112832973967263E-4 4.2904436283890926E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geomFromText(CAST ('POINT(-1.112832973967263E-4 4.290443628890926E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geomFromText(CAST ('POINT(-1.112832973967263E-4 4.290443628890926E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geomFromText(CAST ('POINT(-1.112832973967263E-4 4.29044	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.693612102277938E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.693612102277938E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.693612102277938E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.693612102277938E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.943330028417612E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.943330028417612E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.943330028417612E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SEV geom <> ST_GeomFromText(CAST ('POINT(-2.943330028417612E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.2192879094172776E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2192879994172776E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2192879094172776E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.403173048076544E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.403173048076544E-4 3.621288573296032E-4)' AS TEXT), 4326) LIVE as dist FROM candidates ORDER BY dist LIMIT 1) LIVION ALL (WITH candidates AS (ESLECT cast("RFIMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.403173048076544E-4 3.621288573296032E-4)' AS TEXT), 4326), ELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.403173048076544E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid. code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.39410921227064E-4.3 621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.39410921227064E-4.3 621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.39410921227064E-4.3 621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.39410921227064E-4.3 621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	212	212	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.611250313569734E-5.4.5421515709571E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.611250313569734E-5.4.5421515709571E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.611250313569734E-5.4.5421515709571E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as Closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.611250313569734E-5.4.5421515709571E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM sp	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EE2' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.660365288201814E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.660365288201814E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.660365288201814E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.660365288201814E-4 3.621288573296032E-4)' AS TEXT), 4326). Live) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0549860439518175E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0549860439518175E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0549860439518175E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0549860439518175E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7809100507669515E-4 3.622366551569778E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7809100507669515E-4 3.622366551569778E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7809100507669515E-4 3.622366551569778E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7809100507669515E-4 3.622366551569778E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.77660728596688E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.77660728596688E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.77660728596688E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.77660728596688E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4828627623416477E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4828627623416477E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4828627623416477E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4828627623416477E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.124524795506371E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.124524795506371E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.124524795506371E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.124524795506371E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.45528905740103E-4.3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.45528905740103E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.45528905740103E-4.3621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.45528905740103E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.300688997004059E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.300688997004059E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.300688997004059E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.300688997004059E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7511849634262983E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7511849634262983E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7511849634262983E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7511849634262983E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.270936463972299E-4 4.1323401384435796E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.270936463972299E-4 4.1323401384435796E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.270936463972299E-4 4.1323401384435796E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.559484481795192E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.559484481795192E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.559484481795192E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.559484481795192E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.891349593440051E-5 4.414141642998382E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.891349593440051E-5 4.414141642998382E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-9.891349593440051E-5 4.41411642998382E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.891349593440051E-5 4.414141642998382E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	212	212	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.5124036123436262E-4 3.89087299011227E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5124036123436262E-4 3.89087299011227E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIMIT candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.5124036123436262E-4.3.89087299011227E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5124036123436262E-4.3.89087299011227E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.882603915211132E-4 3.621288573296032E-4') 'AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.882603915211132E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.882603915211132E-4 3.621288573296032E-4') 'AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.882603915211132E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	212	212	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4558097494440965E-4 3.9474668529189313E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4558097494440965E-4 3.9474668529189313E-4)" AS TEXT), 4326), rue) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4558097494440965E-4 3.9474668529189313E-4)" AS TEXT), 4326), tIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4558097494440965E-4 3.9474668529189313E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.3554725064897972E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.3554725064897972E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.3554725064897972E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.587071909581363E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.587071909581363E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.587071909581363E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.587071909581363E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-9.294868244784688E-5 4.473789777835101E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-9.294868244784688E-5 4.473789777835101E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-9.294868244784688E-5 4.473789777835101E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4736009663515145E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4736009663515145E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4736009663515145E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.263846001618215E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.263846001618215E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2263846001618215E-4 4.3 621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2263846001618215E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.275985326690774E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.275985326690774E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.275985326690774E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the control of the	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.012603859668781E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.012603859668781E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.012603859668781E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the control of the contro	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.619752288795908E-4 3.78352431354535E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.619752288795909E-4 3.78352431354535E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.619752288795909E-4 3.78352431354535E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.619752288795909E-4 3.78352431354535E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.579615892723172E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.57961589272172E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.579615892723172E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELY geom, ame, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.579615892723172E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8309599349379625E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8309599349379625E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8309599349379625E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8309599349379625E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	211	211	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.2273681726925024E-4 4.175908429615533E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2273681726925024E-4 4.175908429615533E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.2273681726925024E-4 4.175908429615533E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2273681726925024E-4 4.175908429615535E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast('EE' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('PO'INT(-3.433361015904811E-4.3.621288573296032E-4) AS TEXT), 4356). Limit 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('PO'INT(-3.433361015904811E-4.3.621288573296032E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <-> ST_GeomFromText(CAST ('PO'INT(-3.433361015904811E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.433361015904811E-4.3.621288573296032E-4)' AS TEXT), 4326). Limit 50) SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.6639539750564407E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.6639539750564407E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.6639539750564407E-4 3.621288573296032E-4)" AS TEXT), 4326), IMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.6639539750564407E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.532085865629547E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.532085865629547E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.532085865629547E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.532085865629547E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.558316671925836E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.558316671925836E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.558316671925836E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.558316671925836E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6361960327771477E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6361960327771477E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6361960327771477E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6361960327771477E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.122458670352896E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.122458670352896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.122458670352896E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.122458670352896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	211	211	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.935797902876562E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.935797902876562E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.935797902876562E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.935797902876562E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9629985588579785E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9629985588579785E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9629885588597878E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9629985588579785E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7550431448661604E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7550431448661604E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7550431448661604E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.918621783822474E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.918621783822474E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.918621783822474E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.908300306618802E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.908300306618802E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.908300306618802E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.908300306618802E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.977475157777856E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.977475157777856E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.977475157777856E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.977475157777856E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	210	210	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0791461508127812E-4 4.32413045154282E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0791461508127812E-4 4.32413045154282E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.0791461508127812E-4 4.32413045154282E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0791461508127812E-4 4.32413045154282E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.247418900655773E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.247418900655773E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.247418900655773E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.247418900655773E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.8328463970346127E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.8328463970346127E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.8328463970346127E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1774218428954566E-4 4.2258547594796497E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1774218428954566E-4 4.2258547594796497E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "V" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1774218428954566E-4 4.2258547594796497E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1774218428954566E-4 4.2258547594796497E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.191718778758511E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.191718778758511E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.191718778758511E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.191718778758511E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9744969944947082E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9744969944947082E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9744969944947082E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.817669443014845E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.817669443014845E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.817669443014845E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.817669443014845E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.412246032446151E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.412246032446151E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.412246032446151E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.412246032446151E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.11491282'19662923E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.11491282'19662923E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1149128219662923E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1149128219662923E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5669404986533843E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5669404986533843E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5669404986533843E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.243915471047706E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.243915471047706E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.243915471047706E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.243915471047706E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.315331536135208E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.315331536135208E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) LVINON ALI (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.315331536135208E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.315331536135208E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0973012681156985E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0973012681156985E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.0973012681156985E-4 3.621288573296032E-3) AS TEXT), 4326), true) se dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0973012681156985E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	210	210	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0628866441702179E-4 4.3403899582532095E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0628866441702179E-4 4.3403899582532095E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.0628866441702179E-4 4.3403899582532095E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0628866441702179E-4 4.3403899582532095E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast('EE2' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.977205663192621E-4.3.621288573296032E-4)' AS TEXT), 4356) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.977205663192621E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.977205663192621E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.977205663192621E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.977205663192621E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT (ast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.836075757775593E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.836075757775593E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.836075757775593E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.836075757775593E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2930395942434906E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2930395942434906E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2930395942434906E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2930395942434906E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	210	210	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.43859869024381E-5 4.4594167332946E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.43859869024381E-5 4.4594167332946E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.43859869024381E-5 4.4594167332946E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM spatia	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6769841209580254E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6769841209580254E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6769841209580254E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.323128581979643E-4 4.0801480204455474E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.323128581979643E-4 4.0801480204455474E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.323128581979643E-4 4.08014802044455474E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.323128581979643E-4 4.0801480204455474E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.8576261760307582E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.85762176307582E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.8576261760307582E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7344671505779721E-4 3.668809451853387E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7344671505779721E-4 3.668809451853387E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7344671505779721E-4 3.668809451853387E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.754428047012832E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.754428047012832E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.754428047012832E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.754428047012832E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.734476299141675E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.734476299141675E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.734476299141675E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.734476299141675E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5776304505344067E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.5776304505344067E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5776304505344067E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.623094352474557E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.623094352474557E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.623094352474557E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.623094352474557E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	209	209	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.0038810528491187E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0038810528491187E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.0038810528491187E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0038810528491187E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7115601108329243E-4 3.691716491506322E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7115601108329243E-4 3.691716491506322E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7115601108329243E-4 3.691716491506322E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1437350197409747E-4 4.2595415826333766E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1437350197409747E-4 4.2595415826333764E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1437350197409747E-4 4.2595415826333764E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1437350197409747E-4 4.2595415826333764E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3693963933936498E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3693963933936498E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.369363933939489E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.9893237709645315E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.9893237709645315E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.9893237709645315E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.361940376535458E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.361940376535458E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.361940376535458E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.361940376535458E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.554283401711001E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.554283401711001E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.554283401711001E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.554283401711001E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.298963900836828E-4 4.1043127015450744E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.298963900836828E-4 4.1043127015450744E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.298963900836828E-4 4.1043127015450744E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.298963900836828E-4 4.1043127015450744E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.372176596492569E-4 4.0311000058095524E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.372176596492569E-4 4.0311000058095524E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.372176596492569E-4 4.0311000058095524E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.372176596492569E-4 4.0311000058095524E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.806346096153088E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.806346096153088E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.806346096153088E-4.3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.806346096153088E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.99229735996582BE-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.99229735996582BE-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.99229735996582BE-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.99229735996582BE-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.881090502073683E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.881090502073683E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.881090502073683E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.881090502073683E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.994089416252216E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.994089416252216E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.994089416252216E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.994089416252216E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	209	209	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0998074023475302E-4 4.3034692000238007E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0998074023475302E-4 4.3034692000238007E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.0998074023475302E-4 4.3034692000238007E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0998074023475302E-4 4.3034692000238007E-4)' AS TEXT), 4326), tupe) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	209	209	0	0,00
[WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT-C_3338231081425166E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-C_3338231081425166E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.from WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT-C_3338231081425166E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT-C_3338231081425166E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT-C_3338231081425166E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1736580672658577E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.1736580672658577E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1736580672658577E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0106991004447246E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0106991004447246E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0106991004447246E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0991785816486463E-4 4.304098020747097E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0991785816486463E-4 4.304098020747097E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0991785816486463E-4 4.304098020747097E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0991785816486463E-4 4.304098020747097E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1687081846394974E-4 4.234568417764929E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1687081846394974E-4 4.234568417764929E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1687081846394974E-4 4.234568417764929E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1687081846394974E-4 4.234568417764929E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5371164312206156E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.5371164312206156E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5371164312206156E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.257659694894735E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.257659694894735E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.257659694894735E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.257659694894735E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	209	209	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.509093568637938E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.509093568637938E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.509093568637938E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.50909356837938E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.2111223888954927E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.21112238895492TE-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.2111223888954927E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.674208492140958E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.674208492140958E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.674208492140958E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.674208492140958E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.254061859476406E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.254061859476406E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.254061859476406E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.254061859476406E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.816761979167023E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.816761979167023E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.816761979167023E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.816761979167023E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	208	208	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.354767577108056E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.354767577108056E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.354767577108056E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the candidates or the	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.669339292479307E-4 3.7339373098997034E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.669339292479307E-4 3.7339373098997034E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.669339292479307E-4 3.7339373098997034E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.669339292479307E-4 3.7339373098997034E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.048801391336948E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.048801391336948E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.048801391336948E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4181703390394888E-4 3.9851062633308374E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4181703390394888E-4 3.9851062633308374E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4181703390394888E-4 3.9851062633308374E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.418170339039488E-4 3.9851062633308374E-4)" AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.418170339039488E-4 3.9851062633308374E-4)" AS TEXT), 4326), LIMIT 50, gid, code, na	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5702642652046265246265E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.5702642652046265E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5702642652046265E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.391230029079605E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.391230029079605E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.391230029079605E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.391230029079605E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.441796031011832E-4 3.9614805713681836E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.441796031011832E-4 3.9614805713681836E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.441796031011832E-4 3.9614805713681836E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.441796031011832E-4 3.9614805713681836E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7440928469636047E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7440928469636047E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7440928469636047E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7440928469636047E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-(2.291961615902547E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-(2.291961615902547E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-(2.291961615902547E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and candidates or	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.020158856619087E-5 4.601260716656946E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.020158856619087E-5 4.601260716656946E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-8.020158856619087E-5 4.601260716656946E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2424644437475617E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2424644437475617E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2424644437475617E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2424644437475617E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5844576466937143E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.5844576466937143E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.584457646937143E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.5844576466937143E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.498498022567179E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.498498022567179E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.498498022567179E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	208	208	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.078535627241303E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.078535627241303E-4.3.621288573296032E-4)" AS TEXT), 4326) LIVIE as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-5.078535627241303E-4.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.078536627241303E-4.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.07853627241303E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.134940678520306E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.134940678520306E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.134940678520306E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.134940678520306E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.029123712332877E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.029123712332877E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.029123712332877E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.029123712332877E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8895163686170012E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8895163686170012E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8895163686170012E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.744811499190901E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.744811499190901E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.744811499199091E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.744811499190901E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	208	208	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.6825491014377143E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.6825491014377143E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.6825491014377143E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.096501932923694E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.096501932923694E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.096501932923694E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.096501932923694E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.049973775488154E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.049973775488154E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.049973775488154E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.049973775488154E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0782478355286618E-4 4.3250287668981636E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0782478355286618E-4 4.3250287668981636E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0782478355286618E-4 4.3250287668981636E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0782478355286618E-4 4.3250287668981636E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.381981955935026E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.381981955935026E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.381981955935026E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and complete the code of the control of the complete the code of	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.33535024412552E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.33535024412552E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.33535024412552E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.33535024412552E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.5670211816180932E-4 3.8362554208074765E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5670211816180932E-4 3.8362554208074765E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5670211816180932E-4 3.8362554208074765E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5670211816180932E-4 3.8362554208074765E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5233722073735866E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.5233722073735866E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5233722073735866E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.5233722073735866E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	207	207	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.879922692204328E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.879922692204328E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.879922692204328E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.879922692204328E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.6715896549714564E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.6715896549714564E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.6715896549714564E-4 3.621288573296032E-4")" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3789185354053169E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3789185354053169E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3789185354053169E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.631628347673692E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.631628347673692E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.631628347673692E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, pame, geom set compared to the candidates or th	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.964979426764893E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.964979426764893E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.964979426764893E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, arme, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.964979426764893E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.8234186608332'1E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.82341866083321E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.82341866083321E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.86563947918682BE-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.86563947918682BE-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.86563947918682BE-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, pame, geom set complete the cast of	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.4004826765060363E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.4004826765060363E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.4004826765060363E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.4004826765060363E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.565763540220326E-4 3.837513062126847E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.565763540220326E-4 3.837513062126847E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.565763540220326E-4 3.837513062126847E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.565763540220326E-4 3.837513062126847E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7424621566066356E-4 3.660814445750605E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7424621566066356E-4 3.660814445750605E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7424621566066356E-4 3.660814445750605E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.381353135236143E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.381353135236143E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.381353135236143E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.381353135236143E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.472168236178775E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.472168236178775E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.472168236178775E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.472168236178775E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.683815891399185E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.683815891399185E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.683815891399185E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.683815891399185E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	207	207	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.664057529430407E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.664057529430407E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.664057529430407E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELY geom <>> ST_GeomFromText(CAST ('POINT(-5.664057529430407E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the control of the contr	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0070114334979836E-4 4.3962651688773735E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0070114334979836E-4 4.3962651688773735E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0070114334979836E-4 4.3962651688773735E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-1.0070114334979836E-4 4.3962651688773735E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.345954938759982E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.345954938759982E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.345954938759982E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.345954938759982E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.633590918453201E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.633590918453201E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.633590918453201E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.633590918453201E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2105788254431695E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2105788254431695E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2105788254431695E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.23042701894036E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.23042701894036E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.23042701894036E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.687310172443548E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-2.687310172443548E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-2.687310172443548E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8124454915213977E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.812445491521397TE-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8124454915213977E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.8124454915213977E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.231774491866539E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.231774491866539E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.231774491866539E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.668539957287302E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.668539957287302E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.668539957287302E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.668539957287302E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	207	207	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.9426068019084652E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.9426068019084652E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.9426068019084652E-4.3.621288573296032E-3") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.9426068019084652E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6415052415171555E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6415052415171555E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6415052415171555E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6415052415171555E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9727947697367324E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9727947697367324E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.9727947697367324E-4 3.621288573296032E-3) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9727947697367324E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	206	206	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.5253485009986506E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.5253485009986506E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5253485009986506E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY ("POINT(-3.5253485009986506E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.1863197384900914E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.1863197384900914E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.1863197384900914E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-9.189765356542704E-5 4.486276360332936E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-9.189765356542704E-5 4.486276360332936E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST (POINT(-9.189765356542704E-5 4.486276360332936E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.189765356542704E-5 4.486276360332936E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.2063475950441053E-4 4.1969290073530226E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.2063475950441053E-4 4.1969290073530226E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2063475950441053E-4 4.1969290073530226E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2063475950441053E-4 4.1969290073530226E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2501001236625775E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2501001236625775E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2501001236625775E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2501001236625775E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3545741912056777E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3545741912056777E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3545741912056777E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3545741912056777E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8593421236342887E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8593421236342887E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8593421236342887E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.637723168760151E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-2.637723168760151E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-2.637723168760151E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-2.637723168760151E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6505645030412088E-4 3.7527120993760565E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6505645030412088E-4 3.7527120993760565E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6505645030412088E-4 3.7527120993760565E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6505645030412088E-4 3.7527120993760565E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.129380272322467E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.129380272322467E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.129380272322467E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopping and complete the code, and continued the complete the complete the code, and continued the complete the code of the complete the complete the complete the code, and code of the code, and code of the code of	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.707985146823851E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.707985146823851E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.707985146823851E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and complete the code, and continued the complete the complete the code, and complete the code, and code the code of the code of the code of the code of the code, and code of the code, and code of the code of the code, and code of the code of t	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.2899853222774845E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2899853222774845E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2899853222774845E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2899853222774845E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9516889348417754E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9516889348417754E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9516889348417754E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9516889348417754E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	206	206	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.1420327949829988E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1420327949829988E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.1420327949829988E-4 3.621288573296032E-X) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.399939113053714E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.39939113053714E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.399939113053714E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3993939113053714E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1036701580692442E-4 4.2996064443520443E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1036701580692442E-4 4.2996064443520443E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1036701580692442E-4 4.2996064443520443E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1036701580692442E-4 4.2996064443520443E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1861400754332673E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1861400754332673E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1861400754332673E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	206	206	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2218031922128126E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2218031922128126E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.221801922128126E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.891676899580739E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.891676899580739E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.891676899580739E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.891676899580739E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.9160212437803783E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.9160212437803783E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.9160212437803783E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.9160212437803783E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4769338814664594E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.4769338814664594E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4769338814664594E-4 3.621288573296032E-3") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.4769338814664594E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.042050303860496E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.042050303860496E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.042050303860496E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.042050303860496E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1017928445362965E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.1017928445362965E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.1017928445362965E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.1017928445362965E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.473336046048129E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.473336046048129E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.473336046048129E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.473336046048129E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3468578283259527E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3468578283259527E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3468578283259527E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.549598439388026E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.549598439388026E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.549598439388026E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.549598439388026E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	205	205	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2750687142792488E-4 4.1282078881397756E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2750687142792488E-4 4.1282078881397756E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2750687142792488E-4 4.1282078881397756E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2750687142792488E-4 4.1282078881397756E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.08993965706777E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.08993965706777E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.08993965706777E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.08993965706777E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.02544976823169E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.02544976823169E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.02544976823169E-4)" (POINT-6.02544976823169E-4)" (POINT-6.02544	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.079685139983253E-4 4.3235914624059467E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.079685139983253E-4 4.3235914624059467E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.079685139983253E-4 4.3235914624059467E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.079685139983253E-4 4.3235914624059467E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.386015226149861E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.386015226149861E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.386015226149861E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, name, geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.933264322953622E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.933264322953622E-4 3.621288573296032E-4)') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.933264322953622E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, seem	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.611218293596774E-4' 3.7920583087850047E-4') 'AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.611218293596774E-4' 3.7920583087850047E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.611218293596774E-4' 3.7920583087850047E-4')' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.611218293596774E-4' 3.7920583087850047E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.318565471158039E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.5.318565471158039E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.318565471158039E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st_geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5780704596127633E-4') AS 1EXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5780704596127633E-4') AS 1EXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5780704596127633E-4') AS 1EXT), 4326), true) as dist FROM candidates AS ('POINT(-1.5780704596127633E-4') AS 1EXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5780704596127633E-4') AS 1EXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.077367817371948E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.077367817371948E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.077367817371948E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3451418807224228E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3451418807224228E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3451418807224228E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.020490737041628E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.020490737041628E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.020490737041628E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.020490737041628E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.866699160400366E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.866699160400366E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.866699160400366E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.866699160400366E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	205	205	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.0775429061469195E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.0775429061469195E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist IMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.0775429061469195E-4" 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.0775429061469195E-4" 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.064072751166978E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.064072751166978E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.064072751166978E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.064072751166978E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(9.581430820418818E-5 4.445133520340522E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(9.581430820418818E-5 4.445133520340522E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(9.581430820418818E-5 4.445133520340522E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(9.581430820418818E-5 4.445133520340522E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(5.717417457307105E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(5.5717417457307105E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(5.717417457307105E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(5.717417457307105E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.976846337078973E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.976846337078973E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.976846337078973E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, same, geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.5476221457629632-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.5476221457629632-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-2.5476221457629632-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.547622145762963E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.113830269343497E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.113830269343497E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.113830269343497E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.113830269343497E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.443961136257422E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.443961136257422E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.443961136257422E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.622191462908586E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.622191462908586E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.622191462908586E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.622191462908586E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7390485585269818E-4 3.6642280438719117E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7390485585269818E-4 3.6642280438719117E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7390485585269818E-4 3.6642280438719117-4.7390485585269818E-4 3.6642280438719117-4.9") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.976397179436913E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.976397179436913E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.9763917436913E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.976391719436913E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.5978379701452445E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5978379701452445E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5978379701452445E-4-3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5978379701452445E-4-3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	205	205	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(3.9447719071540545E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(3.9447719071640545E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rlmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(3.9447719071540545E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9447719071540545E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	205	205	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4117116175575303E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4117116175575303E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4117116175575303E-4-3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2801936856805814E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2801936856805814E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2801936856805814E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.8364396581710914E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8364396581710914E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.8364396581710914E-4-3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.4223163121919916E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4223163121919916E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.4223163121919916E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.106922390219479E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.106922390219479E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.106922390219479E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.106922390219479E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.047458492692618E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.047458492692618E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.047458492692618E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.047458492692618E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.108090200088835E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.108090200088835E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.108090200088835E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.108090200088835E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.349988208974817E-4 4.0532883934072116E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.349988208974817E-4 4.0532883934072116E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.349988208974817E-4 4.0532883934072116E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.349988208974817E-4 4.05328393407216E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST. GeomFromText(CAST ('POINT(-1.0263252121065534E-4 4.376951390264148E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0263252121065534E-4 4.376951390264148E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.0263252121065534E-4 4.376951390264148E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0263252121065534E-4 4.376951390264148E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.6785112569410284E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6785112569410284E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.6785112569410284E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3862801464532457E-4 4.016996455901099E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3862801464532457E-4 4.016996455901099E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3862801464532457E-4 4.016996455901099E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3862801464532457E-4 4.016996455901099E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' ORDER BY	0	1	204	204	0	0,00
as varchar) as type, gid, code, name,  (WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.62020602071982E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.62020602071982E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.62020602071982E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest—4' NS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest—5 ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.62020602071982E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4752'133595810784E-4 3.9280632428465045E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4752'133595810784E-4 3.9280632428465045E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'V' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4752'133595810784E-4 3.9280632428465045E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4752'133595810784E-4 3.9280632428465045E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	204	204	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.947920584930323E-4') AS 1EXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.947920584930323E-4') AS 1EXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.947920584930323E-4') AS 1EXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.947920584930323E-4') AS 1EXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.4411672103129482E-4 3.96210939209148E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.4411672103129482E-4 3.96210939209148E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-1.4411672103129482E-4 3.96210939209148E-4)" AS TEXT), 4326). IMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4411672103129482E-4 3.96210939209148E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5276841207373613E-4 3.618503795898022E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.5276841207373613E-4 3.618503795898022E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5276841207373613E-4 3.618503795898022E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.637826723134117E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.637826723134117E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.637826723134117E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.637826723134117E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.392137492927427E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.392137492927427E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.392137492927427E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.392137492927427E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1061991637103323E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1061991637103323E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1061991637103323E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1061991637103323E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.805111326164576E-5 4.4227654698972387E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.805113126164576E-5 4.4227654696972387E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.80511326164576E-5 4.42276546969972387E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.80511326164576E-5 4.4227654696972387E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2596176913923931E-4 4.1436589109540225E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2596176913923931E-4 4.1436589109540225E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2596176913923931E-4 4.1436589109540225E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2596176913923931E-4 4.1436589109540225E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1248703987744647E-4 4.27840620356893E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1248703987744647E-4 4.27840620356893E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.1248703987744647E-4 4.27840620356893E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4408078841993008E-4 3.9624687181827285E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4408078841993008E-4 3.9624687181827285E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4408078841993008E-4 3.9624687181827285E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-1.4408078841993008E-4 3.9624687181827285E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3689472357515896E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3689472357515896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3689472357515896E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3689472357515896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.880268295472422E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.880268295472422E-4.3.62128873296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.880268295472422E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT type, gid, code, name, geom as closest, name, geom, ST_GeomFromText(CAST ("POINT(-2.880268295472422E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.9207777405043608E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.9207777405043608E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.9207777405043608E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	204	204	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.7273704598334277E-4 3.675906142600826E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.7273704598334277E-4 3.675906142600826E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY GIST LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.727370459833427F-4" 4.3675906142600826E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.727370459833427F-4 3.675906142600826E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-7.889903140421757E-5 4.6142862882916533E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-7.889903140421757E-5 4.6142862882916533E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-7.889903140421757E-5 4.6142862882916533E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.889903140421757E-5 4.6142862882916533E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1080764772432806E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.1080764772432806E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1080764772432806E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.276326355677016E-4 4.126950246693183E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.276326355677016E-4 4.126950246693183E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.276326355677016E-4 4.126950246693183E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.276326355677016E-4 4.126950246693183E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.149947118046954E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-4.149947118046954E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-4.149947118046954E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-4.149947118046954E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3682285835242947E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3682285835242947E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.36822858335242947E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3682285835242947E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.8222325538364494E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.8222325538364494E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.8222325538364494E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.761430331947111E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.761430331947111E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom -> ST_GeomFromText(CAST ('POINT(-4.761430331947111E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.761430331947111E-4.3.621288573296032E-4)' AS TEXT), 4326). Livue) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0798785258856307E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0798785258856307E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0798785258856307E-4 3.621285873296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0798785258856307E-4 3.62128573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.80633237'33075336E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.80633237'33075336E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8063323733075336E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8063323733075336E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	204	204	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3416384511143568E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3416384511143568E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3416384511143568E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) on the standard of the s	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1260427829256719E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.1260427829256719E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1260427829256719E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0453694961298872E-4 4.3579071062829696E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0453694961298872E-4 4.3579071062829696E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0453694961298872E-4 4.3579071062829696E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0453694961298872E-4 4.3579071062829696E-4)' AS TEXT), 4326), LIMIT 50) SELECT ('POINT(-1.0453694961298872E-4 4.3579071062829696E-4)' AS TEXT), 4326), LIMIT 50) SELECT ('POINT(-1.0453694961298872E-4 4.3579071062829696E-4)' AS TEXT), 4326), LIMIT 50) SELECT ('POINT(-1.045369496129872E-4 4.3579071062829696E-4)' AS TEXT), 4326), LIMIT 50) SELECT ('POINT(-1.045369496129872	0	1	203	203	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.351169741689726E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.351169741689726E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.351169741689726E-4.3621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.351169741689726E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.8349886308709464E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.8349886308709464E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.8349886308709464E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.8349886308709464E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2972662503607034E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2972662503607034E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2972662503607034E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2972662503607034E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.957101697955749E-5 4.507566432575251E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.957101697955749E-5 4.507566432575251E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-8.957101697955749E-5 4.507566432575251E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.957101697955749E-5 4.507566432575251E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.239324914534994E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.239324914534994E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.239324914534994E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.239324914534994E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4855439853484525E-4 3.917732617023384E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4855439853484525E-4 3.917732617023384E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4855439853484525E-4 3.917732617023384E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7202874919344376E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7202874919344376E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7202874919344376E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1721217827191515E-4 4.2311548196436225E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1721217827191515E-4 4.2311548196436225E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1721217827191515E-4 4.2311548196436225E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1721217827191515E-4 4.2311548196436225E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.18119934137061E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.18119934137061E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.frmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.18119934137061E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1546046346788211E-4 4.2486719676733826E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1546046346788211E-4 4.2486719676733826E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1546046346788211E-4 4.24867196767333826E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-1.1546046346788211E-4 4.2486719676733826E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.665130933489499E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.665130933489499E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.665130933489499E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT type, gid, code, name, geom as closest, st_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.665130933489499E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.75532636229693E-4') AS 1EXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.75532636229695E-4') AS 1EXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.75532636229695E-4') AS 1EXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PONTC-5.75532636229695E-4') AS 1EXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.0467261176197693E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.0467261176197693E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RHO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.0467261176197693E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	203	203	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.2969921814936165E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2969921814936165E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY GIST LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2969921814936165E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY ("POINT(-2.2969921814936165E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.050243270073389E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.050243270073389E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.050243270073389E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.040820108153836E-5 4.599194591568655E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-8.040820108153836E-5 4.599194591568655E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-8.040820108153836E-5 4.599194591568655E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-8.040820108153836E-5 4.599194591568655E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.159460111494918E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.159460111494918E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.159460111494918E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.159460111494918E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.925732197412571E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-4.925732197412571E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-4.925732197412571E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-4.925732197412571E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.3039990407097485E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.3039990407097485E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.3039990407097485E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.809656139858776E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.809565139858776E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.809656139858776E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.80965613958776E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.040702830934317E-4").621288573296032E-4"). AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.040702830934317E-4").63.621288573296032E-4"). AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.040702830934317E-4"). AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.040702830934317E-4"). AS TEXT), 4326). LIWIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.040702830934317E-4"). AS TEXT), 4326). Live) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.620668901207433E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.620668901207433E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.620668901207433E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the cont	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.719654096953702E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.719654096953702E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) LINION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.719654096953702E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SEV geom <> ST_GeomFromText(CAST ('POINT(-3.719654096953702E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.4414458534618873E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4414458534618873E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.4414458534618873E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4414458534618873E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-6.11375416066064E-4 3.621288573296032E-4)" AS "TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.11375416066064E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-6.11375416066064E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.11375416066064E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FROM.	0	1	203	203	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9793524713108045E-4.3 621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9793524713108045E-4.3 621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9793524713108045E-4.3 621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9793524713108045E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	203	203	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.1889202785321867E-4 4.214356323923582E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1889202785321867E-4 4.214356323923582E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.1889202785321867E-4 4.214356323923582E-4)" AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1889202785321867E-4 4.214356323923582E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	202	202	0	0,00
[WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.938061988214266E-5.4.4094704035577056E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.938061988214266E-5.4.4094704035577056E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.938061988214266E-5.4.4094704035577056E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.5671110131465051E-4 3.836165589221053E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.567110131465051E-4 3.836165589221053E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.5671110131446501E-4 3.836165589221053E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.567110131465051E-4 3.836165589221053E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.031643569410264E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.031643569410264E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.031643569410264E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.031643569410264E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, standard and standard as the control of the control	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.008112283248184E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.008112283248184E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.frmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.008112283248184E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, name, geom as closest, graduates or	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3840389325247984E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3840389352547984E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3840389325247984E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.621378404871028E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.621378404871028E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.621378404871028E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.621378404871028E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.229178526106295E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.229178526106295E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.229178526106295E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.229178526106295E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7102217864704473E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7102217864704473E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7102217864704473E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7102217864704473E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.451408004551911E-4.3.951868597854783E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.451408004551911E-4.3.951868597854783E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.451408004551911E-4.3.951868597854783E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped candidates or the control of the cont	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.925467277109188E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.925467277109188E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.925467277109188E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.925467277109188E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.680667213622915E-4 3.621288573296032E-4) 'AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.680667213622915E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.680667213622915E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stock candidates or the control of the contro	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1,0291099894873237E-4 4.374166612866137E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1,0291099894873237E-4 4.374166612866137E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1,0291099894873237E-4 4.374166612866137E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1,0291099894873237E-4 4.374166612866137E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	202	202	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.040976899801404E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.040976899801404E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.040976899801404E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.040976899801404E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.1609826731960695E-4 4.242293929235664E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.1609826731960695E-4 4.242293929235664E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.1609826731960695E-4 4.242293929235664E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.746598981195437E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.746598981195437E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.746598981195437E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6493160102071446E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.6493160102071446E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.6493160102071446E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3524136602419395E-4 4.050862942227672E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3524136602419395E-4 4.050862942227672E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3524136602419395E-4 4.050862942227672E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.717426605870808E-5 4.6315339418165883E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.717426605870808E-5 4.6315339418165883E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.717426605870808E-5 4.6315339418165883E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.717426605870808E-5 4.6315339418165883E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.984306928219017E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.984306928219017E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.984306928219017E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, part of the candidates or of the candidates or of the candidates or of the candidates as a cast of the candidates or of the can	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.221538271909428E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.221538271909428E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.221538271909428E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.221538271909428E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1242415780755811E-4 4.279035024292226E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1242415780755811E-4 4.279035024292226E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1242415780755811E-4 4.279035024292226E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1242415780755811E-4 4.279035024292226E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7972685375016295E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7972685375016295E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7972685375016295E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5384547555830926E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5384547555830926E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.538457555830926E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5384547555830926E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3344519288414004E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3344519288414004E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.3344519288414004E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.612565766522953E-4 3.790710835879211E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.612565766522953E-4 3.790710835879211E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.612565766522953E-4 3.790710835879211E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.612565766522953E-4 3.790710835879211E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	202	202	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.7197393542002633E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7197393542002633E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.7197393542002633E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7197393542002633E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.766101571424533E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.766101571424533E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-4.766101571424533E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.766101571424533E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast('EE' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0443006663526465E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0443006663526465E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0443006663526465E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0443006663526465E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0443006663526465E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0443006663526465E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0443006663526465E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0443006663526465E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0443006663526465E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0443006663526465E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0443006663526465E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name,	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.857639898876313E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.857639898876313E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.857639898676313E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.857639898876313E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	202	202	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.5751105934570205E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.5751105934570205E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.5751105934570205E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.5751105934570205E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0574/0692/0937/0888E-4 4.345869681462807E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0574/0692/0937/0888E-4 4.345869881462807E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0574/06920937/0888E-4 4.345869861462807E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0574/0692/0937/0888E-4 4.345869681462807E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5014487401592197E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5014487401592197E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5014487401592197E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5014487401592197E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.380001088028111E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.380001088028111E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.380001088028111E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.380001088028111E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6772581898251126E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6772581898251126E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.67725818982551126E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6772581898251126E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2025883936963577E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2025883936963577E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.202588393696357E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.202588393696357E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.047714264432301E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.047714264432301E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.047714264432301E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.047714264432301E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1326096330634467E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1326096330634467E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1326096330634467E-4.3.621288573296032E-X)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.178872870195602E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.178872870195602E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.178872870195602E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.178872870195602E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	201	201	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.461738630319285E-4 3.9415379720316617E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.461738630319285E-3.9415379720316617E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.461738630319285E-4' 3.9415379720316617E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.461738630319285E-4' 3.9415379720316617E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(MITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9750451322288825E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9750451322288825E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9750451322288825E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9750451322288825E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.452315468399733E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.45231546839973E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.452315468399733E-4.3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.452315468399733E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.157043808791498E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.157043808791498E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.157043808791498E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.157043808791498E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.9391079465822506E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.9391079465822506E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.9391079465822506E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8022899545289958E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8022899545289958E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8022899545289958E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.127493810225816E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.127493810225816E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.127493810225816E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.127493810225816E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.329695432117418E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.329695432117418E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.329695432117418E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.329695432117418E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.406591220438049E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.406591220438049E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.406591220438049E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.406591220438049E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2091369467067267E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2091369467067267E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2091369467067267E-4-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2091369467067267E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1080719029614299E-4 4.295204699416193E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1080719029614299E-4 4.295204699416193E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1080719029614299E-4 4.295204699416193E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3619358022536065E-4 4.04134080004625E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3619358022536065E-4 4.04134080004625E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.3619358022536065E-4 4.04134080004625E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3619358022536065E-4 4.04134080004625E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.501093988327423E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.501093988327423E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.501093988327423E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.501093988327423E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	201	201	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.81695079078755E-4 3.621288573296032E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.8169507907855E-4 3.621288573296032E-4)" AS TEXT), 4326) LIWIT 50) SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.81695079078755E-4 3.621288573296032E-4)" AS TEXT), 4326) LIWIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.81695079078755E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.806615590738323E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.806615590738323E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.806615590738323E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.806615590738323E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4105346591244727E-4 3.992741943215149E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4105346591244727E-4 3.992741943215149E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4105346591244727E-4 3.992741943215149E-4)' AS TEXT), 4326), IMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4105346591244727E-4 3.992741943215149E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7468776243443753E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7468776243443753E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7468776243443753E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.097490079736225E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-5.097490079736225E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-5.097490079736225E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-5.097490079736225E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6047504235511132E-4 3.798526178809147E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6047504235511132E-4 3.798526178809147E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6047504235511132E-4 3.798526178809147E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4143167318814775E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4143167318814775E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4143167318814775E-4 3.621285873296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4143167318814775E-4 3.62128573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.732149827966666E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.732149827966666E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.73214982796666E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.732149827966666E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	201	201	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0821105912503755E-4 4.321166011099185E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0821105912503755E-4 4.321166011099185E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0821105912503755E-4 4.321166011099185E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0821105912503755E-4 4.321166011099185E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.7369108989725E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.7369108989725E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.frmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.7369108989725E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.736910898725E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM spatial.eez where the start of the st	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6452644428649035E-4 3.7580121595400293E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6452644428649035E-4 3.7580121595400293E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6452644428649035E-4 3.7580121595400293F-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.645264442864903E-4 3.7580121595400293E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.455648383514678E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.455648383514678E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIMIT to AND distance (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.455648383514678E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.455648383514678E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2258410367094988E-4 4.177435565694173E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2258410367094988E-4 4.177435565694173E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.frino WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2258410367094988E-4 4.177435565694173E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2258410367094988E-4 4.177435565694173E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	200	200	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.722349042806061E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.722349042806061E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.722349042806061E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.722349042806061E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.0215641411007199E-4 4.381712461291248E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.0215641411007199E-4 4.381712461291248E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.0215641411007199E-4 4.381712461291248E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0215641411007199E-4 4.381712461291248E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.012944888655024E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-2.012944888655024E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-2.012944888655024E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.373348980643776E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.373348980643776E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.373348980643776E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9645302691228324E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9645302691228324E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9645302691228324E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.042603015876523E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.04260315876523E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.042603015876523E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.969480151749192E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.969480151749192E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.969480151749192E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.937414870387977E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.93741487038797F-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.937414870387977E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.937414870387977E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.952057409519125E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.952057409519125E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.952057409519125E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.952057409519125E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7695958524688965E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7695958524688965E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7695958524688965E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7695958524688965E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.250648261396752E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.250648261396752E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.250648261396752E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.250648261396752E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9512352029178643E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9512352029178643E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.9512352029178643E-4 3.621288573296032F-3) X TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.424377863063615E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.424377863063615E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.424377863063615E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.424377863063615E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	200	200	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.059841520767914E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.059841520767914E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIMIT candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.059841520767914E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SEV geom <>> ST_GeomFromText(CAST ('POINT(-3.059841520767914E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.306249403201899E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.306249403201899E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.306249403201899E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.306249403201899E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.235381475848571E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.235381475848571E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.235381475848571E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.235381475848571E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.4750382708061053E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.4750382708061053E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.4750382708061053E-4 3.621288573296032E-3)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.83221757633573E-4.3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.83221757633573E-4.3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.83221757633573E-4.3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.051491762907454E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.051491762907454E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-4.051491762907454E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.810747841045273E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.810747841045273E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.810747841045273E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.810747841045273E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.447998980754108E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.447998980754108E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.447998980754108E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3140601718918874E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3140601718918874E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3140601718918874E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3140601718918874E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1642303310644534E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1642303310644534E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1642303310644534E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1642303310644534E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.066673291209074E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.066673291209074E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.066673291209074E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the cont	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2942074041128462E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2942074041128462E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2942074041128462E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2279208847085273E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2279208847085273E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2279208847085273E-4 3.621288573296032E-3)' AS TEXT), 4326), true) s dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	200	200	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3938351434035526E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3938351434035526E-4) 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist IMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.39383514344035526E-4) 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(3.976123110569826E-4' 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.976123110569826E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.976123110569826E-4' 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.976123110569826E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	200	200	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(3.469563121854828E-4 3.6212888573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.469563121854828E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.469563121854828E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.469563121854828E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(3.5310078872886034E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(3.5310078872886034E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(3.5310078872886034E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8481938655475036E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8481938655475036E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8481938655475036E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7286281012311952E-4 3.6746485011542333E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7286281012311952E-4 3.6746485011542333E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'V' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7286281012311952E-4 3.6746485011542333E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RDCT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RDRTAREA' as varchar) as type, gid, code, na	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.038924497493482E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.038924497493482E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.038924497493482E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.038924497493482E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.907406565616534E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.907406565616534E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.907406565616534E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.907406565616534E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3471181743474858E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3471181743474858E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.347181743474858E-4' 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.347181743474858E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6029675158284285E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6029675158284285E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6029675158284285E-43.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.8742450087869694E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8742450087869694E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8742450087869694E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.447374734337075E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.447374734337075E-4 3.621288573296032E-4)" AS TEXT), 4326) LIWIT tupe) as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIWITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.447374734337075E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.447374734337075E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST. GeomFromText(CAST ('POINT(-2.3191805690113686E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3191805690113686E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3191805690113686E-4 3.621288573296032E-X) X = TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	199	199	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-63.799 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-63.799 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-63.799 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-63.799 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-63.799 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4514217273974643E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4514217273974643E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4514217273974643E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4514217273974643E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.951608251877066E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.951608251877066E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.951608251877066E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, arme, geom as closest, stopped candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.734655962198498E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.734655962198498E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.734655962198498E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, produced to the control of t	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5470923051561937E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5470923051561937E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5470923051561937E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.773023173394105E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.773023173394105E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.773023173394105E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, goom	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.433980688039992E-4 3.9692959142981194E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.433980688039992E-4 3.9692959142981194E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.433980688039992E-4 3.9692959142981194E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.433980688039992E-4 3.9692959142981194E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.094435807770218E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.094435807770218E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.094435807770218E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.094435807770218E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.837876962625683E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.837876962625683E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.837876962625683E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.837876962625683E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9397413415629854E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9397413415629854E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9397413415629854E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9397413415629854E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4565375502350944E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4565375502350944E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4565375502350944E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.876131470883621E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.876131470883621E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.876131470883621E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.876131470883621E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.261163124502801E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.261163124502801E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.261163124502801E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.261163124502801E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	199	199	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.5650448879930303E-4 3.838231714436566E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5650448879930303E-4 3.838231714436566E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.5650448879930303E-4 3.838231714436566E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5650448879930303E-4 3.838231714436566E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.67949940375356E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.67949940375356E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.67949940375356E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.67949940375356E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.24004356676229E-4 3.621288573296032E-4) 'AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.24004356676229E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.24004356676229E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.24004356676229E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	199	199	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.5842734093550393E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.5842734093550393E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.5842734093550393E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1755353807988057E-4 4.227741221649538E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1755353807988057E-4 4.227741221649538E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1755353807988057E-4 4.227741221649538E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0266891125020524E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0266891125020524E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0266891125020524E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.96983947786284E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.96983947786288E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.96983947786284E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.96983947786284E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.5587612552860453E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.5587612552860453E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.5587612552860453E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.5587612552860453E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.5214004880303753E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.5214004880303753E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.5214004880303753E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.504777080992313E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.504777080992313E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.504777080992313E-4.3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.504777080992313E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.665845011434943E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.665845011434943E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.665845011434943E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.665845011434943E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.2197462156230405E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2197462156230405E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist TROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST (POINT(-4.2197462156230405E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.276609573107806E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.276609573107806E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.276609573107806E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.276609573107806E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.904895857102851E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.904895857102851E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.904895857102851E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.904895857102851E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.4127804473347712E-4 3.9904961550812337E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.4727804473347712E-4 3.9904961550812337E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.4127804473347712E-4 3.9904961550812337E-4)" AS TEXT), 4326), true) os dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("ROTATEA") as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4127804473347712E-4 3.9904961550812337E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4717099299730118E-4 3.931566672427012E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4717099299730118E-4 3.931566672427012E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4717099299730118E-4 3.931566672427012E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4717099299730118E-4 3.931566672427012E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar") as type, gid, code, name,	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5963960914088017E-4 3.806880511003178E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5963960914088017E-4 3.806880511003178E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5963960914088017E-4 3.806880511003178E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5963960914088017E-4 3.806880511003178E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.974676657551532E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.974676657551532E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.974676657551532E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.974676657551532E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.386648621130596E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.386648621130596E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.386648621130596E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.386648621130596E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.777415769722588E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.777415769722588E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.777415769722588E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.777415769722588E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopping the control of	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1230829167699285E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1230829167699285E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1230829167699285E-4 3.621288573296032E-3) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1230829167699285E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.628115769501923E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.628115769501923E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.628115769501923E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.628115769501923E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.242298503536292E-4") AS 1EXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.242298503536292E-4") AS 1EXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.242298503536292E-4") AS 1EXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.242298503536292E-4") AS 1EXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.846608918009047E-5.4.518615710580869E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-8.846608918009047E-5.4.518615710580869E-4)") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-8.846608918009047E-5.4.518615710580869E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-8.846608918009047E-5.4.518615710580869E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.835366254112E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.835366254112E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.835366254112E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as Closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.835366254112E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FROM spatia	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT-(6.113574497603815E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT-(6.113574497603815E-4 3.621288573296032E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" (POINT-(6.113574497603815E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	198	198	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.938843026278866E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.938843026278866E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.938843026278866E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.938843026278866E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.382256024802113E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.382256024802113E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.382256024802113E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.382256024802113E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.792691703834471E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.792691703834471E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.792691703834471E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.792691703834471E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.623898261948413E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.623898261948413E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.623898261948413E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.623898261948413E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.411446697254146E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.411446697254146E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.411446697254146E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.411446697254146E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.635203311682765E-4 3.7680732907311023E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.635203311682765E-4 3.7680732907311023E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.635203311682765E-4 3.7680732907311023E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.635203311682765E-4 3.7680732907311023E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.315681713685153E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.315681713685153E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.315681713685153E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.315681713685153E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	198	198	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.2780423032805454E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.2780423032805454E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.2780423032805454E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.2780423032805454E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.611676599802536E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.611676599802536E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.611676599802536E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.611676599802536E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.470003130933185E-4 3.933273471424054E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.470003130933185E-4 3.9332734714240544E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.470003130933185E-4 3.9332734714240544E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.470003130933185E-4 3.9332734714240544E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.102879971440942E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.102879971440942E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.102879971440942E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.102879971440942E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.931032257588878E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.931032257588878E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.931032257588878E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.931032257588878E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.541886650790151E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.541886650790151E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.541886650790151E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.541886650790151E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	197	197	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8417305697836943E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.8417305697836943E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8417305697836943E-4" 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.8417305697836943E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3789276839690193E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3789276839690193E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3789276839690193E-4 3.621288573296032E-30) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.959499703531764E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.959499703531764E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.959499703531764E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.959499703531764E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9727003639264694E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9727003639264694E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9727003639264694E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5951430242928856E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5951430242928856E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5951430242928856E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gld, code, name, geom FROM spatial eez WHERE enabled = "Y" ORDER BY geom <> ST GeomFromText(CAST ("POINT(-3.7059098731066737E-4 3.621288573296032E-4)) AS TEXT), 4326) LIMIT 50) SELECT type, gld, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.7059098731066737E-4 3.621288573296032E-4)) AS TEXT), 4326), true) as dist FROM candidates ORDER BY gist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast(RFMO' as varchar) as type, gid, code, name, geom FROM spatial-firm WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7059098731066737E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.7059098731066737E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, spen as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.7059098731066737E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.85836312538546E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.85836312538546E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.85836312538546E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.85836312538546E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3048120987473075E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3048120987473075E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3048120987473075E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3048120987473075E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0412418201047887E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0412418201047887E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0412418201047887E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0412418201047887E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.685792185024248E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.685792185024248E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.685792185024248E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.685792185024248E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.566590321103438E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.566590321103438E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.566590321103438E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and control of the co	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.29520469948908E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.29520469948908E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.29520469948908E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.29520469948908E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4921154097680787E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.492115409768078TE-4 3.621288573299032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfm WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4921154097680787E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4921154097680787E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.6443707018626356E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.6443707018626356E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.6443707018626356E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY ("POINT(-2.6443707018626356E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.9389328578072773E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.9389328578072773E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.9389328578072773E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8066962737030327E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8066962737030327E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8066962737030327E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2587330989538275E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2587330989538275E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2587330989538275E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8637347199627714E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8637347199627714E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8637347199627714E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WTH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.9663268996910725E-4") AS 152T), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.9663268996910725E-4") AS 152T), 4326) LIMIT 50) SELECT 33.621288573296032E-4) AS 152T, 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast(RFMO" as varchar) as type, gid, code, name, geom FROM spatial.from WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.9663268996910725E-4") AS 152T), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.9663268996910725E-4") AS 152T), 4326) LIMIT 50) SELECT type, gid, AS 152T), 4326) LIMIT 50) AS 152T ("POINT(-2.9663268996910725E-4") AS 152T ("POINT(-2.9663	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1544249716219971E-4 4.248851630719007E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1544249716219971E-4 4.248851630719007E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.154429716219971E-4 4.248851630719007E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1544249716219971E-4 4.248851630719007E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4675822539479134E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4675822539479134E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4675822539479134E-4 4.3.621288573296032E-X)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4675822539479134E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8677908615868626E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8677908615868626E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.867790861586862E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8677908615868626E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.937513850480092E-5 4.6095252173917756E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.937513850480092E-5 4.6095252173917756E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.937513850480092E-5 4.6095252173917756E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.937513850480092E-5 4.6095252173917756E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.2779478974702827E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2779478974702827E-4) 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.2779478974702827E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.146713183024123E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.146713183024123E-4.3.621288573296032E-4)" AS TEXT), 4326) LIWIT to as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.146713183024123E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.146713183024123E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4512374900587893E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4512374900587893E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4512374900587893E-4 3.621288573296032E-4)' AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4512374900587893E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.5504967546721453E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5504967546721453E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.5504967546721453E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	197	197	0	0,00
[WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y ORDER BY geom <-> ST_GeomFromText(CAST ('POINT'(4-)34266192611707E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.934266192611707E-4 3.621288573296032E-4)" AS TEXT), 4326). true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.934266192611707E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.934266192611707E-4 3.621288573296032E-4)" AS TEXT), 4326). Live) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.482777505095087E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.482777505095087E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.482777505095087E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.482777505095087E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	197	197	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.243452590560093E-4 3.62128857329603E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.243452590560093E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.243452590560093E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.243452590560093E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.904087373347144E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.904087373347144E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.904087373347144E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50; BLICCT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.904087373347144E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.83860018913483E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.83860018913483E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.83860018913483E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.83860018913483E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5690918810534195E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5690918810534195E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5690918810534195E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.53729609427744E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.53729609427744E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.53729609427744E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom from text(CAST ('POINT(-3.53729609427744E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9148580081928747E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9148580081928747E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9148580081928747E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9148580081928747E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.029582018538639E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.029582018538639E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.029582018538639E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.029582018538639E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.003077143375263E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.003077143375263E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.003077143375263E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.003077143375263E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6117572827672452E-4 3.791519319648132E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6117572827672452E-4 3.791519319648132E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6117572827672452E-4 3.791519319648132E-4)" AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6117572827672452E-4 3.791519319648132E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.1351249158589807E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.1351249158589807E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.1351249158589807E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	196	196	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.075562038240006E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.075562038240006E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.075562038240006E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.075562038240006E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.323236710635461E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.323236710635461E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.323236710635461E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0595628776189755E-4 4.3437137247880926E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0595628776189755E-4 4.3437137247880926E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0595628776189755E-4 4.3437137247880926E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0595628776189755E-4 4.3437137247880926E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.208966432213606E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.208966432213606E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.208966432213606E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the co	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8689495228925157E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8689495228925157E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8689495228925157E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8689495228925157E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.007375338934827E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.007375333934827E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0073753338934827E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0073753338934827E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.57600890874114E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.57600890874114E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.57600890874114E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.57600890874114E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.4262597508784155E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4262597508784155E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4262597508784155E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4262597508784155E-4' 3.62128573296003E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.637377565492057E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.637377565492057E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.637377565492057E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.637377565492057E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8980549380979885E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8980549380979885E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8980549380979885E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8980549380979885E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.5256134213020345E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.5256134213020345E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.5256134213020345E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.61813532)*2844942E-4 3.785141281083191E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.61813532)*2844942E-4 3.785141281083191E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.61813532)*2844942E-4 3.785141281083191E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.61813532)*2844942E-4 3.785141281083191E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.661272752049637E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.661272752049637E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.661272752049637E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	196	196	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.457435865519214E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.457435865519214E-4 3.621288573296032E-4)' AS TEXT), 4326) LIVE as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIMIT to A GELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.457435865519214E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.457435865519214E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.20968051015905E-4 3.618503795898022E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.20968051015905E-4 3.618503795898022E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.20968051015905E-4 3.618503795898022E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.20968051015905E-4 3.618503795898022E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	196	196	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.154982257919874E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.154982257919874E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.154982257919874E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.154982257919874E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.198092242993908E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.198092242993908E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-3.198092242993908E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.198092242993908E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2959233517163764E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2959233517163764E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2959233517163764E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2959233517163764E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.829073472841311E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.829073472841311E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.829073472841311E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.177875574819388E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.177875574819388E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.177875574819368E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.177875574819368E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.697106383322302E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.697106383322302E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.69710638322302E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.697106383322302E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6065470541193523E-4 3.7967295482256813E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6055470541193523E-4 3.7967295482256813E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6065470541193523E-4 3.7967295482256813E-4)' AS TEXT), 4326), tIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6065470541193523E-4 3.7967295482256813E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.391239177643308E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.391239177643308E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.391239177643308E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.391239177643308E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.039638575438928E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.039638575438928E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.039638575438928E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.039638575438928E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.702846452576965E-4 3.7004301497916013E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.702846452576965E-4 3.7004301497916013E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.702846452576965E-4 3.7004301497916013E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.702846452576965E-4 3.7004301497916013E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0219371900599213E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0219371900599213E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0219371900599213E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0219371900599213E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	195	195	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4018210008685133E-4 4.0014556015004286E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4018210008685133E-4 4.0014556015004286E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4018210008686133E-4 4.0014556015004286E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.401821000868513SE-4 4.0014556015004286E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.5798808130265563E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.57988081430265563E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.5798808130265563E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.32187551486372TE-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.32187551486372TE-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.32187551486372TE-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.32187551486372TE-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.592537909968939E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.592537909968939E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.592537909968939E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.592537909968939E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.984472868430286E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-2.984472868430286E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-2.984472868430286E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, st. ["POINT(-2.984472868430286E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3164003659124497E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3164003659124497E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3164003659124497E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4154845417508323E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4154845417508323E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4154845417508323E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4154845417508323E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.218569257189982E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.218569257189982E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.218569257189982E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.218569257189982E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2703213661189697E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2703213661189697E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2703213661189697E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2703213661189697E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1898323166618596E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1898323166618596E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1898232166618596E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.183997841596935E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.183997841596935E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.183997841596935E-4)' AS TEXT), 4326) LIMIT 50) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.183997841596935E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.2628562006970747E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2628562006970747E-4 3.6212885732996032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.2628562006970747E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2628562006970747E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.06739651771822E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.06739651771822E-4 3.621288573296032E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.06739651771822E-4) AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.06739651771822E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	195	195	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.1264873662858797E-4 4.276789236031089E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1264873662858797E-4 4.276789236031089E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.1264873662858797E-4 4.276789236031089E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.587691581716545E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.587691581716545E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.587691581716545E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.587691581716545E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-7.819834548260434E-5 4.621293147578891E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.819834548260434E-5 4.621293147579891E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-7.819834548260434E-5 4.621293147579891E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.819834548260434E-5 4.621293147579891E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9904870065520357E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9904870065520357E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9904870065520357E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.1073669735796877E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1073669735796877E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.1073669735796877E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9963306301806635E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9963306301806635E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9963306301806635E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.546373652928898E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.546373652928898E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.546373652928898E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.546373652928898E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.330063906794769E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.330063906794769E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.330063906794769E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.330063906794769E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-7.90158123911531E-5 4.613118478431484E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.90158123911531E-5 4.613118478431484E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-7.90158123911531E-5 4.613118478431484E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-7.90158123911531E-5 4.613118478431484E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	195	195	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4823191988893245E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4823191988893245E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4823191988893245E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.482319198893245E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.5958616765201815E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.5958616765201815E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.5958616765201815E-4 4.3621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.85611733717516E-4 3.618503795898022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.85611733717516E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.85611733717516E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.85611733717516E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.914148504529281E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.914148504529281E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.914148504529281E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.914148504529281E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	194	194	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.234393329036039E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.234393329036039E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.234393329036039E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.234393329036039E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, structured and control of the contro	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5355847209557615E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5355847209557615E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5355847209557615E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8261988639321295E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8261988639321295E-4 3.621286573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8261988639321295E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.644096632995548E-4 3.759179969400198E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.644096632995548E-4 3.759179969400198E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.644096632995548E-4 3.759179969400198E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.644096632995548E-4 3.759179969400198E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.477378464826667E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.477378464826667E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.477378464826667E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.357462522960414E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.357462522960414E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.357462522960414E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5369321938819407E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5369321938819407E-4 3.621288573296032E-4)' AS TEXT), 4326), True) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5369321938819407E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5369321938819407E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.049695132339215E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.049695132339215E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.04969513339215E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.049695132339215E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.064153434131687E-4 3.618503795898022E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.064153434131687E-4 3.618503795898022E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.064153434131687E-4 3.618503795898022E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.064153434131687E-4 3.618503795898022E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0027893516626218E-4 4.40048725064037885E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0027893516626218E-4 4.4004872506403785E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0027893516626218E-4 4.4004872506403785E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0027893516626218E-4 4.4004872506403785E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.816946216505698E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.816946216505698E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.816946216505698E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.175270460495421E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.175270460495421E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.175270460495421E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st. processed of the control of the code, and candidates or the control of	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.816411801617079E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.816411801617079E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.816411801617079E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.816411801617079E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	194	194	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.970917456203784E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.970917456203784E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.970917456203784E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.970917456203784E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5837298459027164E-4 3.819546756419415E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.583729845927164E-4 3.819546756419415E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5837298459027164E-4 3.819546756419415E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5837298459027164E-4 3.819546756419415E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.972534423715199E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.972534423715199E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.972534423715199E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8349033736243856E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.8349033736243856E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8349033736243856E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.8349033736243856E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.719748502763966E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.719748502763966E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.719748502763966E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.719748502763966E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.53173111379775E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.53173111379775E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.53173111379775E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.846146037521433E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.846146037521433E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.846146037521433E-43.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopped and control of the code, and control of the control of the control of the control of the code, and control of the control of the control of the control of the code, and control of the code, and control of the control of the control of the code, and control of the control of the control of the control of the code, and control of the control of the control of the control of the code, and control of the code, and	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.745606260101054E-4 3.657670342261346E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.745606260101054E-4 3.657670342261346E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.745606260101054E-4 3.657670342261346E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.52903159366354E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.52903159366354E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.52903159366354E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.52903159366354E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	194	194	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4145/770779030106E-4 3.988699524497768E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4145770779030106E-4 3.988699524497768E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4145770779030106E-4 3.988699524497768E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4145770779030106E-4 3.988699524497768E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5531871262426525E-4 3.850089476211105E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5531871262426525E-4 3.850089476211105E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5531871262426525E-4 3.850089476211105E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.580334544950468E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.580334544950468E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.580334544950468E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.580334544950468E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.970284061223049E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.970284061223049E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-3.970284061223049E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	193	193	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.859010243211748E-5 4.4173755780740643E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.859010243211748E-5 4.4173755780740643E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.859010243211748E-5 4.4173755780740643E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.859010243211748E-5 4.4173755780740643E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.29953735233878E-4 3.62128857329603E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.239953735233878E-4 3.62128857329603E-4)) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.23995373523878E-4 3.621288573296032E-4)) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.23995373523878E-4 3.621288573296032E-4)) AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.23995373523878E-4 3.621288573296032E-4)) AS TEXT), 4326) LIMIT 50) ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.45340259530438E-4.3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.45340259530438E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.45340259530438E-4.3621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.45340259530438E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.7249587314118595E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.7249587314118595E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.7249587314118595E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0362965117602801E-4 4.3669800906594977E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0362965117602801E-4 4.3669800906594977E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0362965117602801E-4 4.3669800906594977E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0362965117602801E-4 4.3669800906594977E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.421597659964696E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.421597659964696E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.421597659964696E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.421597659964696E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4072108925732303E-4 3.996065709750032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4072108925732303E-4 3.996065709750032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4072108925732303E-4 3.996065709750032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4072108925732303E-4 3.996065709750032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.84497822765208E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.84497822765208E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.84497822765208E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.84497822765208E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5196891147086973E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5196891147086973E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5196891147086973E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, code,	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8916814738625913E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8916814738625913E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8916814738625913E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8916814738625913E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.4896762356554023E-4 3.91360036671958E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4896762356554023E-4 3.91360036671958E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.4896762356554023E-4 3.91360036671958E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.4896762356554023E-4 3.91360036671958E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.621118058849494E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.621118058849494E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.621118058849494E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.621118058849494E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.110147176678607E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.110147176678607E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.110147176678607E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.110147176678607E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	193	193	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6370897737794159E-4 3.7661868285612137E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6370897737794159E-4 3.7661868285612137E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6370897737794159E-4 3.7661868285612137E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6370897737794159E-4 3.7661868285612137E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast('EE2' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.865001509924241E-4 3.621288573296032E-4)' AS TEXT), 4356) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.865001509924241E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.865001509924241E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.865001509924241E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.865001509924241E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3072375500144304E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3072375500144304E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3072375500144304E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.000472029051316E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.000472029051316E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.000472029051316E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, name, geom	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.236629968882636E-4 3.618503795898022E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2366299688682636E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.23662996882636E-4 3.618503795898022E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.23662996882636E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.635670766452229E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.635670766452229E-4) as 125. T. Distance(geom, ST_GeomFromText(CAST ('POINT	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.900489537928814E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.900489537928814E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.900489537928814E-4.3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.900489537928814E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8017555396403753E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.8017555396403753E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8017555396403753E-4 3.621288573296032E-4")" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5736687147205778E-4 3.82960788773771E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5736687147205778E-4 3.82960788773771E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.5736687147205778E-4 3.82960788773771E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5736687147205778E-4 3.82960788773771E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9295812302887319E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9295812302887319E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9295812302887319E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2121866443908821E-4 4.191089958052177E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.2121866443908821E-4 4.191089958052177E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.2121866443908821E-4 4.191089958052177E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0169873074335614E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0169873074335614E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0169873074335614E-4 3.621288573296032E-4)" AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0169873074335614E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.474243509895952E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.474243509895952E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.474243509895952E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 30 SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.474243509895952E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	193	193	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.661353435014346E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.661353435014346E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.661353435014346E-4), as (21288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.661353435014346E-4), as TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	193	193	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5643308100475854E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5643308100475854E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5643308100475854E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6532731717391216E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6532731717391216E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6532731717391216E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.016452892544941E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-3.016452892544941E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-3.016452892544941E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.46605969822467626E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4660596922467626E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4660596922467626E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.957177806638607E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.957177806638607E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.957177806638607E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.957177806638607E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3898825561534267E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.38988253661534267E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3898825661534267E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EE2' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8781077645086837E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8781077645086837E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.frmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8781077645086837E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8781077645086837E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8781077645086837E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, as varchar) as type, gid, code, name,	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.952757764619016E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.952757764619016E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.952757764619016E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.952757764619016E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.455019562815794E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.455019562815794E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.455019562815794E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the cont	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3038239519347755E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3038239519347755E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3038239519347755E-4-3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3038239519347755E-4-3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast("POINT(-3.725582977828891E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.725582977828891E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.725582977828891E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT (10) as dist FROM candidates ORDER BY dist LIMIT 1) LNION AIL (WITH candidates AS (SELECT cast("POINT(-3.725582977828891E-4 3.621288573296032E-4)' AS TEXT), 4326) SELECT type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.725582977828891E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, st_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.725582977828891E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1892841789276858E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1892841789276858E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.1892841789276858E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	192	192	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.349198022346514E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.349198022346514E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.349198022346514E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.349198022346514E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1826320715433498E-4 4.2206445307748773E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1826320715433498E-4 4.2206445307748773E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1826320715433349E-4 4.2206445307748773E-4") AS TEXT), 4326), true) os dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-1.1826320715433349E-4 4.2206445307748773E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4065013889096374E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4065013889096374E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4065013889096374E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5063986227855793E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5063986227855793E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5063986227855793E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.86563490/4904976E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.86563490/490/4976E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.86563490/490/4976E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.86563490/490/4976E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5673942305772953E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5673942305772953E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5673942305772953E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1543397143754364E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1543397143754364E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1543397143754364E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.223901337339248E-5 4.4808864685825394E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.223901337339248E-5 4.4808864685825394E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.223901337339248E-5 4.4808864685825394E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.675555965067137E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.675555965067137E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.67555965067137E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.174012819097654E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.174012819097654E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.174012819097654E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.174012819097654E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.466144949493322E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.466144949493322E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.466144949493322E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.466144949493322E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7927815353628826E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7927815353628826E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.7927815353628826E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.902456682990174E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.902456682990174E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.902456682990174E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.902456682990174E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	192	192	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.013937609749407E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.013937609749407E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.013937609749407E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SEV geom <> ST_GeomFromText(CAST ('POINT(-3.013937609749407E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.857105483987691E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-5.857105483987691E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-5.857105483987691E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.987181537128199E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.987181537128199E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.987181537128199E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.201959572997474E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.20195957299474F-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-4.201959572997474E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT type, gid, code, name, geom as closest, st_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.201959572997474E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.612480509276392E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.612480509276392E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.612480509276392E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.612480509276392E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.807958489382652E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.807958489382652E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.807958489382652E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.807958489382652E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	192	192	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0526549984949576E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0526549984949576E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0526549984949576E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2571968144071214E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2571968144071214E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2571968144071214E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2571968144071214E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.23806727313722TE-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.238067273137227E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.23806727313722TE-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.238067273137227E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0408779197092895E-4 4.362398682678022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0408779197092895E-4 4.362398682678022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0408779197092895E-4 4.362398682678022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.4539232873474455E-4 3.94935331508882E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4539232873474455E-4 3.94935331508882E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.4539232873474455E-4.3.94935331508882E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_geomFromText(CAST ('POINT(-1.4539232873474455E-4.3.94935331508882E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.929765467627407E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.929765467627407E-4 3.621288573296032E-4)' AS TEXT), 4326) LIWIT to andidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.929765467627407E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.929765467627407E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.643108486183017E-4 3.7601681162147436E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.643108486183017E-4 3.7601681162147436E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.643108486183017E-4 3.7601681162147436E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.643108486183017E-4 3.7601681162147436E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	191	191	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.599814263770307E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.599814263770307E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.599814263770307E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.599814263770307E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.530648561174955E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.530648561174955E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-3.530648561174955E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.59495878695421E-4 3.808317815495395E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.59495878695421E-4 3.808317815495395E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.59495878695421E-4 3.808317815495395E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.250019440697868E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.250019440697868E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.250019440697868E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.250019440697868E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopping the control of	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.02454687866572E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.02454687866572E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.02454687866572E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.02454687866572E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.49264982/4656699E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.49264982/4656699E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.49264982/4656699E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.49264982/4656699E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.090114745842742E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.090114745842742E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.090114745842742E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.090114745842742E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopping the control of	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.5.418368299223718E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.5.418368299223718E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.418368299223718E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped in the control of the	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0182540973950315E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0182540973950315E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0182540973950315E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0182540973950315E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1183126972003924E-4 4.284963905179496E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1183126972003924E-4 4.284963905179496E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1183126972003924E-4 4.284963905179496E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1183126972003924E-4 4.284963905179496E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.211391883480729E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.211391883480729E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.211391883480729E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.211391883480729E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1425809327171737E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1425809327171737E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.1425809327171737E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7994290684653674E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7994290684653674E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7994290684653674E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7994290684653674E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	191	191	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.772299946884958E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.772299946884958E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION BY geom <>> ST_GeomFromText(CAST ('POINT(-4.772299946884958E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.772299946884958E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.772299946884958E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.813442786897632E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.813442786897632E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.813442786897632E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.813442786897632E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.492191518450937E-4 3.911085083953617E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.492191518450937E-4 3.911085083953617E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.492191518450937E-4 3.911085083953617E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.49219518450937E-4 3.911085083953617E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8482882713577664E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.8482882713577664E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8482882713577664E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4531285264372923E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4531285264372923E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4531285264372923E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.848018776772531E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.848)18776772531E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-2.848018776772531E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.848018776772531E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.789174551380851E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.789174551380851E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST (POINT(-1.789174551380851E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.789174551380851E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.31136980032138E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.31136980032138E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.31136980032138E-4 3.621288573296032E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.31136980032138E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1056510259761583E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.1056510259761583E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1056510259761583E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.395905842838879E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.395905842838879E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.395905842838879E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.395905842838879E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	191	191	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.241575277027144E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.241575277027144E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.241575277027144E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELY geom <> ST_GeomFromText(CAST ('POINT(-4.241575277027144E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.9928226262907464E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9928226262907464E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9928226269207464E-4' 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9928226262907464E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9489894147075653E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.94898994147075653E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.9489894147075653E-4 3.621288573296032F-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9489894147075653E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	190	190	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6450847798080796E-4 3.7581918225856534E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6450847798080796E-4 3.7581918225856534E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6450847798080796E-4 3.7581918225856534E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6450847798080796E-4 3.758191822585634E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7497522332535575E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7497522332535575E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.749752233253575E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1643064397473119E-4 4.238970162573558E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1643064397473119E-4 4.238970162573558E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1643064397473119E-4 4.238970162573558E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5069238891104973E-4 3.8963527133218675E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5069238891104973E-4 3.8963527133218675E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5069238891104973E-4 3.8963527133218675E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5069238891104973E-4 3.8963527133218675E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0033420636786466E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0033420636786466E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0033420636786466E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.302386647480185E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.30238647480185E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.302386647480185E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.302386647480185E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2468753372034503E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2468753372034503E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2468753372034503E-4 3.621288573296032E-3) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2468753372034503E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.9532967537894873E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.9532967537894873E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.9532967537894873E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.9532967537894873E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.8765045198428215E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.8765045198428215E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.8765045198428215E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.749208669801235E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.749208669801235E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.749208669801235E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3306790046480986E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3306790046480986E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3306790046480986E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.58040607'9351474E-4' 3.8228705230815204E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.58040607'9351474E-4' 3.8228705230815204E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.58040607'9351474E-4' 3.8228705230815204E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.58040607'9351474E-4' 3.8228705230815204E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.244800063486272E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.244800063486272E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.244800063486272E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.244800063486272E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	190	190	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.6908227506153177E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6908227506153177E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.6908227506153177E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6908227506153177E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast('EE2' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.257300368781087E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.257300368781087E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.257300368781087E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.257300368781087E-4)' AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.257300368781087E-4)' AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.257300368781087E-4)' AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5239020479803562E-4 3.87937455442898E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5239020479803562E-4 3.87937455442898E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.5239020479803562E-4 3.87937455442898E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5239020479803562E-4 3.87937455442898E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.85631529735939E-5.4.41764507257889E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.85631529735939E-5.4.41764507257889E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-9.85631529735939E-5.4.41764507257889E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as Closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.85631529735939E-5.4.41764507257889E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FROM sp	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3163912173487467E-4 4.0868853849745153E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3163912173487467E-4 4.0868853849745153E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3163912173487467E-4 4.0868853849745153E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3163912173487467E-4 4.0868853849745153E-4)") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.751104280461589E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.751104280461589E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.751104280461589E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.751104280461589E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.72872708132331E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.72872708132331E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.72872708132331E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.72872708132331E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	190	190	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1483301505355387E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1483301505355387E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1483301505355387E-4-3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.78908929413429E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.78908929413429E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.78908929413429E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.78908929413429E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.216058548676299E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.216058548676299E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.216058548676299E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.216058548676299E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.54510228868557TE-4.3.858174313773088E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.54510228868557TE-4.3.858174313773088E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.545102288685577E-4.3.858174313773088E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.54510228685577E-4.3.858174313773088E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.0053990402684198E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0053990402684198E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.0053990402684198E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.028225397048758E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.028225397048758E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.028225397048758E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.028225397048758E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	189	189	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.5610923007429044E-4 3.8421843015675237E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5610923007429044E-4 3.8421843015675237E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5610923007429044E-4 3.8421843015675237E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5610923007429044E-4 3.8421843015675237E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.09784025728617E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.09784025728617E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.09784025728617E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.09784025728617E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.963627379556862E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.963627379556862E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-1.963627379556862E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.963627379556862E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.675456984975021E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.675456984975021E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-3.675456984975021E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.675456984975021E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0467169690560663E-4 4.356559633249954E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0467169690560663E-4 4.356559633249954E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.0467169690560663E-4 4.356559633249954E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0467169690560663E-4 4.356559633249954E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2704020490836786E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2704020490836786E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2704020490836786E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2704020490836786E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.43911480800502E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.43911480800502E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.43911480800502E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.43911480800502E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7863989225637827E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.7863989225637827E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7863989225637827E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.348115469723719E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.348115469723719E-4.3 621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.348115469723719E-4.3621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.348115469723719E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.207354038984042E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.207354038984042E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.207354038984042E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0684607732136102E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0684607732136102E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0684607732136102E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0684607732136102E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.981692665331367E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.981692665331367E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.981692665331367E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.981692665331367E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4274367093114734E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4274367093114734E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4274367093114734E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4274367093114734E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	189	189	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.48933520666916E-4 3.621288573296032E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.48933520666916E-4 3.621288573296032E-4)' AS TEXT), 4326) LIWIT by as dist FROM candidates ORDER BY dist LIMIT 1) LIVION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.48933520666916E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.48933520666916E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.659188329768756E-4 3.744088272549978E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.659188329768756E-4 3.744088272549978E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.659188329768756E-4 3.744088272549978E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.659188329768756E-4 3.744088272549978E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8144217851464607E-4 3.621288573296032E-4)") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.8144217851464607E-4 3.621288573296032E-4)") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8144217851464607E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6590984982403444E-4 3.744178104136401E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6590984982403444E-4 3.744178104136401E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6590984982403444E-4 3.744178104136401E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1208417028414806E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1208417028414806E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1208417028414806E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1208417028414806E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4749438649958423E-4 3.9283327373513296E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4749438649958423E-4 3.9283327373513296E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4749438649958423E-4 3.9283327373513296E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4749438649958423E-4 3.9283327373513296E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.712552831927307E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.712552831927307E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.712552831927307E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.712552831927307E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eaz WHERE enabled = "Y ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.478550848977874E-4.3.621288573296032E-4)' AS TEXT), 4236). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.478550848977874E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.478550848977874E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.478550848977874E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT (ast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.782077860836307E-4 3.621288573296032E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.782077860636307E-4 3.621288573296032E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST (POINT(-1.782077860636307E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.782077860636307E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7298050596642536E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.7298050596642536E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.7298050596642536E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.729805059664258E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	189	189	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.898423412775339E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.898423412775339E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.898423412775339E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.898423412775339E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2755270204850114E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2755270204850114E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2755270204850114E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2755270204850114E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.88439597'149752E-4 3.62128857'3296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.88439597'149752E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.88439597'149752E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.88439597'149752E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	188	188	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.781826663178477E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.781826663178477E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.781826663178477E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped candidates or of the control of the candidates and candidates or of the control of the candidates and candidates or of the c	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1448129980819183E-4 4.2584636043596305E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1448129980819183E-4 4.2584636043596305E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1448129980819183E-4 4.2584636043596305E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1448129980819183E-4 4.2584636043596305E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1533469932810536E-4 4.249929609119975E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1533469932810536E-4 4.249929609119975E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1533469932810536E-4 4.249929609119975E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1533469932810536E-4 4.249929609119975E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.481335626358645E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.481335626358645E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.481335626358645E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.481335626358645E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.0444849036913214E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.0444849036913214E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.0444849036913214E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.0444849036913214E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.803112161130257E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.803112161130257E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.803112161130257E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.803112161130257E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.014391341673318E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.014391341673318E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.014391341673318E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.014391341673318E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.42447684315573E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.42447684315573E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.42447684315573E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.42447684315573E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.861507228879878E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.861507228879878E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.861507228879878E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.861507228879878E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.800677561299432E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.800677561299432E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.800677561299432E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.800677561299432E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3728191400370055E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3728191400370055E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3728191400370055E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-8.3525355117433111E-5.4.568023051180891E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-8.352535511743311E-5.4.568023051180891E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-8.352535511743311E-5.4.568023051180891E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, arme, geom	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4272524719727984E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4272524719727984E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4272524719727984E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4272524719727984E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	188	188	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.478824917844961E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.478824917844961E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.478824917844961E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELY geom, ST_GeomFromText(CAST ('POINT(-5.478824917844961E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the control of the control	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.250553855864885E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.250553855864885E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.from WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.2505538555864885E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2505538555864885E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.827007347687837E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.827007347687837E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('POINT(-4.827007347687837E-4)) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.827007347687837E-4)) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.827007347687837E-4)) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.827007347687837E-4)) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.827007347687837E-4)) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.827007347687837E-4)) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.827007347687837E-4)) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.827007347687837E-4)) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.827007347687837E-4)) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.827007347687837E-4)) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.827007347687837E-4)) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.827007347687837E-4)) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.827007347687837E-4)) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POI	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.3350853238221356E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3350853238221356E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.3350853238221356E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3350853238221356E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6156337613345133E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6156337613345133E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6156337613345133E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6156337613345133E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2646482569834624E-4.4.1386283454220973E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2646482569834624E-4.4.1386283454220973E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2646482569834624E-4.4.1386283454220973E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2646482569834624E-4.4.1386283454220973E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2646482569834624E-4.4.1386283454220973E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2646482569834624E-4.4.1386283454220973E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2646482569834624E-4.4.1386283454220973E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2646482569834624E-4.4.1386283454220973E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2646482569834624E-4.4.1386283454220973E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2646482569834624E-4.4.1386283454220973E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.264648256983464E-4.4.1386283454220973E-4)' AS TEXT), 43261, LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.264661979829016E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.264661979829016E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.264661979829016E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.264661979829016E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.95985445536356E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.95985445536356E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.95985445536356E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.95985445536356E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0981904348361149E-4 4.3050861675616417E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0981904348361149E-4 4.3050861675616417E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0981904348361149E-4 4.3050861675616417E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0981904348361149E-4 4.3050861675616417E-4)' AS TEXT), 4326), LIMIT 50), SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0981904348361149E-4 4.3050861675616417E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0981904348361149E-4 4.3050861675616417E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0981904348361149E-4 4.3050861675616417E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0981904348361149E-4 4.3050861675616417E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0981904348361149E-4 4.3050861675616417E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0981904348361149E-4 4.3050861675616417E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0981904348361149E-4 4.3050861675616417E-4)' AS TEXT, 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.992831774854449E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.992831774854449E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.992831774854449E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopped and control of the co	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8146060224851356E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8146060224851356E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8146060224851356E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8146060224851356E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.9852859264678445E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9852859264678445E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.9852859264678445E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9852859264678445E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.381429243919E-4.021847358514622E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.381429243919E-4.021847358514622E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.381429243919E-4.021847358514622E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as follows as the control of the control	0	1	188	188	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.2059030116838968E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2059030116838968E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.2059030116838968E-4 3.621288573296032E-4)" AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2059030116838968E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	188	188	0	0,00
[WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.3121828583589394E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.3121828583589394E-4 3.621288573296032E-4)" AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.3121828583589394E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, and geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.3121828583589394E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.0219234672143676E-4 4.381353135199999E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0219234672143676E-4 4.381353135199999E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.0219234672143676E-4 4.381353135199999E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0219234672143676E-4 4.38135313519999E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7433696204544576E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7433696204544576E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7433696204544576E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	188	188	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6742800265419643E-4 3.728996575826979E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6742800265419643E-4 3.728996575826979E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6742800265419643E-4 3.728996575826979E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6742800265419643E-4 3.728996575826979E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0974855054543734E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0974855054543734E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0974855054543734E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.742646393945311E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.742646393945311E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.742646393945311E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.742646393945311E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.925822028940984E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.925822028940984E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.925822028940984E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.925822028940984E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9943589108374527E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9943589108374527E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9943589108374527E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9943589108374527E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7498283419364159E-4 3.6534482604983414E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7498283419364159E-4 3.6534482604983414E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7498283419364159E-4 3.6534482604983414E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7498283419364159E-4 3.6534482604983414E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7498283419364159E-4 3.6534482604983414E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7498283419364159E-4 3.6534482604983414E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7498283419364159E-4 3.6534482604983414E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7498283419364159E-4 3.6534482604983414E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7498283419364159E-4 3.6534482604983414E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7498283419364159E-4 3.6534482604983414E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7498283419364159E-4 3.6534482604983414E-4)' AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4786315319425835E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4786315319425835E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4786315319425835E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5601)33854587848E-4 3.8430826169228674E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5601)39854587848E-4 3.8430826169228674E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5601)39854587848E-4 3.8430826169228674E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5601)39854587848E-4 3.8430826169228674E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0473549383186525E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0473549383186525E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0473549383186525E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	187	187	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.2891814128036277E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2891814128036277E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.2891814128036277E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9886625194297827E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9886625194297827E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9886625194297827E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.214701927186417E-4 4.1885746751589917E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.214701927186417E-4 4.1885746751589917E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.214701927186417E-4 4.1885746751589917E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.214701927186417E-4 4.1885746751589917E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3147833984010345E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3147833984010345E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3147833984010345E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.522554575054177E-4 3.8807220273347735E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.522554575054177E-4 3.8807220273347735E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.522554575054177E-4 3.8807220273347735E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.522554575054177E-4 3.8807220273347735E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.554624430697244E-4 3.84865217/118888E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.554624430697244E-4 3.84865217/1718888E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.554624430697244E-4 3.848652171718888E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.88844296455791E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.88844296455791E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.88844296455791E-4 3.62128573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.88844296455791E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FROM.	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6825445271558635E-4 3.720732075219372E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6825445271558635E-4 3.720732075219372E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6825445271558635E-4 3.720732075219372E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.682545271558635E-4 3.720732075219372E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4869006068383347E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4869006068383347E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4869006068383347E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.941097963052867E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-5.941097963052867E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-5.941097963052867E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.278136709090809E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.278136709090809E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.278136709090809E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	187	187	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.035142424736478E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.035142424736478E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.035142424736478E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.035142424736478E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.765194107576711E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.765194107576711E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.765194107576711E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.765194107576711E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	186	186	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1478718443297757E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1478718443297757E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.1478718443297757E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast("EE" as varchar) as type, gid, code, name, geom FROM spatial.ee" WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.8256553004798057E-4") AS 1288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.8256553004798057E-4") AS 1288573296032E-4") AS TEXT), 4326), true) as tist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.frmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.8256553004798057E-4") AS 1287, 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.8256553004798057E-4") AS 1287, 4326) LIMIT 50) SELECT type, gid, as varchar) as type, gid, code, name,	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1837100498842934E-4 4.2195665525011314E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1837100498842934E-4 4.2195665525011314E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1837100498842934E-4 4.2195665525011314E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1837100498842934E-4 4.2195665525011314E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.603133456039698E-4') AS 1EXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.603133456039698E-4') AS 1EXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.603133456039698E-4') AS 1EXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.603133456039698E-4') AS 1EXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.040177564609399E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.040177564609399E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.040177564609399E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6070860432898238E-4 3.7961905590888086E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6070860432898238E-4 3.7961905590888086E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6070860432898238E-4 3.796190559088808E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6070860432898238E-4 3.7961905590888086E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.4343491627173426E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.4343491627173426E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.4343491627173426E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.289653441854945E-5 4.5743112581594084E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.289653441854945E-5 4.5743112581594084E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.289653441854945E-5 4.5743112581594084E-4)' AS TEXT), 3226) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.289653441854945E-5 4.5743112581594084E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.986363904808788E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.986363904808788E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.986363904808788E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_geomFromText(CAST ('POINT(-3.986363904808788E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.741671969978333E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.741671969978333E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.741671969978333E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the control of the contro	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7511895377081494E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7511895377081494E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7511895377081494E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.686870163365192E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.686870163365192E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.686870163365192E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.686870163365192E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.38736269907604E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.38736269907604E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.38736269907604E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	186	186	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.203293323078099E-4 4.1999832793830806E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.203293323078099E-4 4.1999832793830806E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.203293323078099E-4 4.1999832793830806E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.203293323078099E-4 4.1999832793830806E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast("EE2" as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST" ("POINT(-5.331231716664124E-4.3.621288573032E-4)" AS TEXT), 4250; LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-5.331231716664124E-4.3.621288573296032E-4)" AS TEXT), 4250; true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST" ("POINT(-5.331231716664124E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-5.331231716664124E-4.3.621288573296032E-4)" AS TEXT), 4326) LiVie) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(3.145091641230857E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.145091641230857E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.145091641230857E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.145091641230857E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	186	186	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0351287018909245E-4 4.368147900519667E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0351287018909245E-4 4.368147900519667E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0351287018909245E-4 4.368147900519667E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0351287018909245E-4 4.368147900519667E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.220289779075363E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.220289779075363E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.220289779075363E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.220289779075363E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.010443328705043E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.010443328705043E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.f/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.010443328705043E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.010443328705043E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0919966336575417E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0919966336575417E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0919966336575417E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST. GeomFromText(CAST ('POINT(-1.1906270775720136E-4 4.2126495247993176E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-1.1906270775720136E-4 4.2126495247993176E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST. GeomFromText(CAST ('POINT(-1.1906270775720136E-4 4.2126495247993176E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-1.1906270775720136E-4 4.2126495247993176E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0244387500099021E-4 4.3788378523068144E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0244387500099021E-4 4.3788378523068144E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0244387500099021E-4 4.3788378523068144E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0244387500099021E-4 4.3788378523068144E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1231681740164894E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.1231681740164894E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1231681740164894E-4" 4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.732598985608726E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.732598985608726E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.732598985608726E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and complete the control of the control of the cast of the control	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.3994945296935054E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.3994945296935054E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.3994945296935054E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast/EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8941876080944228E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.89418428E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast(RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (*POINT(-1.8941876080944228E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (*POINT(-1.8941876080944228E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast(*PORTAREA' as varchar) as type, gid, code, name,	0	1	185	185	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT'-5.958525279564786E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'-5.958525279564786E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT'-5.958525279564786E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'-5.958525279564786E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3507'966927'305245E-4 4.05247'99096382'913E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3507'966927'305245E-4 4.05247'99096382'913E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3507'966927'305245E-4 4.05247'99096382'913E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-1.3507'966927'305245E-4 4.05247'99096382'913E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3751456112120148E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3751456112120148E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3751456112120148E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3647343024799304E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.364734024799304E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3647343024799304E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1669115540712583E-4 4.236365048348394E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1669115540712583E-4 4.236365048348394E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1669115540712583E-4 4.236365048348394E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5091696773207963E-4 3.89410692506073E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5091696773207963E-4 3.89410692506073E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.5091696732207963E-4 3.89410692506073E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5091696773207963E-4 3.89410692506073E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.28702088183989E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.28702088183989E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.28702088183989E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.28702088183989E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FROM.	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.4882480797645144E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.4882480797645144E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.4882480797645144E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.4882480797645144E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.386747601222712E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.386747601222712E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.386747601222712E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.61267389517877E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.61267389517877E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.61267389517877E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.61267389517877E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3738879698142473E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3738879698142473E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3738879698142473E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6260404957847458E-4 3,777236106694054E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6260404957847458E-4 3.777236106694054E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.6260404957847458E-4 3.777236106694054E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.059581174746381E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.059581174746381E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.059581174746381E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.059581174746381E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	185	185	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.0810417614731344E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0810417614731344E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.0810417614731344E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.1129319540593777E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.1129319540593777E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.1129319540593777E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	185	185	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1931515089312506E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1931515089312506E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1931515089312506E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0618086658292744E-4 4.3414679365269554E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0618086658292744E-4 4.3414679365269554E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0618086658292744E-4 4.3414679365269554E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0618086658292744E-4 4.3414679365269554E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORT)AREA' as varchar) as type, gid, code, na	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.59217400957344E-4 3.811102592766183E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.59217400957344E-4 3.811102592766183E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.59217400957344E-4 3.811102592766183E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.59217400957344E-4 3.811102592766183E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.130094350267912E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.130094350267912E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.130094350267912E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.130094350267912E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.155516672808495E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.155516672808495E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.155516672808495E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the co	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.896806445263924E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.896806445263924E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.896806445263924E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.896806445263924E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.979995014855243E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.979995014855243E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.979995014855243E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.979995014855243E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.746428466702316E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-4.746428466702316E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-4.746428466702316E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1081617344898416E-4 4.29511486782977E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1081617344898416E-4 4.29511486782977E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.1081617344898416E-4 4.29511486782977E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1081617344898416E-4 4.29511486782977E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.452948863380468E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.452948863380468E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.452948863380468E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.452948863380468E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.879743029147505E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.879743029147505E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.879743029147505E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.879743029147505E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	184	184	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.462655242730811E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.462655242730811E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.462655242730811E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.462655242730811E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.238449470660132E-5.4.579431655277757E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.238449470660132E-5.4.579431655277757E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.238449470660132E-5.4.579431655277757E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.238449470660132E-5.4.579431655277757E-4)' AS TEXT), 4326). LiVie) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.511325634002683E-4 3.891950968386016E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.511325634002683E-4 3.891950968386016E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.511325634002683E-4 3.891950968386016E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6009912222033655E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6009912222033655E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6009912222033655E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.109347841486602E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-5.109347841486602E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-5.109347841486602E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.434798320359402E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.434798320359402E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom -> ST_GeomFromText(CAST ('POINT(-3.434798320359402E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.434798320352402E-4)' AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.434798320359402E-4)' AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.434798320359402E-4)' AS TEXT), 4326) LIMIT 50) SELECT (ast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.930753614439939E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.930753614439939E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.930753614439939E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the co	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2854937458568865E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2854937458568865E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.285493745856886E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.285493745856886E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.859526360972963E-4') AS 124.9 (AS 125.9 (AS 125.	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.035861076963774E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.035861076963774E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.035861076963774E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.190101811247096E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.190101811247096E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.190101811247096E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.190101811247096E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4414458534618873E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4414458534618873E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4414458534618873E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	184	184	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.607449943685323E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.607449943685323E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.607449943685323E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the complex of the complex of the cast of the complex of the comple	0	1	183	183	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1249739531484304E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1249739531484304E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY stat LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1249739531484304E-4 3.621288573296032E-4)' AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1249739531484304E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(4.779216974572678E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(4.779216974572678E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(4.779216974572678E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.779216974572678E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7333891722370287E-4 3.669887430127133E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7333891722370287E-4 3.669887430127133E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7333891722370287E-4 3.669887430127133E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4139482572041268E-4 3.9893283452210643E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4139482572041268E-4 3.9893283452210643E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4139482572041268E-4 3.9893283452210643E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4139482572041268E-4 3.9893283452210643E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4024589701310993E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4024589701310993E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.4024589701310993E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3257336963035896E-4 4.0775429060931615E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3257336963035896E-4 4.0775429060931615E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3257336963035896E-4 4.0775429060931615E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3257336963035896E-4 4.0775429060931615E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.961745491742062E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-2.961745491742062E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.961745491742062E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.961745491742062E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.625061497535917E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.625061497535917E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.625061497535917E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped candidates or	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2205501250968965E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2205501250968965E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2205501250968965E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2205501250968965E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3805400771985835E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3805400771985835E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3805400771988385E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3805400771985835E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.382965528465706E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.382965528465706E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.382965528465706E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.382965528465706E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.216687369375183E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.216687369375183E-4.3.621288573296032E-4)" AS TEXT), 4326), LIVIE as dist FROM candidates ORDER BY dist LIMIT 1) LIVION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.216687369375183E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.216687369375183E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast/EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1292858665122046E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1292586665122046E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1292858665122046E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1292858665122046E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	183	183	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2706715436689143E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2706715436689143E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2706715436689143E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2706715436689143E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.464721367884285E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.464721367884285E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.464721367884285E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.464721367884285E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.586820712123534E-5 4.444594531076427E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.586820712123534E-5 4.444594531076427E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.586820712123534E-5 4.444594531076427E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.586820712123534E-5 4.444594531076427E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	183	183	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5080962732617045E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5080962732617045E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5080962732617045E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2181155252660713E-4 4.1851610771649075E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2181155252660713E-4 4.1851610771649075E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2181155252660713E-4 4.1851610771649075E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2181155252660713E-4 4.1851610771649075E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2181155252660713E-4 4.1851610771649075E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2181155252660713E-4 4.1851610771649075E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2181155252660713E-4 4.1851610771649075E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2181155252660713E-4 4.1851610771649075E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2181155252660713E-4 4.1851610771649075E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geomFromText(CAST ('POINT(-1.2181155252600713E-4 4.1851610771649075E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geomFromText(CAST ('POINT(-1.2181155252600713E-4 4.1851610771649075E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geomFromText(CAST ('POINT(-1.2181155252600713E-4 4.185161	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.884050368229426E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.884050368229426E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.884050368229426E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.884050368229426E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3522431457488184E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3522431457488184E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3522431457488184E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6667479010009146E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.666747901009146E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6667479010009146E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.67086642846231E-4.3.732410173948286E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.67086642846231E-4.3.732410173948286E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.67086642846231E-4.3.732410173948286E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.67086642846231E-4.3.732410173948286E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7060895361634976E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7060895361634976E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7060895361634976E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7060895361634976E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.1026820112567126E-4 4.300594591166589E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1026820112567126E-4 4.300594591166589E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.1026820112567126E-4 4.300594591166589E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1349315299566034E-4 4.268345072377857E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1349315299566034E-4 4.268345072377857E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1349315299566034E-4 4.268345072377857E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1349315299566034E-4 4.268345072377857E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast/EEZ' as varchar) as type, gid. code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.62147281068129E-4.3 621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.62147281068129E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.62147281068129E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.62147281068129E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	182	182	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.9502516303871834E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.9502516303871834E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.9502516303871834E-4" 4.3621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0639783453567154E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.063978345367154E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0639783453657154E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.848562340224854E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.848562340224854E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.848562340224854E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT type, gid, code, name, geom as closest, st. Distance(geom, ST_GeomFromText(CAST ("POINT(-3.848562340224854E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7583623371355514E-4 3.644914265258686E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7583623371355514E-4 3.644914265258686E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.7583623371355514E-4 3.644914265258686E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.7583623371355514E-4 3.644914265258686E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-8.573521071636713E-5 4.545924495169655E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.573521071636713E-5 4.545924495169655E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-8.573521071636713E-5 4.545924495169655E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9149478397212863E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9149478397212863E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9149478397212863E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0674817749647814E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0674817749647814E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0674817749647814E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0674817749647814E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.395281596421847E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.395281596421847E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.395281596421847E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.395281596421847E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.466446464051519E-5 4.4566319558965895E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.466446464051519E-5 4.4566319558965895E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.46644646051519E-5 4.4566319558965895E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.453114803591738E-4 3.950161798730518E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.453114803591738E-4 3.950161798730518E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.453114803591738E-4 3.950161798730518E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.453114803591738E-4 3.950161798730518E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5192353827847863E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5192353827847863E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5192535827847863E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5192353827847863E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.757931476620896E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.757931476620896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.757931476620896E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the control of the cont	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2979894768698505E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2979894768699505E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.2979894768699505E-4 3.621288573296032E-3) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2979894768698505E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	182	182	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5570498819643665E-4 3.8462267204121266E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5570498819643665E-4 3.8462267204121266E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5570498819643665E-4 3.8462267204121266E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5570498819643665E-4 3.8462267204121266E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as ype, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.278231114901073E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.278231114901073E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.278231114901073E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.278231114901073E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	182	182	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.340389958280292E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.340389958280292E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.340389958280292E-4.3621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.340389958280292E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	181	181	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.820903378037674E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.820903378037674E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.820903378037674E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, name, geom	0	1	181	181	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0346795442488649E-4 4.368597058070117E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0346795424288649E-4 4.368597058070117E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.0346795442488649E-4 4.368597058070117E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0346795442488649E-4 4.368597058070117E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	181	181	0	0,00
[WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <- S T_GeomFromText(CAST ('POINT-1-5027018072751356E-4') a 3005747950848725E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5027018072751356E-4)') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.5027018072751356E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5027018072751356E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	181	181	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.390089664901357E-5 4.464267635908123E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.390089664901357E-5 4.464267635908123E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-9.390089664901357E-5 4.464267635908123E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.390089664901357E-5 4.464267635908123E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	181	181	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.4800734106790266E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4800734106790266E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.4800734106790266E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.4800734106790266E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	181	181	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.282255236552208E-4 4.1210213658059137E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.282255236552205E-4 4.1210213658059137E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.282255236552205E-4 4.1210213658059137E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	181	181	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1033245548011496E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1033245548011496E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1033245548011496E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1033245548011496E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	181	181	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.769694832561011E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.769694832561011E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.769694832561011E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.769694832561011E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	181	181	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.93542485391736E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.93542485391736E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.93542485391736E-4 3.621288573296032E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.93542485391736E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	181	181	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.216238211733123E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.216238211733123E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.216238211733123E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.216238211733123E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	181	181	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.116444532231146E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.116444532231146E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.116444532231146E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 30; bistance(geom, ST_GeomFromText(CAST ('POINT(-5.116444532231146E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0995516306078486E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0995516360678486E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0995516306078486E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.3664365272379073E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.3664365272379073E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.3664365272379073E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5019923036115424E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.5019923036115424E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5019923036115424E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.156864145734673E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.156864145734673E-4.3.62128573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.156864145734673E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, arme, geom as closest, stopped candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.713276058436454E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.713276058436454E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-3.713276058436454E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.280831654943168E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.280831654943168E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.280831654943168E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.280831654943168E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.491297777448669E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.491297777448669E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.491297777448669E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.491297777448669E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7171342398763166E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7171342398763166E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7171342398763166E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2895407389172754E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2895407389172754E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2895407389172754E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2895407389172754E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.644725453694432E-4 3.758551148676902E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.644725453694432E-4 3.758551148676902E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.644725453694432E-4 3.758551148676902E-4)' AS TEXT), 4326) LIMIT 50) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.644725453694432E-4 3.758551148676902E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.727748083074482E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.727748083074482E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.727748083074482E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.727748083074482E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2587193761082736E-4 4.144557226309367E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2587193761082736E-4 4.144557226309367E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2587193761082736E-4 4.144557226309367E-4)' AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2587193761082736E-4 4.144557226309367E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	180	180	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.932474136325321E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.932474136325321E-4 3.621288573296032E-4)' AS TEXT), 4326). true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RPMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.932474136325321E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) ELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.932474136325321E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5119636032652693E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.5119636032652693E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo HERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5119636032652693E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast(EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.812998203537423E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.812998203537423E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINT(-5.812998203537423E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates AS (SELECT cast('POINT(-5.812998203537423E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and candidates or cast ("POINT(-5.812998203537423E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.998131835030754E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.998131835030754E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.998131835030754E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.998131835030754E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.400222330484504E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.400222330484504E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.400222330484504E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.400222330484504E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, god	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.495443750601172E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.495443750601172E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.495443750601172E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, graduates or	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8950859233785424E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8950859233785424E-4.3.621288573296032E-4)' AS TEXT), 4326), Irue) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8950859233785424E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8950859233785424E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.796374796499361E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.796374796499361E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.796374796499361E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.796374796499361E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	180	180	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1572234718483214E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1572234718483214E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1572234718483214E-4.3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.023203880021391E-4 3.618503795898022E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.023203980021391E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.023203980021391E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.023203980021391E-4 3.618503795898022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0605555987133583E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0605555987133583E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.060555987133583E-4 3.621288573296032E-3) X TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom,	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.870746153460755E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.870746153460755E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.870746153460755E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.870746153460755E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7293467534584912E-4 3.673929848971736E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7293467534584912E-4 3.673929848971736E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.7293467534584912E-4 3.6739298489971736E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7293467534584912E-4 3.673929848971736E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	179	179	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.5447429625719294E-4 3.858533639864337E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5447429625719294E-4 3.858533639864337E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.5447429625719294E-4 3.858533639864337E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5447429625719294E-4 3.858533639864337E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.8577160075591704E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.857716007591704E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.8577160075591704E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.1303592705712966E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1303592705712966E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.1303592705712966E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.19695187881566E-5 4.483581414521349E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.19695187881566E-5 4.483581414521349E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.19695187881566E-5 4.483581414521349E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.19695187881566E-5 4.483581414521349E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.342002351509856E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.342002351509856E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.342002351509856E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.342002351509856E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.288382077611622E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.288382077611622E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.288382077611622E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.288382077611622E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.787935207110489E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.787935207110489E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.787935207110489E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.787935207110489E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.3328395356118366E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.3328395356118366E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.332895356118366E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.332895356118366E-4 3.621288573296032E-4)" AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.022570585040657E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.022570585040657E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.022570585040657E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.022570585040657E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.860590616468353E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.860590616468353E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.860590616468353E-4.3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.860590616468353E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.48941588963387E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.48941588963387E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.48941588963387E-4 3.621288573296032E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.48941588963387E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.4257299102716465E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4257299102716465E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist TROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST (POINT(-4.4257299102716465E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.750735805784238E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.750735805784238E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.750735805784238E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.750735805784238E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	179	179	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.8502737135465326E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.8502737135465326E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY GIST LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.8502737135465326E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.8502737135465326E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.931306326455965E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.931306326455965E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.931306326455965E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.931306326455965E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6519165502492397E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6519165502492397E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6519165502492397E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.765382919197238E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.765382919197238E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.765382919197238E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.765382919197238E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4795389957904056E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4795389957904056E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4795389957904056E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4795389957904056E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT-5.585454942069949E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT-6.585454942069949E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT-6.585454942069949E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT-6.58545942069949E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6387067412908314E-4 3.7645698611505946E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6387067412908314E-4 3.7645698611505946E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6387067412908314E-4 3.7645698611505946E-4)' AS TEXT), 4326), tlmIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6387067412908314E-4 3.7645698611505946E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.996694530576163E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.996694530576163E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.996694530576163E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.996694530576163E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	179	179	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5768173924968474E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5768173924968474E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5768173924968474E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5665857468215877E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5665857468215877E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5665857468215877E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5665857468215877E-4 3.621288573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0790700421299236E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0790700421299236E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0790700421299236E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0790700421299236E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4440418192221307E-4.3.9592347832342683E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4440418192221307E-4.3.9592347832342683E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4440418192221307E-4.3.9592347832342683E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4440418192221307E-4.3.9592347832342683E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST. GeomFromText(CAST ('POINT(-4.4572607767442415E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-4.457260776742415E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfm WHERE enabled = 'Y' ORDER BY geom <> ST. GeomFromText(CAST ('POINT(-4.4572607767442415E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-4.4572607767442415E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	178	178	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.949083820517828E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.949083820517828E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.949083820517828E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the control of the	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1301796075144727E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1301796075144727E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1301796075144727E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.507826778676468E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.507826778676468E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.507826778676468E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.507826778676468E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9047877284470336E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9047877284470336E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9047877284470336E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.600542064561305E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.600542064561305E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.600542064561305E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the co	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8499904961157427E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8499904961157427E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8499904961157427E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8499904961157427E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0848999429129973E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0848999429129973E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0848999429129973E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.8506330396601803E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8506330396601803E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.8506330399661803E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8506330396601803E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.953934723052074E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.953934723052074E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.953934723052074E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st_geom.	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.963187370478505E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.963187370478505E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.963187370478505E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and complete the control of the control of the cast of the control	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5477972345379355E-4 3.855479367834279E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5477972345379355E-4 3.855479367834279E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5477972345379355E-4 3.855479367834279E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.556870218907543E-4") AS 1257.506E-4)" AS 1257.4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.556870218907543E-4") AS 1257.4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.556870218907543E-4") AS 1257.4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("AST ("POINT(-1.556870218907543E-4")) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.556870218907543E-4")) AS 1257.1, 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.538293389653673E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.538293389653673E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.538293389653673E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, same, geom	0	1	178	178	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-9.393682926037837E-5 4.4639083098168745E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_bistance(geom, ST_GeomFromText(CAST ("POINT(-9.393682926037837E-5 4.4639083098168745E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-9.393682926037837E-5 4.4639083098168745E-4)" AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.393682926037837E-5 4.4639083098168745E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
[WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez_WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3047176929370442E-4") AS 1228573296032E-4) AS 1EXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3047176929370442E-4") AS 1EXT), 4326) LIMIT 50) SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.3047176929370442E-4") AS 1EXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.3047176929370442E-4") AS 1EXT), 4326) LIMIT 50) SELECT type, gid, AS 1EXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.03568598818801E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.03568598818801E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.035685988188801E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, structured to the control of the	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6790548203933517E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6790548203933517E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6790548203933517E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7297060795721386E-4 3.673570522753265E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7297060795721386E-4 3.673570522753265E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7297060795721386E-4 3.673570522753265E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.922228767804506E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.922228767804506E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.922228767804506E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.728462161019925E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.728462161019925E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.728462161019925E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, goom	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7142550566852824E-4 3.6890215456947343E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7142550566852824E-4 3.6890215456947343E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7142550566852824E-4 3.6890215456947343E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7142550566852824E-4 3.6890215456947343E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar)' as type, gid, code, na	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.979267214064244E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.979267214064244E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.979267214064244E-4), as (21288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stock candidates or the control of the c	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5286768418317433E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5286768418317433E-4 3.621288573296032E-4)' AS TEXT), 4326), True) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5286768418317433E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5286768418317433E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.890244169408E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST GeomFromText(CAST ('POINT(-3.890244169408E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.890244169408E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as follows a first candidates or	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1752750347777274E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1752750347777274E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.17527503477772724E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.611582193992273E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.611582193992273E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.611582193992273E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.611582193992273E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	178	178	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.342006925791707E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.342006925791707E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RPMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.342006925791707E-4.3621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.342006925791707E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.38072888881911E-4.3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.38072888881911E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.38072888881911E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.38072888881911E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4570811136874177E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.4570811136874177E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4570811136874177E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.411895854896206E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-4.411895854896206E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-4.411895854896206E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-4.411895854896206E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	178	178	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.73106270106202E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.73106270106202E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.73106270106202E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.135848142368128E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.135848142368128E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.135848142368128E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.135848142368128E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2878293655955972E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.287829365595972E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2878293655955972E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.455917878099914E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.455917878099914E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.455917878099914E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.455917878099914E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3930312339296955E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3930312339296955E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3930312339296955E-4 3.621288573296032E-X) X S TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.339212999847234E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.339212999847234E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.339212999847234E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and candidates or the stopped candidates or the s	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9268908587182246E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9268908587182246E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9268908587182246E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9268908587182246E-4' 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.08141481'0432335E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.081414810432335E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.081414810432335E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the control of the c	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6317/360/49202535E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6317/360/49202535E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6317/36049202535E-4 3.621288573296032E-3) X TEXT), VASTEXT), VASTEXT), VASTEXT), VASTEXT), VASTEXT), VASTEXT), VASTEXT), VASTEXT), VASTEXT, VASTEXT), VASTEXT, VASTEXT	0	1	177	177	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.0175354451677355E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0175354451677355E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.0175354451677355E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.659013240993784E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.659013240993784E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST (POINT(-2.659013240993784E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.659013240993784E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3446028915519512E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3446028915519512E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3446028915519512E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3446028915519512E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1392525918840793E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1392525918840793E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1392525918840793E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8302321341469643E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8302321341469643E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8302321341469643E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8302321341469643E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.387286590393182E-4 3.621288573296032E+4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.387286590393182E-4 3.621288573296032E-4) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.387286590393182E-4 3.621288573296032E-4) AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.38728659039182E-4) AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.38728659039182E-4) AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.38728659039182E-4) AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.378209031741724E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.378209031741724E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.378209031741724E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.378209031741724E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.875502650184737E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.875502650184737E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.875502650184737E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.875502650184737E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.727743508792629E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.727743508792629E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.727743508792629E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.727743508792629E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.588239719450719E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.588239719450719E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.588239719450719E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.588239719450719E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.375415105797251E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.375415105797251E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.375415105797251E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.375415105797251E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.76277323059144E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.76277323059144E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.76277323059144E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.76277323059144E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.076554759334388E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.076554759334388E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.076554759334388E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, structured to the control of the code, and control of the control of the control of the control of the code, and control of the contr	0	1	177	177	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9225743710726E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9225743710726E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.9225743710726E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9225743710726E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as FROM sp	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.107816131221748E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.107816131221748E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom -> ST_GeomFromText(CAST ('POINT(-4.107816131221748E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.107816313221748E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4937323772794945E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.4937323772794945E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.4937323772794945E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.37471017641551E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.37471017641551E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.37471017641551E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.37471017641551E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	177	177	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.898773590325284E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.898773590325284E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.898773590325244E-4 3.426) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.89877359032524E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.976931594325534E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.976931594325534E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.976931594325534E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.976931594325534E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.877407409408794E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.877407409408794E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.877407409408794E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.877407409408794E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1212771376379867E-4 4.2819994647358607E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1212771376379867E-4 4.2819994647358807E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1212771376379867E-4 4.2819994647358607F.4 A: 281994647358607F.4 A: 281994647358607F.4 A: 28199464735807F.4 A: 2819464735807F.4	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.038295676794599E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.038295676794599E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.038295676794599E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.038295676794599E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.556075457997389E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.556075457997389E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.556075457997389E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.556075457997389E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.281815227473848E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.281815227473848E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.281815227473848E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.281815227473848E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9961463928419885E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9961463928419885E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9961463928419885E-4 3.621288573296032E-X)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.876863845956471E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.876863845956471E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.876863845956471E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.876863845956471E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	176	176	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.497585984437506E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.497585984437506E-4 3.621288573296032E-4)' AS TEXT), 4326), tupe) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.497585984437506E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.497585984437506E-4 3.621286573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, started and candidates or	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.1231773225801913E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.1231773225801913E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.1231773225801913E-4 3.621288573296032E-4")" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.94880517736889E-4.3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.94880517736889E-4.3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.94880517736889E-4.3.621288573296032E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.94880517736889E-4.3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1216410380334858E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.1216410380334858E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1216410380334858E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.6749134215226997E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.6749134215226997E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.6749134215226997E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.927263907677426E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.927263907677426E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.927263907677426E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.927263907677426E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.343354398717886E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.343354398717886E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.343354398717886E-4.3621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.343354398717886E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.95044044200771E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.95044044200771E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.95044044200771E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.95044044200771E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	176	176	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.3035544573495405E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.3035544573495405E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.3035544573495405E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.701872028609987E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.701872028609987E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.701872028609987E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.689569883499401E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.689569883499401E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.6895698634949401E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.689569863499401E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.178508969800103E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.178508969800103E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.178508969800103E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.178508969800103E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.629391708027096E-5 4.640337431561069E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.629391708027096E-5 4.640337431561069E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-7.629391708027096E-5 4.640337431561069E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.629391708027096E-5 4.640337431561069E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	175	175	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.7685270226916556E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7685270226916556E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.7685270226916556E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7685270226916556E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.6979194413598614E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.6979194413598614E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.6979194413598614E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9754942898709425E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9754942898709425E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9754942898709425E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8350023537165006E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8350023537165006E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8350023537165006E-4 3.621285373296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.327440495343417E-4 4.0758361070961194E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.327440495343417E-4 4.0758361070961194E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.327440495343417E-4 4.0758361070961194E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.327440495343417E-4 4.0758361070961194E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7478520483113532E-4 3.655424554127431E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7478520483113532E-4 3.655424554127431E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7478520483113532E-4 3.655424554127431E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7478520483113532E-4 3.65542454127431E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0309157686192657E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0309157686192657E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0309157686192657E-4' 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0309157686192657E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3637415813855484E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3637415813855484E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.363741581385548E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4654354458297294E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4654354458297294E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.4654354458297294E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8390310496494845E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8390310496494845E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8390310496494845E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8390310496494845E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.498223953700091E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.498223953700091E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.498223953700091E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SEV geom <> ST_GeomFromText(CAST ('POINT(-4.498223953700091E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	175	175	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7274648656436907E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7274648656436907E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7274648656436907E-4' 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7274648656436907E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.208692363346519E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.208692363346519E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.208692363346519E-4 3.6212885733296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.208692363346519E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	174	174	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6169812342606935E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.616981234260693E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.616981234260693E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.616981234260693E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.1082515660182535E-4 4.2950250363705688F-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-1.1082515660182535E-4 4.2950250363705687E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.1082515660182535E-4 4.2950250363705687E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1082515660182535E-4 4.2950250363705687E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.5533713635813275E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.5533713635813275E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.5533713635813275E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.829792125068807E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.829792125068607E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.829792125068607E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.829792125068607E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopping the control of	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5152021125699504E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5152021125699504E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5152021125699504E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.58275999621759E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.58275999621759E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.58275999621759E-4 3.621288573296032E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.58275999621759E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.693593805150534E-4 3.7098827972137535E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.693593805150534E-4 3.7098827972137535E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.693593805150534E-4 3.7098827972137535E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.693593805150534E-4 3.7096827972137535E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7269350250369224E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7269350250369224E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.726935025036922E-4' 4.3 621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.726935025036922E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.66575060562468E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.66575060562468E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.66575060562488E-4) as 621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.184976839845764E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-3.184976839845764E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-3.184976839845764E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.979096699571123E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.979096699571123E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.979096699571123E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.5767321352502863E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.5767321352502863E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.5767321352502863E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.5767321352502863E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.51016697269703E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.51016697269703E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.51016697269703E-4 3.621288573296032E-4') 'AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.51016697269703E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	174	174	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.143654336776265E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.143654336776265E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.143654336776265E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.143654336776265E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.923207766053335E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.923207766053335E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.923207766053335E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.212739356406908E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.212739356406908E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.212739356406908E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st. pistance(geom, ST_GeomFromText(CAST ('POINT(-4.212739356406908E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	174	174	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.877667755430326E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.877667755430326E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.877667755430326E-4)', AS TEXT), 4326), LIMIT 50; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.87766755430326E-4 3.621288573296032E-4)', AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.704643083145204E-4 3.6986335192081357E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.704643083145204E-4 3.6986335192081357E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.704643083145204E-4 3.6986335192081357E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.704643083145204E-4 3.6986335192081357E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9046978969186214E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9046978969186214E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.904697869186214E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2753427831463362E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2753427831463362E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.2753427831463362E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom, as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2753427831463362E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0771698571877182E-4 A.3261067451719996E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0771698571877182E-4 4.3261067451719096E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0771698571877182E-4 4.3261067451719096E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0771698571877182E-4 4.3261067451719096E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.313795251588503E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.313795251588503E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.313795251588503E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) ELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.313795251588503E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.097494654018076E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.097494654018076E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.097494654018076E-4"), as TEXT), 4326), LIMIT 50; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.097494654018076E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1966595128211683E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1966595128211683E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1966595128211683E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.397792304935529E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.397792304935529E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.397792304935529E-4.3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.397792304935529E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.953665228466838E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.953665228466838E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.953665228466838E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	173	173	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.3911447718330453E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3911447718330453E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.3911447718330453E-4' 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3911447718330453E-4' 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.221367757416306E-4 3.621288573296032E-4) 'AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.221367757416306E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST (POINT(-5.221367757416306E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.221367757416306E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.09964146213626E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.09964146213626E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.09964146213626E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.09964146213626E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.895270160717218E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.895270160717218E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.895270160717218E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.895270160717218E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.523561018994114E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.523561018994114E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.523561018994114E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.523561018994114E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.772928767583841E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.772928767583841E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST (POINT(-4.772928767583841E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.772928767583841E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.802034182789314E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.802034182789314E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.802034182789314E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.802034182789314E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0357620968716595E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0357620968716595E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0357620968716595E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0357620968716595E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.468224797492351E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.468224797492351E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.468224797492351E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.468224797492351E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.94794345633958E-5 4.4084822567431607E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.94794345633958E-5 4.4084822567431607E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-9.94794345633958E-5 4.4084822567431607E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.94794345633958E-5 4.4084822567431607E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	173	173	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.699540983153127E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.699540983153127E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.699540983153127E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.699540983153127E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.634228887715787E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.63422887715787E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.634228887715787E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.634228887715787E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.948904157461005E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.948904157461005E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.948904157461005E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.948904157461005E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	172	172	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.899056807756074E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.899056807756074E-4 3.621288573296032E-4)' AS TEXT), 4326) LIVIE as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RPMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.899056807756074E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.899056807756074E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.681035688300266E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.681035688300266E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.681035688300266E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.7712219685440145E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.7712219685440145E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.7712219685440145E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.7712219685440145E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.045293387447029E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.045293387447029E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-4.045293387447029E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.045293387447029E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.137663070063774E-5 4.489510295408618E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.137663070063774E-5 4.489510295408618E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.137663070063774E-5 4.489510295408618E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.894021667883154E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.894021667883154E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.894021667883154E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.640719629170704E-5 4.439204639453253E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-9.640719629170704E-5 4.439204639453253E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-9.640719629170704E-5 4.439204639453255E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-9.640719629170704E-5 4.439204639453255E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8907740100147688E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8907740100147688E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8907740100147688E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1525430838071973E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1525430838071973E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1525430838071973E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.1525430838071973E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.800327383749486E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.800327383749486E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.800327383749486E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the complex of the complex of the cast of the complex of the compl	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2301529500732727E-4 4.173123652344745E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2301529500732727E-4 4.173123652344745E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2301529500732727E-4 4.173123652344745E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2301529500732727E-4 4.173123652344745E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9738681737958245E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9738681737958245E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9738861737958245E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9738681737958245E-4 3.62128573296032E-4)' AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.0822141456243414E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0822141456243414E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.0822141456243414E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0822141456243414E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	172	172	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.196929007406405E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.196929007406405E-4 3.621288573296032E-4)' AS TEXT), 4326). true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RPIMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.196929007406405E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.196929007406405E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	172	172	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.448807464509816E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.448807464509816E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom -> ST_GeomFromText(CAST ('POINT(-2.448807464509816E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.448807464509816E-4 3.621288573296032E-4)' AS TEXT), 4326). Live) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.970562704371988E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.970562704371988E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.970562704371988E-4 3.621288573296032E-4)' AS TEXT), 4326), Imma sclosest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.970562704371988E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, starting and candidates or the cast of the candidates or the cast of	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.426704334238624E-4 3.9765722680911824E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.426704334238624E-4 3.9765722680911824E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.426704334238624E-4 3.9765722680911824E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.125697179657577E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.12569717965757F-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.125697179657577E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.125697179657577E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0238190778747215E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0238190778747215E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0238190778747215E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8110173356305085E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8110173356305085E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8110173356305085E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8110173356305085E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.307426361634956E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.307426361634956E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.307426361634956E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_GeomFromText(CAST ('POINT(-5.307426361634956E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5596595705701646E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5596595705701646E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.5596595705701646E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5596595705701646E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.759179969454962E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.759179969454962E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.759179969454962E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.759179969454962E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2104935681966095E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2104935681966095E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2104935681966095E-4 3.62128573296032E-4)' AS TEXT), 4326), true) be still from the control of the c	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.269247962059877E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.269247962059877E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.269247962059877E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.269247962059877E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.993914327477243E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.993914327477243E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.993914327477243E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.993914327477243E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	171	171	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.1475977754626887E-4 4.255678826834398E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1475977754626887E-4 4.255678826834398E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.1475977754626887E-4 4.255678826834398E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-6.012244533555133E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.012244533555133E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-6.01224453555133E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.012244533555133E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.9653341785966891E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.9653341785966891E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.9653341785966891E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.9653341785966891E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1345859266885096E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.1345859266885096E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.1345859266885096E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0708816501988815E-4 4.332394952150427E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0708816501988815E-4 4.332394952150427E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.0708816501988815E-4 4.332394952150427E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.0708816501988815E-4 4.332394952150427E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.47197942/4558248E-4 3.9312971777949647E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.47197942/4558248E-4 3.9312971777949647E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.471979424558248E-4 3.9312971777949647E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.471979424558248E-4 3.9312971777949647E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	171	171	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7037447678610847E-4 3.6995318345634795E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7037447678610847E-4 3.6995318345634795E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7037447678610847E-4 3.6995318345634795-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7037447678610847E-4 3.6995318345634795E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.772124858109984E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.772124858109984E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.772124858109984E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.772124858109984E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7785744310282406E-4 3.624702171417339E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7785744310282406E-4 3.624702171417339E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7785744310282406E-4 3.624702171417339E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7785744310282406E-4 3.624702171417339E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2500955493807264E-4 4.153181053008223E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2500955493807264E-4 4.153181053008223E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2500955493807264E-4 4.153181053008223E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2500955493807264E-4 4.153181053008223E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.21794501077295E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.21794501077295E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.21794501077295E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.21794501077295E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.582490501632354E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.582490501632354E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.582490501632354E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.582490501632354E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.329964926702655E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.329964926702655E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.329964926702655E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.329964926702655E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	170	170	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.129995370175797E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.129995370175797E-4 3.621288573296032E-4)' AS TEXT), 4326). true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RPIMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.129995370175797E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.129995370175797E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.974155965508466E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.974155965508466E-4 3.621288573296032E-4)' AS TEXT), 4326). true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom -> ST_GeomFromText(CAST ('POINT(-5.974155965508466E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.974155965508466E-4 3.621288573296032E-4)' AS TEXT), 4326). Live) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7579269023390454E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7579269023390454E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7579269023390454E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7579269023390454E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.877393686563239E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.877393686563239E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.877393686563239E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and calculated or control of the control of the calculated or calculated o	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.774994892737316E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.77494892737316E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.774994892737316E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and code succession of the control of the control of the control of the control of the code succession of the control of the control of the control of the code succession of the	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.40192912952433E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.40192912952433E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.40192912952433E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.40192912952433E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3339220882346313E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3339220882346313E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3339220882346313E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3339220882346313E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2608844813538626E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2608844813538626E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2608844813538626E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3807197402554073E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3807197402554073E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3807197402554073E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6311654671860786E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6311654671860786E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6311654671860786E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6311654671860786E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9167444702895254E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9167444702895254E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9167444702895254E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9167444702895254E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	170	170	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.028948623557905E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.028948623557905E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.028948623557905E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_geomFromText(CAST ('POINT(-5.028948623557905E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.336603311241436E-4.066673291133168E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.336603311241436E-4.066673291133168E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.336603311241436E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.336603311241436E-4.066673291133168E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	169	169	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.5249891748850024E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.5249891748850024E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.5249891748850024E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY ("POINT(-3.5249891748850024E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0623568035634485E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.0623568035634485E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.0623568035634485E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6714952491611934E-4 3.7317813532249897E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6714952491611934E-4 3.7317813532249897E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6714952491611934E-4 3.7317813532249897E-4") AS TEXT), 4326), true) os dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RONTAREA") as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6714952491611934E-4 3.7317813532249997E-4)") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-6.019341224299678E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-6.019341224299678E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-6.019341224299678E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1440045143262105E-4 4.259272088001329E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1440045143262105E-4 4.259272088001329E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1440045143262105E-4 4.259272088001329E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1440045143262105E-4 4.259272088001329E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.676898863711465E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.676898863711465E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.676898863711465E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1951278025563136E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1951278025563136E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1951278025563136E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6470610734331428E-4 3.75621552899565637E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6470610734331428E-4 3.7562155289565637E-4)' AS TEXT), 4326), rue) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6470610734331428E-4 3.75621552899565637E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6470610734331428E-4 3.7562155289565637E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.928593083476201E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.928593083476201E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.92859308476201E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.928593083476201E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8679659503618354E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8679659503618354E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.8679659503618354E-4-4 3.62128573296032E-3) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.8679659503618354E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1682590269974379E-4 4.235017575442601E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1682590269974379E-4 4.235017575442601E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1682590269974379E-4 4.235017575442601E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1682590269974379E-4 4.235017575442601E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.969394894502632E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.969394894502632E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RPMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.969394894502632E-4)' AS TEXT), 4326), LIMIT 50) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.969394894502632E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.16620662'46895164E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.16620662'46895164E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.16620662'46895164E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.16620662'46895164E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	169	169	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5768128182149963E-4 3.826463784248451E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5768128182149963E-4 3.826463784248451E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.5768128182149963E-4 3.826463784248451E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.5768128182149963E-4 3.826463784248451E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast("EZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5177935040483435E-4 3.8854830983618737E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.517935040483435E-4 3.8854830983618737E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom as Closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5177935040483435E-4 3.8854830983618737E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as Closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5177935040483435E-4 3.8854830983618737E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.147157766384331E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.147157766384331E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.147157766384331E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.147157766384331E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.470650248759473E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.470650248759473E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.470650248759473E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the control of the contro	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1859558380945924E-4 4.2173207643672166E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1859558380945924E-4 4.2173207643672166E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1859558380945924E-4 4.2173207643672166E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINT(-1.1859558380945924E-4 4.2173207643672166E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINT(-1.1859578380945924E-4 4.2173207643672166E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINT(-1.178597878)) p. gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1859558380945924E-4 4.2173207643672166E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINT(-1.17859587878)) p. gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.18595880945924E-4 4.2173207643672166E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINT(-1.178595878)) p. gid, code, name, geomFromText(CAST ('POINT(-1.17859587880945924E-4 4.2173207643672166E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINT(-1.178595878)) p. gid, code, name, geomFromText(CAST ('POINT(-1.17859587880945924E-4 4.2173207643672166E-4)' AS TEXT), 4326, true) p. gid, code, name, geomFro	0	1	169	169	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.013412343424489E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.013412343424489E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT-6.013412343424489E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.013412343424489E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.182578834269749E-5 4.485018719013566E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.182578834269749E-5 4.485018719013566E-4)' AS TEXT), 4326) LIVE up as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.182578834269749E-5 4.485018719013566E-4)' AS TEXT), 4326) LIMIT 50) ELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.182578834269749E-5 4.485018719013566E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.986359330526937E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.986359330526937E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.986359330526937E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_geomFromText(CAST ('POINT(-2.986359330526937E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3451510292861253E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3451510292861253E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3451510292861253E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3451510292861253E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6739207004283163E-4 3.729355901918228E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6739207004283163E-4 3.729355901918228E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6739207004283163E-4 3.729355901918228E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6739207004283163E-4 3.729355901918228E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7701394159212197E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7701394159212197E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7701394159212197E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.482597842038263E-4') AS 1257. A\$26) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.482597842038263E-4') AS 1257. A\$26), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.482597842038263E-4') AS 1257. A\$2597842038263E-4') A\$257. A\$2597842038263E-4') A\$257842038263E-4') A\$257842038263	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.939202352392514E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.939202352392514E-4.3.62128573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.939202352392514E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	168	168	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.784063302825072E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.784063302825072E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.784063302825072E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.784063302825072E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7429158885305466E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.742915888503646E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.7429158885305466E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.912890863131514E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.912890863131514E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.912890863131514E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.912890863131514E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1877570429446825E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.1877570429446825E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1877570429446825E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO") as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.1877570429446825E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.241867643021639E-5 4.4790898379990743E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.241867643021639E-5 4.4790898379990743E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.241867643021639E-5 4.4790898379990743E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.241867643021639E-5 4.4790898379990743E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.073864387763881E-4 3.621288573296032E-4) 'AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.073864387763881E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.073864387763881E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.073864387763381E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3912208805159028E-4 4.012055721828374E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3912208805159028E-4 4.012055721828374E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3912208805159028E-4 4.012055721828374E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3912208805159028E-4 4.012055721828374E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.495192553143341E-5 4.4537573470393785E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.495192553143341E-5 4.4537573470393785E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.49519253143341E-5 4.4537573470393785E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.317572750063656E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.317572750063656E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.317572750063656E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.317572750063656E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8253766573308674E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8253766573308674E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8253766573308674E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8253766573308674E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.867993396052943E-5 4.4164772627187205E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.867993396052943E-5 4.4164772627187205E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.867993396052943E-5 4.4164772627187205E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.867993396052943E-5 4.4164772627187205E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast("POINT(-3.501722809026307E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.501722809026307E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.501722809026307E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT (1) UNIVAL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-3.501722809026307E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, sT_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.501722809026307E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	168	168	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid. code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.63656908173635E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.563656908173635E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.63656908173635E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.63656908173635E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	167	167	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.7904367670604697E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7904367670604697E-4 3.621288573296032E-4)' AS TEXT), 4326), truly as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.7904367670604697E-4 3.621288573296032E-1)' AS TEXT), 4326), trule job SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.7904367670604697E-4 3.621288573296032E-4)' AS TEXT), 4326), trule jos dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.932649225100292E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.932649225100292E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.932649225100292E-4)', as TEXT), 4326), ame, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.932649225100292E-4 3.621288573296032E-4)', as TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7484945918557905E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7484945918557905E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7484945918557905E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7484945918557905E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.432651512241218E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.432651512241218E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.432651512241218E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.432651512241218E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.544671428170922E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.544671428170922E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.544671428170922E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.544671428170922E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, standard and candidates or	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6646726272837367E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6646726272837367E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.6646726272837367E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.6646726272837367E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.684161494667279E-4 3.7191151076815303E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.684161494667279E-4 3.7191151076815303E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.684161494667279E-4 3.7191151076815303E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.279578587827252E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.279578587827252E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.279578587827252E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.279578587827252E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.706808188390794E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.706808188390794E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.706808188390794E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.706808188390794E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8567415835921925E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8567415835921925E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8567415835921925E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7799356267999734E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.7799356267999734E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.7799356267999734E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2023995820758305E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2023995820758305E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2023995820758305E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2023995820758305E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.094799708165717E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.094799708165717E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.094799708165717E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.094799708165717E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	167	167	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.0085522923265405E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.0085522923265405E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.0085522923265405E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.997422331367162E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.9974223313367162E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.997422331367162E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.997422331367162E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.130462824945263E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.130462824945263E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.130462824945263E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.130462824945263E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1932321918959602E-4 4.2100444104469317E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1932321918959602E-4 4.2100444104469317E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1932321918959602E-4 4.2100444104469317-4.35) ELICT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1932321918959602E-4 4.2100444104469317E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	167	167	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.801944351260902E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.801944351260902E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.801944351260902E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.801944351260902E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.33349580200183E-5 4.469927022163345E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.33349580200183E-5 4.469927022163345E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.33349580200183E-5 4.469927022163345E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.33349580200183E-5 4.469927022163345E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.829612462011784E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.829612462011784E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.829612462011784E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.829612462011784E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.752882613902422E-4 3,6503939884682834E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.752882613902422E-4 3,6503939884682834E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.752882613902422E-4 3,6503939884682834E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.752882613902422E-4 3,6503939884682834E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.027870645216962E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.027870645216962E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.5.027870645216962E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.027870645216962E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.625241160592741E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.625241160592741E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.625241160592741E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.625241160592741E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8691246116674882E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8691246116674882E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8691246116674882E-4 3.621288573296032E-3)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8691246116674882E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.583748143030121E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.583748143030121E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.583748143030121E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.583748143030121E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.978813482140333E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.978813482140333E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.978813482140333E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.978813482140333E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	166	166	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.842808548124638E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.842808548124638E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.842808548124638E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.842808548124638E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, structure of the control of the cont	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.2485821362432766E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.2485821362432766E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.2485821362432766E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3015690151607748E-4 4.1017075871926885E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3015690151607748E-4 4.1017075871926885E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3015690151607748E-4 4.1017075871926885E-4)' AS TEXT), 4326), true) os dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO') as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3015690151607748E-4 4.1017075871926885E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.947916010648473E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.947916010648473E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.947916010648473E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.984935748917898E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-5.984935748917898E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-5.984935748917898E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, st. page of the candidates or	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.591379248663286E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.591379248663286E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.591379248663286E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.212559693350084E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.212559693350084E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.212559693350084E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, pame, geom set compared to the cast of the cas	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0362112545137194E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0362112545137194E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0362112545137194E-4 3.621288573296032E-3)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.036212545137194E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.942710356282431E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.942710356282431E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.942710356282431E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.942710356282431E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.715966430006962E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.715966430006962E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.715966430006962E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	166	166	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.389074072397718E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.389074072397718E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.389074072397718E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.389074072397718E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.307776539184902E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.307776539184902E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.307776539184902E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.307776539184902E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.059855243613467E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.059855243613467E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.059855243613467E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.059855243613467E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	165	165	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.357996937849035E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.357996937849035E-4.3.621288573296032E-4)' AS TEXT), 4326). LIVIE) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RPMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.357996937849035E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.357996937849035E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4471006654699885E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4471006654699885E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4471006654699885E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2744490421440683E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2744490421440683E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2744490421440683E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.104573047635215E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-2.104573047635215E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.104573047635215E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.104573047635215E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.002803074508175E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.002803074508175E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.002803074508175E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.002803074508175E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.619931951852733E-4 3.783344650499725E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-1.619931951852733E-4 3.783344650499725E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST" ("POINT(-1.619931951852733E-4 3.783344650499725E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-1.619931951852733E-4 3.783344650499725E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.986458310619052E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.986458310619052E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.986458310619052E-4.3621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.986458310619052E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1608928416676577E-4 4.242383760694865E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1608928416676577E-4 4.242383760694865E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1608928416676577E-4 4.242383760694865E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1608928416676577E-4 4.242383760694865E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.219018414832042E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.219018414832042E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.219018414832042E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and candidates or the control of the	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9063)49438711888E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.90631943871188BE-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.90631943871188E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping and complete the control of the contr	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.47575234875155E-4 3.92752426536824094E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.47575234875155E-4 3.9275242535824094E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.47575234875155E-4 3.9275242535824094E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.47575234875155E-4 3.9275242535824094E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.197193927709789E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.197193927709789E-4 3.621288573296032E-4)' AS TEXT), 4326) LIVE up as dist FROM candidates ORDER BY dist LIMIT 1) JUNION ALI (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-3.197193927709789E-4 3.621288573296032E-4)' AS TEXT), 4326), ELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.197193927709789E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.906072815535908E-5 4.6126693207538123E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.90607281553908E-5 4.6126693207538123E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rimo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-7.906072815535908E-5 4.6126693207538123E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-7.906072815535908E-5 4.6126693207538123E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	165	165	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.717772209138902E-4.3.621288573296032E-4)' AS TEXT), 4326); LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.717772209138902E-4.3.621288573296032E-4)' AS TEXT), 4326); true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RPMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.717772209138902E-4.3.621288573296032E-4)' AS TEXT), 4326); name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.717772209138902E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, standards or cast of the cast of t	0	1	165	165	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4128748531450345E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.4128748531450345E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.4128748531450345E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	164	164	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.221816915058366E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.221816915058366E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.221816915058366E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.221816915058366E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	164	164	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.531187550345427E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.531187550345427E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.531187550345427E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.531187550345427E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	164	164	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.251191824849075E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.251191824849075E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.251191824849075E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.251191824849075E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	164	164	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.422410718002255E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.422410718002255E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.422410718002255E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.422410718002255E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	164	164	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0483385108493326E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.04833385108493326E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0483385108493326E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	164	164	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.607822992644524E-4") 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.607822992644524E-4") 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFNO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.607822992644524E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.607822992644524E-4") AS TEXT), 4326), Live) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	164	164	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.945131233267702E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.945131233267702E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.94513123367702E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.945131233267702E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	164	164	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.820180151528528E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.820180151528528E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.820180151528528E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the co	0	1	164	164	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.47431961857881E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.47431961857881E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.47431961857881E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	164	164	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.5003707618182755E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5003707618182755E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.5003707618182755E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.5003707618182755E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	164	164	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3463949478383387E-4 4.0568816545741423E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3463949478383387E-4 4.0568816545741423E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3463949478383387E-4 4.0568816545741423E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.346394947838338F-4 4.0568816545741423E-4') 'AS TEXT), 4226), tupe) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	163	163	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.691186651010816E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.691186651010816E-4 3.621288573296032E-4)' AS TEXT), 4326). true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RPMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.691186651010816E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.691186651010816E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	163	163	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3291518686650956E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3291518686650956E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3291518686650956E-4 3.621288573296032E-X) X S TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	163	163	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9252784654886605E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.925278465486605E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9252784654886605E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, as varchar) as type, gid, code, name, as varchar) as type, gid, code, name,	0	1	163	163	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.430405724030919E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.430405724030919E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.430405724030919E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.430405724030919E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	163	163	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.77230452116681E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.77230452116681E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.77230452116681E-4)) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.77230452116681E-4)) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.77230452116681E-4)) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.77230452116681E-4)) SELECT type, gid, code, name, geom FRO	0	1	163	163	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.47206925608666E-4.3.9312073463357636E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.47206925608666E-4.3.9312073463357636E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.47206925608666E-4.3.9312073463357636E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.47206925608666E-4.3.9312073463357636E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	163	163	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.2872903764251256E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.2872903764251256E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.2872903764251256E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	163	163	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.3904261196057494E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.3904261196057494E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.3904261196057494E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom, as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.3904261196057494E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	163	163	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3922'1360'1610'2857E-4' 3.62'1288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3922'1360'1610'2857E-4') 3.62'1288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3922'1360'1610'2857E-4' 3.62'1288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	163	163	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.059311680161145E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.059311680161145E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) LIVION LIMIT dandidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.059311680161145E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50, SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.059311680161145E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	163	163	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.530747541267069E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.530747541267069E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIMIT to AID didates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.530747541267069E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.530747541267069E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	163	163	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.001100849750199E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.001100849750199E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) LVINON LIMIT 610 Middlates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.001100849750199E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.001100849750199E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	163	163	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9133262979280194E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9133262979280194E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.9133262979280194E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.9133262979280194E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	162	162	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.387106927336358E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.387106927336358E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.387106927336358E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.387106927336358E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	162	162	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.162694046517748E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.162694046517748E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.162694046517748E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.162694046517748E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	162	162	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.5715493522935E-5 4.446121667155067E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.5715493522935E-5 4.446121667155067E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom ROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.5715493522935E-5 4.446121667155067E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.5715493522935E-5 4.446121667155067E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM sp	0	1	162	162	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.268165409437083E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.268165409437083E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.268165409437083E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.268165409437083E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	162	162	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1428412787387064E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.1428412787387064E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.1428412787387064E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	162	162	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.704661380272609E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.704661380272609E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.704661380272609E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.704661380272609E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	162	162	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.322967216050225E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.322967216050225E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.322967216050225E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.322967216050225E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	162	162	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1672800287486095E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1672800287486095E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.1672800287486095E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.1672800287486095E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	162	162	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.738348203427091E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.738348203427091E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.738348203427091E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-5.738348203427091E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	162	162	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.484021423647301E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.484021423647301E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.484021423647301E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.484021423647301E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	162	162	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.24634092231483E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.24634092231483E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.24634092231483E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.24634092231483E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	162	162	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.160731475738239E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.160731475738239E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.160731475738239E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.160731475738239E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	162	162	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.614829851860656E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.614829851860656E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.614829851860656E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.614829851860656E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	161	161	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.141314142755703E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.141314142755703E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION AIL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.1413141412755703E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.141314142755703E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	161	161	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.192801331381306E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.192801331381306E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.192801331381306E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.192801331381306E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	161	161	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.051657703118724E-4 4.351618899304452E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.051657703118724E-4 4.351618899304452E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.051657703118724E-4 4.351618899304452E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.051657703118724E-4 4.351618899304452E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	161	161	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0707019871420578E-4 4.332574615196052E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.0707019871420578E-4 4.332574615196052E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.0707019871420578E-4 4.332574615196052E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	161	161	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.985191520657582E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.985191520657582E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.985191520657582E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.985191520657582E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	161	161	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.605204155475025E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.605204155475025E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.605204155475025E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.605204155475025E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	161	161	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.013138274557402E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.013138274557402E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.013138274557402E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.013138274557402E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	161	161	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.1210076430527508E-4 4.282268959367908E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.1210076430527508E-4 4.282268959367908E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.121076430527508E-4 4.282268959367908E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.121076430527508E-4 4.282268959367908E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	161	161	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.009459756174363E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.009459756174363E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.009459756174363E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.009459756174363E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	161	161	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.770763662338252E-4 3.621288573296032E-4) 'AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.770763662338252E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.770763662338252E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.770763662338252E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	161	161	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.519069442573516E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.519069442573516E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.519069442573516E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.519069442573516E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	161	161	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.883138330099753E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.883138330099753E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.883138330099753E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.883138330099753E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	161	161	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.679135503358061E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.679135503358061E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.679135503358061E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.679135503358061E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	161	161	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.0752879693729183E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0752879693729183E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.0752879693729183E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	161	161	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.704647657427055E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.70447657427055E-4 3.62128873296032E-4)) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-2.704647657427055E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.704647657427055E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	161	161	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.135210173105542E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.135210173105542E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.135210173105542E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	160	160	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.165299)1608416946E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.16529)41608416946E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.1652991608416946E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	160	160	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.957168658074904E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.957168658074904E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.957168658074904E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.957168658074904E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	160	160	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6029537929828744E-4 3.8003228093926126E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6029537929828744E-4 3.8003228093926126E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFIMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.6029537929828744E-4 3.8003228093926126E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.6029537929828744E-4 3.8003228093926126E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	160	160	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.505074021268658E-5 4.4527692002248337E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.505074021268658E-5 4.4527692002248337E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.505074021268658E-5 4.4527692002248337E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.505074021268658E-5 4.4527692002248337E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	160	160	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.912167636622367E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.91216763662236F-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.912167636622367E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	160	160	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.373362703489329E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.373362703489329E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.373362703489329E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	160	160	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.354157053536578E-5 4.467860896947832E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.354157053536578E-5 4.467860896947832E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-9.354157053536578E-5 4.467860896947832E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.354157053536578E-5 4.467860896947832E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	160	160	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-(4.224866612742522E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-(4.224866612742522E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-(4.22486661274252E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the code, and control of the control of the control of the control of the code, and control of the control of the control of the control of the code, and control of the code, and control of the control of the control of the code, and control of the control of the control of the control of the code, and control of the control of the control of the control of the code, and control of the control of	0	1	160	160	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.391593929475104E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.391593929475104E-4 3.621288573296032E-4)' AS TEXT), 4326) LIVE as dist FROM candidates ORDER BY dist LIMIT 1) UNION LIVE (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.391593929475104E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type; gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.391593929475104E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	160	160	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.11606690899090355E-4 4.287209693440633E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.11606690899090935E-4 4.287209693440633E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.1160669089900935E-4 4.287209693440633E-4)' AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.11606908990935E-4 4.287209693440633E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	160	160	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.954208791919161E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.954208791919161E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-4.954208791919161E-4"), AS TEXT), 4326), true) as dist FROM candidates or AS ("POINT(-4.954208791919161E-4"), AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.954208791919161E-4"), AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, standard, as type, gid, code, name, geom as closest, standard, as type, gid, code, name, geom as closest, standard, as type, gid, code, name, geom.	0	1	160	160	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.051590742999569E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.051590742999569E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-6.051590742999569E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	160	160	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.771046879769041E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.771046879769041E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.771046879769041E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, goom	0	1	160	160	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9587764770226165E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9587764770226165E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9587764770226165E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	159	159	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.414344177572586E-5 4.461842184601362E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.414344177572586E-5 4.461842184601362E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.414344177572586E-5 4.461842184601362E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.414344177572586E-5 4.461842184601362E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	159	159	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.740769080412363E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.740769080412363E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.740769080412363E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.740769080412363E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	159	159	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.299970344776765E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.299970344776765E-4 3.621288573296032E-4)') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.299970344776765E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, same, geom	0	1	159	159	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.291274983648211E-5 4.474149104053572E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.291274983648211E-5 4.474149104053572E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.291274983648211E-5 4.474149104053572E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.291274983648211E-5 4.474149104053572E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	159	159	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.744636410415927E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.744636410415927E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.744636410415927E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.744636410415927E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	159	159	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.313889657398766E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.313889657398766E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.313889657398766E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and calculated the control of the control of the calculated as a stopped cast of the calculated as a stopped cast of the cas	0	1	159	159	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.747061861883051E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.747061861683051E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.747061861883051E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.747061861683051E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	159	159	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.4268078886125907E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4268078886125907E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.4268078886125907E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.4268078886125907E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	159	159	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2142527695443573E-4 4.189023832836664E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2142527695443573E-4 4.189023832836664E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2142527695443573E-4 4.189023832836664E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2142527695443573E-4 4.189023832836664E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	159	159	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.456564995926202E-5 4.45762010271113343E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.456564995926202E-5 4.4576201027111343E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-9.456564995926202E-5 4.4576201027111343E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.456564995926202E-5 4.4576201027111343E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	158	158	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.2897204019741004E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2897204019741004E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2897204019741004E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.2897204019741004E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	158	158	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.924568961825068E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.924568961825068E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.924568961825068E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopping the complex of the control of the co	0	1	158	158	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.462834905787634E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.462834905787634E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.462834905787634E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the control of the con	0	1	158	158	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.085457229210874E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.085457229210874E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.085457229210874E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the control	0	1	158	158	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.77111841'41700484E-4 3.632158188256026E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.77111841'41700484E-4 3.632158188256026E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.77111841'41700484E-4 3.632158188256026E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.77111841'41700484E-4 3.632158188256026E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	158	158	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3815236497292633E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3815236497292633E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.3815236497292633E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.3815236497292633E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	158	158	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8744383946893474E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8744383946893474E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8744383946893474E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	158	158	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2447102319578604E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2447102319578604E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2447102319578604E-4 3.621288573296032E-3)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2447102319578604E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	158	158	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.2658297896983716E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.2658297896983716E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.2658297896983716E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	158	158	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.119503378479005E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.119503378479005E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.119503378479005E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, geom	0	1	158	158	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8207952493818578E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.8207952493818578E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.8207952493818578E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	158	158	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.683461139567389E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.683461139567389E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.683461139567389E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.683461139567389E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	157	157	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.3274542181889704E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.32745421889704E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.3274542181889704E-4 3.621288573296032E-X)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3274542181889704E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	157	157	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8070555998166804E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.8070555998166804E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.8070555998166804E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	157	157	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.9820428428813123E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.982042842813123E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-1.9820428428813123E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	157	157	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.415224195729299E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.415224195729299E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.415224195729299E-4.3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.415224195729299E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	157	157	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.751279369236561E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.751279369236561E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.751279369236561E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.751279369236561E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	157	157	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.450527986395196E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.450527986395196E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.450527986395196E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.450527986395196E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	157	157	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.249054165294593E-5 4.478371185816577E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.249054165294593E-5 4.478371185816577E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-9.249054165294593E-5 4.478371185816577E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.249054165294593E-5 4.478371185816577E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	157	157	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.838865109438214E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.838865109438214E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.838865109438214E-4.3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.838865109438214E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	157	157	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.9319168500274428E-4 3.621288573296032E-4") 'AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.9319168500274428E-4 3.621288573296032E-4") 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-1.9319168500274428E-4 3.621288573296032E-4") 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	157	157	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.9578020530556398-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.9578020530556398-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.9578020550556398-4.3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.9578020530556398-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	157	157	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6025944668692264E-4 3.800682135483861E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6025944668692264E-4 3.800682135483861E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6025944668692264E-4 3.800682135483861E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	157	157	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4067617349311707E-4 3.996514867427704E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4067617349311707E-4 3.996514867427704E-4)' AS TEXT), 4326), true) as dist TROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-1.4067617349311707E-4 3.996514867427704E-X) STEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	157	157	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.299611018663116E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.299611018663116E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.299611018663116E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.299611018663116E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	156	156	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.7154274408364897E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-2.7154274408364897E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.7154274408364897E-4" 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.7154274408364897E-4" 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	156	156	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.338683159240465E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-4.338683159240465E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-4.338683159240465E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, strong candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	156	156	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.965258069913832E-4.3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.965258069913832E-4.3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-4.965258069913832E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.965258069913832E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	156	156	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.458702655480684E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.458702655480684E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.458702655480684E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.458702655480684E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	156	156	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5458346637584256E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5458346637584256E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5458346637584256E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5458346637584256E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	156	156	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2844111932340917E-4 4.1188654091312E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2844111932340917E-4 4.1188654091312E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.2844111932340917E-4 4.1188654091312E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2844111932340917E-4 4.1188654091312E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	156	156	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.057052169105292E-4' 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.057052169105292E-4' 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.057052169105292E-4' 3.621288573296032E-4') 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.057052169105292E-4' 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	156	156	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-3.962738212836448E-4 3.621288573296032E-4) 'AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.962738212836445E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-3.962738212836445E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-3.962738212836445E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	156	156	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.478124562745071E-5 4.4554641461636425E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.478124562745071E-5 4.4554641461636425E-4)' AS TEXT), 4326), rue) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.478124562745071E-5 4.4554641461636425E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.478124562745071E-5 4.4554641461636425E-4)' AS TEXT), 4326), rue) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	156	156	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.043227262293554E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.043227262293554E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.04322726293554E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.043227262293554E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	156	156	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.4296687746762185E-4 3.9736078276475474E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.4296687746762185E-4 3.9736078276475474E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.429687746762185E-4 3.97360782764754744-3 STEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.429687746762185E-4 3.9736078276475474E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, nam.	0	1	156	156	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.689228654513158E-5 4.4343537369669517E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.689228654513158E-5 4.4343537369669517E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.6892865451315E-5 4.43435373696698517E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.68922865451315E-5 4.4343357369669517E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	156	156	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.02913286089658E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.02913286089658E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.02913286089658E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.02913286089658E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	155	155	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.580604039535703E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.580604039535703E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.580604039535703E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.580604039535703E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	155	155	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.423578527871611E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.423578527871611E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.423578527871611E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.423578527871611E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	155	155	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.421602234246548E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.421602234246548E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.421602234246548E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.421602234246548E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	155	155	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3508058412942275E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.3508058412942275E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3508058412942275E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	155	155	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0265094494452285E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0265094494452285E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.0265094494452285E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	155	155	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5135851450585357E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5135851450585357E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5135851450585357E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	155	155	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.22289489339931E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.22289489339931E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.22289489339931E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.22289489339931E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	155	155	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2633007840572833E-4 4.139975818327891E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2633007840572833E-4 4.139975818327891E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.263300784057283E-4 4.139975818327891E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2633007840572833E-4 4.139975818327891E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	154	154	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.11977287306424E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.11977287306424E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.11977287306424E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	154	154	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.2816401386988747E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2816401386988747E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.2816401386988747E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2816401386988747E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	154	154	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.422231054945432E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.422231054945432E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.422231054945432E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.422231054945432E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	154	154	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.677262764106964E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.677262764106964E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.677262764106964E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.677262764106964E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	154	154	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.268708972889406E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.268708972889406E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.268708972889406E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.268708972889406E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	154	154	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.836174737867708E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.836174737867708E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.836174737867708E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.836174737867708E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	154	154	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6654765367575926E-4 3.7378000656988823E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6654765367575926E-4 3.7378000656986823E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.6654765367575926E-4 3.7378000656988623E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.665465367575926E-4 3.7378000656986823E-4)" AS TEXT), 4326), LIMIT 50), gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.6654765367575926E-4 3.737800065698623E-4)" AS TEXT), 4326), LIMIT 50, gid, code, na	0	1	154	154	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.397886710745792E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.397886710745792E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.397886710745792E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopping the complex of the control of the contr	0	1	154	154	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.987626120488407E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.987626120488407E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.987626120488407E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.987626120488407E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom.	0	1	154	154	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9700952496025227E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9700952496025227E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9700852496025227E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9700952496025227E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	154	154	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-5.20268279950662E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-5.20268279950662E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.20268279950662E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.20268279950662E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	154	154	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2869264760296265E-4 4.116350126365237E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2869264760296265E-4 4.116350126365237E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2869264760296265E-4 4.116350126365237E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	154	154	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5001058415148916E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5001058415148916E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.5001058415148916E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.5001058415148916E-4 3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	154	154	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.755236530768538E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.755236530768538E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.755236530768538E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the control	0	1	153	153	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.741582138449922E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.741582138449922E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.741582138449922E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.741582138449922E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	153	153	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7385994008849216E-4') AS 646772015495833E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7385994008849216E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.7385994008849216E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.7385994008849216E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	153	153	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.565602174290908E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.565602174290908E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.565602174290908E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.565602174290908E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	153	153	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.88001252373274E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.88001252373274E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.88001252373274E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	153	153	0	0,00

Request	% of	Hits	Mean time	Max time	Standard	% of system
	cumulative time		(ms)	(ms)	deviation	error
[WITH candidates AS (SELECT cast(EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-4.2445397174647385E-4 3.621288573296032E-4) AS TEXT), 43260, LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-4.2445397174647385E-4 3.621288573296032E-4)) AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2445397174647385E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	153	153	0	0,00
[WITH candidates AS (SELECT cast(FEZ' as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINTG-Z78500609486308E-4 3 621288873296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINTG-5.278500609486308E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINTG-5.278500609486308E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINTG-5.278500609486308E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINTG-5.278500609486308E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	153	153	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.694227200131269E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.694227200131269E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.694227200131269E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, game, geom.	0	1	153	153	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.775466921788632E-5 4.425729910140873E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.775466921788632E-5 4.425729910140873E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.775466921788632E-5 4.425729910140873E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.775466921788632E-5 4.425729910140873E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	153	153	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.599558492030626E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.599558492030626E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.599558492030626E-4 3.621288573296032E-4') as TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, arme, geom	0	1	153	153	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.068119744227367E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.068119744227367E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.068119744227367E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, name, geom	0	1	153	153	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3547584285443524E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.354758428543524E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.3547584285443524E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	153	153	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.413517396689471E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.413517396689471E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.413517396689471E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, graduates or candidates or code, as the candidates or candidates or candidates or candidates or code, as the candidates or candidates o	0	1	152	152	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.37758478532469E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.37758478532469E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.37758478532469E-4)) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.37758478532469E-4)) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.37758478532469E-4))) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.37758478532469E-4))) SELECT type, gid, code, name, geom FRO	0	1	152	152	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.291162280710542E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.291162280710542E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.291162280710542E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, goom	0	1	152	152	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.710051271977327E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.710051271977327E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.710051271977327E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, name, geom as closest, second candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	152	152	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2491074025681946E-4 4.1541691998227677E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2491074025681946E-4 4.1541691998227677E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2491074025681946E-4 4.1541691998227677E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2491074025681946E-4 4.1541691998227677E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	152	152	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as vps. gid, code, name geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.6254162493677136E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.6254162493677136E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.frmo HREE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-2.6254162493677136E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.6254162493677136E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	152	152	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.275446337520301E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.275446337520301E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.275446337520301E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.275446337520301E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	152	152	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.767382084231556E-5 4.4265383939097935E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.767382084231556E-5 4.4265383939097935E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.767382084231556E-5 4.4265383939097935E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.767382084231556E-5 4.4265383939097935E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	152	152	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.766285808763208E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.766285808763208E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.766285808763208E-4)", AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.766285808763208E-4 3.621288573296032E-4)", AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	152	152	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.319373954913746E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.319373954913746E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.319373954913746E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.319373954913746E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	152	152	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2746195566371891E-4 4.1286570456902254E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2746195566371891E-4 4.1286570456902254E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2746195566371891E-4 4.1286570456902254E-4)' AS TEXT), 4326), true) os dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO') as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2746195566371891E-4 4.1286570456902254E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, na	0	1	152	152	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.94225662/43585194E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.94225662/43585194E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.9422566243585194E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.9422566243585194E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	152	152	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2505584298683396E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2505584298683396E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2505584298683396E-4 3.621288573296032E-3) X STEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA') as varchar) as type, gid, code, name,	0	1	152	152	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.335628887274458E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.335628887274458E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-4.335628887274458E-4.35628887274458E-4.35628887274458E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, graph candidates or cast of the cast	0	1	152	152	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7851412811660157E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.7851412811660157E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.7851412811660157E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	152	152	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.602092071953565E-5 4.443067395125009E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.602092071953565E-5 4.443067395125009E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-9.602092071953565E-5 4.443067395125009E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.602092071953565E-5 4.443067395125009E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	151	151	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.221008431302659E-4.3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.221008431302659E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.221008431302659E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	151	151	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.820808972227412E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.820808972227412E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.820808972227412E-4.3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.820808972227412E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	151	151	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.392851570872872E-4' 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.392851570872872E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.392851570872872E-4' AS 621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.392851570872872E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	151	151	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.0233653459508102E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.0233653459508102E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.0233653459508102E-4") AS CEVEN AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA") as varchar) as type, gid, code, name,	0	1	151	151	0	0,00
(WITH candidates AS (SELECT cast('EE2' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.983583701709869E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.983583701709869E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.983583701709869E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.983583701709869E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	151	151	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.757477744696988E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.757477744696986E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.757477744696986E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.757477744696986E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	151	151	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.804194713753052E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.804194713753052E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.804194713753052E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.804194713753052E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	150	150	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5835501828458925E-4 3.8197264195922613E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.5835501828458925E-4 3.8197264195922613E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.5835501828458925E-4 3.8197264195922613E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS ("SELECT" cast("POINT(-1.5835501828458925E-4 3.8197264195922613E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	150	150	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.563176723023786E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.563176723023786E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.563176723023786E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.563176723023786E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	150	150	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.129744172717967E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.129744172717967E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-6.129744172717967E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-6.129744172717967E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	150	150	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.616267156315248E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.616267156315248E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.616267156315248E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.616267156315248E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	150	150	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.598839839803329E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.598839839803329E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.598839839803329E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.598839839803329E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	150	150	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2011419406780633E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2011419406780633E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.2011419406780633E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.2011419406780633E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	150	150	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.392846996591021E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.392846996591021E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.392846996591021E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.392846996591021E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	150	150	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.04783154165182E-5.4.498493448198723E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.04783154165182E-5.4.498493448198723E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.04783154165182E-5.4.498493448198723E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.04783154165182E-5.4.498493448198723E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	150	150	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-6.064256988505655E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.064256988505655E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-6.064256988505655E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.064256988505655E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom.	0	1	150	150	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.000386771804757E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.000386771804757E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.000386771804757E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.000386771804757E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	150	150	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.egz WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2505447070227857E-4 4.152731895330551E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2505447070227857E-4 4.152731895330551E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast(RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2505447070227857E-4 4.152731895330551E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, AS TEXT), 4326, true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	150	150	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.312093026830527E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.312093026830527E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.312093026830527E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.312093026830527E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	150	150	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8358108374722087E-4.3 621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8358108374722087E-4.3621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8358108374722087E-4.3 621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8358108374722087E-4.3.62128573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	149	149	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.56021228258619E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.56021228258619E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.56021228258619E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.56021228258619E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	149	149	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.189374010456098E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.189374010456098E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.189374010456098E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.189374010456098E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	149	149	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.205377745358979E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.205377745358979E-4 3.621288573296032E-4)' AS TEXT), 4326) LIVIE up as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.205377745358979E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELY geom <>> ST_GeomFromText(CAST ('POINT(-5.205377745358979E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	149	149	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5961403196691204E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.5961403196691204E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.5961403196691204E-4 3.621288573296032E-X) X STEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	149	149	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.925736771694424E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.925736771694424E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.925736771694424E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.925736771694424E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	149	149	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6305457950508966E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6305457950508966E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.6305457950508966E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.6305457950508966E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	149	149	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.789718114833174E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-2.789718114833174E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" ("POINT(-2.789718114833174E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" ("POINT(-2.789718114833174E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	149	149	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3669663678446758E-4 4.036310234514324E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3669663678446758E-4 4.036310234514324E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3669663678446758E-4 4.036310234514324E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3669663678446758E-4 4.036310234514324E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	149	149	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.857644473158163E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.857644473158163E-4 3.621288573296032E-4)") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.857644473158163E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	148	148	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.688936288518667E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.688936288518667E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.688936288518667E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SEV geom <> ST_GeomFromText(CAST ('POINT(-4.688936288518667E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	148	148	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.635329737465988E-5 4.4397436285901256E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.635329737465988E-5 4.4397436285901256E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.635329737465988E-5 4.4397436285901256E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.635329737465988E-5 4.4397436285901256E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	148	148	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-6.084019924756283E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.084019924756283E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-6.084019924756283E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	148	148	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.128661620095171E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.128661620095171E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.128661620095171E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, arme, geom as closest, stopped to the candidates or	0	1	148	148	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1270263554563514E-4 4.276250246894216E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1270263554563514E-4 4.276250246894216E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1270263554563514E-4 4.276250246894216E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1270263554563514E-4 4.276250246894216E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	147	147	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.093811561353186E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.093811561353186E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.093811561353186E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	147	147	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9722512062844092E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9722512062844092E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9722512062844092E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	147	147	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-9.715279797752623E-5.4.431748622614566E-4)" AS TEXT), 4325L IMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.715279797752623E-5.4.431748622614566E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-9.71527997752623E-5.4.431748622614566E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-9.715279979752623E-5.4.431748622614566E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	147	147	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-6.01718526761779E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.01718526761779E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-6.01718526761779E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.01718526761779E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	147	147	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.053921788456427E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.053921788456427E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.053921788456427E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	147	147	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.757558427661695E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.757558427661695E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.757558427661695E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the co	0	1	147	147	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.357750314673055E-5 4.4675015708565833E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.357750314673055E-5 4.4675015708565833E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.357750314673055E-5 4.46750157085665833E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	147	147	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8302412827106676E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8302412827106676E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8302412827106676E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8302412827106676E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	147	147	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.98861884158279E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.98861884158279E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.98861884158279E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.98861884158279E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	146	146	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.854051212021686E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.854051212021686E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.854051212021686E-4 3.621288573296032E-4") AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.854051212021686E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	146	146	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1842490390547651E-4 4.219027563364259E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1842490390547651E-4 4.219027563364259E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1842490390547651E-4 4.219027563364259E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	146	146	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9351507850502736E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.9351507850502736E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.9351507850502736E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	146	146	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.821698138947829E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.821698138947829E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-2.821698138947829E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-2.821698138947829E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	146	146	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.688401873630046E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.688401873630046E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.688401873630046E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	146	146	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.192082679154011E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.192082679154011E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.192082679154011E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.192082679154011E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	146	146	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.305539899538306E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.305539899538306E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.30553989953306E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.305539899538306E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	145	145	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.214540561256999E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.214540561256999E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.214540561256999E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.214540561256999E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	145	145	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.59749236687715E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.59749236687715E-4 3.621288573296032E-4)') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.59749236687715E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.59749236687715E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	145	145	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.109707167600249E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.109707167600249E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.109707167600249E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.109707167600249E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	144	144	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.814615171048838E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.814615171048838E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.814615171048838E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.814615171048838E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	144	144	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.059226422914584E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.059226422914584E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.059226422914584E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.059226422914584E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	144	144	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-6.064795977676126E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.06479597767126E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-6.064795977676126E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.064795977676126E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	144	144	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.386708865615402E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.336708865615402E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.336708655615402E-4) AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.336708655615402E-4) AS TEXT), 4326). LIWIT type as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	144	144	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-6.067850249642131E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.067850249642131E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-6.067850249642131E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, part of the candidates or of the candidates or of the candidates or of the candidates as a cast of the candidates or of the can	0	1	144	144	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2547667888581477E-4 4.148509813440324E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2547667888581477E-4 4.148509813440324E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2547667888581477E-4 4.148509813440324E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	144	144	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3423525290598009E-4 4.0609240732915233E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.3423525290598009E-4 4.0609240732915233E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/fmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.3423525290598009E-4 4.0609240732915233E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-1.3423525290598009E-4 4.0609240732915233E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, na	0	1	144	144	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.353060778068228E-4 3.621288573296032E-4) 'AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.353060778068228E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.353060778068228E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.353060778068228E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	144	144	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.442532980366533E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.442532980366533E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.442532980366533E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.442532980366533E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	143	143	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.741043149279449E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.741043149279449E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.741043149279449E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	143	143	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.578448082853816E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.578448082853816E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.578448082853816E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.578448082853816E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	143	143	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.772286224039404E-4 3.6309903782686347E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.772286224039404E-4 3.6309903782686347E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.772286224039404E-4 3.6309903782686347E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	143	143	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT-(6.080426663619805E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-(6.080426663619805E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT-(6.080426663619805E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT-(6.080426663619805E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	143	143	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.194777625006388E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.19477762500638E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.19477762500638E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.19477762500638E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	143	143	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.900763606795901E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.900763606795901E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.900763606795901E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.900763606795901E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	143	143	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.908390138147214E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.908390138147214E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.908390138147214E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped to the control of the control of the candidates or the control of th	0	1	143	143	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.5947928467429406E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.5947928467429406E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.5947928467429406E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name,	0	1	143	143	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-1.721351747429827E-4 3.681924854947296E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.72135174742982F-4 3.681924854947296E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-1.721351747429827E-4 3.681924854947296E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-1.721351747429827E-4 3.681924854947296E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	143	143	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3571884540933263E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3571884540933263E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3571884540933263E-4 3.62128573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3571884540933263E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	143	143	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.60260818971478E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.60260818971478E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-4.60260818971478E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.60260818971478E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	143	143	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.601880388923782E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.601880388923782E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.601880388923782E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, st_geom.	0	1	142	142	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.791424913873001E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.791424913873001E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-2.791424913873001E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the con	0	1	142	142	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3611410413434533E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3611410413434533E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3611410413434533E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3611410413434533E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	142	142	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.076833402483327E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.076833402483327E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.076833402483327E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and candidates or	0	1	142	142	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT-6.088242006591645E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT"-6.088242006591645E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT"-6.088242006591645E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, goom	0	1	142	142	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.746792367097815E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.746792367097815E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.746792367097815E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	142	142	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-2.581308968917445E-4.3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-2.581308968917445E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST" (POINT(-2.581308968917445E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, name, geom	0	1	142	142	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.402553375941363E-4.3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.402553375941363E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.402553375941363E-4.3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	141	141	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.975593269963057E-4.3.621288573296032E-4)" AS TEXT), 4326); LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.975593269963057E-4.3.621288573296032E-4)" AS TEXT), 4326); true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("POINT(-5.97593269963057E-4.3.621288573296032E-4)" AS TEXT), 4326); true) as dist FROM candidates AS (SELECT cast("POINT(-5.97593269963057E-4.3.621288573296032E-4)" AS TEXT), 4326); true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.975593269963057E-4.3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, stopped and the stopped as	0	1	141	141	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8759653306723505E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.875965306723505E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8759655306723505E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	141	141	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT-6.458972150065919E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-6.458972150065919E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT-6.458972150065919E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, stopped and control of the cont	0	1	141	141	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.649235327242435E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.649235327242435E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.649235327242435E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.649235327242435E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	141	141	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.52706444860218E-4 3.621288573296032E-4") AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.52706444860218E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.52706444860218E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	141	141	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.486370766231565E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.486370766231565E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.486370766231565E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, name, geom as closest, graduates or candidates or c	0	1	141	141	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.184087673125347E-4 3.621288573296032E-4)" AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.184087673125347E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.184087673125347E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, pame, geom set complete the cast of	0	1	141	141	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-6.076743570954915E-4") AS 1EX1, 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.076743570954915E-4") AS 1EX1, 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-6.076743570954915E-4") AS 1EXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.076743570954915E-4") AS 1EXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.076743570954915E-4") AS 1EXT), 4326). LIMIT 50) SELECT ("POINT(-6.076743570952E-4") AS 1EXT), 4326). LIMIT 50) AS 1EXT ("POINT(-6.076743570954915E-4") AS 1EXT	0	1	140	140	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.130260290479182E-4 4.273016311945756E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.1302602904791822E-4 4.273016311945756E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.1302602904791822E-4 4.273016311945756E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.130260290479182E-4 4.273016311945756E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	140	140	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.987001874071375E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.987001874071375E-4 3.621288573296032E-4)' AS TEXT), 4326) true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.987001874071375E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.987001874071375E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	140	140	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8602358646365563E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.8602356646365563E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-2.8602358644365563E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.860235864636556E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINT(-2.860235864436556E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINT(-2.860235864436556E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINT(-2.860235864436556E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINT(-2.86023564436556E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('POINT(-2.86023564436556E-4 3.621288573296032E-4)' AS TEXT), 4326), true) and true are carried to the carried true and true are carried true and true are carried true	0	1	140	140	0	0,00
as varchar) as type, gid, code, name,  (WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-6.113035508433344E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.113035508433344E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT type as dist FROM candidates ORDER BY dist LIMIT 1) JUNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-6.113035508433344E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT (type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-6.113035508433344E-4.3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	140	140	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-2.0407926624627288E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0407926624627288E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-2.0407926624627288E-4 3.621288573296032E-4)' AS TEXT), 4326), true) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-2.0407926624627288E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	139	139	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.71571065826728E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.71571065826728E-4 3.621286573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFIMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.71571065826728E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.71571065826728E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	139	139	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as ype, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST" (POINT(-5.783443630689891E-4 3.621288573296032E-4)" AS TEXT), 4325) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-5.783443630689891E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST" (CAST" (POINT(-5.783443630689991E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST" (POINT(-5.783443630689891E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT (point (FOINT), 4326) LIMIT 50) SELECT (point (FOINT), 4326) LIMIT 60) SELECT (poin	0	1	139	139	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2884673348581834E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2884673348581834E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2884673348581834E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	139	139	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.989606988395322E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.989606988395322E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.989606988395322E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.98960698395322E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	139	139	0	0,00
(WITH candidates AS (SELECT cast("EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-3.744806924909049E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-3.744806924909049E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-3.744806924909049E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, arme, geom as closest, stopped candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	138	138	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST (POINT(-5.376686470040571E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-5.376686470040571E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST (POINT(-5.376686470040571E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, st. page 1.00 for the candidates or	0	1	138	138	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y" ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.595516073252087E-4 3.621288573296032E-4") AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.595516073252087E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y" ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.595516073252087E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom as closest, geom	0	1	138	138	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = "Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.197292907801903E-4 3.621288573296032E-4") AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.197292907801903E-4 3.621288573296032E-4") AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.197292907801903E-4"), AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.197292907801903E-4"), AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	138	138	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2050138449634805E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.2050138449634805E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.2050138449634805E-4 3.621288573296032E-3)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	138	138	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.84695452127714E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.84695452127714E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.84695452127714E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.84695452127714E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FROM.	0	1	138	138	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.936961138464067E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.936961138464067E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.936961138464067E-4.3.621288573296032E-4)' AS TEXT), 4326), ame, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.936961138464067E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	138	138	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT'-6.049255123260857E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'-6.049255123260857E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT'-6.049255123260857E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, strong candidates or the control of the contro	0	1	138	138	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.604229731508047E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.604229731508047E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.604229731508047E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.604229731508047E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	138	138	0	0,00

Request	% of	Hits	Mean time	Max time	Standard	% of system
ANTHUR THE ADOPT FOR A STATE OF THE ANALYSIS AND A STATE O	cumulative time		(ms)	(ms)	deviation	error
[WITH candidates AS (SELECT cast(EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT',c.6904542759379667E-4) AS TEXT), 4326. LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',c.6904542759379667E-4) AS TEXT), 4326, Irug is a dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT',c.6904542759379667E-4 3.621288573296032E-4)' AS TEXT), 4326), Irug is often supported by the control of the control o	0	1	138	138	0	0,00
[WITH candidates AS (SELECT cast(FEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5-9)1181288479057E-4 3.621288573296032E-4)' AS TEXT), 4326), Itue) as dist FROM candidates ORDER BY dist LIMIT 1) WINON ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5-9)181288479057E-4 3.621288573296032E-4)' AS TEXT), 4326), Itue) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5-9)181288479057E-4 3.621288573296032E-4') AS TEXT), 4326), Itue) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	138	138	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.13917190891937E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.13917190891937E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.13917190891937E-4 3.621288573296032E-4') AS TEXT), 4326), true) as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.13917190891937E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	138	138	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.255319500874173E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.255319500874173E-4 3.62128873296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.255319500874173E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.255319500874173E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	137	137	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.937495553352687E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.937495553352687E-4 3.62128873296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.937495553352687E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	137	137	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.979725520270007E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.979725520270007E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.979725520270007E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, arme, geom	0	1	137	137	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.315960356834092E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.315960356834092E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.315960356834092E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.315960356834092E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	136	136	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-3.401201328733333E-4.3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.401201328733333E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-3.401201328733333E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-3.401201328733333E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	136	136	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.70331390734643E-4 3.621288573296032E-4') AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.70331390734643E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.70331390734643E-4), SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.70331390734643E-4), SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.70331390734643E-4), SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.70331390734643E-4), SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom FRO	0	1	136	136	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2343750319086344E-4 4.168901570454518E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2343750319086344E-4 4.168901570454518E-4)' AS TEXT), 4326), Irue) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.2343750319086344E-4 4.168901570454518E-4)' AS TEXT), 4326), Irue) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	135	135	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.331406805439097E-4.3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.331406805439097E-4.3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.331406805439097E-4.351288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, graduates or	0	1	135	135	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-9.428717222118499E-5.4.460404880109145E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.428717222118499E-5.4.460404880109145E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-9.428717222118499E-5.4.460404880109145E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.428717222118499E-5.4.460404880109145E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	135	135	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez.WHERE enabled = "Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.168726481766902E-4 3.621288573296032E-4)" AS TEXT), 4325) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.168726481766902E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmow WHERE enabled = "Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.168726481766902E-4 3.621288573296032E-4)" AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.168726481766902E-4") AS TEXT), 4326) LIMIT 50) SELECT ("POINT(-5.1768726481769902E-4") AS TEXT), 4326) LIMIT 50) SELECT ("POINT(-5.1	0	1	135	135	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.2144324326011811E-4 4.18844169791039E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2144324326011811E-4 4.18844169791039E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-1.2144324326011811E-4 4.18844169791039E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.2144324326011811E-4 4.188844169791039E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	134	134	0	0,00
(WITH candidates AS (SELECT cast("EZ" as varchar) as type. gid. code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.380639057290697E-4 3.621288573296032F-4) AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.380639057290697E-4 3.621288573296032E-4) 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <-> ST_GeomFromText(CAST ("POINT(-5.380639057290697E-4 3.621288573296032E-4) 'AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.380639057290697E-4 3.621288573296032E-4) 'AS TEXT), 4326). Live) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	134	134	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.650672631697027E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.650672631697027E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.650672631697027E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.650672631697027E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	134	134	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.218308911168449E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.218)30811168449E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rlmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.218308911168449E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	133	133	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.15435343722099E-4 3.621288573296032E-4') AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.15435343722099E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.15435343722099E-4 3.621288573296032E-4') 'AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom FRO	0	1	133	133	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.353774856013673E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.353774856013673E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.r/mo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-4.353774856013673E-4 3.621288573296032E-4') AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.353774856013673E-4 3.621288573296032E-4') AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	133	133	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-5.886660056835224E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.886660056835224E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-5.886660056835224E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-5.886660056835224E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	133	133	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.703224075818018E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.703224075818018E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.703224075818018E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.703224075818018E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	132	132	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3034554772574256E-4 4.099821125150022E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-1.3034554772574256E-4 4.099821125150022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-1.3034554772574256E-4 4.099821125150022E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	132	132	0	0,00
(WITH candidates AS (SELECT cast("EEZ" as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ("POINT(-4.954298623447573E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.954298623447573E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("RFMO" as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ("POINT(-4.954298623447573E-4 3.621288573296032E-4)" AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-4.954298623447573E-4 3.621288573296032E-4)" AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast("PORTAREA" as varchar) as type, gid, code, name, geom	0	1	131	131	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-6.120761019876771E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.120761019876771E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-6.120761019876771E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-6.120761019876771E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	131	131	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.383513666199881E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.383513666199881E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.383513666199881E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.383513666199881E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	130	130	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.865998805300475E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.865998805300475E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <-> ST_GeomFromText(CAST ('POINT(-5.865998805300475E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.865998805300475E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	129	129	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	129	129	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.750205965177469E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.750205965177469E-4 3.621288573296032E-4)' AS TEXT), 4326). true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.fmo WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.750205965177469E-4 3.621288573296032E-4)' AS TEXT), 4326). LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.750205965177469E-4 3.621288573296032E-4)' AS TEXT), 4326). Live) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	129	129	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.433370164468513E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.433370164468513E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.433370164468513E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.433370164468513E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	128	128	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8825232322464226E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.8825232322464226E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.8825232322464226E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	127	127	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-5.646181055276429E-4 3.621288573296032E-4)' AS TEXT), 4326), LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.646181055276429E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = Y' ORDER BY geom <>> ST_GeomFromText(CAST ('POINT(-5.646181055276429E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-5.646181055276429E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom	0	1	127	127	0	0,00
(WITH candidates AS (SELECT cast('EEZ' as varchar) as type, gid, code, name, geom FROM spatial.eez WHERE enabled = Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3076014504099286E-4 3.621288573296032E-4)' AS TEXT), 4326) LIMIT 50) SELECT type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3076014504099286E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('RFMO' as varchar) as type, gid, code, name, geom FROM spatial.rfmo WHERE enabled = 'Y' ORDER BY geom <> ST_GeomFromText(CAST ('POINT(-4.3076014504099286E-4 3.621288573296032E-4)' AS TEXT), 4326), true) bas dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name, geom as closest, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-4.3076014504099286E-4 3.621288573296032E-4)' AS TEXT), 4326), true) as dist FROM candidates ORDER BY dist LIMIT 1) UNION ALL (WITH candidates AS (SELECT cast('PORTAREA' as varchar) as type, gid, code, name,	0	1	126	126	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.93 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.93 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.93 40.312)' AS TEXT), 4326) <-y geom LIMIT to)	0	1	110	110	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.385 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.385 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.385 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	105	105	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.847 51.314)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.847 51.314)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.847 51.314)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.847 51.314)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.847 51.314)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	2	49	96	66	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.837 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.837 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.837 40.312)' AS TEXT), 4326) =	0	1	95	95	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.321 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.321 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.321 40.312)' AS TEXT), 4256)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.321 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.321 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.321 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.321 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.321 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.321 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.321 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	94	94	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.117 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.117 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-39.117 40.312)' AS TEXT), 4326) = 9 geom LMIT 10)	0	1	90	90	0	0,00
(SELECT /PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.366 51.783)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.366 51.783)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.366 51.783)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	88	88	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.841 51.308)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial, fimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.841 51.308)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.841 51.308)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.841 51.308)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.841 51.308)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, "F"	0	1	83	83	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.294 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.294 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.294 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.294 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.294 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.294 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.294 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	82	82	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.466 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.466 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.466 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.466 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.466 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	78	78	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.728 50.421)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.728 50.421)' AS TEXT), A326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.728 50.421)' AS TEXT), A326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.728 50.421)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.728 50.421)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	73	73	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.043 51.106)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.043 51.106)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.043 51.106)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.043 51.106)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.043 51.106)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.043 51.106)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	64	64	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.517 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.517 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.517 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.517 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.517 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.517 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.517 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.517 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.517 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.517 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POIN	0	1	59	59	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	53	53	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	53	53	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	49	49	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.986 48.163)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.986 48.163)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.986 48.163)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.986 48.163)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.986 48.163)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	44	44	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.194 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.194 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.194 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.194 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.194 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	44	44	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	42	42	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.102 51.047)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.102 51.047)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.102 51.047)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.102 51.047)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.102 51.047)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	42	42	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.754 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.754 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.754 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.754 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.754 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.754 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.754 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.754 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.754 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.754 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	40	40	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.885 50.264)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.885 50.264)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.885 50.264)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.885 50.264)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.885 50.264)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.885 50.264)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	40	40	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.774 50.375)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.774 50.375)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.774 50.375)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	38	38	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.052 50.097)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.052 50.097)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.052 50.097)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.052 50.097)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.052 50.097)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	37	37	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.63 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.63 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.63 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'Tarret' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.63 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.63 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	37	37	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.99 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.99 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.99 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.99 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.99 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	36	36	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.654 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.654 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.654 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.654 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.654 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	36	36	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-49.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-49.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	36	36	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.567 51.582)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.567 51.582)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.567 51.582)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	33	33	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.947 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.947 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.947 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.947 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.947 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	33	33	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.946 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.946 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.946 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	31	31	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.629 51.52)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.629 51.52)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.629 51.52)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.629 51.52)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.629 51.52)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	31	31	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.4 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.4 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.4 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	30	30	0	0,00
(SELECT /PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.778 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.778 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.778 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	30	30	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.513 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.513 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.513 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	30	30	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.75 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.75 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.75 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	30	30	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.091 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.091 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.091 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	29	29	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.299 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-36.299 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'FORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-36.299 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.299 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.299 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	29	29	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ("POINT(-43,712 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-43,712 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-43,712 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-43,712 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm" WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-43,712 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm" WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-43,712 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm" WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-43,712 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm" WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-43,712 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm" WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-43,712 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm" WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-43,712 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm" WHERE ST_Intersects(geom, ST_GeomFromT	0	1	28	28	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.776 40.373)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.776 40.373)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.776 40.373)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	28	28	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.699 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.699 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.699 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.699 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.699 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.699 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	27	27	0	0,00
OKION ALL (SELECT 6 as index  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.268 44.881)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.268 44.881)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.268 44.881)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	27	27	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.064 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.064 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.064 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.064 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.064 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	27	27	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.725 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.725 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.725 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.725 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.725 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	26	26	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.116 50.033)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.116 50.033)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.116 50.033)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.116 50.033)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.116 50.033)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	26	26	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.21 50.961)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.21 50.961)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.21 50.961)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.21 50.961)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.21 50.961)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	2	13	23	14	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	25	25	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.314 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.314 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.314 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.314 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.314 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	25	25	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.075 49.074)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.075 49.074)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.075 49.074)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.075 49.074)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.075 49.074)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	25	25	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	25	25	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	25	25	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.67 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.67 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.67 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.67 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.67 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	25	25	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	24	24	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.455 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.455 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.455 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.455 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.455 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	24	24	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-35.59 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-35.59 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-35.59 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-35.59 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-35.59 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, "E"	0	1	24	24	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.943 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.943 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.943 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.943 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.943 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	24	24	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.46 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.46 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.46 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	24	24	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.435 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.435 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.435 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.435 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.435 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	24	24	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.69 51.459)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.69 51.459)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.69 51.459)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.69 51.459)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.69 51.459)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	24	24	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.17 50.001)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.17 50.001)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.17 50.001)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.17 50.001)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.17 50.001)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	24	24	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.467 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.467 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.467 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.467 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.467 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.467 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.467 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.467 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.467 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.467 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm wHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POINT	0	1	23	23	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.97 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.97 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.97 40.312)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	23	23	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(Geom, ST_Distance(Geom, ST_Distance(Geom, ST_Distance) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.81 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.81 40.281)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	23	23	0	0,00
select from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	23	23	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.205 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.205 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.205 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.205 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.205 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.")	0	1	23	23	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.437 44.712)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.437 44.712)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.437 44.712)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	22	22	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.317 48.832)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.317 48.832)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.317 48.832)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	22	22	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.024 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.024 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.024 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	22	22	0	0,00
select from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.739 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.739 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.739 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.739 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.739 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.739 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.739 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	22	22	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.142 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.142 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-42.142 40.312)' AS TEXT), 4326) <-x, geom LIMIT 10)	0	1	21	21	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.557 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.557 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.557 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	21	21	0	0,00
select from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.706 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.706 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.706 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.706 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.706 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.706 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	21	21	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.822 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.822 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.822 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.822 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.822 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	21	21	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.99 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.99 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.99 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.99 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.99 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.99 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	21	21	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.926 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.926 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port.area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.926 40.312)" AS TEXT), 49326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.926 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.926 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	21	21	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.982 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.982 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.982 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.982 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.982 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.982 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.982 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.982 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.982 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	21	21	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.343 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.343 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.343 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	21	21	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.815 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.info WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.815 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.815 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.815 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.815 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	21	21	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.995 41.154)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.995 41.154)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.995 41.154)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	21	21	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.57 51.579)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.57 51.579)' AS TEXT), 4326) <>> geom LIMIT 10)  TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.57 \$1.579)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	20	20	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-8-335 16 14)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-8.535 51.614)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS; PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-8.535 51.614)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-8.535 51.614)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-8.535 51.614)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-8.535 51.614)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-8.535 51.614)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-8.535 51.614)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-8.535 51.614)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-8.535 51.614)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST (*POINT(-8.535 51.614)* AS TEXT), 432	0	1	20	20	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	20	20	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.621 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(15 GeomFromText(CAST ('POINT(-30.621 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.621 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	20	20	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-49.08 d.0.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-49.08 d.0.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, *POFTAREA' as type, gid, code, name FROM spatial.port area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-49.08 d.0.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, *STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-49.08 d.0.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, *GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-49.08 d.0.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, *GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-49.08 d.0.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, *GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-49.08 d.0.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, *GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-49.08 d.0.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, *GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. *GFCM' as type, gid, code for the spatial spatia	0	1	20	20	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	20	20	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	20	20	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.871 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.871 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.871 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.871 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.871 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	20	20	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.305 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-27.305 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.305 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	20	20	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.023 50.126)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.023 50.126)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.023 50.126)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.023 50.126)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.023 50.126)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	20	20	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.091 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.091 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.091 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.091 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.091 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	20	20	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.27 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.imfo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.27 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.27 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.27 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.27 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.27 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "F"	0	1	20	20	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.62 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.62 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.62 40.312)' ASTEXT), 4328) (">- QeomFromText(CAST ('POINT(-27.62 40.312)' ASTEXT), 4328) (">- QEOMFROMTEXT(-27.62 40.312)' ASTEXT), 4328) (">- QEOMFROMTEXT(-27.62 40.312)' ASTEXT(-27.62 40.312)'	0	1	19	19	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	19	19	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-17.596 42.553)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.596 42.553)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.596 42.553)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.596 42.553)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.596 42.553)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	19	19	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-45.877 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.877 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.877 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.877 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.877 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	19	19	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.932 50.217)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.932 50.217)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.932 50.217)' AS TEXT), 100N ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.932 50.217)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.932 50.217)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	19	19	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.25 50.899)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.25 50.899)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.25 50.899)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.25 50.899)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.25 50.899)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	19	19	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT-(46.787 40.312) ÅS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT-(46.787 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area wHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-46.787 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-46.787 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-46.787 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index."	0	1	19	19	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.234 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.234 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.234 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.234 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.234 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	19	19	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-60.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	19	19	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.886 50.263)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.886 50.263)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.886 50.263)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	19	19	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.387 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.387 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.387 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	19	19	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial, eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT', 38.45 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.45 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.45 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STRTAREC" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.45 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.45 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, "F."	0	1	19	19	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.284 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.284 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.284 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	19	19	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-33.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	19	19	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.243 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.243 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.243 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.243 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.243 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	19	19	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.747 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.747 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.747 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.747 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.747 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	19	19	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.72 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.72 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.72 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.72 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.72 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	19	19	0	0,00
(SELECT 'PORT' as type, gid. code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.8, 412 51.737)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "V" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.412 51.737)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.412 51.737)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	19	19	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.584 40.312) AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.584 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.584 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.584 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.584 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.584 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.**	0	1	19	19	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.147 51.002)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.147 51.002)' AS TEXT), 4326), geom, 22224) GNDER BY ST_GeomFromText(CAST ('POINT(-9.147 51.002)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	18	18	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.683 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.683 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.683 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.683 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.683 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	18	18	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-61.927 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.927 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.927 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.927 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.927 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	18	18	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-21.546 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.546 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.546 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.546 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.546 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	18	18	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.272 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.272 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.272 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.272 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.272 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	18	18	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-62.999 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-62.999 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-62.999 40.312)' AS TEXT), 4250) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-62.999 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-62.999 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	18	18	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.685 50.464)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.685 50.464)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.685 50.464)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	18	18	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.7 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.7 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.7 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.7 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.7 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FACO' a	0	1	18	18	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.572 51.577)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.572 51.577)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.572 51.577)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	18	18	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.859 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.859 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.859 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.859 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.859 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	18	18	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.85 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.85 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.85 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.85 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.85 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'F	0	1	18	18	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.047 50.102)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.047 50.102)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.047 50.102)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	18	18	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.23 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.23 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.23 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.23 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.23 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, F	0	1	18	18	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.17 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.17 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.17 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.17 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.17 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	18	18	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.179 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.179 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.179 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	18	18	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-45.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'FORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as intersects(geom, ST_GeomFromText(CAST ('POINT(-45.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as intersects(geom, ST_GeomFromText(CAST ('POINT(-45.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as intersects(geom, ST_GEOMFromText(CAST ('POINT(-45.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as intersects(geom, ST_GEOMFromText(CAST ('POINT(-45.	0	1	17	17	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	17	17	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.727 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.727 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.727 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.727 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.727 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	17	17	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.753 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.753 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.753 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.753 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.753 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	17	17	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	17	17	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.296 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.296 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.296 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.296 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.296 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	17	17	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.865 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.865 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.865 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.865 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.865 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	17	17	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	17	17	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.471 49.678)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.471 49.678)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.471 49.678)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.471 49.678)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gord WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.471 49.678)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	17	17	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49,166 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE e-nabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49,166 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49,166 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	17	17	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.328 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.328 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.328 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	17	17	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.033 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.033 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.033 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.033 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.033 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	17	17	0	0,00
select *from ((SELECT1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.799 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.799 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.799 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.799 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.799 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	17	17	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.418 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.418 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.418 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.418 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.418 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.418 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.418 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	17	17	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.804 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.804 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.804 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.804 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.804 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.871 42.278)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.871 42.278)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.871 42.278)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.871 42.278)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.871 42.278)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.11 49.039)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.11 49.039)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.11 49.039)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.11 49.039)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.11 49.039)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.103 50.046)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.103 50.046)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.103 50.046)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.103 50.046)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.103 50.046)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.972 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.972 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.972 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.972 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.972 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.84 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.84 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.84 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.84 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.84 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	16	16	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.263 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.263 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.263 40.312)' AS JOAN (19.20) AS TEXT), 4326) - SecomFromText(CAST ('POINT(-53.263 40.312)' AS JOAN (19.20) AS TEXT), 4326) - SecomFromText(CAST ('POINT(-53.263 40.312)' AS JOAN (19.20) AS JOAN (	0	1	16	16	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.315 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = 'Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-36.315 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.315 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.858 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.858 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.858 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.858 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.858 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	16	16	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.77 40.281)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "\" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.77 40.281)' AS TEXT), 4326), geom, 2224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.77 40.281)' AS TEXT), 4326) \" a> geom LIMIT 10)	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.17 42.979)') AS TEXT), 42329)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.17 42.979)') AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.17 42.979)') AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.17 42.979)') ASTEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.17 42.979)') ASTEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.984 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.984 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.984 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.984 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.984 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.984 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.984 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.984 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.984 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.984 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	16	16	0	0,00
select * from ((SELECT t as index.R.); EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.R.)	0	1	16	16	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'FATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	16	16	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.416 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.416 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.416 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.416 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.416 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.822 42.327)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.822 42.327)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.822 42.327)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.822 42.327)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.822 42.327)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	16	16	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62 649 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = \(^1\) AND ST_DWISHIN(ST_GEOMFROMTEXT(CAST ('POINT(-62.649 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.649 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.345 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.345 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.345 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.345 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.345 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.17 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.17 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.17 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STAITRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.17 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.17 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.149 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.149 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.149 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.149 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.149 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	16	16	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-38, 76.40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ntmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38, 76.40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38, 76.40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38, 76.40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.76.40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.76.40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.76.40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.76.40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.76.40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.76.40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POINT(-38.76.4	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	16	16	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.085 50.064)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.085 50.064)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.085 50.064)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.085 50.064)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.085 50.064)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.829 50.32)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.829 50.32)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.829 50.32)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.829 50.32)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.829 50.32)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.463 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.463 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.463 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.463 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.463 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.463 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.463 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects((geom, ST_GeomFromText(CAST ('POINT(-52.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects((geom, ST_GeomFromText(CAST ('POINT(-52.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.501 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.501 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.501 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.501 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.501 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.501 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.501 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS.	0	1	15	15	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.627 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.627 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.627 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	15	15	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.133 41.016)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.133 41.016)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.133 41.016)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.133 41.016)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.133 41.016)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	15	15	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.305 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(17.2 DownFromText(CAST ('POINT(-28.305 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.305 40.312)' AS TEXT), 4326), <a ('point(-29,635="" (cast="" 22224)="" 40,312)'="" 4326)="" 4326),="" <="" and="" as="" by="" geom,="" href="https://example.com/spatial-restance-news-news-news-news-news-news-news-new&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;1&lt;/td&gt;&lt;td&gt;15&lt;/td&gt;&lt;td&gt;15&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;0,00&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29,635 40,312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = " order="" st_dwithin(fx)="" st_geomfromtext(cast="" text),="" y=""> geom LIMIT 10)</a>	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.766 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.766 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.766 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.766 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.766 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	15	15	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.446 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.446 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.446 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	15	15	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.348 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.348 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.348 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	15	15	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.195 50.954)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.195 50.954)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.195 50.954)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST (POINT(-58.635 40.312) 'AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-58.635 40.312) 'AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-58.635 40.312) 'AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ("POINT(-58.635 40.312)" AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ("POINT(-58.635 40.312)" AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	15	15	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.35 51.799)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.35 51.799)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.35 51.799)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.502 49.647)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.502 49.647)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.502 49.647)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.502 49.647)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.502 49.647)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.531 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.531 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.531 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.531 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.531 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.531 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.531 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.531 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.531 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	15	15	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.117 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.117 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.117 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.117 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.117 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	15	15	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.101 51.048)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.101 51.048)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.101 51.048)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.562 51.587)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.562 51.587)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.562 51.587)' AS TEXT), 329)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.562 51.587)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'FCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.562 51.587)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	15	15	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.441 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.441 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.441 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.682 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.682 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.682 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.682 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.682 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.682 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.109 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.109 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.109 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.109 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.109 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-61.119 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.119 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.119 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATCT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.119 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.119 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.119 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.119 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as indexRS, 'GF	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST (POINT:(40.413 40.312) AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (DINT:(40.413 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT:(40.413 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT:(40.413 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-40.413 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.635 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.635 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.635 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.635 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.635 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.845 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.845 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.845 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.845 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.845 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	15	15	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 23,606,40,312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23,606,40,312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-23,606,40,312)' AS TEXT), 4326), segom LIMIT 10)	0	1	15	15	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.815 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-67.815 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-67.815 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-67.815 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.815 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.**	0	1	15	15	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.091 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.091 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.091 40.312)' AS TEXT), 4326) = 9 geom LiMIT 10)	0	1	14	14	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.889 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.889 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-67.889 40.312)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.654 50.495)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.654 50.495)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.654 50.495)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-9.654 50.495)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-9.654 50.495)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, "F"	0	1	14	14	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.319 47.83)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.319 47.83)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-12.319 47.83)' AS TEXT), 4326) <-> geom LiMIT (10)	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'FAO' a	0	1	14	14	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.857 50.292)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.857 50.292)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.857 50.292)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	14	14	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.459 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.459 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.459 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	14	14	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.002 50.147)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.002 50.147)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.002 50.147)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	14	14	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.075 50.074)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.075 50.074)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.075 50.074)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.075 50.074)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.075 50.074)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.77 44.379)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.77 44.379)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.77 44.379)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.77 44.379)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.77 44.379)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.239 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.239 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.239 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.239 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.239 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.529 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.529 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.529 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.529 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.529 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.494 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.494 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.494 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.494 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.494 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.091 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.091 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.091 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.091 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.091 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.347 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.347 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.347 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.347 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.347 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index."	0	1	14	14	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.83 49.319)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.83 49.319)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.83 49.319)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.715 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.715 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.715 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.715 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.715 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.61 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.61 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.61 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.61 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.61 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'F	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.671 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.671 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.671 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.671 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.671 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.813 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.813 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.813 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.813 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.813 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	14	14	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.61 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.61 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.61 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.943.40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.943.40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.943.40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.943.40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.943.40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	14	14	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.505 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.505 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.505 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.505 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.505 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.989 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.989 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port.area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.989 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.989 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.989 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.989 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.989 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.989 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as index.	0	1	14	14	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.235 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.235 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.235 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	14	14	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.746 48.403)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.746 48.403)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.746 48.403)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.228 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.228 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.228 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.228 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.228 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.476 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.476 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.476 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.476 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.476 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.476 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.476 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.476 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.476 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.476 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.893 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.893 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.893 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.893 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.893 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type gid, code, name FROM spatial-eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-48,916 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial-from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-48,916 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial-port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48,916 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial-stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48,916 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial-gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48,916 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.**	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	14	14	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.876 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.876 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.876 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	14	14	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	13	13	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.642 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.642 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.642 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.462 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.462 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.462 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.462 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.462 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.817 47.332)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.817 47.332)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.817 47.332)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.817 47.332)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.817 47.332)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.319 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.319 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.319 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.319 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.319 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	13	13	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.114 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.114 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.114 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	13	13	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.771 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.771 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.771 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	13	13	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.257 43.892)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-16.257 43.892)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.257 43.892)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.257 43.892)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gtom WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.257 43.892)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	13	13	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.415 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.415 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-67.415 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	13	13	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.073 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.073 40.312)' AS TEXT), 4326), geom, 22224) (ARDER BY ST_GeomFromText(CAST ('POINT(-58.073 40.312)' AS TEXT), 4326) -> geom LiMIT 10)	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.58 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.58 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.58 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.58 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.58 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.572 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.572 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(sgeom, ST_GeomFromText(CAST ('POINT(-49.572 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.572 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.572 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.755 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.755 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.755 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.755 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.755 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.454 44.695)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.454 44.695)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.454 44.695)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.454 44.695)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.454 44.695)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.454 44.695)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.582 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.582 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.582 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.582 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.582 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.582 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.582 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.582 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.582 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.582 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as indexRS,	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-10.217 49.932)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-10.217 49.932)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-10.217 49.932)' AS TEXT), 4256)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.217 49.932)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.217 49.932)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.217 49.932)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.217 49.932)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.217 49.932)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.217 49.932)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.217 49.932)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.05 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.05 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.05 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-49.05 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-49.05 40.281)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "F"	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.109 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.109 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.109 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.109 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.109 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.109 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.109 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.109 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.109 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	13	13	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.964 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.964 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.964 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.964 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.964 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.964 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.964 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.964 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.964 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.964 40.312)' AS TEXT), 4326)) AND enabled = "Y')	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.678 48.471)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.678 48.471)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.678 48.471)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.678 48.471)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.678 48.471)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.678 48.471)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	13	13	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.239 48.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.239 48.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.239 48.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.239 48.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.239 48.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.115 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.115 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.115 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.115 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.115 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.115 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.115 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.471 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.471 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.471 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.471 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.471 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.484 49.665)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.484 49.665)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.484 49.665)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.484 49.665)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.484 49.665)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.") UNION ALL (SELECT 6 as index.")	0	1	13	13	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.124 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.124 40.312)' AS TEXT), 4326), geom, 22224) (ADREB BY ST_GeomFromText(CAST ('POINT(-67.124 40.312)' AS TEXT), 4326) (SS_geom LIMIT 10)	0	1	13	13	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	13	13	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.627 48.522)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.627 48.522)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.627 48.522)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	13	13	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55,724 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^{Y}\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55,724 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55,724 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial-eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.423 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.423 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, order and WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.423 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.423 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.423 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.423 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.423 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.423 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'FOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.423 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'FOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.423 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-9.74 50.409)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.74 50.409)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.74 50.409)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.74 50.409)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gicm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.74 50.409)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	13	13	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.413 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.413 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.413 40.312)' AS TEXT), 4326) <->	0	1	13	13	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.981 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.981 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.981 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.981 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.981 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	13	13	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.679 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.679 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.679 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.679 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.679 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.971 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.971 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.971 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.971 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.971 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.027 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.027 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.027 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.027 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.027 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.142 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.142 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.142 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.142 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.142 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.695 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.695 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.695 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.695 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.695 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	13	13	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.966 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.966 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.966 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-67.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-67.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, "F	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.299 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.299 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.299 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.299 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.299 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.299 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.299 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	13	13	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.586 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.586 40.312)' AS TEXT), 4326), geom, 22224) (ARDER BY ST_GeomFromText(CAST ('POINT(-26.586 40.312)' AS TEXT), 4326) = -2 geom Limit 10)	0	1	13	13	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT, 54.575 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT, 64.575 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT, 64.575 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT, 54.575 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT, 54.575 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.573 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.573 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.573 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.573 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.573 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.718 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.718 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.718 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.718 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.718 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.718 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.718 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.718 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.718 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	12	12	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.457 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.457 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.457 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	12	12	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.183 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.183 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.183 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	12	12	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.822 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.822 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.822 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.667 50.482)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.667 50.482)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.667 50.482)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.667 50.482)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.667 50.482)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, ST_COMFromText(CAST ('POINT(-9.667 50.482)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, ST_COMFromText(CAST ('POINT(-9.667 50.482)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.8.924 0.3.12)' AS TEXT), 4329)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.923 40.312)' AS TEXT), 4329)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.923 40.312)' AS TEXT), 4329)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.923 40.312)' AS TEXT), 4329)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	12	12	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.611 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.611 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.611 40.312)' AS TEXT), 4326) - geom Limit 10)	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.0 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.0 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.0 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.0 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.0 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.761 46.388)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.761 46.388)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.761 46.388)' AS TEXT), 526)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.761 46.388)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.761 46.388)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-45.68 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'GFT as type, gid, code, name FROM spatial stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as intersects(geom, ST_GEOMFromText(CAST ('POINT(-45.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	12	12	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.546 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.546 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.546 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.155 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.R.	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.501 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.501 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.501 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.501 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.501 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.374 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.374 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.374 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-17.653 42.496)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.653 42.496)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.653 42.496)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.653 42.496)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.653 42.496)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.063 43.086)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.063 43.086)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.063 43.086)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.063 43.086)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.063 43.086)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-50.132 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-50.132 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-50.132 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-50.132 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-50.132 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	12	12	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.922 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.922 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.922 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromTe	0	1	12	12	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.227 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.227 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.227 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.529 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.529 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.529 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.529 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.529 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.949 41.2)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.949 41.2)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.949 41.2)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.949 41.2)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.949 41.2)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.151 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.151 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.151 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.151 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.151 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.691 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.691 40.312)' AS TEXT), 4326), geom, 22224) (RDBR BY ST_GeomFromText(CAST ('POINT(-58.691 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	12	12	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 38, 838, 40, 312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38, 838, 40, 312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38, 838, 40, 312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	12	12	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-24.941 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.941 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-24.941 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.344 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.344 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.344 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.344 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.344 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.679 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mfm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.679 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.679 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.679 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.679 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62,474 40,312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(F3,02474 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62,474 40,312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.261 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-67.261 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-67.261 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.261 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.261 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.766 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.766 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.766 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.766 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.766 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.727 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWINIn(ST_GeomFromText(CAST ('POINT(-21.727 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.727 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.972 41.177)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.972 41.177)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.972 41.177)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.972 41.177)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.972 41.177)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.972 41.177)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFOM' as type, gid, code, name FROM UNION ALL (SELECT 6 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.972 41.177)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.972 41.177)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.972 41.177)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.972 41.177)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFOM' as type, gid, code,	0	1	12	12	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.655 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.655 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.655 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.469 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.469 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.469 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.469 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.469 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.05 40,312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POINT(-21.05 40.312)' A	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.866 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.866 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.866 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.866 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.866 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.179 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.179 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.179 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.179 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.179 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	12	12	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36, 45 40, 281)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36, 45 40, 281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36, 45 40, 281)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.617 4.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.617 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREÂ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.617 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.617 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.617 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.617 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.617 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.966 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.966 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.966 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.statt rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.966 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.966 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.797 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.797 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.797 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.208 47.941)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.208 47.941)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port.area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.208 47.941)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.208 47.941)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.208 47.941)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.004 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.004 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.004 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.004 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.004 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT-62.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm where spatial.gfcm where spatial.gfcm where spatial.gfcm where spatial.	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.189 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.189 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.189 40.312)' AS TEXT), 4326) <-> ————————————————————————————————————	0	1	11	11	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.599 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-43.599 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.plord. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-43.599 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.599 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.599 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.58 51.569)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.58 51.569)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.58 51.569)' AS TEXT), 4326), e>e geom LIMIT 10)	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.024 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.024 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.024 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.024 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.024 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.49 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'V' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.49 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.49 40.312)' AS TEXT), 4326) <->	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.029 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.029 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.029 40.312)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.581 50.568)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.581 50.568)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.581 50.568)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.581 50.568)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.581 50.568)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	11	11	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.732 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.732 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.732 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.732 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.732 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.677 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.677 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.677 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.677 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.677 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-43.593 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-43.593 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.593 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.593 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stgm' with the state of the state	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRs, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRs, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRs, 'POTARTAEA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRs, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRs, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.Rs, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.Rs, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.Rs, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.Rs, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.Rs, 'GFCM' as index.Rs, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.Rs, 'GFCM' as index.Rs, 'GFCM' as index.Rs, 'GFCM' as index.Rs, 'GFCM'	0	1	11	11	0	0,00
select *from ((SELECT t as indexRs, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.372 51.777)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.372 51.777)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.372 51.777)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.372 51.777)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.372 51.777)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.372 51.777)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.372 51.777)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.372 51.777)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.372 51.777)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as	0	1	11	11	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.562 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.562 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.562 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.882 51.267)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.882 51.267)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.882 51.267)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.882 51.267)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.882 51.267)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.882 51.267)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "F"	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.653 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.653 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.653 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.653 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.653 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.212 50.937)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.212 50.937)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.212 50.937)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.083 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.083 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.083 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.083 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.083 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.94 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \( \frac{1}{2} \) 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.94 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-67.94 40.312)' AS TEXT), 4326) <->9 geom LIMIT 10)	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.603 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.603 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.603 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.603 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.603 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.967 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.967 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.967 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.967 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.967 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.87 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \( \frac{1}{2} \) "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.87 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-28.87 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.369 44.78)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.369 44.78)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.369 44.78)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.369 44.78)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.369 44.78)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.111 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.111 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.111 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.111 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.111 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.339 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.339 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.339 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.339 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.339 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.545 45.604)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.545 45.604)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.545 45.604)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.545 45.604)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.545 45.604)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.573 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.573 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.573 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.573 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.573 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.127 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.127 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.127 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-26.196 40.312) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-26.196 40.312) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port.area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-26.196 40.312)" AS TEXT), 1010NO ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-26.196 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-26.196 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-26.196 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_INTERSECT.gfcm Text(-47.145 40.312)' AS	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.186 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE e-nabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-41.186 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.186 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	11	11	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.274 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.274 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'FORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.274 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.274 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.274 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.369 46.78)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.369 46.78)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.369 46.78)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.369 46.78)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.369 46.78)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37,207 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.207 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.207 40.312)' AS TEXT), 4326) - 2 geom LIMIT 10)	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.373 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.373 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.373 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.373 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.373 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.674 41.475)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.674 41.475)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.674 41.475)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.674 41.475)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.674 41.475)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.674 41.475)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.674 41.475)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexR.)	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.93 41.219)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.93 41.219)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.93 41.219)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.93 41.219)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.93 41.219)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.999 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.999 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.999 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.999 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.999 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.136 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.136 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.136 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.136 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.136 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.562 40.312)' AS TEXT), 4326), true) AS distance FROM spatial,port WHERE enabled = 'V' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.562 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.562 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	11	11	0	0,00

Request	% of cumulative	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.g/cm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	<b>time</b> 0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37, 444 40.312)' AS TEXT), 4328), frue) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST (POINT(-37,444 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST (POINT(-37,444 40.312)' AS TEXT), 4326) ->>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.631 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.631 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'POTATREA' as type, gid, code, name FROM spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-69.631 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial, stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.631 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.631 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.631 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.631 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.631 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.631 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index."	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.167 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.167 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.167 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.167 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.167 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.194 6.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.timo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.196 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREAE' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.196 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.196 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.196 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.196 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.196 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-57.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.ptor. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-57.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-57.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-57.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.906 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.906 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.906 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.906 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.906 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.657 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.657 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.657 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-8.78 51.369) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-8.78 51.369)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-8.78 51.369)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-8.78 51.369)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.78 51.369)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'FACT' (SELECT 6 as indexRS, 'FACT') (SEL	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.261 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'V' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.261 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.261 40.312)' AS TEXT), 4326) <->, geom LMIT 10)	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.324 41.825)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.324 41.825)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.324 41.825)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.324 41.825)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.324 41.825)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.87 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.87 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.87 40.312)' AS TEXT), 4326) <->9 geom LIMIT 10)	0	1	11	11	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	11	11	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.206 40.943)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.206 40.943)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.206 40.943)' AS TEXT), 4326) <-ye geom LIMIT 10)	0	1	11	11	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.784 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.784 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.784 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.894 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.894 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.894 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.894 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.894 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.27 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.27 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.27 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'TATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.27 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.27 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	10	10	0	0,00
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15,405.44.744)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.405.44.744)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.405.44.744)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	10	10	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-16:79 44.359)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15:79 44.359)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15:79 44.359)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15:79 44.359)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM patial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15:79 44.359)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM patial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15:79 44.359)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM patial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15:79 44.359)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM patial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15:79 44.359)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM patial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15:79 44.359)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM patial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15:79 44.359)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM patial.gfcm WHERE ST_INTERSECTS(TEXT), 4326)	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.091 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.091 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.091 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.091 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.091 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT-62.702 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-62.702 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-62.702 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-62.702 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-62.702 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stgm code, name FROM spatial.s	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.482 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.482 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.482 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.972 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "Y AND ST_DWIstin(ST_GeomFromText(CAST ('POINT(-38.972 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.972 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.537 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.537 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.537 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.537 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.537 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.537 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.537 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.537 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.537 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.537 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-56.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-56.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial stat_rect WHERE ST_INTERSECTS(geom, ST_GeomFromText(CAST ('POINT(-56.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	10	10	0	0,00
Select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	10	10	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-30.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-23.037 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.037 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.037 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.68 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.68 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-51.68 40.312)' AS TEXT), 4326) <-> geom LiMiT 10)	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial. from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-27.772 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.772 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.772 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.772 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.772 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.843 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.843 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.843 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.843 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.843 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.504 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.504 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.504 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.504 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.504 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-17.521 42.628) 'AS TEXT), 4326)). AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-17.521 42.628) 'AS TEXT), 4326)). AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(tgeom, ST. GeomFromText(CAST (POINT(-17.521 42.628) 'AS TEXT), 4326)). AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATKECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ("POINT(-17.521 42.628)" AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ("POINT(-17.521 42.628)" AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.941 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.941 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.941 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	10	10	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.784 50.365)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.784 50.365)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.784 50.365)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.784 50.365)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.784 50.365)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.784 50.365)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.794 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.794 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-30.794 40.312)' AS TEXT), 4326) <->->	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.139 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.139 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.139 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.139 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.139 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.766 47.383)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial. from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.766 47.383)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.766 47.383)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.766 47.383)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.766 47.383)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.289 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.289 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.289 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.234 41.915)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.234 41.915)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.234 41.915)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	10	10	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	10	10	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-19,371 40,778)) AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19,371 40,778)) AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19,371 40,778)) AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19,371 40,778)) AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19,371 40,778)) AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 6 as index."	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.851 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.851 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.851 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.851 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.851 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-42.474 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-42.474 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-42.474 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-42.474 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-42.474 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.342 40.807)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.342 40.807)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.342 40.807)' AS TEXT), 4226)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.342 40.807)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.342 40.807)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.278 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.278 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.278 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.278 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.278 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.278 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.278 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.278 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.278 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.613 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.613 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.613 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.613 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.613 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.613 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.613 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.613 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.613 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.613 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('PO	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.659 44.49)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.659 44.49)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.659 44.49)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.562 41.587)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.562 41.587)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.562 41.587)' AS TEXT), 4326) -> geom Limit 10)	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.884 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.884 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.884 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-26.138 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.138 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.138 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.138 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.138 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.138 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.138 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.138 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.138 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.138 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.39 40.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.39 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.39 40.281)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	10	10	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.688 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	10	10	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.761 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.761 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.761 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.761 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.761 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.63 d).281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.63 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.63 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.63 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.63 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.63 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.63 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.63 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.63 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.63 40.281)' AS TEXT), 4326)) AND enabled = "Y)	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.024 41.125)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.024 41.125)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.024 41.125)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.773 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-67.773 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.773 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.323 51.826)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.323 51.826)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.323 51.826)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.59 49.581)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.59 49.581)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.59 49.581)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.59 49.581)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.59 49.581)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.556 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.556 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.556 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.556 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.556 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.015 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.015 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.015 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.015 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.015 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.517 49.632)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.517 49.632)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.517 49.632)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.47 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.47 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.47 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.005 40.312)' AS TEXT), 4328)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.005 40.312)' AS TEXT), 4328)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.005 40.312)' AS TEXT), 4328)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.005 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.005 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56, 987 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.987 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-56.987 40.312)' AS TEXT), 4326), ~ geom LIMIT 10)	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.744 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.744 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.744 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.744 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.744 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type_gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-26.678 40.312)' AS TEXT), 343(6)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-26.678 40.312)' AS TEXT), 432(6)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-26.678 40.312)' AS TEXT), 432(6)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-26.678 40.312)' AS TEXT), 432(6)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.678 40.312)' AS TEXT), 432(6)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.")	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.057 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.057 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.057 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	10	10	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.019 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.019 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.019 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.019 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.019 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.105 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.105 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.105 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.105 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.105 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.345 51.804)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.345 51.804)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.345 51.804)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.345 51.804)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.345 51.804)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.225 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.225 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-23.225 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.014 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.014 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.014 40.312)' AS TEXT), 4326) - geom Limit 10)	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.046 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.046 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.046 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.046 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.046 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAS	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.441 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.441 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.441 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	10	10	0	0,00
select *from ((SELECT1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.spot area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CA	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	10	10	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.27 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.27 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.27 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.27 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.27 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.27 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'E	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.94 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.94 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.94 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.94 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.94 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.94 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.008 44.141)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.008 44.141)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.008 44.141)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	10	10	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.666 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.666 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.666 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.666 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.666 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.666 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.666 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.666 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.666 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.666 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	10	10	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.043 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.043 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.043 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.043 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.043 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	10	10	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.802 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.802 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.802 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.052 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_Within(ST_GeomFromText(CAST ('POINT(-40.052 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.052 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.436 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.436 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.436 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	9	9	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.32 42.829)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.32 42.829)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.32 42.829)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.32 42.829)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.32 42.829)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.782 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.782 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.782 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.782 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.782 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.703 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.703 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.703 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.703 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.703 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.171 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.171 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.171 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.171 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.171 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.91 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.91 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.91 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.91 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.91 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.419 51.73)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.419 51.73)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.419 51.73)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.419 51.73)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.419 51.73)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.43 43.719)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.43 43.719)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.43 43.719)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.43 43.719)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.43 43.719)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.419 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.419 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.419 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.419 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.419 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-9.783 50.366)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-9.783 50.366)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-9.783 50.366)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-9.783 50.366)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-9.783 50.366)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.27 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.27 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.27 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.27 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.27 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.783 43.366)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.783 43.366)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.783 43.366)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.783 43.366)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.783 43.366)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.298 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.298 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.298 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.298 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.298 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52,845 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.845 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.845 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-32.149 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, rfmo WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-32.149 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.149 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial, stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.149 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.149 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.665 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.665 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-42.665 40.312)' AS TEXT), 4326) ->> geom LIMIT 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.49 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.49 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.49 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.49 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.49 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.771 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.771 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREĂ as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.771 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.771 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.771 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-39,341 40,312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.341 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.341 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.613 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.613 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.613 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.613 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.613 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.171 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.171 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-21.171 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.829 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.829 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.829 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.829 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.829 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.371 51.778)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.371 51.778)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.371 51.778)' AS TEXT), 4328) (->> geom LiMT (10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.967 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.967 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.967 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.967 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.967 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.609 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.609 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.609 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.609 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.609 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_Geom	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.463 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.463 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.463 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.463 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.g/cm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.463 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.967 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.967 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.967 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	9	9	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.721 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.721 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.721 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.721 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.721 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.197 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-35.197 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-35.197 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.045 42.104)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.045 42.104)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.045 42.104)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom. ST_GeomFromText(CAST ('POINT(-18.045 42.104)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.045 42.104)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.719 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.719 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.719 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.719 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.719 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-59.051 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-59.051 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-59.051 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-59.051 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-59.051 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-59.051 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-59.051 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-59.051 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-59.051 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-59.051 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-59.	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.634 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.634 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.634 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.634 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.634 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.827 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.827 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.827 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.827 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.827 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.137 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.137 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.137 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.558 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.558 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.558 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.558 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.558 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.96 44.189)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.96 44.189)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.96 44.189)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.96 44.189)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.96 44.189)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.985 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.985 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.985 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.985 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.985 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.367 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.367 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.367 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.367 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.367 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.9 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.9 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.9 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.9 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.9 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.078 51.071)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'V' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.078 51.071)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.078 51.071)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	9	9	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.912 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.912 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.912 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.912 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.912 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-38.056 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-38.056 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.056 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.056 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.056 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index		1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.996 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.996 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.996 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.996 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.996 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.956 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.956 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-35.956 40.312)' AS TEXT), 4226)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-35.956 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-35.956 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.752 44.397)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.752 44.397)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.752 44.397)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.752 44.397)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.752 44.397)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.539 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.539 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.539 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.539 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.539 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.782 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.782 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.782 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.782 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.782 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.863 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.863 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.863 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.863 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.863 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.863 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.863 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-55.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.477 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.477 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.477 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
select from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.63 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.63 40.281)' AS TEXT), 329)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.63 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.63 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	9	9	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial info WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-51.556 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-51.556 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.or area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-51.556 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-51.556 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-51.556 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 6 as index.")	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.515 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.515 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.515 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.996 44.153)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.996 44.153)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.996 44.153)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.996 44.153)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.996 44.153)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.996 44.153)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.563 42.586)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.563 42.586)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.563 42.586)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.563 42.586)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.563 42.586)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.756 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.756 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.756 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.756 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.756 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.824 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial. 'mro WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.824 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.824 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.824 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.824 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.116 51.033)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.116 51.033)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.116 51.033)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-9.116 51.033)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-9.116 51.033)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.019 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.019 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.019 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.923 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.923 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.923 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	9	9	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial-eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.054 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.trimo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.054 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.054 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'GRTARECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.054 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.054 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.")	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.948 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.948 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.948 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	9	9	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.412 40.737)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.412 40.737)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.412 40.737)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.412 40.737)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.412 40.737)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
Select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.369 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.369 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.369 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATTECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.369 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.369 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.R.)	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.727 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.727 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.727 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Downtin(ST_POINT(-15.68 44.469)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.68 44.469)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.68 44.469)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	9	9	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.037 43.112)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.037 43.112)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.037 43.112)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.037 43.112)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.037 43.112)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.905 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.905 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.905 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.905 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.905 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINTI', 30.998 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI', 30.998 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI', 30.998 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI', 30.998 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI', 30.998 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.R.)	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.372 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.372 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.372 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.088 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.088 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.088 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.088 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.088 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.35 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.35 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.35 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.35 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.35 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.558 47.591)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.558 47.591)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.558 47.591)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFTATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.558 47.591)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.558 47.591)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.658 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-39.658 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-39.658 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.958 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.958 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.958 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.958 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.958 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as intersects(geom, ST_GeomFromText(CAST ('POINT(-40.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.426 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.426 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.426 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.426 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.426 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.903 50.246)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.903 50.246)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.903 50.246)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.657 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.657 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.657 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-53.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-53.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-53.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-53.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-53.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index."	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.479 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.479 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.479 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.744 42.405)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.744 42.405)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.744 42.405)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	9	9	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.952 45.197)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.952 45.197)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.952 45.197)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.952 45.197)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.952 45.197)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.631 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.822 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.822 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.822 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.586 42.563)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.586 42.563)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.586 42.563)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.586 42.563)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.586 42.563)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.667 50.492)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.667 50.492)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-9.657 50.492)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.279 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.279 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-31.279 40.312)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.667 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.667 40.312)' AS TEXT), 4326), geom, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-61.667 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.325 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.325 40.312)' AS TEXT), 4326), geom, 22224) (ADBER BY ST_GeomFromText(CAST ('POINT(-31.325 40.312)' AS TEXT), 4326), exp. geom LiMIT 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.681 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.837 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.837 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.837 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.837 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.837 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.936 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.936 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.936 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.888 49.261)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.888 49.261)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.888 49.261)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.888 49.261)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.888 49.261)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.888 49.261)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.888 49.261)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.737 47.412)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.737 47.412)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.737 47.412)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.737 47.412)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.737 47.412)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.413 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.413 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.413 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.909 50.24)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.909 50.24)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.909 50.24)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.899 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.899 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.899 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.899 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.899 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.958 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial. drmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.958 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.958 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.958 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.958 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-46.247 40.312) AS TEXT), 4326)) AND enabled = "'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-46.247 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'POINT(-46.247 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial, stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-46.247 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-46.247 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-46.247 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'STATRECT as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.789 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.789 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.789 40.312)' AS TEXT), 4326) <->	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.32 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.32 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.32 40.312)' AS TEXT), 4326) <-> geom LiMiT to)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.474 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.474 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.474 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.474 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.474 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.584 45.565)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.584 45.565)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.584 45.565)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.584 45.565)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.584 45.565)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.584 45.565)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.584 45.565)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.'	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-66.312 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.312 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.312 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.312 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.312 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.855 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mfm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.855 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.855 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.855 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.855 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-15.672 44.477) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-15.672 44.477)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-15.672 44.477)' AS TEXT), 4256)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-15.672 44.477)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-15.672 44.477)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.701 50.448)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.701 50.448)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.701 50.448)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.701 50.448)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.701 50.448)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.953 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.953 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.953 40.312)' AS TEXT), 4326), expend_spatial.port.pdf	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.303 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.303 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.303 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.303 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.303 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.303 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.169 50.98)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.169 50.98)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.169 50.98)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	9	9	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.677 45.472)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.677 45.472)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.677 45.472)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.677 45.472)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.677 45.472)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.49 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.49 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.49 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance) A326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.874 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.874 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.871 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.871 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.871 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.889 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.889 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.889 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.525 50.624)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.525 50.624)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.525 50.624)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.672 40.477)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.672 40.477)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.672 40.477)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.883 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.883 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.883 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.883 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.883 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.883 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.631 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWISHIN(ST_GeomFromText(CAST ('POINT(-51.631 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-51.631 40.312)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.768 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.768 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.768 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.768 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.768 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-11.098 49.051)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-11.098 49.051)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-11.098 49.051)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.098 49.051)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.098 49.051)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.098 49.051)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.594 50.555)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.594 50.55)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.594 50.555)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.594 50.555)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.594 50.555)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.729 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.729 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS; PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.729 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS; "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.729 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS; "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.729 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.226 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.226 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.226 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.226 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.226 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.031 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.031 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.031 40.312)' AS TEXT), 4326), expend_LMIT 10)	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.252 41.897)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.252 41.897)' AS TEXT), 4326), geom, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-18.252 41.897)' AS TEXT), 4326) ->> geom LMIT 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.308 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.308 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.308 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.308 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.308 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.086 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.086 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-20.086 40.312)' AS TEXT), 4326) ->>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.789 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.789 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.789 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.789 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.789 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.789 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	9	9	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.539 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.539 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.539 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.142 47.007)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.142 47.007)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.142 47.007)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.142 47.007)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.142 47.007)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00

Request	% of cumulative	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.901 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.901 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.901 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.901 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.901 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.901 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.901 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.901 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.901 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.901 40.312)' AS TEXT), 4326)) AND enabled = "Y")	<b>time</b> 0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.369 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.369 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.369 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.369 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.369 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.244 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.244 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.244 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.244 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.244 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.733 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.733 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.733 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.733 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.733 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.349 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.349 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.349 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.349 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.349 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.549 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.549 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.549 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.549 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.549 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.173 49.976)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.173 49.976)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.173 49.976)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.173 49.976)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.173 49.976)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.") UNION ALL (SELECT 6 as index.") AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.413 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.413 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.413 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.413 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.413 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	9	9	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.905 46.244)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.905 46.244)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.905 46.244)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.905 46.244)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.905 46.244)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.778 44.371)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.778 44.371)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.778 44.371)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.778 44.371)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.778 44.371)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.215 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.215 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.215 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.215 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.215 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.739 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.739 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.739 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.739 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.739 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.337 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.337 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.337 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.337 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.337 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.139 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.139 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.139 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	8	8	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez. WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.986 50.163)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.986 50.163)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.986 50.163)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.986 50.163)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.986 50.163)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.986 50.163)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.521 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.521 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.521 40.312)' AS TEXT), 4326) <-> ————————————————————————————————————	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.711 51.438)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.711 51.438)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.711 51.438)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.711 51.438)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.711 51.438)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.282 47.867)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.282 47.867)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.282 47.867)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.282 47.867)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.282 47.867)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.552 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.552 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.552 40.312)' AS TEXT), 4326) <->, geom Limit 10)	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.573 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.573 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.573 40.312)' AS TEXT), 4326) <-x, geom LIMIT 10)	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.417 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.417 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.417 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	8	8	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.326 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.326 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.326 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.326 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.326 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.23 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.23 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.23 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.23 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.23 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.741 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.741 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.741 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.741 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.741 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-4.0)53 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-4.0)54 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-4.0)53 40.312)' AS TEXT), 4226)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-4.0)53 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-4.0)53 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.01 45.139)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.mfm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.01 45.139)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-15.01 45.139)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-15.01 45.139)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-15.01 45.139)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.175 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.175 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.175 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.175 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.175 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.661 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.661 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.661 40.312)' AS TEXT), A326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.661 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.661 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.106 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.106 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.106 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.021 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.021 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.021 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.093 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.093 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.093 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.093 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.093 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.407 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.407 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.407 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.407 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.407 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.77 40.401)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.77 40.401)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.77 40.401)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.77 40.401)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.77 40.401)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.152 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.152 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.152 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATREOT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.152 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'STATREOT' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.152 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'STATREOT' as index."	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.484 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.484 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.484 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.484 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.484 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.527 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.527 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.527 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.527 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.527 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.502 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.502 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.502 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.502 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.502 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.789 45.36)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.789 45.36)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.789 45.36)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.666 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.666 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.666 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.666 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.666 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.856 47.293)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.856 47.293)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.856 47.293)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.856 47.293)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.856 47.293)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.646 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.646 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.646 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.646 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.646 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.646 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.148 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.148 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.148 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.148 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.148 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.841 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.tmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.841 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.841 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.841 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.841 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.294 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.294 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.294 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.294 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.294 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.294 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.294 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.294 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.294 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST (POINT(-28.05 40.281) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-28.05 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-28.05 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-28.05 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-28.05 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.789 46.36)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.789 46.36)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.789 46.36)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.789 46.36)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.789 46.36)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.292 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.292 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.292 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.041 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.041 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.041 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.041 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.041 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.371 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-64.371 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-64.371 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.092 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.092 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.092 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.092 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.092 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
Select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.453 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.453 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.453 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.453 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.453 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.453 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.453 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.453 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.453 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.453 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.058 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.058 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.058 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.058 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.058 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.813 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.813 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.813 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.813 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.813 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.178 42.971)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.178 42.971)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.178 42.971)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.18 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.18 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.18 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	8	8	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.875 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.875 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.875 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.875 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.875 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.493 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.493 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.493 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-13.447 46.702)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-13.447 46.702)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.447 46.702)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.447 46.702)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.447 46.702)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.216 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.216 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.216 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.216 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.216 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.086 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.086 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.086 40.312)' AS TEXT), 4326), expend_LMIT 10)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.592 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.592 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.592 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.592 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.592 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.984 40.312)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.984 40.312)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(tgeom, ST_GeomFromText(CAST (*POINT(-50.984 40.312)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATKECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.984 40.312)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.984 40.312)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.603 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.603 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.603 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	8	8	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.343 43.806)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.343 43.806)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.343 43.806)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.343 43.806)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.343 43.806)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.343 43.806)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.243 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.243 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.612 41.537)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.612 41.537)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.612 41.537)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.612 41.537)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.612 41.537)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.743 50.406)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial. /mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.743 50.406)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-9.743 50.406)' ASTEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-9.743 50.406)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-9.743 50.406)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, FAO' a	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.274 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.274 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.274 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	8	8	0	-,
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.214 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.214 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.214 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	8	8	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.831 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.831 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.831 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.831 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.831 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.351 44.798)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.351 44.798)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.351 44.798)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.351 44.798)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.351 44.798)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-54.588 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM as i	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.773 51.376)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.773 51.376)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-8.773 51.376)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.049 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.049 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.049 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.049 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.049 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index		1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.572 40.312)' AS TEXT), 34326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-28.572 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.ord area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-28.572 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-28.572 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-28.572 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index."	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.98 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.98 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.98 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.98 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.98 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'E	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.816 50.333)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.816 50.333)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.816 50.333)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.816 50.333)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.816 50.333)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.816 50.333)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.816 50.333)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.816 50.333)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'Fo	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.801 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.801 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.801 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	8	8	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.449 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.449 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.449 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.449 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.449 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-63.683 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-63.683 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-63.683 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-63.683 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-63.683 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-\$3.01 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, rfmo WHERE ST_Intersects(geom, ST. GeomFromText(CAST (*POINT(-\$3.01 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-\$3.01 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial, stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-\$3.01 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-\$3.01 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-\$3.01 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-\$3.01 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-\$3.01 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-\$3.01 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-\$3.01 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_INTERSECT, 'GFOM STATUS (*POINT(-\$3.01 40.312)'	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.894 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.894 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.894 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.894 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.894 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-53.163 40.312)' AS TEXT), 4326)) AND enabled = "'Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-53.163 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.163 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.163 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.163 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM unit of the spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.163 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 5 as index."	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.732 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.732 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.732 40.312)' AS TEXT), 4326) -> geom LMIT 10)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.103 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.103 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.103 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.103 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.103 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.987 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.987 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.987 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.848 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.848 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.848 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.454 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.454 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.454 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.244 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.244 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.244 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.244 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.244 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.244 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.244 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.124 48.025) 'AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.124 48.025)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 3 as indexRS, 'POINT(-12.124 48.025) AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 4 as indexRS, 'STA'IRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.124 48.025)) AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.124 48.025)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.124 48.025)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 6 as index."	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.693 45.456)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.693 45.456)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.693 45.456)' AS TEXT), 4326) <-> geom LMIT 10)	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.987 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.987 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.987 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	8	8	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.986 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.986 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.986 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.986 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.986 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index."	0	1	8	8	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.526 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.526 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.526 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.526 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.526 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.65 46.499)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.65 46.499)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.65 46.499)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.65 46.499)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.65 46.499)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-17.861 42.288)) AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.861 42.288)) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREAE' as type, gid, code, name FROM spatial port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.861 42.288)) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.861 42.288)) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.861 42.288)) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.861 42.288)) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.861 42.288)) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFOM as index	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.912 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.912 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-56.912 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.366 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.366 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.366 40.312)' AS TEXT), 4326), exp. geom LiMIT 10)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.009 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.009 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.009 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.009 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.009 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.012 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial. from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.012 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.012 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.012 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.012 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.646 44.503)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.646 44.503)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.646 44.503)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.646 44.503)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.646 44.503)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.078 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.078 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.078 40.312)' AS TEXT), 4226)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.078 40.312)") AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.078 40.312)") AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.12 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.12 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.12 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.893 48.256)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.893 48.256)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.893 48.256)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.893 48.256)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.893 48.256)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 6 as index	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.843 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.843 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.843 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.511 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.85 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.85 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.85 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.85 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.85 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.99 41.159)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.99 41.159)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.99 41.159)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.99 41.159)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.99 41.159)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.614 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.614 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.614 40.312)' AS TEXT), 4326), geom, 2224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.614 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.155 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.155 40.312)' AS	0	1	8	8	0	0,00
4326),frule) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWININ(ST_Geominism (CAST) (POINT (6-7.15s 40.312) AS TEXT), 4326), geom_Z2224) ORDER BY ST_Geominism (CAST) (POINT (6-7.15s 40.312) AS TEXT), 4326) — select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_Geominism (CAST) (POINT (-16.47 43.679) AS TEXT), 4228)) AND enabled = Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_Geominism (CAST) (POINT (-16.47 43.679) AS TEXT), 4328)) AND enabled = Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_Geominism (CAST) (POINT (-16.47 43.679) AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_Geominism (CAST) (POINT (-16.47 43.679) AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_Geominism (CAST) (POINT (-16.47 43.679) AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_Geominism (CAST) (POINT (-16.47 43.679) AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 6 as indexRS, GFOM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_Geominism (CAST) (POINT (-16.47 43.679) AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 6 as indexRS, GFOM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_Geominism (CAST) (POINT (-16.47 43.679) AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 6 as indexRS, GFOM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_Geominism (CAST) (POINT (-16.47 43.679) AS TEXT), 4326)) AND enabled = Y)	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.454 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.454 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.454 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.691 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.691 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.691 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.691 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.691 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.315 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.315 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.315 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.315 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.315 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.621 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.621 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.621 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom. ST_GeomFromText(CAST ('POINT-146.094 40.312)' AS TEXT), 4329)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.084 40.312)' AS TEXT), 4329)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.084 40.312)' AS TEXT), 4329)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.084 40.312)' AS TEXT), 4329)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.084 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_INTERSECTS('GFCM' as type, gid, code, n	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.261 50.888)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.261 50.888)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.261 50.888)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.261 50.888)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gidm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.261 50.888)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.456 50.693)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.456 50.693)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.456 50.693)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.23 40.281)' AS TEXT), 4328)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.23 40.281)' AS TEXT), 4328)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.23 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.23 40.281)' ASTEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.23 40.281)' ASTEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.23 40.281)' ASTEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.23 40.281)' ASTEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.23 40.281)' ASTEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.23 40.281)' ASTEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.23 40.281)' ASTEXT), 4326)) AND enabled = 'Y')	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.047 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.047 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.047 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom. ST_GeomFromText(CAST ('POINT'-C24.544 0.312)' AS TEXT), 4328)) AND enabled = "Y UNION ALL ('SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.545 40.312)' AS TEXT), 4328)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.545 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.545 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.545 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.183 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.921 45.228)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.921 45.228)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.921 45.228)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.106 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.106 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.106 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom. ST_GeomFromText(CAST ('POINT-C26.294 4).312)' AS TEXT), 4329) N.ND enabled = 'Y) UNION ALL ('SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.294 40.312)' AS TEXT), 4329)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.294 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.294 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.294 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.011 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.011 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.011 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.777 49.372)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.777 49.372)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.777 49.372)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	8	8	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.27 46.879)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.27 46.879)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.27 46.879)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, TSTATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.27 46.879)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.27 46.879)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, TEXT), 4326)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.043 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.043 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.043 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STAFRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.043 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.043 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.043 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.09 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.856 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.856 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.856 40.312)' AS TEXT), 4326) = -2, geom LIMIT 10)	0	1	8	8	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.236 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.236 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.236 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.236 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.236 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.591 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.591 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.591 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.591 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.591 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.85 40.281)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "Y AND ST_DWIbtin(ST_GeomFromText(CAST ('POINT(-56.85 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.85 40.281)' AS TEXT), 4326) <>- geom LiMIT 10)	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.044 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.044 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.044 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.044 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.044 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.005 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.005 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.005 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.005 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.005 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.016 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.016 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.016 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	8	8	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.814 50.335)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.814 50.335)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.814 50.335)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.936 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.936 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.936 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.041 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.041 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.041 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.041 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.041 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.976 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.976 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.976 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.976 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.976 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.403 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.403 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.403 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.403 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.403 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.346 51.803)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.346 51.803)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.346 51.803)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.409 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.409 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.409 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.409 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.409 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText((CAST ('POINT(-29.097 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.097 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.097 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.097 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.097 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16,489 43.66)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.489 43.66)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-16.489 43.66)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.252 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.252 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.252 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.252 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.252 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.231 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.231 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.231 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.231 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.231 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'(-49,611 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49,611 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49,611 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.902 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.902 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.902 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.902 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.902 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.376 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.376 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.376 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.376 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.376 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.243 47.906)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.243 47.906)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.243 47.906)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.243 47.906)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.243 47.906)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.114 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.114 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.114 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.114 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.114 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez_WHERE_ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS;RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.22 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.22 40.312)' ASTEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.22 40.312)' ASTEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.22 40.312)' ASTEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.22 40.312)' ASTEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.22 40.312)' ASTEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.22 40.312)' ASTEXT), 4326)) AND enabled = "Y')	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.251 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.251 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.251 40.312)' AS TEXT), 4326) <->, geom LMIT 10)	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.091 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.091 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.091 40.312)' AS TEXT), 4326) = 9 geom LiMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.988 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.988 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.988 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.988 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.988 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.657 49.492)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.657 49.492)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.657 49.492)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.657 49.492)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.657 49.492)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.338 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.338 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.338 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.338 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.338 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.338 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.338 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.338 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.338 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.338 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.881 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.881 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.881 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.16 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.16 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.16 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	7	7	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.454 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.454 40.312)' AS TEXT), 4326), geom, 22224) (RDBR BY ST_GeomFromText(CAST ('POINT(-33.454 40.312)' AS TEXT), 4326) ->>> geom LiMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.356 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.356 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.356 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.356 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.356 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00

Request	% of cumulative	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-62.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_INERSECTS(geom, ST_GeomFromText(CAST ('POINT(-62.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	<b>time</b> 0	1	7	7	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.471 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.471 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.471 40.312)' AS TEXT), 14326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.471 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.471 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.939 44.21)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.939 44.21)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.939 44.21)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.939 44.21)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.939 44.21)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.321 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.321 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.321 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.321 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.321 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.324 50.825)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.324 50.825)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.324 50.825)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.155 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.155 40.312)' AS TEXT), 4326), geom, 2224) (ARDER BY ST_GeomFromText(CAST ('POINT(-68.155 40.312)' AS TEXT), 4326) <->	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial-eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial-from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.583 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.583 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.583 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.583 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.583 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.195 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.195 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.195 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.195 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.195 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.289 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.289 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.289 40.312)' AS TEXT), 4326) ->>> geom LMIT 10)	0	1	7	7	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.583 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.583 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.583 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.652 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.652 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.652 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	7	7	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.883 40.312)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.883 40.312)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.883 40.312)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.883 40.312)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.883 40.312)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.12 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.601 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.601 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.601 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.601 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.601 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.802 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.802 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.802 40.312)' AS TEXT), 4326) ->>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.578 44.571)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.578 44.571)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.578 44.571)' AS TEXT), 4326) - 29 geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.546 48.603)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.546 48.603)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.546 48.603)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.546 48.603)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.546 48.603)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.546 48.603)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.546 48.603)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.546 48.603)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.546 48.603)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.546 48.603)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.216 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.216 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.216 40.312)' AS TEXT), 4326) <->	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.288 50.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.288 50.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.288 50.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.288 50.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glrcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.288 50.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glrcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.288 50.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glrcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.288 50.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'FC	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.359 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.359 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.359 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial-eez WHERE ST Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.016 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial-frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.016 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, *PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.016 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.016 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.016 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.016 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.016 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.016 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.016 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.274 50.875)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.274 50.875)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.274 50.875)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, TATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.274 50.875)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.274 50.875)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.603 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.603 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.603 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.603 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.603 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.478 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.478 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.478 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.478 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.478 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.154 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.154 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.154 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.154 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.154 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.41 43.739)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.41 43.739)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.41 43.739)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.41 43.739)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.41 43.739)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.41 43.739)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.41 43.739)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	7	7	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.475 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.475 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.475 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.475 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.475 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-63.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-63.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-63.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-63.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.R.)	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.747 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.747 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-65.747 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.36 42.789)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.36 42.789)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.36 42.789)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.36 42.789)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.36 42.789)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.156 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.156 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.156 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.156 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.156 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.935.40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-66.935.40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-66.935.40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.775 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.775 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.775 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.775 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.775 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-49.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-49.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-49.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.828 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.826 51.323)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.826 51.323)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.826 51.323)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.826 51.323)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.826 51.323)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, "F"	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.588 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.588 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-32.588 40.312)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.565 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.565 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.565 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.991 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.991 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.991 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.991 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.991 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.677 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.677 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.677 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.677 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.677 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.37 40.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.37 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.37 40.281)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.792 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.792 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.792 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	7	7	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-60.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.98 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.98 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.98 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.98 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.98 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.852 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.852 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.852 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.852 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.852 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-61.783 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.783 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.783 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50,031 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.031 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.031 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39,748 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.748 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.748 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.83 40.312)' AS TEXT), 326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez, WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.105 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-53.105 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-53.105 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-53.105 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-53.105 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index."	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.156 40.993)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.156 40.993)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.156 40.993)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-39.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.72 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.72 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.72 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.356 40.312)' AS TEXT), 2526)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.938 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.938 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.938 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.573 48.576)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.573 48.576)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.573 48.576)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.264 45.885)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.264 45.885)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.264 45.885)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.732 46.417)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.732 46.417)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.732 46.417)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.732 46.417)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.732 46.417)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-27.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-34.721 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.721 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.721 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.721 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.721 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-51.09 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-51.09 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-51.09 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-51.09 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-51.09 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-55.387 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.387 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.387 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.387 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.387 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.241 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.241 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.241 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.241 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.241 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.".	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-23.379 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-23.379 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-23.379 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-23.379 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-23.379 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.595 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.595 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.595 40.312)' AS TEXT), 4326) <->, geom LMIII' 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.927 51.222)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.927 51.222)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.927 51.222)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.927 51.222)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.927 51.222)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.927 51.222)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.69 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.69 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.69 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.69 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.69 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.745 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.745 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.745 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.278 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.278 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.278 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.278 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.278 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.508 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.508 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.508 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.508 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.508 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index."	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-65.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.542 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial. from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.542 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.542 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.542 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.542 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.851 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.851 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.851 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.851 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.851 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.177 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.177 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.177 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.177 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.177 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.118 46.031) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.118 46.031) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.118 46.031) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.118 46.031) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.118 46.031) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.539 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.539 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.539 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.539 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.539 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.192 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.192 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.192 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.192 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.192 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.096 43.053)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.096 43.053)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.096 43.053)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.974 48.175)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.974 48.175)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.974 48.175)' AS TEXT), 4326) <-y> geom LMIT 10)	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.802 45.347)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.802 45.347)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.802 45.347)' AS TEXT), 4326) ->> geom LMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.445 49.704)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.445 49.704)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.445 49.704)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.445 49.704)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.445 49.704)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.827 43.322)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.827 43.322)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.827 43.322)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.827 43.322)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.827 43.322)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.042 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.042 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.042 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-55.655 40.312) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.655 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.655 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.655 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.655 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.875 49.274)' AS TEXT), 4226)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS,'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.875 49.274)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS,'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.875 49.274)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS,'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.875 49.274)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS,'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.875 49.274)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.357 51.792)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.357 51.792)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.357 51.792)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.357 51.792)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.357 51.792)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.631.40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.631.40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-64.631.40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.608 49.541)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.608 49.541)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.608 49.541)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.608 49.541)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.608 49.541)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.984 46.165)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.984 46.165)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-13.984 46.165)' AS TEXT), 4326) <->, geom LMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.742 40.312)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.742 40.312)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.742 40.312)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.742 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.742 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.673 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.673 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.673 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',28.084 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.084 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.084 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)		1	7	7	0	0,00
select * from ((SELECT 1 as indexRS; 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.854 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.854 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.854 40.312)' AS TEXT), 425(a)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.854 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.854 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
(SELECT 'PORT' as Yose, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.315 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.315 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.315 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.04 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.04 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.04 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	7	7	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.83 50.319)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.83 50.319)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.83 50.319)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.83 50.319)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.83 50.319)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_INTERSECTS(geom, ST_GeomFromText(CAST ('POINT(-9.83 50.319)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'FACT 6 as indexRS, 'FACT 6.	0	1	7	7	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.809 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.809 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.809 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.402 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.402 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.402 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.402 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.402 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.33 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.33 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.33 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.33 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.33 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'F	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.33 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.33 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-67.33 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-67.33 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-67.33 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, "F"	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.701 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.701 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.701 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.701 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.701 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.109 49.04)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.109 49.04)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.109 49.04)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.109 49.04)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.109 49.04)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-11.595 48.554) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-11.595 48.554)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.595 48.554)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.595 48.554)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.595 48.554)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(4-1)16 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-41)-916 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-41)-916 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-41)-916 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-41.916 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.099 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.099 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-1.099 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.099 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.099 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.852 49.297)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.852 49.297)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.852 49.297)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.852 49.297)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.852 49.297)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.839 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.839 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.839 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.839 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.839 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.187 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.187 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.187 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.187 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.187 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.654 45.495)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.654 45.495)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.654 45.495)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.654 45.495)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.654 45.495)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	7	7	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.159 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.159 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.159 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.159 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.159 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.657 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.657 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.657 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.657 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.657 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.898 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.898 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.898 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.898 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.898 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.302 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.302 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'POTARREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.302 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.302 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.302 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.493 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.493 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.493 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.493 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.493 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.97 51.201)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.97 51.201)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.97 51.201)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.97 51.201)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.97 51.201)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.001 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-25.001 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-25.001 40.312)' AS TEXT), 4326), geom (LMT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.285 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.285 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.285 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.285 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.285 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-58.667 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-58.667 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-58.667 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-58.667 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-58.667 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-58.667 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-58.667 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-58.667 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-58.667 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-58.667 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-5	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.748 51.401)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.748 51.401)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-8.748 51.401)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.625 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.625 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.625 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.625 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.625 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.625 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.625 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.625 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.625 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.625 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-49.038 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-49.038 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-49.038 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-49.038 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-49.038 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.4.40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-32.4.40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-32.4.40.312)' AS TEXT), 4326) <> geom LiMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.632 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.632 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.632 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom. ST_GeomFromText(CAST ('POINT(-56.632 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.632 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.007 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.007 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.007 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.007 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.007 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.984 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.984 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.984 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 4 as indexRS, 'SFTATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.31 45.839)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.31 45.839)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-14.31 45.839)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.635 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.635 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.635 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.635 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.635 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.635 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.635 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.635 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.635 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.83 43.341)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.83 43.341)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-16.83 43.341)' AS TEXT), 4326) - geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'FAO' a	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.833 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.833 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.833 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.833 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.833 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.399 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.399 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.399 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.399 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.399 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.233 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^1\) "AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-25.233 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.233 40.312)' AS TEXT), 4326) ">- CENTRAL STANDARD	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.598 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.598 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.598 40.312)' AS TEXT), 4226)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.598 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.598 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.951 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.951 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.951 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial-eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial-from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS.	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.15 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWINIn(ST_GeomFromText(CAST ('POINT(-39.15 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.15 40.312)' AS TEXT), 4326) <> geom LiMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.538 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.538 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.538 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.538 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.538 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.952 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.952 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.952 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.952 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.952 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.")	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.892 41.257)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.892 41.257)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.892 41.257)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.892 41.257)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.892 41.257)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-34.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-34.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRs, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRs, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRs, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRs, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRs, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_INTERSECTS(GEOM, ST_GEOMFROM TEXT), 4326)	0	1	6	6	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT-33.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.nfmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_intersects(geom, ST_GeomFromText(CAST ('POINT(-33.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'TATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.985 41.164)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.985 41.164)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.985 41.164)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.985 41.164)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.985 41.164)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.076 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.076 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.076 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STAFRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.076 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.076 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.895 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.895 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.895 40.312)' AS TEXT), 4326) - 2-9 geom LIMIT 10)	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.201 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.201 40.312)' AS TEXT), 4326), geom, 2224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.201 40.312)' AS TEXT), 4326) = 25 geom LIMIT 10)	0	1	6	6	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.325 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.325 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.325 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.325 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.325 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.807 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.807 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.807 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.789 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.789 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.789 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.307 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.307 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.307 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.311 41.838)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.311 41.838)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.311 41.838)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.311 41.838)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.311 41.838)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.311 41.838)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.311 41.838)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.311 41.838)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.311 41.838)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.311 41.838)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAS	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.625 45.524)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.625 45.524)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.625 45.524)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.625 45.524)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.625 45.524)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.032 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.032 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.032 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.032 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm' WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.032 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.61 46.539)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.61 46.539)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.61 46.539)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.61 46.539)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.61 46.539)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-46.105 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-46.105 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-46.105 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-46.105 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-46.105 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.919 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.919 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.919 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-38.806 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-38.806 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-38.806 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-38.806 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-38.806 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.26 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.26 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.26 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.042 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST DOWITH(167.042 60.00FF) (CAST ('POINT(-47.042 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.042 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.987 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.987 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.987 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.306 50.843)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.306 50.843)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.306 50.843)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.306 50.843)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.306 50.843)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.306 50.843)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.306 50.843)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.306 50.843)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.306 50.843)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.306 50.843)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_INTERSECTS(GEOMFROM STATE)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.976 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.976 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.976 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATREOT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.976 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.976 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-28.605 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-28.605 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-28.605 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-28.605 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.605 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.605 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.605 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.605 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.605 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.605 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.792 49.357)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.792 49.357)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.792 49.357)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.792 49.357)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.792 49.357)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.338 48.811)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.338 48.811)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.338 48.811)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.338 48.811)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.338 48.811)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.843 45.306)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.843 45.306)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.843 45.306)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.843 45.306)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.843 45.306)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.693 47.456)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.693 47.456)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.693 47.456)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.693 47.456)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.693 47.456)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.693 47.456)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.693 47.456)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.693 47.456)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.693 47.456)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.693 47.456)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.347 51.802)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.347 51.802)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-8.347 51.802)' AS TEXT), 4326) <>-9 geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.096 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.096 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.096 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.096 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.096 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.798 40.351)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.798 40.351)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.798 40.351)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.798 40.351)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.798 40.351)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.567 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(157 GeomFromText(CAST ('POINT(-52.567 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.567 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.145 47.004)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.145 47.004)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.145 47.004)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.382 43.767)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.382 43.767)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.382 43.767)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.382 43.767)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.382 43.767)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.719 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.719 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.719 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.133 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.133 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.133 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.133 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.133 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.142 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.142 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.142 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.142 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.142 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.142 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.142 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.142 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.359 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.359 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.359 40.312)' AS TEXT), 4326), exp. geom Limit 10)	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.632 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.632 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.632 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
Select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.906 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.906 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.906 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.std. rect WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.906 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.906 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.906 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.906 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.906 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.906 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.086 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.086 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.086 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.086 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.086 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.204 46.945)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.204 46.945)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.204 46.945)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.274 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.274 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.274 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.274 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.274 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-39.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.609 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.609 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.609 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.609 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.609 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-25.045 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-25.045 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-25.045 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-25.045 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-25.045 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-43.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.15 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.15 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.15 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.15 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.15 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.574 45.575)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.574 45.575)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.574 45.575)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.574 45.575)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.574 45.575)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.603 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.603 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.603 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	6	6	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.659 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.659 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.659 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.659 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.659 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.659 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.659 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.659 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.659 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as inde	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.715 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.715 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.715 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.715 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.715 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.542 41.607)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.542 41.607)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.542 41.607)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.542 41.607)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.542 41.607)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.873 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.873 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.873 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.848 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.848 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.848 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.848 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.848 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.4 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.4 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.4 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.4 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.4 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.4 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'FAOT a	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-58.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.73 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.73 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.73 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom. ST_GeomFromText(CAST (*POINT(-52.73 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.73 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-63.227 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.398 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.398 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.398 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.675 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.675 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.675 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.675 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.675 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.68 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.68 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.68 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.219 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.219 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.219 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.0 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.0 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.0 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.283 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.283 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.283 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.283 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.283 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST (POINT(-33.047 40.312)' AS TEXT), 34326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-33.047 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.ord area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-33.047 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ("POINT(-33.047 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ("POINT(-33.047 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.814 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.814 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.814 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.std. rect WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.R.)	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.77 51.379)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.77 51.379)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.77 51.379)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.681 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.681 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.681 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.681 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.681 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.331 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.45 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.45 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.45 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.137 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.137 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.137 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.321 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.321 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.321 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.321 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.321 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm; WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.")	0	1	6	6	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.413 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.413 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.ptm area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.413 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.413 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm' WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.413 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.085 49.064)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.085 49.064)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.085 49.064)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.085 49.064)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.085 49.064)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-11.235 48.914) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-11.235 48.914)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-11.235 48.914)' AS TEXT), 525) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.235 48.914)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.235 48.914)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.235 48.914)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.235 48.914)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.235 48.914)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.235 48.914)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.235 48.914)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.26 49.889)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.26 49.889)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.26 49.889)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.26 49.889)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.26 49.889)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, "F	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46,758 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-46,758 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46,758 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.023 49.126)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.023 49.126)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.023 49.126)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.023 49.126)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.023 49.126)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.418 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.418 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.418 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.418 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.418 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.472 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.472 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.472 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.472 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.472 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.219 41.93)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.219 41.93)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.219 41.93)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.219 41.93)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.219 41.93)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.25 40.281)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.25 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.25 40.281)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-4.9.709 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.709 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.709 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.709 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.709 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.709 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.709 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.227 49.922)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.227 49.922)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.227 49.922)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.227 49.922)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.227 49.922)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.09 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.09 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.09 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.09 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.09 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'POINT ('POINT(-26.921 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.58 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.58 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.58 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.768 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.768 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.768 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.768 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.768 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	6	6	0	0,00
select *for ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.727 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.727 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.727 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.727 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.727 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.328 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.328 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.328 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.423 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.423 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.423 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.423 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.423 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.578 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.578 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.578 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-24.94 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.94 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.94 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.94 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.94 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, F	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-32.573 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-32.573 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-32.573 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-32.573 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-32.573 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-66.214 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.214 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.214 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.214 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.214 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.471 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.471 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.471 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.471 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.471 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.978 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.978 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.978 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.978 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.978 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.146 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.146 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.146 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.146 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.146 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.555 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.555 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.555 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.555 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.555 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.348 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.348 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.348 40.312)' AS TEXT), 4326) <-> ————————————————————————————————————	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.269 50.88)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.269 50.88)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.269 50.88)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.269 50.88)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.269 50.88)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.824 47.325)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.824 47.325)' AS TEXT), 4326), expen_22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.824 47.325)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.005 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.005 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.005 40.312)' AS TEXT), 4326) ~ geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez, WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.756 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-36.756 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-36.756 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-36.756 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.756 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.343 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWINIn(ST_GeomFromText(CAST ('POINT(-43.343 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.343 40.312)' AS TEXT), 4326) <-y_ geom LIMIT 10)	0	1	6	6	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.15 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.15 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.15 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'SFTATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.15 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.15 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'F	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.968 51.181)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.968 51.181)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.968 51.181)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.968 51.181)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.968 51.181)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.968 51.181)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'F	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.079 44.07)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.079 44.07)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.079 44.07)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.079 44.07)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.079 44.07)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.314 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.314 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.314 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.314 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.314 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.754 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.754 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.754 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.754 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.754 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.706 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.706 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.706 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.706 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.706 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.63 40.519)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.63 40.519)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.63 40.519)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.63 40.519)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.63 40.519)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.938 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.938 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.938 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.938 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.938 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.929 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.929 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.929 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.929 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.929 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.257 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.257 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.257 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.257 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.257 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.175 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.175 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.175 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.175 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.175 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.886 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.886 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.886 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.886 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.886 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.417 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.417 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.417 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.417 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.417 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.09 40.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-57.09 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.09 40.281)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.634 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.634 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.634 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.634 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.634 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.312 44.837)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.312 44.837)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.312 44.837)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.312 44.837)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.312 44.837)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.162 46.987)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.162 46.987)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.162 46.987)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.162 46.987)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.162 46.987)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.162 46.987)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.186 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.186 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.186 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	6	6	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.655 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.655 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.655 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.655 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.655 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.655 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.23 47.919)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.23 47.919)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.23 47.919)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.274 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.274 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.274 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	6	6	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.366 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.366 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.366 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.366 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.366 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.366 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ntmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.737 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial./mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.737 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.737 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.737 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.737 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.07 45.079)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.07 45.079)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.07 45.079)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.07 45.079)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.07 45.079)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.342 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.342 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.342 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STAFRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.342 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.342 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.223 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.223 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.223 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.223 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.223 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.111 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.114 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.111 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.111 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.111 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.486 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.486 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.486 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.486 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.486 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.675 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.675 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.675 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.675 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.675 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.835 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.835 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.835 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.835 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.835 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.129 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.129 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.129 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.129 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.129 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.998 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.998 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.998 40.312)' AS TEXT), 4326) = 200 (CAST) ("POINT(-25.998 40.312)' AS TEXT), 4326) = 200 (CAST) ("POINT(-25.99	0	1	6	6	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.686 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.686 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.686 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.686 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.686 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.417 41.732)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.417 41.732)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.417 41.732)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.417 41.732)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.417 41.732)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.564 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT-18.125 42.024)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-18.125 42.024)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.ord area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-18.125 42.024)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-18.125 42.024)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-18.125 42.024)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.475 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \(^1\) 'AND ST_DWISHIN(ST_GeomFromText(CAST ('POINT(-23.475 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.475 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.553 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.553 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.553 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.553 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.553 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.55 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.55 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.55 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.55 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.55 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.621 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.621 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.621 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.621 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.621 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.155 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'V' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.155 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.155 40.312)' AS TEXT), 4326) ~ geom Limit 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.377 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.498 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.498 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-32.498 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.229 44.92)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.229 44.92)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.229 44.92)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.229 44.92)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.229 44.92)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.229 44.92)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.668 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.668 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.668 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.668 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.668 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.984 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.984 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.984 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.984 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.984 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.583 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.583 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.583 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.583 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.583 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.747 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.747 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.747 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.747 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.747 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.464 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.464 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.464 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.464 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.464 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.326 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.326 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.326 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.326 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.326 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.326 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.326 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.496 46.653)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.496 46.653)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.496 46.653)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.496 46.653)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.496 46.653)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.496 46.653)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.496 46.653)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.721 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.721 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.721 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.721 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.721 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.691 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.691 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.691 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.691 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.691 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT-62.441 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-62.441 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-62.441 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-62.441 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.441 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.423 43.726)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.423 43.726)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.423 43.726)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.423 43.726)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.423 43.726)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.39 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.39 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.39 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	6	6	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.407 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.407 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.407 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.407 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.407 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	6	6	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ("POINT(-62.611 40.312)" AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-62.611 40.312)" AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-62.611 40.312)" AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 4 as indexRS, "STAFTRECT" as type, gid, code, name FROM spatial, star_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-62.611 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-62.611 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.759 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.759 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.759 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.759 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.759 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.29 40.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.29 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.29 40.281)' AS TEXT), 4326) < 9 geom LiMIT 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50, 191 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50, 191 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50, 191 40.312)' AS TEXT), 4326) <->	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.006 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.006 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.006 40.312)' AS TEXT), 4326) -> geom LMIT 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.84 44.309)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.84 44.309)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.84 44.309)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.245 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.245 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.245 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.245 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.245 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.712 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.712 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.712 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.712 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.712 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.87 51.279)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.87 51.279)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.87 51.279)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.87 51.279)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.87 51.279)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.101 48.048)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.101 48.048)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.101 48.048)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.101 48.048)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.101 48.048)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.101 48.048)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.101 48.048)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.101 48.048)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.101 48.048)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.101 48.048)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	5	5	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.302 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.302 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.302 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.302 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.302 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.377 48.772)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.377 48.772)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.377 48.772)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.377 48.772)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.377 48.772)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT-19.448 40.701)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.448 40.701)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.448 40.701)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.448 40.701)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.448 40.701)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-60.363 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST (POINT(-60.363 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-60.363 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.91 47.239)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.91 47.239)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.91 47.239)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.769 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.769 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.769 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.769 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.769 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid. code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-42.06 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST (POINT(-42.06 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-42.06 40.312)' AS TEXT), 4326) <>-y geom LiMit 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.724 51.425)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.724 51.425)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.724 51.425)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.724 51.425)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.724 51.425)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT-22-952 40.312)' AS TEXT), 4326)) AND enabled = 'Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.nfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-22-952 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-22-952 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-22-952 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-22-952 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.552 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = \(^17\) AND ST_DWISHIN(ST_GeomFromText(CAST ('POINT(-33.552 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.552 40.312)' AS TEXT), 4326),~9 geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.829 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.829 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.829 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.829 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.829 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.R.)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-24.682 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-24.682 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-24.682 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-24.682 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-24.682 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-24.682 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-24.682 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index."	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.081 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.081 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.081 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.081 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.081 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-48.122 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-48.122 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-48.122 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-48.122 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-48.122 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-37.908 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.908 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.908 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.908 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.908 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-S3.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-S3.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-S3.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-S3.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-S3.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-56.253 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.253 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.253 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.253 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.253 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.792 45.357)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.792 45.357)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.792 45.357)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.792 45.357)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.792 45.357)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.203 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.203 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.203 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.203 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.203 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.259 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.259 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.259 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	5	5	0	0,00
select from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.884 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.884 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.884 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.884 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.884 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.884 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.884 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.884 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.884 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.702 41.447)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.702 41.447)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.702 41.447)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.702 41.447)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.702 41.447)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.975 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.975 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.975 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.975 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.975 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.474 49.675)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.474 49.675)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.474 49.675)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.474 49.675)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.474 49.675)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.959 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.959 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.959 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.639 42.51)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.639 42.51)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.639 42.51)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.639 42.51)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.639 42.51)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.639 42.51)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, F	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.292 47.857)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.292 47.857)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.292 47.857)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.292 47.857)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.292 47.857)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.999 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.999 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.999 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.999 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.999 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-53.822 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-53.822 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-53.822 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-53.822 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-53.822 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.334 41.815)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.334 41.815)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.334 41.815)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.334 41.815)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.334 41.815)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ("POINT(-50.62 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-50.62 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-50.62 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-50.62 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-50.62 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-64.77 40.312) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-64.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST Intersects(geom, ST_GeomFromText(CAST ("POINT(-64.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-64.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-64.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-54.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-54.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-54.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-54.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-54.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-35.507 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-35.507 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-35.507 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-35.507 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-35.507 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.044 48.105)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.044 48.105)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.044 48.105)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.044 48.105)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.044 48.105)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.828 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.828 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.828 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.828 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.828 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.644 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.644 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.644 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.644 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.644 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.989 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.984 47.165)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.984 47.165)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.984 47.165)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.984 47.165)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.984 47.165)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.643 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.643 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.643 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.643 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.643 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.845 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.845 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.piort_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.845 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.845 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.845 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.07 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.07 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.07 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ("POINT(-13.421 46.728)" AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-13.421 46.728)" AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-13.421 46.728)" AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-13.421 46.728)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-13.421 46.728)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.313 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.313 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.313 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.313 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.313 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-55.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.st_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.803 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.803 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.803 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.803 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.803 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.665 45.484)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.665 45.484)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.665 45.484)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	5	5	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.554 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.554 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.554 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance) as type, gid, code, name, geom, ST_Distance(geom, ST_Distance) as distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-61.211 40.312)" AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-61.211 40.312)" AS TEXT), 4326) -> geom LIMIT 10)	0	1	5	5	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.672 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.672 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.672 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.672 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.672 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.217 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.217 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.217 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.217 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.217 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.784 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.784 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.784 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.952 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.952 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.952 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-13.537 46.612)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.537 46.612)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.537 46.612)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.537 46.612)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.537 46.612)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.537 46.612)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.537 46.612)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.537 46.612)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.537 46.612)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.05 47.121)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.05 47.121)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.05 47.121)' AS TEXT), 4326) <-> geom LIMIT 10)	0	2	2	4	2	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.657 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.657 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.657 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.657 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.657 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53, 407 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53, 407 40.312)' AS TEXT), 4326), geom, 22224) (RDBR BY ST_GeomFromText(CAST ('POINT(-53, 407 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.854 46.295)' AS TEXT), 325()) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.854 46.295)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.854 46.295)' AS TEXT), 52(50) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.854 46.295)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.854 46.295)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.854 46.295)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.854 46.295)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.854 46.295)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.854 46.295)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.854 46.295)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST	0	1	5	5	0	0,00
Select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.961 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.961 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.961 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.961 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.961 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.103.40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.103.40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.103.40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.103.40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.103.40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'(-23.874 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.874 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.874 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.057 40.312)' AS TEXT), 4326)) AND enabled = "\chiv' \() UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.057 40.312)' AS TEXT), 4326)) AND enabled = "\chiv' \) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.057 40.312)' AS TEXT), 4326)) AND enabled = "\chiv' \) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.057 40.312)' AS TEXT), 4326)) AND enabled = "\chiv' \) UNION ALL (SELECT 5 as indexRS, 'SFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.057 40.312)' AS TEXT), 4326)) AND enabled = "\chiv' \) UNION ALL (SELECT 6 as index."	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST (POINT(-44.205 40.312) 'AS TEXT), 34326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-44.205 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.ord. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-44.205 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-44.205 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-44.205 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index."	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.413 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.413 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.413 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.413 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.413 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port.area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.422 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.422 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.422 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.422 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.422 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREÄ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.235 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.235 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.235 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.235 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.235 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.463 49.686)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.463 49.686)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.463 49.686)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.667 45.482)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.667 45.482)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.667 45.482)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.667 45.482)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.667 45.482)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.26 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.26 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-31.26 40.312)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.484 50.665)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.484 50.665)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.484 50.665)' AS TEXT), 4328) (-9 geom LiMIT (10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.052 49.097)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.052 49.097)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.052 49.097)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.052 49.097)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.052 49.097)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.805 40.312)' AS TEXT), 4328)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.805 40.312)' AS TEXT), 4328)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.805 40.312)' AS TEXT), 4328)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.317 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial./mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.317 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.317 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.317 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.317 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.235 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.235 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.235 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.235 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.235 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index."		1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.451 46.698)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.451 46.698)' AS TEXT), 4326), 2-5 geom LMIRT 10) TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.451 46.698)' AS TEXT), 4326) -> geom LMIRT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.844 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.844 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.844 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.844 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.844 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.163 49.986)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.163 49.986)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.163 49.986)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.163 49.986)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.163 49.986)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-54.771 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-54.771 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.771 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.771 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.771 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez, WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.802 50.347)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.tmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-9.802 50.347)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-9.802 50.347)' AS TEXT), 1000 ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.802 50.347)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.802 50.347)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez, WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.05 40.312)' AST EXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.05 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-32.8 40.312)' AS 'TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ntmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-32.8 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-32.8 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STAT, 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.8 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'FACM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.8 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'FACM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.8 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'FACM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.8 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'FACM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.8 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'FACM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.8 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'FACM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST_GEOMFromText(CAST ('POINT(-32.8 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'FACM' as type, gid, code, name FROM spatial.gfcm wHER	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.888 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.888 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.888 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.888 40.312) 'AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.888 40.312) 'AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.461 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial. from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.461 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.461 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.461 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.461 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.186 40.963)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.186 40.963)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.186 40.963)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.186 40.963)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.186 40.963)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.498 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.498 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.498 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-31.498 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-31.498 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.335 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.mfm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.335 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.335 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.335 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.335 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.588 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.588 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.588 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-55.304 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.701 47.448)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.701 47.448)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.701 47.448)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFTATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.381 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.381 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.381 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.381 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.381 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.709 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.709 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.709 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.709 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.709 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.237 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.237 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.237 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.237 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.237 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.237 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.237 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.45 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "\" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.45 40.281)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-60.45 40.281)' AS TEXT), 4326  expected = geom FromText(CAST ('POINT(-60.45 40.281)' AS TEXT), 4326  expected = geom FromText(CAST ('POINT(-60.45 40.281)' AS TEXT), 4326  expected = geom FromText(CAST ('POINT(-60.45 40.281)' AS TEXT), 4326  expected = geom FromText(CAST ('POINT(-60.45 40.281)' AS TEXT), 4326  expected = geomFromText(CAST ('POINT(-60.45 40.281)' AS TEXT), 4326  expected = geomFromText(CAST)  expected = geomFromText(CAST)  expected = geomFromText(-60.45 40.281)' AS TEXT), 4326  expected = geomFromText(CAST)  expected = geomFromText(-60.45 40.281)' AS TEXT), 4326  expected =	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.932 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.R.	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.238 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.238 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.238 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.238 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.238 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.185 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.185 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.185 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.185 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.185 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom. ST_GeomFromText(CAST ('POINT(-68.114 0.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.114 0.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.114 0.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'SFATREOT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.114 0.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.114 0.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.114 0.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'FE	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.801 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.801 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.801 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS.	0	1	5	5	0	0,00
Select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SSTATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.2 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.2 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.2 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.2 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.2 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (DINT(-32.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-32.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.974 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.974 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.974 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.974 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.974 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44,029 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.029 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-44.029 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.614 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.614 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.614 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.614 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.614 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.929 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.929 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.929 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.929 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.929 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.207 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.207 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.207 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.207 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.207 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.886 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.886 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.886 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.886 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.886 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.63 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.63 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.63 40.312)' AS TEXT), 4326) <-y geom LiMIT (5)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.212 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.212 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-22.212 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25, 104 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25, 104 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-25, 104 40.312)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.186 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.186 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.186 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.186 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.186 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.764 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.764 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.764 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.764 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.764 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.863 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.863 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.863 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.114 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.114 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.114 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	5	5	0	0,00

Request	% of cumulative	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.475 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.475 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.475 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT :as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.475 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.475 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.**)	<b>time</b> 0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.064 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.064 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.064 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.064 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.064 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.247 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.247 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.247 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.247 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.247 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.253 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mfo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.253 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.253 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.253 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.253 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.516 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.516 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.516 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.516 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.516 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.171 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.171 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.171 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.363 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.363 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.363 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.363 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.363 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-55.825 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.825 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.825 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.825 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.825 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez.WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.546 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.546 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.or area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.546 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.546 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.546 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfm o WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.11 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.167 47.982)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.167 47.982)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.167 47.982)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.167 47.982)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.167 47.982)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.946 41.203)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.946 41.203)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.946 41.203)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.946 41.203)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.946 41.203)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.282 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.282 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.282 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.282 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.282 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.556 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.556 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.556 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.556 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.556 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.824 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.824 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.824 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.824 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.824 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.341 46.808)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.341 46.808)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.341 46.808)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.341 46.808)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.341 46.808)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-17.524 42.625)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-17.524 42.625)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.524 42.625)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.524 42.625)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.524 42.625)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.914 40.312)' ÅS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-19.914 40.312)' ÅS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-19.914 40.312)' ÅS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-19.914 40.312)' ÅS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-19.914 40.312)' ÅS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.734 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.734 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.734 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.734 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.734 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.994 47.155)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.994 47.155)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.994 47.155)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.994 47.155)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.994 47.155)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.647 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.647 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.647 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.647 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.647 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.224 45.925)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.224 45.925)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.224 45.925)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.224 45.925)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.224 45.925)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.425 40.724)' AS TEXT), 4326)). AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.425 40.724)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.425 40.724)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.425 40.724)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.425 40.724)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.305 48.844)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.305 48.844)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.305 48.844)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.305 48.844)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.305 48.844)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.305 48.844)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.305 48.844)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.5 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.5 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.5 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.5 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.5 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.59 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.59 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.59 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.59 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.59 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.267 43.882)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.267 43.882)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.267 43.882)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.267 43.882)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.267 43.882)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ("POINT(-56.448 40.312)" AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("DINT(-56.448 40.312)" AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-56.448 40.312)" AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-56.448 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-56.448 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.008 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.008 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.008 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.008 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.008 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.413 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.413 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.413 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.413 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.413 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.236 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.236 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.236 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.236 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.236 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.824 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.824 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.824 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.683 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.683 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.683 40.312)' AS TEXT), 4326) - 29 geom LIMIT 10)	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.628 45.521)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.628 45.521)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.628 45.521)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.628 45.521)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.628 45.521)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.717 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.714 0.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.717 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.717 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.717 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.197 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.197 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.197 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.197 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.197 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.9 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.9 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.9 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.9 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.9 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.317 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.317 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.317 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.317 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.317 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT-C26.098 40.312)' AS TEXT), 4329)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.098 40.312)' AS TEXT), 4329)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.098 40.312)' AS TEXT), 4329)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.098 40.312)' AS TEXT), 4329)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.098 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.159 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.159 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.159 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-41.159 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-41.159 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-41.159 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-41.159 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-41.159 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-41.159 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-41.159 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.956 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.956 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.956 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.956 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.956 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.956 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.956 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.305 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.305 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.305 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom. ST_GeomFromText(CAST ('POINT(-66.305 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.305 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.185 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.185 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.185 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.185 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.185 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.185 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.185 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.516 40.633)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.516 40.633)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.516 40.633)' AS TEXT), 4326) -> geom LiMIT 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.07 41.079)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_OWithin(ST_GeomFromText(CAST ('POINT(-19.07 41.079)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.07 41.079)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.096 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.096 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.096 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.61 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.61 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.61 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'FATRECT' as type, gid, code, name FROM spatial, stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.61 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial, grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.61 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.591 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.591 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.591 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.591 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.591 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-51.016 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.016 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.016 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.016 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.016 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-21.409 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.409 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.409 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.409 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.409 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez.WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.641 43.508)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.641 43.508)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.641 43.508)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.641 43.508)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.641 43.508)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.641 43.508)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.641 43.508)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.641 43.508)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.641 43.508)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.641 43.508)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOM* STATE) AS TEXT (*	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.233 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.233 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.233 40.312)' AS TEXT), 4326) =	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-48.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-45.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.349 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.349 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.349 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.665 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.665 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.665 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.665 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.665 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.665 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.372 47.777)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.372 47.777)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.372 47.777)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.372 47.777)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.372 47.777)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-30.752 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.752 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.752 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.752 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.752 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type_gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.76 47.389)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.#mo WHERE ST Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.76 47.389)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.76 47.389)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.76 47.389)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.76 47.389)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "F"	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.77 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.534 42.615)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.534 42.615)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.534 42.615)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.534 42.615)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.534 42.615)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14,149 46,0)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.149 46.0)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.149 46.0)' AS TEXT), 4326) <> geom LiMiT 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16,844 43.305)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.844 43.305)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.844 43.305)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.364 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.364 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.364 40.312)' AS TEXT), 4326) <-> ————————————————————————————————————	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.431 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-23.431 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-23.431 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.79 40.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.79 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.79 40.281)' AS TEXT), 4326  geom LIMIT 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.832 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.832 40.312)' AS TEXT), 4326), geom, 22224) (ARDER BY ST_GeomFromText(CAST ('POINT(-40.832 40.312)' AS TEXT), 4326) <->, geom LMIT 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.585 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.585 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.585 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.552 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.552 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.552 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.309 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.309 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.309 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.309 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.309 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.309 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.309 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.281 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.281 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.281 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.281 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.281 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.281 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.281 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-65.979 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-65.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-65.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-65.979 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-65.979 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-65.979 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-65.979 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-65.979 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-65.979 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-65.979 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.526 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.526 40.312)' AS TEXT), 4326), acom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.526 40.312)' AS TEXT), 4326) - x-9 geom LIMIT 10)	0	1	5	5	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.436 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.436 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.436 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	5	5	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.643 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.643 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.643 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.643 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.643 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.643 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.427 40.312)' AS TEXT), 4326)) AND enabled = (''') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.427 40.312)' AS TEXT), 4326)) AND enabled = (''') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.427 40.312)' AS TEXT), 4326)) AND enabled = (''') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.427 40.312)' AS TEXT), 4326)) AND enabled = (''') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.427 40.312)' AS TEXT), 4326)) AND enabled = (''') UNION ALL (SELECT 6 as index.")	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.652 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.652 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.652 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.652 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.652 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.652 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.652 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.652 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.652 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.652 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.765 44.384)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.765 44.384)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.765 44.384)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.765 44.384)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.765 44.384)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.655 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.655 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-34.655 40.312)' AS TEXT), 4326) ->>> geom LMIT 10)	0	1	5	5	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.603 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.603 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.603 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.603 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.603 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.603 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.603 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.603 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.603 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.603 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-66.493 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-66.493 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-66.493 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATREOT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.493 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.493 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as 'Ype, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.493 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as 'Ype, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.493 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as 'Ype, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.493 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as 'Ype, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.493 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as 'Ype, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.493 40.312)' AS TEXT), 4326)) AND enabled = 'Y)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.131 51.018)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.131 51.018)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.131 51.018)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.131 51.018)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.131 51.018)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.99 40.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.99 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.99 40.281)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.574 45.575)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.574 45.575)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.574 45.575)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.053 40.312)' AS TEXT), 4326)) AND enabled = 'V) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.053 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.053 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.053 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.053 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as index.R).	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.318 51.831)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.318 51.831)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.318 51.831)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-35,7.40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35,7.40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35,7.40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-17.211 42.938)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.211 42.938)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-17.211 42.938)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.937 48.212)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.937 48.212)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.937 48.212)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.937 48.212)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.937 48.212)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-30.393 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-30.393 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-30.393 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATREOT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-30.393 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-30.393 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.121 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.121 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-63.121 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-8.455.51.694)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWITHIN(ST_GeomFromText(CAST (POINT(-8.455.51.694)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-8.455.51.694)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-18.929 41.22)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-18.929 41.22)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-18.929 41.22)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-18.929 41.22)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-18.929 41.22)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.764 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.764 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.764 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.764 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.764 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.775 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.775 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.775 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom. ST_GeomFromText(CAST ('POINT(-67.775 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.775 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-51.18 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST (POINT(-51.18 40.312)' AS TEXT), 4326), geom, 22224) (RDBR BY ST_GeomFromText(CAST (POINT(-51.18 40.312)' AS TEXT), 4326) «> geom LIMIT 10)	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.692 40.457)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.692 40.457)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.692 40.457)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.692 40.457)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.692 40.457)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.848 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.848 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.848 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.848 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.848 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.999 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.999 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.999 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.999 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.999 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-56.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-56.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-56.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-56.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.082 45.067)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.082 45.067)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.082 45.067)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.082 45.067)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.082 45.067)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.597 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.597 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.597 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.597 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.597 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.604 42.545)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.604 42.545)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.604 42.545)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.604 42.545)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.604 42.545)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.95 43.221)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.95 43.221)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.95 43.221)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.95 43.221)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.95 43.221)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.474 40.675)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.474 40.675)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.474 40.675)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.474 40.675)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.474 40.675)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.474 40.675)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.474 40.675)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.474 40.675)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.474 40.675)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.474 40.675)') AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.244 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.244 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.244 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.244 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.244 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.346 47.803)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.346 47.803)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.346 47.803)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.346 47.803)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.346 47.803)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.306 42.843)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.306 42.843)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.306 42.843)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.306 42.843)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.306 42.843)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.306 42.843)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.306 42.843)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.306 42.843)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.306 42.843)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.387 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.387 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.387 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.387 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.387 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.397 44.752)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.397 44.752)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.397 44.752)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.397 44.752)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.397 44.752)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.945 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST GeomFromText(CAST ('POINT(-61.945 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.945 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.53 47.619)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.nfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.53 47.619)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.53 47.619)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.53 47.619)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.53 47.619)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.53 47.619)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.758 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.758 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.758 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.758 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.758 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.144 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.144 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.144 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.144 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.144 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.448 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.448 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.448 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT'-9.83150.318)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.83150.318)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.83150.318)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.83150.318)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.83150.318)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.515 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.66.27 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT'.66.27 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'.66.27 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.44 40.312)' AS TEXT), 4526)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POIN	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.133 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.451 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.451 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.451 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.451 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.451 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.386 41.763)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.386 41.763)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.386 41.763)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.386 41.763)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.386 41.763)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.158 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.158 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.158 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.972 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.972 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.972 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.548 51.601)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial. from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.548 51.601)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.548 51.601)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.548 51.601)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.548 51.601)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.548 51.601)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-39.182 40.312), AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-39.182 40.312), 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.182 40.312), 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.182 40.312), 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.182 40.312), 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-48.206 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.206 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.206 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.206 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.206 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.206 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.206 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.206 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.206 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.206 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.036 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.036 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-4.5.519 40.312) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-4.5.519 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-4.5.519 40.312)" AS TEXT), 4236)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-4.5.519 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-4.5.519 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.832 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.832 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.832 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial-eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-21.695 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.695 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.ord, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.695 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.695 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.695 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.173 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.173 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.173 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.897 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.897 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.897 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.897 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.897 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-11.626 48.523) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.626 48.523)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.626 48.523)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.626 48.523)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.626 48.523)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.67 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.67 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.67 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.67 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.67 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.526 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.526 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.526 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.526 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.526 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(37.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(37.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.752 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.752 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.752 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.752 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.752 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.322 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.322 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.322 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.322 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.322 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.927 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.927 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.927 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.927 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.927 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.66 43.489)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.66 43.489)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.66 43.489)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.66 43.489)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.66 43.489)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	5	5	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.153 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.153 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-23.153 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	5	5	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('PO	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.865 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.383 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.383 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.383 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.383 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.383 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.071 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.071 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.071 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.071 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.071 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	5	5	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.977 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.977 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.977 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.977 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.977 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	5	5	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.469 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.469 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.469 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.469 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.469 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-12.06 48.089)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.06 48.089)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.06 48.089)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.06 48.089)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.06 48.089)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.06 48.089)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.128 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.128 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.128 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.128 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.128 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.128 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.128 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.128 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.128 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.128 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.788 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.768 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.768 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.768 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.768 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.768 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.12 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.12 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.12 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.12 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.12 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.799 48.35)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.799 48.35)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.799 48.35)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.799 48.35)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.799 48.35)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "STEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "STEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "STEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "STEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "STEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "STEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "STEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "STEXT), 4326) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "STEXT), 4326)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.67 40.479)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.67 40.479)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.67 40.479)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.67 40.479)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.67 40.479)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.371 44.778)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.371 44.778)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.371 44.778)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. prec WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.371 44.778)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.371 44.778)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index.")	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.932 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.932 40.312)' AS TEXT), 4326), expen_S2224) (ADER BY ST_GeomFromText(CAST ('POINT(-62.932 40.312)' AS TEXT), 4326) <-x-geom LMIRT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-24.479 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.479 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.479 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.479 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.479 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.479 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.154 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.154 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.154 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.154 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.154 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-19.42 40.729)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.42 40.729)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.42 40.729)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.42 40.729)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.42 40.729)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.42 40.729)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "F"	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-15.271 44.878) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.271 44.878)) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.271 44.878)) AS TEXT), 19UNON ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.271 44.878)) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.271 44.878)) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.032 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, drmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.032 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.032 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.032 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.032 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-64.646 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial. from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-64.646 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-64.646 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-64.646 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-64.646 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS: 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.311 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.311 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.ptor. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.311 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.311 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.311 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.733 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.733 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.733 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.733 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.733 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.2 44.949)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.2 44.949)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.2 44.949)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.2 44.949)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.2 44.949)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FACO' a	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.508 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.508 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.508 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.875 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.875 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.875 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.875 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.875 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.404 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial. from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.404 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.404 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.404 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.404 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.069 50.08)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.069 50.08)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.069 50.08)' AS TEXT), 3250)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.069 50.08)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.069 50.08)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.229 43.92)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.229 43.92)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.229 43.92)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.229 43.92)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.229 43.92)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomfromText(CAST ('POINT(-15,032 45.117)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DOWITHINGTO, CoemfromText(CAST ('POINT(-15,032 45.117)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.032 45.117)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-39,524 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.524 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.524 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.535 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.535 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.535 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.535 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.535 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.584 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.584 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.584 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.584 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.584 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.554 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial. 'fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.554 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.554 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.554 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.554 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.299 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.299 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.299 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.299 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.299 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez.WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.973 60.176)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.973 50.176)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.973 50.176)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STA'RECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.973 50.176)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.973 50.176)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.973 50.176)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.278 46.871)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.278 46.871)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.278 46.871)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.278 46.871)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.278 46.871)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.213 42.936)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.213 42.936)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.213 42.936)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.213 42.936)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.213 42.936)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39,663 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39,663 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-39,663 40.312)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez_WHERE_ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.789 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.789 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.rfm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.789 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.789 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.789 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.235 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.235 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.235 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.436 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.436 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.436 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
(SELECT/PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.372 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.372 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.372 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.816 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.816 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.816 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.816 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.816 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.254 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.254 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.254 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.254 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.254 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.087 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.087 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.087 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.087 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.087 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.701 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.701 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.701 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.701 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.701 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.204 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.204 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.204 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.204 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.204 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.485 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.485 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-44.485 40.312)' AS TEXT), 4326) - Segom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.883 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.883 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.883 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.883 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.883 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.693 43.456)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.693 43.456)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.693 43.456)' AS TEXT), 4226)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.693 43.456)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.693 43.456)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.998 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.998 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.998 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.998 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.998 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.895 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.895 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.895 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.895 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.895 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.955 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.955 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.955 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.955 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.955 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.05 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.05 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.or and WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.05 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.501 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.501 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.501 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.501 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.501 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.402 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.402 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.402 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.402 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.402 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.278 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.278 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.278 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.278 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.278 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.348 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.348 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.348 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'SFOMTEXT, 'ASTATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.348 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.348 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.348 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.348 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.348 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.348 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.348 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_Geom	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.803 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.803 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.803 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.803 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.803 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.803 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.803 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.803 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.803 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.803 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.751 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.751 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.751 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFTATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.751 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.751 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.751 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.751 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.751 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.751 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.751 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.51 47.639)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM, spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.51 47.639)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.51 47.639)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.51 47.639)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.51 47.639)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.916 49.233)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMC' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.916 49.233)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.916 49.233)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.916 49.233)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.916 49.233)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.004 47.145)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.004 47.145)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.004 47.145)' A3 TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.004 47.145)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.004 47.145)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.577 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.577 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.577 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.577 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.577 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.396 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.396 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.396 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.396 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.396 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.396 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.396 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.396 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.396 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.396 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8-931 51.218)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8-931 51.218)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8-931 51.218)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.513 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.513 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.513 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.513 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.513 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.815 45.334)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.815 45.334)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-14.815 45.334)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.99 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.99 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.99 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.99 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.99 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.547 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.547 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.547 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.547 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.547 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.054 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.882 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.t/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.882 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.882 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.882 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.882 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.439 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.#mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.439 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.439 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.439 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.439 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.521 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.521 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.521 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.521 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.521 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.596 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.596 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.596 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.596 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.596 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.817 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.817 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.817 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.817 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.817 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.848 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.848 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.848 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.116 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.116 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.116 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-32.131 40.312) AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.867 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.867 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.867 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.867 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.867 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.055 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.055 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.055 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.055 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.055 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.055 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.055 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.523 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.523 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.523 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.523 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.523 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.399 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.399 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.399 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.399 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.399 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.034 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.034 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.034 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.034 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.034 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.213 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.213 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.213 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.213 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.213 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.565 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.565 40.312)' AS TEXT), 4326), geom, 22224) (APDER BY ST_GeomFromText(CAST ('POINT(-49.565 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.476 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.476 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.476 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.476 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.476 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.476 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.476 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.476 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.476 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as intersects(geom, ST_GeomFromText(CAST ('POINT(-50.476 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as intersects(geom, ST_GeomFromText(CAST ('POINT(-50.476 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.485 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.485 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.485 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.485 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.485 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.432 48.717)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.432 48.717)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.432 48.717)' AS TEXT), 4326) -> geom LMIT 10)	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.312 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.312 40.312)' AS TEXT), 4326), agom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.312 40.312)' AS TEXT), 4326) = 2 open fromText(CAST ('POINT(-31.312	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.314 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.314 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.314 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.314 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.314 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.314 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.314 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.314 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.314 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as i	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.651 41.498)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.651 41.498)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.651 41.498)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.651 41.498)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.651 41.498)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.651 41.498)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.651 41.498)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.651 41.498)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.651 41.498)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.651 41.498)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.753 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.753 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.753 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.323 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.323 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.323 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.323 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.323 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.817 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.817 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.817 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.069 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.069 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.069 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.069 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.069 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.658 43.491)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.658 43.491)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.658 43.491)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.658 43.491)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.658 43.491)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.841 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.841 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.841 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'SFATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.841 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.841 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.841 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.841 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.623 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.623 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.623 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.623 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.623 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-62.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÄLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.166 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.054 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.054 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.054 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.663 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects((geom, ST_GeomFromText(CAST ('POINT(-66.663 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.663 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.663 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.663 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.988 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.988 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.988 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.988 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.988 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.508 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.508 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.508 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.508 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.508 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55,343 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÄLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55,343 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55,343 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55,343 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55,343 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.38 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.38 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.38 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.38 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gicm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.38 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gicm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.38 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.558 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.558 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.558 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.558 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.558 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.673 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.673 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.673 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.673 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.673 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.249 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.249 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.249 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.249 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.249 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.515 40.634)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.515 40.634)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.515 40.634)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.515 40.634)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.515 40.634)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText((CAST ('POINT(-58.928 40.312)' AS TEXT), 34326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.928 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.928 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.928 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.928 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.888 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.888 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.888 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.888 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.888 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.514 46.635)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.514 46.635)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.514 46.635)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.514 46.635)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.514 46.635)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.014 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.014 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.014 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.014 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.014 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "F"	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.083 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.083 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.083 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.083 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.083 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.398 47.751)* AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.398 47.751)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.398 47.751)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.398 47.751)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.398 47.751)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.852 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.852 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.852 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.852 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.852 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-10.564 49.585)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.564 49.585)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.564 49.585)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.564 49.585)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.564 49.585)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.421 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.421 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.421 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.421 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.421 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-29.567 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.567 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.567 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.567 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.567 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.017 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.017 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.017 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.017 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.017 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.619 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.619 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.619 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.619 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.619 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.702 51.447)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.702 51.447)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.702 51.447)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial.eez.WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.223 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.223 40.312)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.223 40.312)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.223 40.312)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.223 40.312)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.141 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.141 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.141 40.312) 'AS TEXT), 4256)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.141 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.141 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.163 40.986)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.drno WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.163 40.986)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.163 40.986)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.163 40.986)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'STATREOT' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.163 40.986)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.274 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.274 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.274 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.495 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.495 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.495 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.495 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.495 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.779 43.37)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.779 43.37)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.779 43.37)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.779 43.37)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.779 43.37)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.779 43.37)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.362 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.362 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.362 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.362 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.362 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.741 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.741 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.741 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.741 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.741 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.197 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.197 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.197 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.197 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.197 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.415 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.415 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.415 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.415 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.415 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.176 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.176 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.176 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.176 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.176 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.112 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.112 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.112 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.112 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.112 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText((CAST ('POINT(-28.891 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.891 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.891 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.891 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.891 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.572 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.572 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.572 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.572 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.572 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.055 40.312)' AS TEXT), 3236)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.055 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.055 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.055 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.055 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.867 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.867 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.867 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.867 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.867 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.777 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.534 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.534 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.534 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.534 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.534 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.238 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.238 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.238 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.238 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.238 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-36,122 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.122 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.122 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.85 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-62.85 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.85 40.281)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.147 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.188 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.188 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.188 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.188 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.188 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.987 42.162)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.987 42.162)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.987 42.162)' AS TEXT), 4226)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.987 42.162)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.987 42.162)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.987 42.162)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.987 42.162)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.987 42.162)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.987 42.162)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.R.	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.974 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.974 40.312)' AS TEXT), 4326), acom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.974 40.312)' AS TEXT), 4326), acom, 22243 (ORDER BY ST_GeomFromText(CAST ('POINT(-67.974 40.312)' AS TEXT), 4326)	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.826 49.323)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.826 49.323)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.826 49.323)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.826 49.323)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.826 49.323)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.826 49.323)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.826 49.323)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.69 40.459)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.69 40.459)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.69 40.459)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.69 40.459)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.69 40.459)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.884 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.884 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.884 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.884 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.884 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.943 41.206)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.943 41.206)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.943 41.206)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.943 41.206)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.943 41.206)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.187 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.187 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.187 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.187 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.187 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.602 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.602 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.602 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.602 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.602 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.949 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.949 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.949 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.949 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.949 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.021 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.021 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-41.021 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.053 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.053 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.053 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.053 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.053 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.037 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.037 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.037 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.037 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.037 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.376 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.376 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.376 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.376 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.376 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.682 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.682 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.pdf and WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.682 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.682 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.682 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.004 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.004 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.004 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.004 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.004 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.005 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.005 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.005 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.005 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.005 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.05 41.121)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.05 41.121)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.05 41.121)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.05 41.121)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.05 41.121)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.208 46.941)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.208 46.941)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.208 46.941)' AS TEXT), 4326) ->> geom LMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.573 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.573 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.573 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'ST3 40.312)' AS TEXT), 4326)) AND enabled = 'ROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.573 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.573 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.028 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.028 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.028 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.028 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.028 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.791 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.791 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.791 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.811.40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.811.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.811.40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.287 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.287 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.287 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.287 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.287 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.287 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.287 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.287 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.287 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.287 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.214 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.214 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.214 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.214 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.214 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.44 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = 'Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-62.44 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.44 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.995 40.312') AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.995 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'FORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.995 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.995 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.995 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.877 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.877 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.877 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.284 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.284 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.284 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.284 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.284 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.332 51.817)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.332 51.817)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.332 51.817)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.332 51.817)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.332 51.817)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.332 51.817)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "F"	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.641 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.641 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.641 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.641 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.641 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.152 46.997)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.152 46.997)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.152 46.997)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.152 46.997)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.152 46.997)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.686 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.686 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.686 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.686 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.686 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.198 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.198 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.198 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.198 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.198 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-60.724 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-60.724 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-60.724 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-60.724 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-60.724 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.01 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.01 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.01 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.01 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.01 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.254 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.254 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.254 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.254 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.254 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.462 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.462 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.462 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.462 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.462 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.594 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.594 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.594 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.594 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.594 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.492 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.492 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.492 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.492 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.492 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.149 40.312)' ÅS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.149 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.149 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.149 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.149 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'FORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.169 40.312)' ASTEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.169 40.312)' ASTEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.461 40.688)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.461 40.688)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.461 40.688)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.461 40.688)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.461 40.688)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.461 40.688)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.461 40.688)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.461 40.688)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.461 40.688)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.461 40.688)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.565 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.565 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.565 40.312)' AS TEXT), 4326) -s-geom LMIT 10)	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.655 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.655 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.655 40.312)' AS TEXT), 4326) -> geom LMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.436 43.713)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.436 43.713)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.436 43.713)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.436 43.713)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.436 43.713)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.436 43.713)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.436 43.713)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.436 43.713)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.436 43.713)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.436 43.713)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.486 46.663)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.486 46.663)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.486 46.663)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.486 46.663)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.486 46.663)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.486 46.663)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.486 46.663)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.486 46.663)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.486 46.663)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.486 46.663)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.284 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.284 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.284 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.907 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.907 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.907 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.907 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.907 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.781 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.781 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.781 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.995 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_Downthin(5T_00) AS ("POINT(-47.995 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-47.995 40.312)' AS TEXT), 4326), <> geom LIMIT 10)	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-64, 454 0.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.45.40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.45.40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.45.40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.45.40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.45.40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.45.40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.45.40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.45.40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.45.40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFOM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POINT(-54.45.40.2	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-20.304 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-20.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-20.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.304 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('P	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.585 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.585 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.585 40.312)' AS TEXT), 4326) <->, geom LMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.38 47.769)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.38 47.769)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.38 47.769)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.38 47.769)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.38 47.769)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM UNION ALL (SELECT 5 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.964 42.185)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.964 42.185)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.964 42.185)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.964 42.185)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.964 42.185)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.467 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.467 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.467 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.467 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.467 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.686 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.686 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.686 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.686 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.686 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.638 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.638 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.638 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.638 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.638 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.223 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.223 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.223 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.223 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.223 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.219 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.219 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.219 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.219 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.219 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.612 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.612 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.612 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.612 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.612 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.824 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.824 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.824 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.824 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.824 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.403 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.403 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.403 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.403 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.403 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.542 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.542 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.542 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.542 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.542 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.578 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.578 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.578 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.578 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.578 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.332 40.817)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.332 40.817)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.332 40.817)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.332 40.817)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.332 40.817)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.931 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.931 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.931 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.931 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.931 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.617 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.617 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.617 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.617 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.617 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.408 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.408 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.408 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.408 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.408 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.207 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.207 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.207 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.207 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.207 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.442 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.442 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.442 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.442 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.442 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-23.66 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.66 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.66 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.66 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.66 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.487 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.487 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.487 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.487 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.487 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.379 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.379 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.379 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.379 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.379 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.392 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.392 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.392 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.392 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.392 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.392 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.688 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.608 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.608 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.608 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.608 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.786 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.786 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.786 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.786 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.786 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.493 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.493 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.493 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.493 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.493 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.81 43.339)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.81 43.339)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.81 43.339)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.81 43.339)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.81 43.339)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-S3.957 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-S3.957 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.957 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.957 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.957 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.291 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.291 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.291 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.291 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.291 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.".	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.62 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWIN(ST_GeomFromText(CAST ('POINT(-22.62 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.62 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.856 50.293)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.856 50.293)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.856 50.293)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.856 50.293)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.856 50.293)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.856 50.293)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'F	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.06 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.06 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.06 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.05 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.05 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.05 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.05 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.694 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.694 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.694 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.694 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.694 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.276 49.873)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.276 49.873)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.276 49.873)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.597 50.552)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.597 50.552)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.597 50.552)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-39,033 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39,033 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39,033 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39,033 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39,033 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stgm with the state of the state	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.897 42.252)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.897 42.252)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.897 42.252)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.897 42.252)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stgm with the state of the state	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.246 44.903)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.246 44.903)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.246 44.903)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stgm with the state of the state	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.516 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.516 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.516 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.516 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stgm with the state of the state	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.084 42.065)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.084 42.065)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.084 42.065)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.084 42.065)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.084 42.065)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.531 40.312)' ÅS TEXT), 3236)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.531 40.312)' ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.531 40.312)' ÅS TEXT), 5259) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.531 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.531 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.531 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.531 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.531 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.531 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.531 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.647 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.647 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.647 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.647 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.647 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.073 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.073 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.073 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.073 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.073 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.073 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.073 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.073 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.073 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.073 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.503 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.503 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.503 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(stigeom, ST_GeomFromText(CAST ('POINT(-29.503 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.503 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.509 40.64)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.509 40.64)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.509 40.64)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.509 40.64)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.509 40.64)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-52.675 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-52.675 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-62.675 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-52.675 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-52.675 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-52.675 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.848 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.848 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.848 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.848 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.848 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.848 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.848 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.353 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.353 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.353 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.435 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.435 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.435 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.435 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.435 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.597 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.597 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.597 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.597 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.597 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.116 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.116 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.116 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.116 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.116 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.207 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.207 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.207 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std rect WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.923 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.972 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.972 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.972 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.972 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.972 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.773 43.376)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.773 43.376)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.773 43.376)' AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.773 43.376)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.773 43.376)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.249 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.249 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.249 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.249 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.249 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.595 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.595 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.595 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.428 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.428 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.428 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.627 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.627 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.627 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.906 49.243)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial. from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.906 49.243)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.906 49.243)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.906 49.243)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.906 49.243)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-55.785 40.312) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.785 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.785 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT Tas type, gid, code, name FROM spatial stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.785 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.785 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.785 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT-(26.406.40.312) AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT-(26.406.40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREAE' as type, gid, code, name FROM spatial port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.406.40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.406.40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.406.40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.406.40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index."		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.201 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.201 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.201 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.201 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.201 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.151 43.998)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.151 43.998)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.151 43.998)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.151 43.998)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.151 43.998)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.984 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.984 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.984 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.984 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.984 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-55.043 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.043 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.043 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.043 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.043 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.043 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez, WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT', 26.49 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT', 26.49 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT', 26.49 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STA'TRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT', 26.49 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT', 26.49 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.649 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.649 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.649 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.649 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.649 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.".	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.96 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.96 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.96 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.833 45.316)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.833 45.316)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.833 45.316)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.833 45.316)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.833 45.316)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-36:223 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-36:223 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36:223 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36:223 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36:223 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.281 44.868)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.281 44.868)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.281 44.868)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.281 44.868)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.281 44.868)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-27.909 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.909 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.909 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.909 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.909 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.084 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.084 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.084 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.084 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.084 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.992 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.992 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.992 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.992 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.992 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.401 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.401 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.401 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.401 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.401 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.401 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.401 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.401 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.887 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.887 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.887 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.887 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.887 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-60.547 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.547 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.547 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.547 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.547 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.864 46.285)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.864 46.285)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.864 46.285)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.864 46.285)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.864 46.285)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.818 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.818 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.818 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.818 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.818 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.212 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.212 40.312)' AS TEXT), 4326), geom_22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-23.212 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.033 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.033 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.033 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.033 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.033 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-60.033 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as indexRS, "GFOM	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.882 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.882 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.882 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.882 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.882 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.08 42.069)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.08 42.069)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.08 42.069)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.08 42.069)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.08 42.069)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.08 42.069)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.979 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.979 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.979 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.944 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.944 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.944 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.944 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.944 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.823 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.823 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.823 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.823 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.823 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.823 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.823 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS		1	4	4	0	0,00
SELECT COORD_DIMENSION FROM GEOMETRY_COLUMNS WHERE F_TABLE_SCHEMA = 'spatial' AND F_TABLE_NAME = 'user_areas_v' AND F_GEOMETRY_COLUMN = 'geom'	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.315 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.315 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.315 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.315 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.315 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.19 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.19 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.19 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.19 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.19 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.212 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.212 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.212 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.212 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.212 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.644 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.644 40.312)' AS TEXT), 4326), eye geom LiMIT 10) TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.644 40.312)' AS TEXT), 4326) eye geom LiMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.R.)	0	1	4	4	0	0,00
select 'from ((SELECT 1 as indexRS,'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS,'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS,'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS,'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS,'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS,'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS,'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS,'GFCM'	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.841 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.841 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.841 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.841 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.841 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.853 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.853 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.853 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.853 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.853 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.121 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.121 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.121 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.121 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.121 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.374 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.374 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.374 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.374 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.374 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.168 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.168 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.168 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.168 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gram WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.168 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.739 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.739 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.739 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.739 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.739 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT-(6-6 403 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(6-6 403 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(6-6.403 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(6-403 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(6-403 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(6-403 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(6-403 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(6-403 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as i	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.5 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.5 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.5 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT1-65-716 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT1-65-716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT1-65-716 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT1-65-716 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT1-65-716 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT1-65-716 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT1-65-716 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as indexRS, 'GFO	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.453 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.453 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.453 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.453 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.453 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.304 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.304 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-66.304 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.168 41.981)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.168 41.981)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.168 41.981)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.168 41.981)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.168 41.981)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.198 40.312') AS TEXT), 34326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (DINT(-62.198 40.312) AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-62.198 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.198 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.198 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.881 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.881 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-64.881 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST (POINT(-30.484 40.312) 'AS TEXT), 3436)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-30.484 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-30.484 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-30.484 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-30.484 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.382 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.382 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.382 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.06 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.06 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.06 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.053 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.053 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.053 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.053 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.053 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.532 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.532 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.532 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.532 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.532 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	o	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.79 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.79 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.79 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.067 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.516 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.516 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.516 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.516 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.516 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60,989 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60,989 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.989 40.312)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.792 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.792 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.792 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.792 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.792 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.683 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.683 40.312)' AS TEXT), 4326), geom, 22224) (RDBR BY ST_GeomFromText(CAST ('POINT(-67.683 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.44 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial.port WHERE enabled = Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.44 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.44 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.161 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.161 40.312)' AS TEXT), 4326), geom, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-26.161 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.883 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.883 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.883 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.883 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.883 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.155 43.994)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.155 43.994)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.155 43.994)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.481 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.481 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.481 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.481 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-49.481 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.65 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = \( \frac{1}{2} \) 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.65 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-51.65 40.312)' AS TEXT), 4326) \( \frac{1}{2} \) 'egom LIMIT (10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.04 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-63.585 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-63.585 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREÄ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-63.585 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-63.585 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-63.585 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.444 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial. #mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.444 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.444 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.444 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.444 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49,094 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.094 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.094 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.341 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.341 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.341 40.312)' AS TEXT), 4326) <-> CENTRAL STANDARD AS ASSESSED AS	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS; 'EEZ' as type, gid, code, name FROM spatial eez, WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.357 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS; 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-56.357 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.ptort. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-56.357 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-56.357 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-56.357 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index."	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.799 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.799 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.799 40.312)' AS TEXT), 4326) <->, geom LMIII' 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.906 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.906 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.906 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.906 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.906 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.927 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.927 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.927 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.927 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.927 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.459 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.459 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.459 40.312)' AS TEXT), 4326) <->, geom LMIII' 10)	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.111 40.312)' AS TEXT), 4326),true) & distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.111 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.111 40.312)' ASTEXT), 4326( >>> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.008 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.008 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.008 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.263 45.886) 'AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.trimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.263 45.886) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.263 45.886) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.263 45.886) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.263 45.886)) AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.263 45.886)) AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.**	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.459 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.459 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.459 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.459 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.459 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.9 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.9 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.9 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.284 48.865)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.284 48.865)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.284 48.865)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.284 48.865)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.284 48.865)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.685 44.464)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.685 44.464)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.685 44.464)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.685 44.464)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.685 44.464)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.441 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.441 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.441 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.441 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.441 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.73 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.73 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.73 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.73 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.73 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-50.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÄLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.932 47.217)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.932 47.217)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.932 47.217)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.932 47.217)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.932 47.217)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.297 48.852)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.297 48.852)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.297 48.852)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.297 48.852)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.297 48.852)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-62.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-62.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-62.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-62.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-62.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-62.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-62.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS.	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.975 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.975 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.975 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.975 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.975 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.872 45.277)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.872 45.277)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.872 45.277)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.872 45.277)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.872 45.277)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT-(18.591 41.558) AS TEXT), 4326)) AND enabled = 'Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-18.591 41.558)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.pot area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.591 41.558)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.591 41.558)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.591 41.558)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.591 41.558)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.054 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.25 40.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.25 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.25 40.281)' AS TEXT), 4326 \( \cdots \) geom LIMIT (0)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.806 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.806 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.806 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.806 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.806 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.42 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.42 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-44.42 40.312)' AS TEXT), 4326) <->, geom LIMIT to)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.207 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.207 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.207 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.207 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.207 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select *from ((SELECT 4 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.642 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.642 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.642 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.642 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.642 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.642 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.642 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.642 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.642 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.642 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POIN	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.613 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.613 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.613 40.312)' AS TEXT), 14326) < geom Limit 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.583 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.583 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.583 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.583 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.583 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.583 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.583 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.583 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.583 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as indexRS,	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.237 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.237 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.237 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.237 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51.237 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.209 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.209 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.209 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.209 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.209 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.933 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.933 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.933 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.933 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.933 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.289 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.289 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.289 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.289 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.289 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.885 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial, port WHERE enabled = "AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-60.685 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.685 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.874 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.874 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.874 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'Tarter as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.874 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.874 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.181 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.181 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.181 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.181 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.181 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.106 49.043)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.106 49.043)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.106 49.043)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.106 49.043)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.106 49.043)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.731 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.731 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.731 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.731 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.731 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.903 45.246)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.903 45.246)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.903 45.246)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.903 45.246)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SOFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.903 45.246)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SOFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.903 45.246)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SOFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.903 45.246)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SOFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.903 45.246)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SOFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.903 45.246)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SOFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.903 45.246)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SOFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.662 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.662 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.662 40.312)' AS TEXT), 4326) - geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.976 48.173)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.976 48.173)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.976 48.173)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.976 48.173)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.976 48.173)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-66.071 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-66.071 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-56.071 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-56.071 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-56.071 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.834 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(.49.959 40.312)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = "X AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(.49.959 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(.49.959 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom. ST_GeomFromText(CAST ('POINT(-64.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINTI-67.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-67.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-67.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-67.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-67.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-67.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-67.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-67.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-67.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-67.991 40.312)' AS TEXT), 4326))	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.085 48.064)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.085 48.064)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.085 48.064)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.935 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.935 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.935 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT',64.666 40.312)' AS TEXT), 4329), AND enabled = "Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial,rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT',64.666 40.312)' AS TEXT), 4329)) AND enabled = "Y' UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial,port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT',64.666 40.312)' AS TEXT), 4329)) AND enabled = "Y' UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT',64.666 40.312)' AS TEXT), 4329)) AND enabled = "Y' UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT',64.666 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT',64.666 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 5 as index."	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.901 49.248)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.901 49.248)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-10.901 49.248)' AS TEXT), 4326) ->>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST (POINT(-64.958 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-64.958 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.ord area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-64.958 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ("POINT(-64.958 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ("POINT(-64.958 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.523 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.523 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.523 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.523 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.523 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.111 48.038)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.111 48.038)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.111 48.038)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.111 48.038)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.111 48.038)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.551 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.551 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.551 40.312)' AS TEXT), 4226)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.551 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.551 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.551 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.551 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.551 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.551 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.551 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.433 45.716)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.433 45.716)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.433 45.716)' AS TEXT), 4326), escept collisions and statement of the statement of	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.362 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.362 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.362 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.362 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.362 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.503 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.503 40.312)' AS TEXT), 4326), geom, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-36.503 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.475 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.475 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.475 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.475 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.475 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.475 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.604 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.604 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.604 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.604 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.604 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.613 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.613 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.613 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.613 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.613 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.176 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.176 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.176 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.176 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.176 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.895 45.254)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.895 45.254)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.895 45.254)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.895 45.254)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.895 45.254)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(41.258 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST (POINT(41.258 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-41.258 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-21.905 40.312)' ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-21.905 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.905 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.905 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.905 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as Yep, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as Yep, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as Yep, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as Yep, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as Yep, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as Yep, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.404 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.404 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.404 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.62 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.62 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.62 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.62 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.62 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.203 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.203 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.203 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.203 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.203 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-57.11 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.11 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.11 40.312)' AS TEXT), 4326) &> geom LIMIT 10)	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.111 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.111 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.111 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.353 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.353 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.353 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.353 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.353 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.509 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.509 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.509 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFOMTAREA' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.509 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.509 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.184 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.184 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.184 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.184 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.184 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.086 45.063)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.086 45.063)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.086 45.063)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.552 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.552 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.552 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.552 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.552 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.31 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.31 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.31 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.31 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.31 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.099 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-33.099 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.099 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT-C25.298 40.312)' AS TEXT), 4326)) AND enabled = 'Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.298 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.298 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.298 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.298 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.R.'	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glrcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.383 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.383 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.383 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.383 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.383 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.146 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.146 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.146 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.146 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.146 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.77 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.77 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.77 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.77 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.77 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.289 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.289 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.289 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.872 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.872 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREÀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.872 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.526 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.526 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.526 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.526 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.526 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.158 41.991)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.158 41.991)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.158 41.991)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.158 41.991)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.158 41.991)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT-67-424 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-67-424 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-67-424 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-67-424 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-67-424 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.795 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.795 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.795 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.795 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.795 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(*29.977 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rimo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(*29.977 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREÀ as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(*29.977 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(*29.977 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(*29.977 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(*29.977 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(*29.977 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.".	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText((CAST (POINT(-32.084 40.312) 'AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-32.084 40.312) 'AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-32.084 40.312) 'AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ("POINT(-32.084 40.312)" AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ("POINT(-32.084 40.312)" AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.402 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.402 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.402 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.194 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.194 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.194 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.22 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.22 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.22 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.22 40.312)' ASTEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.22 40.312)' ASTEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.22 40.312)' ASTEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.22 40.312)' ASTEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.22 40.312)' ASTEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.22 40.312)' ASTEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.22 40.312)' ASTEXT), 4326)) AND enabled = "Y")	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.919 42.23)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.919 42.23)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.919 42.23)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.359 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.359 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.359 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.359 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.359 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST (POINT(-26.392 40.312)' AS TEXT), 34326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-26.392 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-26.392 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-26.392 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-26.392 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.068 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.068 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.068 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.24 43.909)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.24 43.909)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.24 43.909)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.24 43.909)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.24 43.909)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.536 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.536 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.536 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.536 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.536 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.546 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.546 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-62.546 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.917 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.917 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.917 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.917 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.917 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.457 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.457 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.457 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.457 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.457 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-25.566 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-25.566 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-25.566 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-25.566 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-25.566 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.029 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.029 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.029 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.029 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.029 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.659 46.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.659 46.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.659 46.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.659 46.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.659 46.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.944 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.944 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.944 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.944 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.944 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.504 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-26.504 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-26.504 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-26.504 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-26.504 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.484 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.484 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.484 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.484 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.484 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.085 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.085 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.085 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.085 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.085 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.937 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.937 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.937 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.937 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.937 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.736 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.736 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.736 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.736 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.736 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-21.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.516 43.633)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.516 43.633)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.516 43.633)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.516 43.633)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.516 43.633)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText((CAST ('POINT(-34.623 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.623 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.623 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.623 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.623 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText((CAST ('POINT(-39.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.689 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.831 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.831 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.831 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.831 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.831 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.408 50.741)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.408 50.741)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.408 50.741)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.408 50.741)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.408 50.741)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.052 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.052 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.052 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.052 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.052 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.907 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.907 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.907 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.907 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.907 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.424 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.424 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.424 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.424 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.424 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.33 41.841)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.33 41.841)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.33 41.841)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.33 41.841)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.33 41.841)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.995 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.995 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.995 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.995 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.995 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-64.599 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-64.599 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.599 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.599 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.599 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-22.901 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.901 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.901 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.901 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.901 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-27.797 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.797 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.797 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.797 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.797 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-40.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.047 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-64.574 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-64.574 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-64.574 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-64.574 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-64.574 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.791 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.791 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.791 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.247 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.247 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.247 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.247 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.247 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.01 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.01 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.01 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.165 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.165 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.165 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.165 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.165 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.043 45.106)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.043 45.106)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.043 45.106)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.043 45.106)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.043 45.106)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-33.341 40.312) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-33.341 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.341 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.341 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.341 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT-(2-2.5.40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-22.5.40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, or where WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-22.5.40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-22.5.40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-22.5.40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as indexRS, FACM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-22.5.40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as indexRS, FACM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-22.5.40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as indexRS, FACM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-22.5.40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as indexRS, FACM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-22.5.40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as indexRS, FACM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-22.5.40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as indexRS, FACM' as type, gid, code, name FROM spatial.gfcm white spatial as type, gid, code, name FROM spatial.gfcm	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.5 49.649)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.5 49.649)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.5 49.649)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.5 49.649)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.5 49.649)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.5 49.649)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-S1.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-S1.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-S1.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-S1.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-S1.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.5 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.5 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.5 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.5 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.5 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.5 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, FAO' a	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.113 45.036)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.113 45.036)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.113 45.036)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.113 45.036)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.113 45.036)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.159 40.312) 'AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.159 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, *PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.159 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.159 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.159 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.159 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.159 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.159 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.159 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.353 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.353 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.353 40.312)' AS TEXT), 4326) <->, geom Limit 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.357 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.357 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.357 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.357 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.357 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.357 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.357 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexR	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.603 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.603 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.603 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.459 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.459 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.459 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.459 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.459 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.459 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.468 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.468 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.468 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.468 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.468 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.577 49.572)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.577 49.572)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.577 49.572)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.577 49.572)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.577 49.572)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.162 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.162 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.162 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.162 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.162 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-37.067 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.067 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.067 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.067 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.067 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-11.901 48.248)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-11.901 48.248)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-11.901 48.248)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-11.901 48.248)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-11.901 48.248)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.321 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.321 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.321 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.321 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.321 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.965 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.965 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.965 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.965 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.965 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.421 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.421 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.421 40.312)' AS TEXT), 4326), expen_LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.771 46.378)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.771 46.378)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.771 46.378)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.771 46.378)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.771 46.378)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.997 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-64.997 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.997 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.017 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.017 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.017 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.017 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.017 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.458 40.312)' ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.458 40.312)' ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.458 40.312)' ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.458 40.312)' ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.458 40.312)' ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.942 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.942 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.942 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.942 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.942 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial, rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "F"	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.781 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.781 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.781 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.781 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.781 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.101 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.101 40.312)' AS TEXT), 4326), geom, 22224) (ANDER BY ST_GeomFromText(CAST ('POINT(-46.101 40.312)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.719 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.719 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.719 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.719 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.719 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.676 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.676 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.676 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 4 as indexRS, 'STĀTRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.676 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.676 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.403 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.403 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.403 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.403 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.403 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.403 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.809 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.809 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-43.804 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.449 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.449 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.449 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.449 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.449 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.048 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.048 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.048 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.048 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.048 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.814 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-42.814 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-42.814 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.814 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.814 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.469 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.469 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.469 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.852 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.852 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.852 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.852 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.852 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.351 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST (POINT(-46.351 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-46.351 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.346 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	4	4	0	0,00
select from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS.	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.896 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.896 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.896 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.896 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.896 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.104 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.104 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.104 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.104 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.104 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.437 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.437 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.437 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.437 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.437 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.319 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.853 51.296)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.853 51.296)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.853 51.296)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.853 51.296)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.853 51.296)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.853 51.296)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.556 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.556 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.556 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.556 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.556 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index		1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.91 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.91 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.91 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.91 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.91 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.758 48.391)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.758 48.391)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.758 48.391)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.758 48.391)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.758 48.391)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.689 50.46)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.689 50.46)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.689 50.46)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.689 50.46)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.689 50.46)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.269 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.269 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.269 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.269 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.269 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.14 46.009)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.14 46.009)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.14 46.009)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.14 46.009)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.14 46.009)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.039 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.039 40.312)' AS TEXT), 4326), geom, 22224) (NDER BY ST_GeomFromText(CAST ('POINT(-66.039 40.312)' AS TEXT), 4326) ->>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.332 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.332 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.332 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.332 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.332 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.727 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.727 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.727 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.727 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.727 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.789 45.36)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.789 45.36)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.789 45.36)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.789 45.36)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.789 45.36)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.789 45.36)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.789 45.36)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.789 45.36)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'Fo	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.032 42.117)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.032 42.117)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.032 42.117)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.032 42.117)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.032 42.117)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.032 42.117)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.032 42.117)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.032 42.117)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.032 42.117)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_INTERSECT, AS TEXT ('POINT(-18.032 42.117)' AS TEXT ('POI		1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.515 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.515 40.312)' AS TEXT), 4326), exp. 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.515 40.312)' ASTEXT), 4326) ->> geom LMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.204 49.945)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.204 49.945)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.204 49.945)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.204 49.945)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.204 49.945)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial leez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.205 50) 444)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.205 50.944)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.205 50.944)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.205 50.944)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.205 50.944)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM STOM (GROWN) ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM STOM (GROWN) ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM STOM (GROWN) ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM STOM (GROWN) ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM STOM (GROWN) ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM STOM (GROWN) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM STOM (GROWN) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM (GROWN) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM (GROWN) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM'	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.664 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.664 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.664 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.664 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.664 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.856 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.856 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.856 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.639 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.639 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.639 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.639 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.639 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.392 43.757)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.392 43.757)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.392 43.757)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.392 43.757)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.392 43.757)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.412 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.412 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.412 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.412 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.412 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.588 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.588 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.588 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.588 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.588 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-55.213 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.213 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.213 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.213 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.213 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.84 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.84 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-50.84 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-50.84 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-50.84 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	4	4	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-15.944 44.205)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.944 44.205)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.944 44.205)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.944 44.205)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.944 44.205)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.765 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.765 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.765 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	4	4	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.606 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.606 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.606 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-22.633 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.633 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.633 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.633 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gor WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.633 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.131 44.018)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.131 44.018)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.131 44.018)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.131 44.018)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.131 44.018)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.807 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.807 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.807 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.807 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.807 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	4	4	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48,583 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48,583 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, con, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48,583 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STAT ('RECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48,583 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48,583 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48,583 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48,583 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48,583 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.264 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.264 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.264 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.264 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.264 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.547 42.602)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.547 42.602)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.547 42.602)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.547 42.602)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.547 42.602)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.068 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-59.442 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.442 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.442 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.442 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-59.442 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-47.347 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.347 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.347 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.347 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.347 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.916 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.916 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.916 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.916 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.916 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial,port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'TARECT as type, gid, code, name FROM spatial,stat_red WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial,grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT-138, 722 40, 312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-38, 722 40, 312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-38, 722 40, 312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial, ered WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-38, 722 40, 312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial, glom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-38, 722 40, 312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.glom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-38, 722 40, 312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.449 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.449 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.449 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.449 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.449 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.028 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.028 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.028 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.028 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.028 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.29 43.881)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.29 43.881)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.29 43.881)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.966 44.183)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.966 44.183)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.966 44.183)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT-20, 043 40, 312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-20, 043 40, 312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port area WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-20, 043 40, 312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, GFCM as type, gid, code, name FROM spatial stat rect WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-20, 043 40, 312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-20, 043 40, 312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-20, 043 40, 312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-20, 043 40, 312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-20, 043 40, 312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-20, 043 40, 312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-20, 043 40, 312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST GEOMFROM ST GEOM	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial, eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15,05 45,099)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15,05 45,099)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15,05 45,099)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15,05 45,099)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15,05 45,099)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15,05 45,099)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15,05 45,099)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15,05 45,099)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm which spatial spati	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.046 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.046 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POIN	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.423 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.423 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.423 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.423 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.423 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.423 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.423 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.423 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.423 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.423 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GEOMFromText(CA	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.279 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.279 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.279 40.312)' AS TEXT), 4326) = 25 geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.661 40.312)' ÅS TEXT), 3250)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.661 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.661 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.661 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.661 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.435 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.435 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.435 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.831 48.318)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.831 48.318)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.831 48.318)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.831 48.318)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.831 48.318)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.67 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.67 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.67 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.772 40.377)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.772 40.377)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.772 40.377)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.772 40.377)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.772 40.377)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.434 40.312)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.434 40.312)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.434 40.312)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.434 40.312)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.434 40.312)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.896 48.253)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.896 48.253)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.896 48.253)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.896 48.253)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.896 48.253)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText((CAST (POINT(-40.536 40.312) 'AS TEXT), 3436)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-40.536 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-40.536 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-40.536 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.536 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.536 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.748 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.748 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.748 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.748 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.748 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.434 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.434 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.434 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.758 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.758 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.758 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.758 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.758 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST (POINT(-14.356 45.793)' AS TEXT), 3236)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-14.356 45.793)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-14.356 45.793)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-14.356 45.793)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.356 45.793)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.153 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.153 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.153 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.153 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.153 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.487 40.662)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.487 40.662)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.487 40.662)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.487 40.662)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.487 40.662)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.078 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.078 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.078 40.312)' AS TEXT), 4226)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.078 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.078 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.078 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.078 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.078 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.078 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.078 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.N. ('POINT(-34.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.N. ('POINT(-34.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.N. ('POINT(-34.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.N. ('POINT(-34.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.N. ('POINT(-34.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.N. ('POINT(-34.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.N. ('POINT(-34.387 40.312)' AS TEXT), 4326)	0	1	3	3	0	0,00
Select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.017 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.017 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.017 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.017 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.017 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.017 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.017 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.017 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.017 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.017 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.m/m WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.535 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.535 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.535 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.535 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.535 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.844 40.312)' ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.844 40.312)' ÅS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.844 40.312)' ÅS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.844 40.312)' ÅS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.844 40.312)' ÅS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.85 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.85 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.85 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.366 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.366 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.366 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25,3 40,312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25,3 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25,3 40,312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.217 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_OeomFromText(CAST ('POINT(-31.217 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.217 40.312)' AS TEXT), 4326) < geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.55.51.599)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.55.51.599)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.55.51.599)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.045 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.045 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.045 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.045 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.045 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.981 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.981 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.981 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.981 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.981 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.R.)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.845 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.845 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.845 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.845 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.845 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-48.674 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-48.674 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-48.674 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-48.674 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-48.674 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-48.674 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-48.674 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-48.674 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-48.674 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as indexRS,	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.188 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.188 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.188 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.188 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.188 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.445 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.445 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.445 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.445 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.445 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select *from ((SELECT1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.309 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.309 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.309 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.309 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.309 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.074 46.075)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.074 46.075)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.074 46.075)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.074 46.075)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.074 46.075)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.352 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.352 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.352 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.352 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.352 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(43.216 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(43.216 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-43.216 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-43.216 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-43.216 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.879 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.879 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.879 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.879 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.879 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-12.379 47.77) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-12.379 47.77)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-12.379 47.77)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-12.379 47.77)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-12.379 47.77)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText((CAST ('POINT(-13.331 46.818)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-13.331 46.818)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-13.331 46.818)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.331 46.818)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.331 46.818)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.764 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.764 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.764 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.764 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.764 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.753 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.753 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.753 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.753 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.753 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.626 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.626 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.626 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.626 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.626 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.385 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.385 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.385 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.385 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.385 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.987 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.987 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.987 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.987 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.987 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.614 42.535)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.614 42.535)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.614 42.535)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.614 42.535)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.614 42.535)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-20.714 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.714 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.714 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.714 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.714 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.307 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.307 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.307 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.307 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.307 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.265 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.265 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.265 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.265 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.265 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial. from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.266 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.266 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.266 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.266 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.266 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.369 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.369 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.369 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.737 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.737 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.737 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.737 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.737 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.805 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.424 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.424 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.424 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.424 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.424 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.386 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.386 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.386 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.386 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.386 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.468 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.468 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.468 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.468 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.468 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.956 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.956 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.956 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.91 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.91 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.91 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.91 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.91 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.084 51.065)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.084 51.065)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.084 51.065)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.084 51.065)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.084 51.065)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.084 51.065)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select *from ((SELECT o as indexRs, "EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-22.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.788 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_INTERSECT.gfcm T	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.526 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.526 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.526 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.68 43.469)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.68 43.469)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.68 43.469)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.68 43.469)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.68 43.469)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.68 43.469)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.697 40,312)' AS TEXT), 4326)) AND enabled = "V') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.697 40.312)' AS TEXT), 4326)) AND enabled = "V') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.697 40.312)' AS TEXT), 4326)) AND enabled = "V') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.697 40.312)' AS TEXT), 4326)) AND enabled = "V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.697 40.312)' AS TEXT), 4326)) AND enabled = "V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.697 40.312)' AS TEXT), 4326)) AND enabled = "V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.697 40.312)' AS TEXT), 4326)) AND enabled = "V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.697 40.312)' AS TEXT), 4326)) AND enabled = "V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.697 40.312)' AS TEXT), 4326)) AND enabled = "V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_INTERSECTS ('GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_INTERSECTS ('GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_INTERSECTS ('GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_INTERSECTS	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.779 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.779 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.779 40.312)' AS TEXT), 4326), ~ geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.669 48.48)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.669 48.48)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.669 48.48)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.669 48.48)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.669 48.48)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.78 41.369)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.78 41.369)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.78 41.369)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFTATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.78 41.369)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.78 41.369)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.184 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.184 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.184 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.184 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.184 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.118 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.118 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.118 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.118 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.118 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.17 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.17 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.17 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.313 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.313 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.313 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.313 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.313 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.313 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.313 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.313 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.074 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.074 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.074 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.074 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.074 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.292 46.857)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.292 46.857)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.292 46.857)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select 'from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.205 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.205 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.205 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.205 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.205 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.367 50.782)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.367 50.782)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.367 50.782)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-32.84 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-32.84 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-32.84 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-32.84 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.84 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.519 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT-63.84 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT-63.84 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-63.84 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATFECT' as type, gid, code, name FROM spatial stat rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-53.84 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.g/cm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-53.84 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.g/cm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-53.84 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.g/cm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-53.84 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.174 43.975)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.174 43.975)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.174 43.975)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.174 43.975)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.174 43.975)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-30.191 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-30.191 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-30.191 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-30.191 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-30.191 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.523 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.523 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.523 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-21.742 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-21.742 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'POINT(-21.742 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.742 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.742 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.742 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.253 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-58.253 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-58.253 40.312)' AS TEXT), 4326) ~ geom Limit 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTi, 31.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTi, 31.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTi, 31.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTi, 31.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTi, 31.363 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.843 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.843 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.843 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.598 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.598 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.598 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.49 43.659)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.49 43.659)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.49 43.659)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.49 43.659)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.49 43.659)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.345 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.345 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.345 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-55.948 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-55.948 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-55.948 40.312)" AS TEXT), 24326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-55.948 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "SFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-55.948 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.412 40.312)' AS TEXT), 4328),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.412 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.412 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.49 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.49 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.49 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.49 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.49 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.947 40.312)' AS TEXT), 3436)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.947 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.947 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.947 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.947 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.136 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.136 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.136 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.136 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.136 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.546 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.546 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.546 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.546 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.546 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.112 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.112 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.112 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.112 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.112 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.405 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.405 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.405 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.405 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.405 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.006 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.006 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-49.006 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60, 188 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60, 188 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-60, 188 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.63.09 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT'.63.09 40.281)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT'.63.09 40.281)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.762 40.387)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.762 40.387)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.762 40.387)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.762 40.387)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.762 40.387)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.398 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.398 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.398 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.398 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.398 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.776 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.776 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.776 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.776 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.776 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.256 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.256 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-36.256 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.746 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.746 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.746 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.746 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.746 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.255 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.255 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.255 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.027 40.312)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.027 40.312)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.027 40.312)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.027 40.312)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.027 40.312)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31) 324 40.312) ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31) 324 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area wHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31, 324 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31, 324 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31, 324 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31, 324 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.723 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.723 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.723 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.723 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.723 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as lyee, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.323 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.323 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.323 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.318 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mfm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.318 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.318 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.318 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.318 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.371 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.371 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.371 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.371 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.371 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.119 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.119 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.119 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.119 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.119 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.119 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.119 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS.'	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromTe	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.153 40.996)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.153 40.996)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.153 40.996)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.153 40.996)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.153 40.996)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.153 40.996)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.153 40.996)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.153 40.996)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.153 40.996)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS.	0	1	3	3	0	0,00
select from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.256 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.256 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.256 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.256 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.256 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.549 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.549 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.549 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT 3s type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.549 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.549 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-64.432 40.312) AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-64.432 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-64.432 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-64.432 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-64.432 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.524 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.524 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.524 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.524 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.524 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.87 48.279)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.87 48.279)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.87 48.279)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.87 48.279)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.87 48.279)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.87 48.279)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.924 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.924 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.924 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.924 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.924 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.82 40.329)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.82 40.329)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.82 40.329)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, Code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.82 40.329)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.82 40.329)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.638 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.638 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.638 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.638 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.638 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial-eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.832 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.832 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.832 40.312)' AS TEXT), 4226)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.832 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.832 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.832 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.832 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.832 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.832 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POINT(-48.832 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.865 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.865 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.865 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.865 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.865 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.865 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.865 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.729 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.729 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.729 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.729 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.729 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.729 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.729 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.729 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.196 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.196 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.196 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.196 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.196 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.196 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.975 50.174)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.975 50.174)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.975 50.174)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	3	3	0	0,00
select from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.799 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.799 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.799 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.799 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.799 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.339 40.312) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.339 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.339 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.339 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.339 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.837 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.837 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.837 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.837 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.837 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.837 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.837 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.837 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.837 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS		1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.023 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.023 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-61.023 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.929 43.22)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM, spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.929 43.22)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.929 43.22)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-16.929 43.22)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-16.929 43.22)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "F"	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.292 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.292 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.292 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.292 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.292 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.292 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(67.033 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(67.033 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(67.033 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(67.033 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(67.033 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.503 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.503 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.503 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.503 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.503 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtor WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.436 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.436 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.436 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.436 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.436 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.436 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.436 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.436 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.436 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.904 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.904 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.904 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.904 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.904 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.456 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.456 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.456 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.456 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.456 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.456 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.456 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.456 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.456 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.456 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.959 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.959 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.959 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.959 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.959 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.264 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.264 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.264 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.781 42.368)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.781 42.368)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.781 42.368)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.781 42.368)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.781 42.368)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.781 42.368)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.781 42.368)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.781 42.368)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.781 42.368)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.781 42.368)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.464 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.464 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.464 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.828 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.828 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.828 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.828 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.828 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.252 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.252 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.252 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.252 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.252 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText((CAST ('POINT(-33.634 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.634 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.634 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.634 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.634 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-'C2-151 40.312)' AS TEXT), 4328)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.nfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.151 40.312)' AS TEXT), 4328)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.151 40.312)' AS TEXT), 4328)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.151 40.312)' AS TEXT), 4328)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.151 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.795 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.795 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.795 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.795 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.795 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-58.33 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT-58.33 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT-58.33 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.562 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.562 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.562 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.562 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.562 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as Yep, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.562 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as Yep, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.562 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as Yep, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.562 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as Yep, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.562 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as Yep, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.562 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as Yep, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.523 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.523 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.523 40.312)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.333 47.816)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.333 47.816)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.333 47.816)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.333 47.816)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.333 47.816)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.333 47.816)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.333 47.816)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.333 47.816)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.333 47.816)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as indexRS, "	0	1	3	3	0	0,00
select * from ((SELECT 1 as index.R.); EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.953 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.953 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'POTATRAEA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.953 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.953 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.953 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.953 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.953 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.953 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.953 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.953 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.183 49.966)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.183 49.966)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.183 49.966)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.183 49.966)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.183 49.966)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.103 49.046)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.103 49.046)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.103 49.046)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.103 49.046)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.103 49.046)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.802 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.794 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.794 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.794 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.794 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.794 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.683 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.683 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.683 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.683 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.683 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.57 47.579)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.57 47.579)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.57 47.579)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.57 47.579)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.57 47.579)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.465 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.465 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.465 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.465 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.465 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.346 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.346 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.346 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.307 45.842') AS TEXT), 34326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (DINT(-14.307 45.842)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-14.307 45.842)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.307 45.842)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.307 45.842)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.307 45.842)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.307 45.842)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.307 45.842)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.307 45.842)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.307 45.842)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS_GEOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_INTERSECT_GEOM_ AS TEXT, AS TEXT, AS TEXT, AS T	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.166 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.166 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.166 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.005 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.005 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.005 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.005 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.005 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.157 47.992)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.157 47.992)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.157 47.992)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.157 47.992)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.157 47.992)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.218 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.218 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.218 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.218 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.218 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.12 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.12 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.12 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.626 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.626 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.626 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.116 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.116 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.116 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.116 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.116 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.789 44.36)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.789 44.36)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.789 44.36)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.789 44.36)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.789 44.36)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.271 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.271 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.271 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.271 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.271 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29,537 40.312)') AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29,537 40.312)') AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29,537 40.312)') AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.988 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.988 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.988 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.988 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.988 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.605 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.605 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.605 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.079 45.07)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.079 45.07)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.079 45.07)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.079 45.07)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.079 45.07)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.079 45.07)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.079 45.07)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.662 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.662 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.662 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.662 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.662 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.425 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.425 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.425 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.425 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.425 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.878 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.878 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.878 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.878 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.878 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.878 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.878 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.796 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.796 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.796 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.796 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.796 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.796 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.325 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.325 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.325 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.325 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.325 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.342 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.342 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.342 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.342 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.342 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.167 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.167 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.167 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.167 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.167 40.312) 'AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.846 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.846 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.846 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.846 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.846 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.324 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.324 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.324 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.324 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.324 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.335 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.335 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.335 40.312)' AS TEXT), 4326), <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.302 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.302 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.302 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-22.561 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-22.561 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-22.561 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-22.561 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-22.561 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT' 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'POINT(-46.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, n	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.114 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.114 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.114 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.291 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CA	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.016 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.016 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.016 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.016 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.016 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.374 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.374 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.374 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.374 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.374 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.848 46.301)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.848 46.301)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.848 46.301)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.848 46.301)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.848 46.301)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.848 46.301)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.848 46.301)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.848 46.301)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.848 46.301)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.848 46.301)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.613 50.536)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.613 50.536)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.613 50.536)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.613 50.536)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.613 50.536)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.613 50.536)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.02 &4.129)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.02 48.129)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.02 48.129)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.02 48.129)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.02 48.129)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.02 48.129)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.02 48.129)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.02 48.129)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.02 48.129)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.02 48.129)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.02 48.129)'	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.525 42.624)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = \(^1\) 'AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-17.525 42.624)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.525 42.624)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'-41.348 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = 'V' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.348 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.348 40.312)' AS TEXT), 4326) - 25 geom LiMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.914 48.235)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.914 48.235)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.914 48.235)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.914 48.235)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.914 48.235)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.914 48.235)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.914 48.235)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.914 48.235)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.914 48.235)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.914 48.235)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.621 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.621 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.621 40.312)' AS TEXT), 4326) -s-geom LMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.828 40.312)' AS TEXT), 4226)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POI	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.67 51.501)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.67 51.501)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.67 51.501)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.039 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.039 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.039 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.039 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.039 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.707 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.707 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'FORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.707 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.707 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.707 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index  UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.954 51.195)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.954 51.195)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.954 51.195)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.954 51.195)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.954 51.195)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.954 51.195)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.954 51.195)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.954 51.195)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.954 51.195)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.954 51.195)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHEREST_INTERSECTS(GEOM, ST_INTERSECTS(GEOM, ST_INTERSECTS(	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.016 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.016 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.016 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.016 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.016 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.977 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.977 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.977 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.977 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.977 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.977 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.977 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.977 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.977 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.977 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.971 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.971 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.971 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.971 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.971 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-63.366 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT-63.366 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT-63.366 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.405 51.744)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.405 51.744)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.405 51.744)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.405 51.744)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.405 51.744)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.405 51.744)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.405 51.744)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.405 51.744)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.405 51.744)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.405 51.744)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POINT(-	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.1 40.312)' AS TEXT), 4326)) AND enabled = "Y') LUNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.1 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.1 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.1 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.1 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'FAO' a	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.734 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.734 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.734 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.734 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.734 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.043 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.043 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.043 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.043 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.043 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.295 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-51.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÄLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.653 50.496)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.653 50.496)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.653 50.496)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.653 50.496)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.653 50.496)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.645 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.882 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.249 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.249 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.249 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.249 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.249 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.475 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.475 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.475 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.475 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.475 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.274 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.274 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.274 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.274 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.274 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.991 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.202 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.202 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-39.202 40.312)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.847 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.847 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.847 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.847 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.847 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.501 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.501 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.501 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.501 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.501 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.845 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.845 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.845 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.845 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.845 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.388 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.388 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.388 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.388 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.388 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.794 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.794 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.794 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.794 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.794 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.942 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.942 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.942 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.942 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.942 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.426 47.723)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.426 47.723)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.426 47.723)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.426 47.723)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.426 47.723)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.839 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.839 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.839 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.839 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.839 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.907 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.907 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-44.907 40.312)' ASTEXT), 4326) ->>> geom LMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.914 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.914 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.914 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.914 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.914 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.199 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.199 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.199 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.199 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.199 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-64.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-64.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-64.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-64.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-64.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.216 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.216 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.216 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.216 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.216 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.366 45.783)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.366 45.783)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.366 45.783)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.366 45.783)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.366 45.783)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.075 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.075 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.075 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.941 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.941 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.941 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.941 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.941 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.168 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.168 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.168 40.312)' AS TEXT), 4326) <-> geom LMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.711 43.438)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.711 43.438)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.711 43.438)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.711 43.438)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.711 43.438)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.669 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial-eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.596 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.596 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, order and WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.596 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.596 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.596 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.596 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.596 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.596 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.596 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.596 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.R.	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.737 47.412)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.737 47.412)' AS TEXT), 4326), geom, 2224) (ARDER BY ST_GeomFromText(CAST ('POINT(-12.737 47.412)' AS TEXT), 4326) <-> geom LMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.518 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.652 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.652 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.652 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.652 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.652 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.452 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.452 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.452 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.452 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.452 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.132 47.017)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.132 47.017)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.132 47.017)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.132 47.017)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.132 47.017)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.106 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.106 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.106 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.106 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.106 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.145 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.145 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.145 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.145 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.145 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.357 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.357 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.357 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.357 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.357 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58,114 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58,114 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58,114 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.146 45.003)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.146 45.003)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.146 45.003)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.146 45.003)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.146 45.003)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.432 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.432 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.432 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.432 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.432 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.73 40.281)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = \(^1\) AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-29.73 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.73 40.281)' AS TEXT), 4326) \(^2\) expendition of the standard of	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.912 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.912 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.912 40.312)' AS TEXT), 4326) - geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.325 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.325 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.325 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.325 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.325 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.263 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.263 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.263 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.263 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.263 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.978 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.83 48.319)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.83 48.319)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.83 48.319)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.83 48.319)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.83 48.319)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.876 43.273)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.876 43.273)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.876 43.273)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.876 43.273)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.876 43.273)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.876 43.273)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.876 43.273)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.876 43.273)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.876 43.273)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.876 43.273)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-44.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-44.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-44.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-44.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.791 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-11.652 48.497)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-11.652 48.497)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-11.652 48.497)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-11.652 48.497)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-11.652 48.497)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32,897 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.897 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.897 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-37.093 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.093 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.093 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.093 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.093 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.507 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.507 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-1.507 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.507 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.507 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.364 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.364 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.364 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.364 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.364 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.162 40.312)', AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.162 40.312)', AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.162 40.312)', AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.162 40.312)', AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.162 40.312)', AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.557 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.557 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.557 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.557 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.557 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-13.21 46.939)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.21 46.939)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.21 46.939)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.21 46.939)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.21 46.939)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-17.223 42.926)) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.223 42.926)) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.223 42.926)) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.223 42.926)) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.223 42.926)) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez, WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.422 40.727)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.422 40.727)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.422 40.727)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.422 40.727)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.422 40.727)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.633 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.633 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.633 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.633 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.633 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-25.632 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-25.632 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.632 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.632 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.632 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.457 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.457 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.457 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.457 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.457 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as index,RS,'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-44.41 40.312)' AS TEXT), 4326)) AND enabled = ''') UNION ALL (SELECT 2 as index,RS,'RFMO' as type, gid, code, name FROM spatial,rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-44.414 40.312)' AS TEXT), 4326)) AND enabled = ''') UNION ALL (SELECT 3 as index,RS, 'PORTAREA' as type, gid, code, name FROM spatial,port area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-44.414 40.312)' AS TEXT), 4326)) AND enabled = ''') UNION ALL (SELECT 4 as index,RS, 'GRTAREOT, as type, gid, code, name FROM spatial,stat_rect WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-44.414 40.312)' AS TEXT), 4326)) AND enabled = ''') UNION ALL (SELECT 5 as index,RS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-44.414 40.312)' AS TEXT), 4326)) AND enabled = ''') UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-44.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-44.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-44.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFOM' as index.R	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.49 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.49 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-67.49 40.312)' AS TEXT), 4326) &> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.046 49.103)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.046 49.103)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.046 49.103)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.046 49.103)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.046 49.103)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.029 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.029 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.029 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.029 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.029 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.838 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.22 49.929)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.22 49.929)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.22 49.929)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.22 49.929)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.22 49.929)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-19.29 40.859)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-19.29 40.859)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-19.29 40.859)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-19.29 40.859)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.29 40.859)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.29 40.859)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.29 40.859)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.29 40.859)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ("POINT(-19.29 40.859)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ("POINT(-19.29 40.859)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ("POINT(-19.29 40.859)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.871 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.871 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.871 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.02 43.129)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.02 43.129)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.02 43.129)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-40.811 40.312) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.t/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-40.811 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-40.811 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-40.811 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.811 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.986 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.986 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.986 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.986 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.986 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.332 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.332 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.332 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.332 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.332 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.48 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.48 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.48 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.648 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.648 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.648 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.648 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.648 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-54.366 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-54.366 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-54.366 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-54.366 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-54.366 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.79 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.79 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-48.79 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.035 46.114)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.035 46.114)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.035 46.114)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.035 46.114)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.035 46.114)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.035 46.114)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.035 46.114)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.035 46.114)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.035 46.114)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.035 46.114)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.595 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.595 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.595 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.595 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.595 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.585 48.564)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.585 48.564)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.585 48.564)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.585 48.564)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.585 48.564)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.797 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIstin(ST_GeomFromText(CAST ('POINT(-35.797 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-35.797 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.64 48.509)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.64 48.509)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.64 48.509)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.64 48.509)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.64 48.509)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.184 40.965)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.184 40.965)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.184 40.965)' AS TEXT), 4326) -> geom Limit 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-38.01 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-38.01 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-38.01 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-38.01 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.01 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34 637 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIstin(ST_GeomFromText(CAST ('POINT(-34.637 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.637 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.138 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.138 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.138 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.138 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.138 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.493 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMC' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.493 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.493 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.493 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.493 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.354 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIstin(ST_GeomFromText(CAST ('POINT(-24.354 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.354 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.022 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.022 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.022 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.022 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.022 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.091 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.091 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.091 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.091 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.091 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.189 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.189 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.189 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.189 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.189 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
[SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34,351 40,312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34,351 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34,351 40,312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-59.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-59.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.147 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.147 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.147 40.312)' AS TEXT), 4326) = 25 geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial stat_rect WHERE ST_INTERSECTS(geom, ST_GeomFromText(CAST ('POINT(-40.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.322 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.78 47.369)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.78 47.369)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.78 47.369)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.78 47.369)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.78 47.369)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.327 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.327 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.327 40.312)' AS TEXT), 2526)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.327 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.327 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.327 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.327 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.327 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.327 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.327 40.312)' ASTEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-66.461 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-66.461 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-66.461 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-66.461 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-66.461 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.716 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWISTING TOTAL (CAST ('POINT(-64.716 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.716 40.312)' AS TEXT), 4326) = 25 geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.59 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.59 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.59 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.59 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.59 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.59 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "F.".	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.076 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.076 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.076 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.076 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.076 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.076 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.076 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.076 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.076 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, FORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.555 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.555 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.555 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.555 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.555 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.233 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.233 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.233 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.233 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.233 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.599 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.599 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREĀ' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.599 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.599 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.599 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.797 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.797 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.797 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.797 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.797 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(52.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.timo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(52.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(52.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(52.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(52.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT-6-9.397 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT-6-9.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-50.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-50.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-50.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index.")	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.057 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.159 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.159 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.159 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.159 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.159 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.167 47.982)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.167 47.982)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.167 47.982)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom. ST. GeomFromText(CAST (*POINT(-26.751 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom. ST_GeomFromText(CAST (*POINT(-26.751 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS; PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.751 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS; STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.751 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS; GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-26.751 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.659 48.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.659 48.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.659 48.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.659 48.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.659 48.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-19.464 40.685)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.464 40.685)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.464 40.685)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.464 40.685)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.464 40.685)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.412 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.412 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.412 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.412 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.412 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.927 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.927 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.927 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.442 50.707)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.442 50.707)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.442 50.707)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.6 44.549)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.6 44.549)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.6 44.549)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial, stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.6 44.549)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial, grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.6 44.549)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.327 45.822)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.327 45.822)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port.area WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.327 45.822)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.327 45.822)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.327 45.822)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.254 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.254 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.254 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.254 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.254 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-51.013 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.013 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.013 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez_WHERE_ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.378 42.771) AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.378 42.771)) AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.378 42.771)) AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.378 42.771)) AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.378 42.771)) AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as index."	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.441 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.441 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.441 40.312)' AS TEXT), 4326) <-> ————————————————————————————————————	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.531 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.531 40.312)' AS TEXT), 4326), yeen, 22224) (ADER BY ST_GeomFromText(CAST ('POINT(-58.531 40.312)' AS TEXT), 4326) ->> geom LMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.417 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.417 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.417 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.417 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.417 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.".	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-55.687 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-55.687 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, FOPTAREA' as type, gid, code, name FROM spatial.port.area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-55.687 40.312)' AS TEXT), 4226)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-55.687 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-55.687 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.366 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.366 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.366 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.366 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.366 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.804 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.804 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.804 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.1 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, FAOT 6	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.285 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.285 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.285 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.285 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.285 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.285 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.285 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.236 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.236 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.236 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.236 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.236 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.868 40.312) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.868 40.312) AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.868 40.312) AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.868 40.312) "AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.868 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-24.55 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.55 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.55 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.55 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.55 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.55 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "F"	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.705 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.705 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.705 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-22.705 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-22.705 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-40.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-40.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-40.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-61.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-61.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-61.91 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-55.141 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.141 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.141 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.141 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.141 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.468 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.468 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.468 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.468 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-53.468 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.342 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.342 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.342 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.342 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.342 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.22 43.929)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.22 43.929)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.22 43.929)' AS TEXT), 4326) <-> geom LiMIT (10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid. code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-24.636 40.312) AS TEXT), 4326)). AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-24.636 40.312) AS TEXT), 4326)). AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-24.636 40.312) AS TEXT), 4326)). AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-24.636 40.312)' AS TEXT), 4326)). AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-24.636 40.312)' AS TEXT), 4326)). AND enabled = 'Y) UNION ALL (SELECT 6 as index.**	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'E.E.2' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-4.5.5 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-4.5.5 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-4.5.5 40.312)' AS TEXT), 325()) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-45.55 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-45.55 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-68.191 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.191 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.191 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.191 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.191 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.191 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.191 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.191 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.191 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.55 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.55 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.55 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.55 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.55 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.55 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.143 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.143 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.143 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.143 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.143 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.311 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.311 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.311 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.311 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.311 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.184 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.184 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.184 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.184 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.184 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.385 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.385 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.385 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.385 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.385 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS; YEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.05 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.05 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.05 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.05 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.05 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.05 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial.eez_WHERE_ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.809 40.312) 'AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.809 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.809 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.809 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.809 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-57.809 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as index."	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.768 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.768 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.768 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.442 45.707)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.442 45.707)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.442 45.707)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.442 45.707)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.442 45.707)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.177 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.177 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.177 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.177 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.177 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as indexRS, 'GFO	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.64 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.64 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.64 40.312)' AS TEXT), 4326) <-y geom LiMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.613 48.536)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.613 48.536)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.613 48.536)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.613 48.536)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.613 48.536)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.613 48.536)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.613 48.536)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS.'	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.991 43.158)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.991 43.158)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.991 43.158)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.991 43.158)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.991 43.158)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.991 43.158)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.991 43.158)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.991 43.158)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.579 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.579 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.579 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.579 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.579 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.137 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.137 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.137 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.137 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.137 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.831 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.831 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.831 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.831 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.831 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.66 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.66 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.66 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.66 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.66 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.236 50.913)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.236 50.913)' AS TEXT), 4326) <-> geom LIMIT 10) TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.236 50.913)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.259 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.259 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.259 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.259 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.259 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.178 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.178 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.178 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom. ST_GeomFromText(CAST ('POINT'-29.55 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-29.55 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-29.55 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-29.55 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-29.55 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-29.55 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-29.55 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-29.55 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-29.55 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-29.55 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFOM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POINT'-29.55	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.416 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.416 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.416 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.416 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm' WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.416 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.38 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.38 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.38 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.38 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.38 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.41.402 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT'.41.402 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'.41.402 40.312)' AS TEXT), 4326), ~ geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.022 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.022 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.022 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.022 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.022 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.45 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.45 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.45 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.45 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.45 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.123 45.026)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.123 45.026)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.123 45.026)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.123 45.026)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.123 45.026)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.376 41.773)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.376 41.773)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.376 41.773)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.376 41.773)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.376 41.773)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-67.072 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.072 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.072 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.072 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.072 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.38 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.38 40.312)' AS TEXT), A326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.38 40.312)' AS TEXT), A326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.38 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.38 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.539 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.539 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.539 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT-12-5.411 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.411 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'FORTAREA' as type, gid, code, name FROM spatial.port.area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.411 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.411 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.411 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.786 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.786 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.786 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.251 48.898)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.251 48.898)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.251 48.898)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.251 48.898)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.251 48.898)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.251 48.898)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.251 48.898)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.251 48.898)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.251 48.898)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.251 48.898)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.477 44.672)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.477 44.672)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.477 44.672)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.477 44.672)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.477 44.672)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.423 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.423 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.423 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.423 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.423 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.311 43.838)' AS TEXT), 4326), frue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.311 43.838)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.311 43.838)' AS TEXT), 4326) = 200 geom Limit 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.158 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.158 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.158 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.158 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.793 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.793 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.793 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.793 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.793 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.793 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.793 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.793 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.793 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.793 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.256 49.893)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.256 49.893)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.256 49.893)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.256 49.893)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.256 49.893)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.256 49.893)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.256 49.893)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.256 49.893)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.256 49.893)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.256 49.893)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('PO	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.024 43.125)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.024 43.125)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.024 43.125)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.024 43.125)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.024 43.125)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.024 43.125)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.024 43.125)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.024 43.125)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.024 43.125)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as indexRS, "	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.071 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.071 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.071 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.071 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.071 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.293 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.293 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.293 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.293 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.293 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.249 49.9)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.249 49.9)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.249 49.9)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.407 41.742)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.407 41.742)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.407 41.742)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.407 41.742)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.407 41.742)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.407 41.742)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.407 41.742)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.407 41.742)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.407 41.742)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.407 41.742)' AS TEXT), 4326)) AND enabled = "Y')	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.745 40.312)' AS TEXT), 4326),true) AS distance FROM spatial, port WHERE enabled = "\AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.745 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.745 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.41 40.761)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.41 40.761)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.41 40.761)' AS TEXT), 425(a)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.41 40.761)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.41 40.761)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.993 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.993 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.993 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.993 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.993 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.936 45.213)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.936 45.213)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.936 45.213)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.936 45.213)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.936 45.213)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.505 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.505 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.505 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.505 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SGFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.505 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS,'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.339 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.339 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.339 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.339 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.339 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.339 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.339 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.339 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.339 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.339 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAS	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.579 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.579 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.579 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.579 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.579 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.579 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.579 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.579 40.312)' AS TEXT), 4326)) AND enabled = "Y')	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.473 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.473 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.473 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.473 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.473 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.95.41.199)' AS TEXT), 4326),(rue) AS distance FROM spatial, port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.95.41.199)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.95.41.199)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.943 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.943 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.943 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.943 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.943 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.153 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.153 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.153 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.153 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.153 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.088 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.088 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.088 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-27.446 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.446 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.446 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.446 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.446 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.528 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.528 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.528 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.528 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.528 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.648 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-59,763 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59,763 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59,763 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type_gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.497 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.497 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.rfm awHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.497 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.497 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.497 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.297 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.297 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.297 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.297 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.297 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index.")	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.176 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.mfm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.176 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.176 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.176 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.176 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.016 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.016 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.016 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.988 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.968 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-46.019 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-46.019 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-46.019 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-46.019 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-46.019 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.933 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.933 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.933 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.933 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.933 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.832 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.832 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.832 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.448 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.448 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.448 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-33.899 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-33.899 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.899 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.899 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.899 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.679 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.679 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.679 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.679 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.679 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-63.918 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-63.918 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-63.918 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-63.918 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-63.918 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-28.018 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-28.018 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-28.018 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-28.018 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-28.018 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as index.".	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.932 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.932 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.932 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.932 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.932 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.932 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.932 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.932 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.932 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.932 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.378 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.378 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.378 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.378 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.378 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.378 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.378 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.378 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.378 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.378 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm All ('GFC, GFC, GFC, GFC, GFC, GFC, GF	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.153 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.153 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.153 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.15 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.15 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.15 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.15 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.15 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.15 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.331 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.331 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.331 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.331 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.331 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.234 50.915)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.234 50.915)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.234 50.915)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.234 50.915)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.234 50.915)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.94 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.94 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.94 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.94 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.94 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial-eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-45.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-45.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.917 40.312)' AS TEXT), 4226)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POINT(-45.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.801 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.801 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.801 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.801 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.801 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.801 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.801 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.801 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.801 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.303 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.303 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.303 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.303 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.303 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.874 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.874 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.874 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.874 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.874 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.479 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.479 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.479 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.479 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.479 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.48 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.48 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.48 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.48 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.48 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.675 43.474)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.675 43.474)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.675 43.474)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-22.072 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.072 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS; PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.072 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS; STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.072 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS; GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.072 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS; GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.072 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS; GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.072 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS; GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.072 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS; GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.072 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS; GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.072 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS; GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POINT(-22.072	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.273 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.273 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.rfm aw HERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.273 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.273 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.273 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.678 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.678 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.678 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49,781 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49,781 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49,781 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49,781 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49,781 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49,781 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.782 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.782 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.782 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.782 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.782 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.782 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.539 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.539 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.539 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.539 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.539 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.539 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.567 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.567 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.567 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.801 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.801 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.801 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.801 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.801 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.487 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.487 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.487 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.706 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.706 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.706 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.706 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.706 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.842 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.842 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.842 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.842 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.842 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.495 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.495 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.495 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.495 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.495 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.903 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.903 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.903 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.903 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.903 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.756 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.756 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.756 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.756 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.756 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.969 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.969 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.969 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.969 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.969 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44,194 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y* AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44,194 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-44.194 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.211 45.938)' AS TEXT), 4328)) AND enabled = "Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.211 45.938)' AS TEXT), 4328)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.211 45.938)' AS TEXT), 4328)) AND enabled = "Y' UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.211 45.938)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.211 45.938)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.973 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.973 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.973 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.973 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.973 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.305 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.305 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.305 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.305 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.305 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.''	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.591 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.591 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.591 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.591 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.591 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.455 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.455 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.455 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.455 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.455 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.871 40.312)' AS TEXT), 4328)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.871 40.312)' AS TEXT), 4328)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port.area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.871 40.312)' AS TEXT), 4328)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.871 40.312)' AS TEXT), 4328)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.871 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.871 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.871 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFOM' as index.RS, 'G	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.977 42.172)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.977 42.172)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.977 42.172)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.977 42.172)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.977 42.172)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.16 50.989)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.16 50.989)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.16 50.989)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.16 50.989)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.16 50.989)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.239 47.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.239 47.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.239 47.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.239 47.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.239 47.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-47.642 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.642 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.642 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.675 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-64.675 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.675 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT-C20.721 40.312)' AS TEXT), 4326)). AND enabled = "y" UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.721 40.312)' AS TEXT), 4326)). AND enabled = "y" UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.721 40.312)' AS TEXT), 4326)). AND enabled = "y" UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.721 40.312)' AS TEXT), 4326)). AND enabled = "y" UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.721 40.312)' AS TEXT), 4326)). AND enabled = "y" UNION ALL (SELECT 5 as indexRS, 'GFCM' as TEXT), 4326)). AND enabled = "y" UNION ALL (SELECT 5 as indexRS, 'GFCM' as TEXT), 4326). AND enabled = "y" UNION ALL (SELECT 5 as indexRS, 'GFCM' as TEXT), 4326).	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.219 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.219 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.219 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.219 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.219 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.407 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.407 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.407 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.407 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.407 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ((POINT, 67.619 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (OINT, 67.619 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT, 67.619 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ((POINT, 67.619 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ((POINT, 67.619 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ((POINT, 67.619 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ((POINT, 67.619 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ((POINT, 67.619 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ((POINT, 67.619 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ((POINT, 67.619 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.776 47.373)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.776 47.373)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.776 47.373)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.776 47.373)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.776 47.373)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.436 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.436 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.436 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.436 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.436 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.818 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.708 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.708 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.708 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.26 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.26 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.26 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.26 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.26 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, F	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.777 41.372)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.777 41.372)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.777 41.372)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.777 41.372)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.777 41.372)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT', 26:1140.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26:11 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'POINT(-26:11 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STA'IRECT' as type, gid, code, name FROM spatial, stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26:11 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26:11 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26:11 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26:11 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26:11 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type.gd, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26:11 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type.gd, code, name FROM spatial.gfom WHERE ST_INTERSECT.geomFromText(CAST ('POINT(-26:11 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type.gd, code, name FROM spatial.gfom WHERE ST_INTERSECT.geomFromText(CAST ('POINT(-26:11 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type.gd, code, name FROM spatial.gfom WHERE S	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-64.672 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-64.672 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-64.672 40.312)' AS TEXT), 4259)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.672 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.672 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.682 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.682 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.682 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.682 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.682 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.812 40.312)' AS TEXT), 4328), true) AS distance FROM spatial port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.812 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.812 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.755 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.755 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.755 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.815 46.334)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.815 46.334)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.815 46.334)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.815 46.334)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.815 46.334)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.542 40.312)' AS TEXT), 4328)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.542 40.312)' AS TEXT), 4328)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.542 40.312)' AS TEXT), 4328)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.542 40.312)' AS TEXT), 4328)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.542 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.813 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.813 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.813 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.813 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.813 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.414 46.735)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.414 46.735)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.414 46.735)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.155 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.019 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.019 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.019 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.019 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.019 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.276 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.276 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.276 40.312)' AS TEXT), 4326) = -2, geom Limit 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.49 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.49 40.281)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.49 40.281)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.542 47.607)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.542 47.607)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.542 47.607)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.962 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.962 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.962 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.962 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.962 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-60.431 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.431 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.431 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.431 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.431 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-23.745 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.745 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.745 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.745 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.745 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-12.041 48.108)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.041 48.108)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.041 48.108)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.041 48.108)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.041 48.108)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.73 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.73 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(tgeom, ST_GeomFromText(CAST ('POINT(-31.73 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.73 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.73 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.615 45.534)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.615 45.534)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.615 45.534)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.615 45.534)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.615 45.534)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.969 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.969 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.969 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.335 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.335 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.335 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.335 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.335 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.496 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.73 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.73 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.73 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.73 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.73 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.053 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.053 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.053 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS; 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.09 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.09 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS; PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.09 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS; STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.09 40.312)' ASTEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS; GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.09 40.312)' ASTEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.09 40.312)' ASTEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.09 40.312)' ASTEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.09 40.312)' ASTEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POINT(-32.09 40.312)' ASTEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type.gdc.gcc.gcc.gcc.gcc.gcc.gcc.gcc.gcc.gcc	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.175 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.175 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.175 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.175 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.175 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.175 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
Select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.567 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.567 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.567 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.567 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.567 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.496 46.653)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.496 46.653)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.496 46.653)' AS TEXT), 4326) ->> geom LiMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-32.345 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-32.345 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-32.345 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-32.345 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-32.345 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.654 0.312) AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREAT as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRAECT' as type, gid, code, name FROM spatial.gret WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index."		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-22.412 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.412 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.412 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.412 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.412 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-56.089 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.089 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.089 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gram WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-24.904 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.904 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.904 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.904 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.904 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.928 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.928 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.928 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.928 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.928 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.928 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.928 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.928 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.928 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.928 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm wHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POIN	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.88 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.88 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.88 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.88 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.88 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.88 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.88 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.88 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.88 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.88 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.88 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.88 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.961 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.961 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.961 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.961 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.961 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-66.174 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-66.174 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-66.174 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-66.174 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-66.174 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.476 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.476 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.476 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.476 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.476 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.746 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.746 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.746 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial, stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.746 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial, grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.746 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-62.981 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62.981 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62.981 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62.981 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62.981 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.432.49.717)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.432.49.717)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.432.49.717)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.432.49.717)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.432.49.717)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-20.094 40.312) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-20.094 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-20.094 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST. GeomFromText(CAST (*POINT(-20.094 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST. GeomFromText(CAST (*POINT(-20.094 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST. GeomFromText(CAST (*POINT(-20.094 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST. GeomFromText(CAST (*POINT(-20.094 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial-eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.744 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial-ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.744 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial-port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-57.744 40.312)' AS TEXT), 4280)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial-stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.744 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial-gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.744 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial-gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.744 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial-gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.744 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial-gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.744 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial-gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.744 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial-gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-57.744 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial-gfcm white spatial-gfcm white spatial-gfcm white spatial-gfc	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.528 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.528 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.528 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.528 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.528 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-15.633 44.516)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.633 44.516)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.633 44.516)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.633 44.516)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-15.633 44.516)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	o	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.142 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.142 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.142 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.799 47.35)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_DEOmFromText(CAST ('POINT(-12.799 47.35)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.799 47.35)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.678 d.312) AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.678 d.0.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.678 d.0.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.678 d.0.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-33.678 d.0.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial leez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-51 831 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51 831 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.831 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.831 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.831 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index."	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.783 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.783 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.783 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, SEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-51.679 40.312) AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.679 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.679 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.679 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.679 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.679 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.352 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.352 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.352 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.352 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.352 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.299 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.299 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.299 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.871 45.278)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.871 45.278)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.871 45.278)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.971 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.971 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.971 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.083 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.083 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.083 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.083 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.083 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.402 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.402 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.402 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.402 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.402 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.337 41.812)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.337 41.812)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.337 41.812)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.337 41.812)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.337 41.812)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.522 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.522 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.522 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.522 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.522 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.98 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.98 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREĂ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.98 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.98 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.98 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.563 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.563 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.563 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.563 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.563 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 20, 132 40.312)' AS TEXT), 4328), true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20, 132 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.132 40.312)' AS TEXT), 4328) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65,044 40,312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.044 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.044 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32,539 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32,539 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32,539 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16,725 43.424)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16,725 43.424)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-16,725 43.424)' AS TEXT), 4326) ->>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.094 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.094 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.094 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.094 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.094 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.271 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.271 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.271 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.271 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.271 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.625 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.625 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.625 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.625 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.625 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.545 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.545 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.545 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.545 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.545 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.504 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.504 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.504 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.504 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.504 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.398 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.398 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.398 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.398 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.398 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.456 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.456 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.456 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.35 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.35 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.35 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.35 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.35 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.855 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-55.289 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS; 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.289 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS; "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.289 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS; "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.289 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.289 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.289 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.289 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.".	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.824 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.824 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-50.824 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.568 43.581)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.568 43.581)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.568 43.581)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.568 43.581)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.568 43.581)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'E2Z' as type_gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-20.225 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-20.225 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-20.225 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.225 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.225 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.611 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.611 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.611 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.704 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.704 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.704 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.704 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.704 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.997 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.997 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.997 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.997 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.997 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT 3s type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.226 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.397 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.397 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.397 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.618 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51,791 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51,791 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51,791 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51,791 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-51,791 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.145 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.145 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-33.145 40.312)' AS TEXT), 4326) - 2 geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.206 46.943)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.206 46.943)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.206 46.943)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.206 46.943)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.206 46.943)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.95 47.199)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.95 47.199)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.95 47.199)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.95 47.199)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.95 47.199)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.425 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.425 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.425 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.425 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.425 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.661 41.488)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.661 41.488)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.661 41.488)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.661 41.488)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.661 41.488)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.891 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.891 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.891 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.98 40.312)' AS TEXT), 4328)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.98 40.312)' AS TEXT), 4328)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.98 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.98 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.98 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.958 49.191)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.958 49.191)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.958 49.191)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.958 49.191)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.958 49.191)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.362 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.362 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.362 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.362 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.362 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.162 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.162 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.162 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.162 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.162 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.284 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.284 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.284 40.312)' AS 40.312)' AS 124.312 (AST) ("POINT(-43.284 40.312)' AS 125.312 (AST) ("POINT(-	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.82 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.82 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.82 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.254 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.254 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.254 40.312)' AS TEXT), 4226)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.254 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFGM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.254 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFGM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.254 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFGM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.254 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFGM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.254 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, SFGM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.254 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, SFGM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.254 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS_TEXT), 4326)	0	1	3	3	0	0,00
UNION ALL (SELECT 6 as index  select * from ((SELECT 1 as index.RS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'POTATRAEA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.01 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.01 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.682 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÄLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.682 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.682 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.682 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.682 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.661 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.661 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.661 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.661 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.661 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.506 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.506 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.506 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.506 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.506 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.109 48.04)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-12.109 48.04)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-12.109 48.04)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.109 48.04)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.109 48.04)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.65 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.65 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.65 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.65 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.65 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.819 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.819 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.819 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.819 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.819 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.968 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.968 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.968 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.968 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.968 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.236 46.913)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.236 46.913)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.236 46.913)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.623 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.623 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.623 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.623 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.623 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.623 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.R.	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.784 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_OWithin(ST_GeomFromText(CAST ('POINT(-35.784 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.784 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.167 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.167 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.167 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.167 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.167 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.146 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.146 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.146 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.146 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.146 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.688 48.461)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.688 48.461)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.688 48.461)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.688 48.461)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.688 48.461)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.688 48.461)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.688 48.461)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.688 48.461)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.688 48.461)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.688 48.461)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.648 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.648 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.648 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.648 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.648 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.573 42.576)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.573 42.576)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.573 42.576)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.573 42.576)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.573 42.576)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.794 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.794 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.794 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.01 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.01 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.01 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.01 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.01 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24, 122 40,312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_Dowlfthin(ST_GEOMFromText(CAST ('POINT(-24,122 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24,122 40,312)' AS TEXT), 4326) < geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11, 354 48, 795)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11, 354 48, 795)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11,354 48,795)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial, stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11,354 48,795)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11,354 48,795)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11,354 48,795)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index."	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.842 51.307)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.842 51.307)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.842 51.307)' AS TEXT), 4326) <-> geom LiMit 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.396 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.631 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.631 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.631 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.631 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.631 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.849 50.3)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.849 50.3)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.849 50.3)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.849 50.3)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.849 50.3)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'FAO' as type	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.314 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIstin(ST_GeomFromText(CAST ('POINT(-62.314 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.314 40.312)' AS TEXT), 4326) <-> CENTRAL PROPERTY OF THE PROPERTY O	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.107 48.042)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.107 48.042)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.107 48.042)' AS TEXT), 4326) -> geom LMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.0 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.0 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.0 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.0 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.0 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'FAO' a	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.726 50.423)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-9.726 50.423)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-9.726 50.423)' AS TEXT), 4326) - geom Limit 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-59.722 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-59.722 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-59.722 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-59.722 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-59.722 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-59.722 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-59.722 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.394 40.755)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.394 40.755)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.394 40.755)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.394 40.755)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.394 40.755)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.019 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.019 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.019 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.019 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.019 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37,225 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_DOMFromText(CAST ('POINT(-37.225 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.225 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT;-65.59 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS;RFMO' as type, gid, code, name FROM, spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.59 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS; "PORTAREA" as type, gid, code, name FROM, spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.59 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.59 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.59 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM SECTION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM SECTION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM SECTION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM SECTION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM SECTION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM SECTION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM SECTION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM SECTION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM SECTION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM SECTION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM SECTION AS TEXT), 4326)) AND SECTION AS TEXT AS T	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-28.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-28.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-28.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.053 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.053 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.053 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.162 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.162 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.162 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATREOT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.162 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'STATREOT' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.162 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'STATREOT' as index.RS, 'STATREO	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.762 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "F"	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.053 48.096)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWIstin(ST_GeomFromText(CAST ('POINT(-12.053 48.096)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-12.053 48.096)' AS TEXT), 4326) -> geom LiMT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.007 47.142)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.007 47.142)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.007 47.142)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.864 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.443 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.443 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.443 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.443 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.443 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-25.457 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWIthin(ST_GeomFromText(CAST (POINT(-25.457 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-25.457 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.709 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-31.545 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.545 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.545 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.545 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.545 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.835 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.835 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.835 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.835 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.835 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.391 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.391 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.391 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.391 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.391 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.882 45.267)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.882 45.267)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.882 45.267)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.882 45.267)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.882 45.267)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.959 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.959 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.959 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	3	3	0	0,00
select from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.385 47.764)' 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.385 47.764)' 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.385 47.764)' 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.385 47.764)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.385 47.764)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.385 47.764)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.385 47.764)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.'	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.089 48.06)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.089 48.06)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.089 48.06)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.089 48.06)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.089 48.06)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.089 48.06)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.59 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.59 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.59 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.59 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.59 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.59 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.83 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.83 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.83 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.83 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.83 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.311 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.311 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.311 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.311 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.311 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.349 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.349 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.349 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.505 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.505 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.505 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.505 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.505 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-16.721 43.428)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-16.721 43.428)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-16.721 43.428)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-16.721 43.428)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-16.721 43.428)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.479 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.479 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.479 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.479 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.479 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.036 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.036 40.312)' AS TEXT), 4326)) AND enabled = "Y')	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.768 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.768 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.768 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.768 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.768 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.414 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.414 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.414 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.414 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.414 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.414 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.185 46.964)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.185 46.964)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.185 46.964)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.185 46.964)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.185 46.964)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.185 46.964)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.185 46.964)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.012 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMC' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.012 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.012 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.012 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.012 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.921 44.228)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.921 44.228)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.921 44.228)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.921 44.228)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.921 44.228)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.199 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.199 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.199 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.199 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.199 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.482 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.482 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.482 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STAIRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.83 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22,771 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22,771 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22,771 40.312)' AS TEXT), 4326). <-> geom LIMIT 10)	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.573 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.573 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.573 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.573 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.573 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.343 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.343 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.343 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.172 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.172 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.172 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.172 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.172 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.149 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.149 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.149 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.149 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.149 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.139 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.139 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.139 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.139 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-58.139 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-8.914.51.235)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-8.914.51.235)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-8.914.51.235)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-8.914.51.235)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-8.914.51.235)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.08 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.08 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.08 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.933 49.216)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.933 49.216)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.933 49.216)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.915 40.312)' AS TEXT), 4326), true, AS distance FROM spatial port WHERE enabled = "Y AND ST Downthin(57 (CAST ('POINT(-22.915 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.915 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT-66 703 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.703 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.703 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.703 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.703 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.703 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.703 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.819 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.819 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.819 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.819 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.819 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.356 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.54 44.609)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.54 44.609)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.54 44.609)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.54 44.609)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.54 44.609)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.54 44.609)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.311 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.311 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.311 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.311 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.311 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.482 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.482 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.482 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.953 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.953 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.953 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.722 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.722 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.722 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.722 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.722 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT / PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.232 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.232 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.232 40.312)' AS TEXT), 4326) <-> geom LiMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.695 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.695 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port.area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.695 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.695 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.695 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.325 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.325 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.325 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.72 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.295 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.295 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-39.515 40.312) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-39.515 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "POTAREA" as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-39.515 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-39.515 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-39.515 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.392 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.392 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.392 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.316 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.316 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.316 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.316 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.316 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.623 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.623 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.623 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.623 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.623 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.623 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.623 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.623 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.623 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.623 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('PO	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.093 48.056)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.093 48.056)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.093 48.056)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.093 48.056)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.093 48.056)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.093 48.056)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.093 48.056)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.093 48.056)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.093 48.056)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.093 48.056)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.612 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.612 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.612 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.612 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.612 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.612 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.612 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.612 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.612 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.612 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.192 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.192 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.192 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.192 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.192 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.065 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.065 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.065 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.065 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.065 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.204 40.312)' AS TEXT), 4326),true) AS distance FROM spatial, port WHERE enabled = "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.204 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.204 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-17.182 42.967)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.182 42.967)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.182 42.967)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.182 42.967)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.182 42.967)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.182 42.967)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.87 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.87 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.87 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.87 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.87 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.87 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.386 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.386 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.386 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.386 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.386 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.05 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.05 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.05 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.702 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.702 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.702 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.702 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.702 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS; 'EEZ' as type, gid, code, name FROM spatial.eez, WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.72 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.tmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.72 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.72 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.72 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.72 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spalle aeZ WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-37.95 40.281)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.95 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.95 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.95 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.95 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.95 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATKECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.362 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.362 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.362 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.362 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.362 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez, WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.95 40.281)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.95 40.281)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.95 40.281)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.95 40.281)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.95 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.95 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.95 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.639 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.639 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-66.639 40.312)' AS TEXT), 4326) ->> geom LMIT 10)	0	1	3	3	0	0,00
select from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.859 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select *from ((SELECT o as intex) select *from ((SELECT 1 as index.RS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as index.RS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as index.RS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as index.RS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.265 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFOM' as index.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.193 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.87 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.132 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.132 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.132 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.132 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.132 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.974 51.175)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.974 51.175)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.974 51.175)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.318 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.318 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.318 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.318 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.318 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.362 40.787)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.362 40.787)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.362 40.787)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfor wHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as index.	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.553 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.553 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.553 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.553 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.553 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.553 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.553 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.553 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.553 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.295 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.295 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.295 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.295 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.295 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.686 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.686 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.686 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.235 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.235 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.235 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.278 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.278 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.278 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.278 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.278 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.278 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.278 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.278 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.278 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.278 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.122 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.122 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.122 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.122 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.122 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.122 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.122 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.122 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.122 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.122 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'POTATREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT 3s type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.131 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.774 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.554 49.595)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.554 49.595)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.554 49.595)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.554 49.595)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.554 49.595)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.464 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.464 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.464 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.464 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.464 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.73 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.73 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.73 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.73 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.73 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-9.95 80.191)' AS TEXT), 4326)) AND enabled = 'YUNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, rtmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-9.958 50.191)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.958 50.191)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.958 50.191)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.958 50.191)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.958 50.191)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.958 50.191)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.958 50.191)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.958 50.191)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, GFOM as indexR	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(62.408 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(62.408 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.408 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.408 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.408 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.145 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.145 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.145 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.145 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.145 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.439 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.439 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.439 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.083 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.063 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.063 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFTATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.063 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.063 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.45 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.45 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.45 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.45 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.45 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.907 42.242)' AS TEXT), 4326),true), AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-17.907 42.242)" AS TEXT), 4326 (spe), 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-17.907 42.242)" AS TEXT), 4326 (-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.158 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.758 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.758 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.758 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.499 43.65)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.499 43.65)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.499 43.65)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(tgeom, ST_GeomFromText(CAST ('POINT(-16.499 43.65)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.499 43.65)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.586 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.586 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.586 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.586 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.586 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.099 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWISHIN(ST_GeomFromText(CAST ('POINT(-21.099 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.099 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.434 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.434 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.434 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.434 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.434 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.624 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.917 50.232)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.917 50.232)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.917 50.232)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.917 50.232)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.917 50.232)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, ST_COMPTON ST_GEOMFROMTEX (CAST ('POINT(-9.917 50.232)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, ST_COMPTON ST_GEOMFROMTEX (CAST ('POINT(-9.917 50.232)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, ST_COMPTON ST	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-34.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-34.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-34.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-34.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-34.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, STEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-34.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-34.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.588 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.588 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.588 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.588 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.588 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.824 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.824 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.824 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.824 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.824 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.029 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.029 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-32.029 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.548 40.601)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.548 40.601)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.548 40.601)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial-eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.143 41.006)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial-frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.143 41.006)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.143 41.006)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.143 41.006)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.143 41.006)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.143 41.006)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.143 41.006)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.143 41.006)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.143 41.006)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.143 41.006)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.22 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.22 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.22 40.312)' AS TEXT), 4326) <->, geom LIMIT to)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.839 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.839 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.839 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.839 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.839 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.243 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.243 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.243 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.243 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.243 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.659 47.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects((geom, ST_GeomFromText(CAST ('POINT(-12.659 47.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.659 47.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.659 47.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.659 47.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.659 47.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.119 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-44.119 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.119 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'TATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, ST_GeomFromText(CAST ('POINT(-45.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, ST_GeomFromText(CAST ('POINT(-45.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-43.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'RORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-43.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STAREA' as TYPE, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as Type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.437 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.189 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-58.189 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.189 40.312)' AS TEXT), 4326) = 25 geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-64.809 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.809 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.809 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.809 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.809 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.113 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.113 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.113 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stgm' wHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm' wHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm' wHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm' wHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm' wHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm' wHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.807 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.641 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.641 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.641 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.641 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.641 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-13,745 46.404)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-13,745 46.404)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-13,745 46.404)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-13,745 46.404)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-13,745 46.404)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.242 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.242 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.242 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.242 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.242 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.974 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	<b>time</b> 0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-25.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-25.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-25.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM Spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM Spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM Spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM Spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM Spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FR	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.877 46.272)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.877 46.272)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'POTATREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.877 46.272)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.877 46.272)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.877 46.272)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.877 46.272)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.877 46.272)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.877 46.272)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHEREST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.877 46.272)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHEREST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.877 46.272)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHEREST_INTERST_INTERST_INTERST_INTERST_INTERS	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.574 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm white statement that the statement that th	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.013 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POI	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.981 47.168)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.981 47.168)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.981 47.168)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.981 47.168)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.981 47.168)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.981 47.168)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.981 47.168)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.981 47.168)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.981 47.168)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.981 47.168)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.315 48.834)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.315 48.834)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.315 48.834)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.315 48.834)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.315 48.834)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.756 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.756 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.756 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-29.756 40.312)' AS TEXT), 4326)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.372 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.526 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.526 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.526 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.956 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.956 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.956 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.956 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.956 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.8 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.8 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.8 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial-sez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial-ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.gtm where ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.439 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.439 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.439 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.infmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.717 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.038 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.038 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.038 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.038 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.038 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.272 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.272 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.272 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.272 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.272 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.587 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.587 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.587 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.587 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.587 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.587 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.587 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.587 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.587 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.587 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.895 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.895 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.895 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.895 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.895 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.616 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.616 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.616 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
[SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.528 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DEOmFromText(CAST ('POINT(-51.528 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.528 40.312)' AS TEXT), 4326) < geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.849 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DWITEN(ST_CAST), ('POINT(-19.849 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.849 40.312)' AS TEXT), 4326) < geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEz' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14, 193 45, 956)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial,rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14, 193 45,956)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial,rom thereof the strength of th	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.716 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.732 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.732 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.732 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.732 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.732 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.693 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.951 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.323 47.826)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.323 47.826)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.323 47.826)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.323 47.826)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.323 47.826)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.692 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.201 44.948)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.201 44.948)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.201 44.948)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.096 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.096 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.096 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.096 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.096 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.922 42.227)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.922 42.227)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-17.922 42.227)' AS TEXT), 4326) - 29 geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.528 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.528 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.528 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.528 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.528 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.529 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.529 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.529 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as Texty, 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.529 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.529 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.329 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.329 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.329 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.329 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.329 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.596 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.596 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.596 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.129 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.129 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.129 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.129 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.129 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.071 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.071 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.071 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.156 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.156 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.156 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.156 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.156 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select *from ((SELECT 1 as index.RS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.074 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.074 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.074 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.074 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.074 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.R.)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.73 44.419)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.73 44.419)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.73 44.419)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFTATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.73 44.419)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.73 44.419)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.33 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.33 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.33 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.703 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.703 40.312)' AS TEXT), 4326), yeen, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.703 40.312)' AS TEXT), 4326) ->> geom LiMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.335 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.335 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.335 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.335 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.335 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59,817 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.817 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.817 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.997 51.152)' AS TEXT), 4326), true) A5 distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.997 51.152)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.997 51.152)' AS TEXT), 4326) <-> geom Limit 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.871 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.871 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.871 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.871 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.871 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.334 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.334 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.334 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.334 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.334 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, IEEZ' as type, gid, code, name FROM spatial.eez_WHERE_ST_Intersects(geom, ST_GeomFromText(CAST (*PDINT(-64.581 40.312) 'AS TEXT), 4326)) AND enabled = "\" (*Y) UNION ALL (SELECT 2 as indexRS, IRFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*PDINT(-64.581 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, FORTAREAT as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*PDINT(-64.581 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*PDINT(-64.581 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, STATRECT as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*PDINT(-64.581 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, STATRECT as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*PDINT(-64.581 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, STATRECT as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*PDINT(-64.581 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, STATRECT as	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.658 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.658 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.658 40.312)' AS TEXT), 4326) ->> geom Limit 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.101 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.101 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.or area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.101 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.101 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.101 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.054 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(C	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.003 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.003 40.312)' AS TEXT), 4326), eyem, 22224) (ADREP BY ST_GeomFromText(CAST ('POINT(-43.003 40.312)' AS TEXT), 4326) ->> geom LiMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.644 47.505)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.644 47.505)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.644 47.505)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.644 47.505)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.644 47.505)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.672 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.672 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.672 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.672 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.672 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.599 42.55)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.599 42.55)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.599 42.55)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.903 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.903 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.903 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.903 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.903 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.785 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.785 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.785 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.785 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.785 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.845 42.304)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.845 42.304)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.845 42.304)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.845 42.304)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.845 42.304)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.919 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.919 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.919 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.919 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.919 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.381 40.768)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.381 40.768)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.381 40.768)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.381 40.768)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.381 40.768)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.121 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.831 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.831 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.831 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.831 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.831 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.099 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.099 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.099 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.099 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.099 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.099 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.099 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.099 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.099 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.099 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.799 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.799 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.799 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.225 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.225 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.225 40.312)' AS TEXT), 4326) ->> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.644 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.644 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.644 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.644 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.644 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.644 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.644 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.644 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.644 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.644 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CA	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.895 51.254)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.895 51.254)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.895 51.254)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.895 51.254)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.895 51.254)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.856 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.856 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.856 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.856 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.856 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.856 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.856 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.856 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.856 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.856 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.564 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.564 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.564 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.529 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.529 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.529 40.312)' AS TEXT), 4326)) AND enabled - 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.529 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.529 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.202 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.202 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.202 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.202 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.202 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.495 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.495 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.495 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.495 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.495 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.659 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.659 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.659 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.659 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.659 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.85 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.85 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.85 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.85 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.85 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-41.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-41.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.77 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.239 43.91)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.239 43.91)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-16.239 43.91)' AS TEXT), 4326) <-> geom LiMIT to)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.288 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.288 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.288 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.288 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.288 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-64.248 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-64.248 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.248 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.248 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.248 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.933 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \( \frac{1}{2} \) 'AND ST_DWISHIN(ST_GeomFromText(CAST ('POINT(-34.933 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-34.933 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.026 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.026 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.026 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.026 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.026 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.482 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.482 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.482 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.382 48.767)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.382 48.767)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.382 48.767)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-66.207 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.207 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.207 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.207 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.207 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.261 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-56.064 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.064 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.064 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.064 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.064 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.562 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.012 51.137)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.012 51.137)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.012 51.137)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.34 47.809)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.mfm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.34 47.809)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.34 47.809)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.34 47.809)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.34 47.809)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41:304 40:312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41:304 40:312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41:304 40:312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41:304 40:312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41:304 40:312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-29.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.861 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.49 45.681)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.49 45.681)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.49 45.681)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-14.49 45.681)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-14.49 45.681)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.636 51.513)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.636 51.513)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.636 51.513)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.636 51.513)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-8.636 51.513)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.189 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.189 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.189 40.312)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.37 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.988 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.988 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.988 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.988 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.988 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.268 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.268 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.268 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.268 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.268 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-34.746 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.746 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.746 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.746 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.746 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.065 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.065 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-68.065 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.029 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.029 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.029 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.222 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.222 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.222 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.222 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.222 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.426 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.426 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.426 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.426 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.426 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.933 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.933 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.933 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.933 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.933 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.335 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (DINT(-44.335 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-44.335 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.335 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.335 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.588 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.588 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.588 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.588 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.588 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.662 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.662 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.662 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.662 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.662 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.714 47.435)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.714 47.435)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.714 47.435)' AS TEXT), 4289)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.714 47.435)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.714 47.435)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.714 47.435)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.714 47.435)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.714 47.435)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.714 47.435)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.714 47.435)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.137 42.012)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.137 42.012)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.137 42.012)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.566 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.566 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.566 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.566 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.566 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.533 48.616)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.533 48.616)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.533 48.616)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.533 48.616)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.533 48.616)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.079 43.07)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.079 43.07)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.079 43.07)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.079 43.07)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.079 43.07)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.079 43.07)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.37 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.37 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.37 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.37 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-56.37 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.8 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.828 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.828 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.828 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.59 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.59 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.887 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.887 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.887 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.887 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.887 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.915 42.234)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.915 42.234)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.915 42.234)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.915 42.234)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.915 42.234)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.813 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.813 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.813 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.813 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.813 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.349 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.512 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.927 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.927 40.312)' AS TEXT), 4326), geom, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-62.927 40.312)' AS TEXT), 4326) -> geom LMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.394 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.394 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.394 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.394 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.394 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.69 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.69 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.69 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.69 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.69 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "F"	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
Select *fom ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.085 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.085 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.085 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.085 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.085 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.085 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.085 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as in	0	1	3	3	0	0,00
Select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.567 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.567 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.567 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFTATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.567 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.567 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.567 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.851 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.851 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.851 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-61.445 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.445 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.445 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.445 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.445 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.291 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.291 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.291 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.291 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.291 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.292 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.292 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.292 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.292 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.292 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.91 47.239)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.91 47.239)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.91 47.239)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.91 47.239)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.91 47.239)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.905 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.905 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.905 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.905 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.905 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.487 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "X ND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.487 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.487 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT', 52.461 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT', 52.461 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.461 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.461 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.461 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.511 40.312)' AS TEXT), 3236)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.511 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.511 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STAFRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.511 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.511 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.516 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.516 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.516 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.516 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.516 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.097 51.052)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.097 51.052)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-9.097 51.052)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-9.097 51.052)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-9.097 51.052)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.171 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.171 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.171 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.171 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.171 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.212 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.212 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.212 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.212 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.212 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.807 41.342)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.807 41.342)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.807 41.342)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.367 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.367 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.367 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.367 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.367 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.052 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.052 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-68.052 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.996 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.996 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.996 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.996 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.996 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.279 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.115 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.115 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREÄ as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.115 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.115 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-55.115 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-40,732 40,312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-40,732 40,312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'STAT as type, gid, code, name FROM spatial.plort area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40,732 40,312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40,732 40,312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40,732 40,312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.389 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.389 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.389 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.87 40.281)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.87 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.87 40.281)' AS TEXT), 4326), geom_EMINT(0)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.767 41.382)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.767 41.382)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.767 41.382)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.767 41.382)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.767 41.382)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.284 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.284 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.284 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.284 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.284 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.763 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.763 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-20.699 40.312) 'AS TEXT), 3236)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-20.699 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-20.699 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-20.699 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.699 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.812 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.812 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.812 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	3	3	0	0,00
select from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.563 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.563 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.563 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.563 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.563 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.563 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.563 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor wHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.563 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor wHERE ST_INTERSECT, 4326) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor wHERE ST_INTERSECT, 4326) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor wHERE ST_INTERSECT, 4326) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor wHERE ST_INTERSECT, 4326) AND enabled = "Y') U	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.108 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.108 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.108 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.108 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.108 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.285 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.285 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.285 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.285 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.285 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.561 45.588)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.561 45.588)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.561 45.588)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.561 45.588)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.561 45.588)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24,135 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24,135 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24,135 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.712 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.712 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.712 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.712 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.712 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.712 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.712 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.712 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.712 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.712 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.914 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.914 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.914 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.781 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.781 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.781 40.312)' AS TEXT), 4326) = 2.9 geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.258 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.258 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.258 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.258 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.258 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.258 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.258 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.258 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.258 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.258 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.567 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.567 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.567 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.567 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.567 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.881 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.881 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.881 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.881 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.881 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.942 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.942 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.942 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.942 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.942 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.248 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.248 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.248 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.248 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.248 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.798 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-36.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-36.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.705 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.176 40.973)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.176 40.973)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.176 40.973)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.176 40.973)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.176 40.973)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.338 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.338 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.338 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.338 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.338 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.617 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.617 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.617 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.617 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.617 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.854 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.854 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.854 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.854 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.854 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-43.397 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-43.397 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-43.397 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.397 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.397 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.852 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.852 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.852 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.852 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.852 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.305 44.844)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.305 44.844)' AS TEXT), 4326), geom, 22224) (ARDER BY ST_GeomFromText(CAST ('POINT(-15.305 44.844)' AS TEXT), 4326), exp. geom LiMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.431 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.431 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.431 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.431 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.431 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.405 44.744)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.405 44.744)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.405 44.744)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.405 44.744)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.405 44.744)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.311 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.311 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.311 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.311 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-48.311 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.546 40.312)' ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.546 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.546 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.546 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.546 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-19.997 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.997 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.997 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.997 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.997 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as index.**)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.201 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.201 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.201 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.871 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.871 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.871 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,026 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,026 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,026 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,026 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,026 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.951 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWISHIN(ST_GeomFromText(CAST ('POINT(-33.951 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.951 40.312)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.119 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.119 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.119 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.119 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.119 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.119 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.76 51.389)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.76 51.389)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.76 51.389)' AS TEXT), 4326), eye geom LIMIT 10;	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.662 50.487)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.662 50.487)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.662 50.487)' AS TEXT), 4326) <-y geom LIMIT 10.	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.372 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.372 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.372 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.647 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.647 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.647 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.13 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.13 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.13 40.312)' AS TEXT), 4326), egom_DLIMIT (54.13 40.312)' AS TEXT),	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.547 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.547 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.547 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.547 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.547 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.222 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.222 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.222 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.222 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.222 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-43.339 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-43.339 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-43.339 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-43.339 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.339 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.061 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.557 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.557 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.557 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial statt_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.222 48.927)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.222 48.927)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.222 48.927)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.222 48.927)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.222 48.927)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.369 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.369 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.369 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.369 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.369 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.393 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.939 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromTe	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.473 46.676)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.473 46.676)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.473 46.676)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.473 46.676)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-13.473 46.676)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.046 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.282 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.282 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.282 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.282 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.282 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.403 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.403 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.403 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.403 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.403 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.793 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.793 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.rfm awHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.793 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.793 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.793 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.793 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.057 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.057 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-52.057 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.603 48.546)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.603 48.546)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.603 48.546)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.603 48.546)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.603 48.546)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.081 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.081 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.081 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.081 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.081 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.454 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.455 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.455 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.455 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.455 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.455 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.254 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.254 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.254 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.254 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.254 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.254 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.254 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.254 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.254 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as index	0	1	3	3	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.967 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.52 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.52 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.52 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-9.797 50.352)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-9.797 50.352)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-9.797 50.352)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-9.797 50.352)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-9.797 50.352)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-9.797 50.352)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.266 49.883)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.266 49.883)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.266 49.883)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.266 49.883)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gord WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.266 49.883)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.975 40.312)' ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.975 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.975 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.975 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.975 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.224 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.659 51.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-8.659 51.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-8.659 51.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-8.659 51.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-8.659 51.49)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.196 44.953)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.196 44.953)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.196 44.953)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.284 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.284 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.284 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44,505 40,312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44,505 40,312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44,505 40,312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44,505 40,312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44,505 40,312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44,505 40,312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.448 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.946 40.312)' ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.946 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.946 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.946 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.946 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.946 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.946 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.946 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.946 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.946 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.478 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.335 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.335 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.335 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.104 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POIN	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.275 42.874)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.275 42.874)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.275 42.874)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.275 42.874)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.275 42.874)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-25.077 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-25.077 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-25.077 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-25.077 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-25.077 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index.") UNION ALL (SELECT 6 as index.") UNION ALL (SELECT 6 as index.")	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.301 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.709 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.61 48.561)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.61 48.561)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.61 48.561)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.61 48.561)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.61 48.561)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.89 48.259)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.89 48.259)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.89 48.259)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.89 48.259)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.89 48.259)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('PDINT(-12.596 47.553)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \( \frac{1}{2} \) "AND ST_DWithin(ST_GeomFromText(CAST ('PDINT(-12.596 47.553)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.596 47.553)' AS TEXT), 4326) <> geom LIMIT 10 \)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.08 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.08 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.08 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.08 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.08 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.08 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-37.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.491 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial.eez_WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.556 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.556 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS; FORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.556 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS; STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.556 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.556 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.556 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.556 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.556 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.556 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.556 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, STAT, 4326)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.113 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.113 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.113 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.113 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.113 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.59 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-54.59 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-54.59 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'SFTATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-54.59 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-54.59 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-54.59 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.328 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-67.326 40.312) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS,RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-67.326 40.312) AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-67.326 40.312) AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-67.326 40.312) "AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-67.326 40.312)") AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-1.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.351 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_I	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.892 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.33 40.281)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = \(^1\) 'AND ST_DWISHIN(ST_GEOMFROMTEXT(CAST ('POINT(-33.33 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.33 40.281)' AS TEXT), 4326) \(^2\) egom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.911 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.911 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.911 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.911 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.911 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.391 50.758)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.391 50.758)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.391 50.758)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.391 50.758)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.391 50.758)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.467 44.682)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.467 44.682)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.467 44.682)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.467 44.682)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.467 44.682)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-40.567 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIT(and Text) AND ST_DWIT(-40.567 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-40.567 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.095 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.13 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select *from ((SELECT 4 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.722 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.722 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port.area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.722 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.722 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.722 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.R.)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.036 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.036 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-61.036 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.728 41.421)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.728 41.421)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.728 41.421)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.728 41.421)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.728 41.421)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.728 41.421)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.728 41.421)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.728 41.421)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.728 41.421)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.728 41.421)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-64.132 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.132 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.132 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.132 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.132 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-54.152 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.152 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-21.637 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.234 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.234 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.234 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.234 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.234 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.234 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.234 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.148 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.148 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.148 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.148 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.148 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.538 50.611)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.538 50.611)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.538 50.611)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.538 50.611)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.538 50.611)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "STEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "STEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "STEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "STEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "STEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "STEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "STEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "STEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "STEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "STEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "STEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "STEXT, 4326)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-30.12 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.12 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.12 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.12 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.12 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.12 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.661 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.661 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.661 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.661 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.661 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.3386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.443 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.443 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.443 40.312)' AS TEXT), 4326), space, gid, code, name, geom_ST_Distance(geom_ST_GeomFromText(CAST ('POINT(-33.717,40.312)' AS TEXT).	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39,717 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39,717 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39,717 40.312)' AS TEXT), 4326) <-> geom LIMIT 10) select 'from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom,	0	1	3	3	0	0,00
ST_GeomFromText(CAST (POINT(-12.478 47.671) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.478 47.671) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.478 47.671) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, STATRECT 'as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.478 47.671) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.478 47.671)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.478 47.671)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index						
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.453 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.thmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.453 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.453 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.453 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.453 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*PoINT(-44.947 40.312) 'AS TEXT), 4226)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.947 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.947 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.947 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.947 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.995 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.995 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.995 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.995 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.995 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.136 45.013)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.136 45.013)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.136 45.013)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.136 45.013)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.136 45.013)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.702 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frim WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.702 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.702 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.702 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.702 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.037 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText((CAST ('POINT(-13.527 46.622)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.527 46.622)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.527 46.622)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.527 46.622)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.527 46.622)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText((CAST ('POINT(-38.675 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.675 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.675 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.675 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.675 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.546 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.546 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.546 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.546 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.546 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.778 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.778 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.778 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.778 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.778 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.403 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.403 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.403 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.002 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.002 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.002 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.002 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.002 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.245 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.245 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-66.245 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.247 45.902)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.247 45.902)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.247 45.902)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.247 45.902)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.247 45.902)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.282 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.282 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.282 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.282 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.282 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.282 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.282 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.282 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.282 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.282 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.933 41.216)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.933 41.216)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.933 41.216)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.933 41.216)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.933 41.216)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.933 41.216)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.405 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.405 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.405 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.873 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial, eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(*-50.672 40.312)) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-50.672 40.312)) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-50.672 40.312)) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-50.672 40.312)) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-50.672 40.312)) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.774 0.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.217 47.932)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.217 47.932)' AS TEXT), 4326), geom, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-12.217 47.932)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.102 42.047)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.102 42.047)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.102 42.047)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.102 42.047)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.102 42.047)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.102 42.047)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.201 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.201 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.201 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.201 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.201 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.201 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.201 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.201 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.201 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.248 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.248 40.312)' AS TEXT), 4326), geom, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-58.248 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.009 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.std. rect WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.312 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.312 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.312 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.819 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.819 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.819 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.819 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.819 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.819 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.44 40.709)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.44 40.709)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.44 40.709)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.44 40.709)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.44 40.709)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-21.011 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-21.011 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ("POINT(-21.011 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.617 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.617 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.617 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.617 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.617 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.495 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.495 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-53.495 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.36 51.789)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.36 51.789)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.36 51.789)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-9.239 50.91)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-9.239 50.91)*) AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-9.239 50.91)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-9.239 50.91)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-9.239 50.91)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-9.239 50.91)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	3	3	0	0,00

Request	% of cumulative	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frino WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.	<b>time</b> 0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.697 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.697 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.697 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.697 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.697 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.088 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.088 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.088 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.267 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.267 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.267 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.267 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.267 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.")	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.296 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.296 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.296 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.296 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.296 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.698 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.698 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.698 40.312)' AS TEXT), 4326), ~ geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.248 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.248 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.248 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.04 42.109)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.04 42.109)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.04 42.109)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.51 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.51 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.51 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.51 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.51 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-58.081 40.312)' AS TEXT), 3236)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-68.081 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-68.081 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-68.081 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-68.081 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.019 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.019 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.019 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.063 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.063 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.063 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.063 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.063 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.063 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.063 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.063 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.063 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.063 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_INTERSECTS('FOMTEXT, TYPOINT(-31.06	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.384 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.384 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.384 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.384 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.384 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'TATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.603 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.603 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.603 40.312)' AS TEXT), 4326) - 2 geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eze WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.552 50.597)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.552 50.597)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.552 50.597)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.552 50.597)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.552 50.597)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.101 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.101 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.101 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.101 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.101 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.101 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.101 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.101 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.101 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.101 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.753 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.753 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.753 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.753 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.753 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.753 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.447 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.447 40.312)' AS TEXT), 4326), yeen, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.447 40.312)' AS TEXT), 4326) ->> geom LMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.61 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.61 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.61 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.61 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-29.61 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-38.15 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-38.15 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-38.15 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-38.15 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-38.15 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.97 51.179)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.97 51.179)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.97 51.179)' AS TEXT), 4326) <> geom LIMIT 10;	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.81 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.81 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.org. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.81 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.81 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.81 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.062 50.087)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.062 50.087)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.062 50.087)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.062 50.087)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.062 50.087)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.062 50.087)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.621 47.528)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.621 47.528)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.621 47.528)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.621 47.528)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.621 47.528)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.756 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.756 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.756 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.756 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.756 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.838 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.838 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.838 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.838 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.838 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-67.163 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ÄLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.163 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.163 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.163 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.163 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.325 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.325 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-49.325 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-49.325 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-49.325 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.779 41.37)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.779 41.37)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.779 41.37)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.779 41.37)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.779 41.37)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.145 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT-32.488 40.312)' AS TEXT), 4326)) AND enabled = ''Y UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-32.488 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.468 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.468 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.468 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.879 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "X AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-58.879 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.879 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.552 40.312)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.552 40.312)' AS TEXT), 4326)). AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.552 40.312)' AS TEXT), 4326)). AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.552 40.312)' AS TEXT), 4326)). AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.552 40.312)' AS TEXT), 4326)). AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.118 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.118 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.118 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.118 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.118 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.95 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.95 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.95 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.352 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.352 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.352 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.352 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.352 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.305 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.305 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.305 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.305 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.305 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST. GeomFromText(CAST ('POINT(-13.566 46.583)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-13.566 46.583)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-13.566 46.583)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-13.566 46.583)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.566 46.583)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.566 46.583)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.566 46.583)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.566 46.583)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.566 46.583)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.566 46.583)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.518 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.518 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.518 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.518 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.518 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.0 46.149)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.0 46.149)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.0 46.149)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.0 46.149)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.0 46.149)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.098 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.098 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.098 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.098 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.098 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.081 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.081 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.081 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial sez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.219 40.93)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.219 40.93)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.219 40.93)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.219 40.93)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.219 40.93)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-66.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.61 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.61 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.61 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-65.961 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-65.961 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-65.961 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-65.961 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gmc WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-65.961 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56,943 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.943 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.943 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-14, 939 45, 21)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14, 939 45, 21)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14, 939 45, 21)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14, 939 45, 21)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14, 939 45, 21)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14, 939 45, 21)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHICEREST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14, 939 45, 21)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHICEREST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14, 939 45, 21)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHICEREST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14, 939 45, 21)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHICEREST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14, 939 45, 21)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHICEREST_INTERSECT, as the spatial spati	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.125 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.125 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.125 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.125 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.125 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.92 44.229)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.92 44.229)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.92 44.229)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.92 44.229)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.92 44.229)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.746 40.403)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.746 40.403)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.746 40.403)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.746 40.403)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.746 40.403)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.925 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.925 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.925 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.388 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.388 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.388 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.388 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.388 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.388 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.388 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.388 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.388 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.388 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.34 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "\"AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.34 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.34 40.312)' AS TEXT), 4326) \"-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.155 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.155 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.155 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.155 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.155 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.368 42.781)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.368 42.781)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.368 42.781)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.368 42.781)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.368 42.781)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.148 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.148 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.148 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.148 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.148 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.493 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.493 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.493 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.117 46.032)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.117 46.032)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.117 46.032)' AS TEXT), 4326) = 9 geom LIMIT 10)	0	1	3	3	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.465 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 28.609 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.609 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.609 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POINT(-59.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POINT(-59.76 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POI	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.4 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.4 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.4 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.4 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.4 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.333 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.333 40.312)' AS TEXT), 4326), geom_22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.333 40.312)' AS TEXT), 4326) <-> geom_LIMIT 10)	0	1	3	3	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.634 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.634 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.634 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.634 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.634 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.472 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.472 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.472 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.472 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-65.472 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8:506 16:43)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8:506 51:643)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'POFTAREA' as type, gid, code, name FROM spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8:506 51:643)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8:506 51:643)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8:506 51:643)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8:506 51:643)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8:506 51:643)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8:506 51:643)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type.gd, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8:506 51:643)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type.gd, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8:506 51:643)' AS TEXT), 4326)) AND enabled = "Y')	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.209 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.209 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.209 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.209 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.209 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.777 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.583 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.583 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-47.583 40.312)' AS TEXT), 4326) ->>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.673 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.673 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.673 40.312)' AS TEXT), 4326) <-> CENTRAL STANDARD AS A CONTRAL STANDARD AS A CONTR	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.676 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.676 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-38.676 40.312)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.406 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.406 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.406 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.406 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.406 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.608 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.608 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.608 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.608 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.608 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	3	3	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.076 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.076 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.076 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.817 43.332)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.817 43.332)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.817 43.332)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.817 43.332)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.817 43.332)* AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.749 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.749 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.749 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.749 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.749 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText((CAST ('POINT(-20.348 40.312)' ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.348 40.312)' ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.348 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.348 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.348 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.713 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.713 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.713 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.713 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-61.713 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.022 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.022 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.022 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.022 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.022 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.116 49.033)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.116 49.033)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.116 49.033)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.502 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DOINT(-50.502 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.502 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2		-,
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.866 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DWITE) (SEGEMFROMTEXIC(CAST ('POINT(-56.866 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.866 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFOM' as TEXT), 4326)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.867 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.867 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.867 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.078 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.078 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-68.078 40.312)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-46.182 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-46.182 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-46.182 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.182 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.g/cm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.182 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-66.428 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.428 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.428 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.428 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.428 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.938 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.938 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.938 40.312)' AS TEXT), 4326), exp. geom LiMT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.497 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.497 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.497 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.497 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-27.497 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.129 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.129 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.129 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.129 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.129 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.083 43.066)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.083 43.066)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.083 43.066)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.145 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.145 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.145 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.444 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.367 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.367 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.367 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.966 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.966 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.966 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.966 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.966 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-28.104 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-28.104 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-28.104 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-28.104 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-28.104 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.078 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.078 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.078 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-36.869 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST (POINT(-36.869 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-36.869 40.312)' AS TEXT), 4326), ~ geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.433 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-54.433 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-54.433 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.649 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.649 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.649 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.312 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.312 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.312 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom. ST_GeomFromText(CAST ('POINT(-45.312 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.312 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.675 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.675 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.675 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.675 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.675 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.647 40.312)' AS TEXT), 4326), fure) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.647 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-43.647 40.312)' AS TEXT), 4326), ~9 geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.131 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-60.131 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-60.131 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.724 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.724 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-31.724 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.616 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.616 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.616 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.616 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.616 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.616 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.616 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.616 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.616 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.616 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.281 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.281 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.281 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.416 47.733)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.416 47.733)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.416 47.733)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.416 47.733)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.416 47.733)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.416 47.733)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.416 47.733)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.416 47.733)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.142 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.142 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.142 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.937 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.937 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.937 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-42.937 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-42.937 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-42.937 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-42.937 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-42.937 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-42.937 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as indexRS, "	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.227 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.227 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.227 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial-eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-19.946 40.312) AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial-from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-19.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial sform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.946 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.076 40.312)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.076 40.312)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.076 40.312)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.076 40.312)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.076 40.312)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.452 42.697)' AS TEXT), 4326),true) AS distance FROM spatial, port WHERE enabled = "V AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-17.452 42.697)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.452 42.697)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.238 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "X AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-37.238 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.238 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT, 51.381 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT, 61.381 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.381 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_red WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.381 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_red WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.381 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-58.163 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE e-nabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT-58.163 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT-58.163 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.073 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-46.073 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.073 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.075 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "X AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-63.075 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.075 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT, 54.941 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT, 64.941 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT, 54.941 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.941 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.941 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT: 22.295 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT-27.295 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT-27.295 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.711 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.711 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.711 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.711 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SOFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.711 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SOFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.711 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SOFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.711 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SOFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.711 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, SOFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.711 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.451 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.451 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.451 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.704 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.704 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.704 40.312)' AS TEXT), 4326) <> geom LiMiT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.727 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.727 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.727 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.507 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.507 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.507 40.312)' AS TEXT), 4326) = "Y geom LIMIT 10")	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.936 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.936 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.936 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial, stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.936 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial, gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.936 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText((CAST ('POINT(-28.181 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.181 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.181 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.181 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.181 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.204 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.204 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.204 40.312)' AS TEXT), 4326) <-> geom LiMiT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.337 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.337 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.337 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.337 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.337 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.738 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.738 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.738 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.738 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.738 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.622 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.622 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port.area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.622 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.622 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.622 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.92 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.92 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.92 40.312)' AS TEXT), 4326) <-y geom LIMIT 10.	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.206 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.206 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.206 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.984 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.984 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.984 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.271 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.271 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.271 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.703 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.703 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.703 40.312)' AS TEXT), 4326) -> geom LMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.024 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.024 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.024 40.312)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.799 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.799 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.799 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.647 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.647 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.647 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.451 50.898)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.451 50.698)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.451 50.698)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.451 50.698)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.451 50.698)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.451 50.698)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.45 45.699)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.45 45.699)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.45 45.699)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.732 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.732 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.732 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28, 738 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,ord WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28, 738 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28, 738 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.76 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.76 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.76 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid. code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.22 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.22 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.22 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.361 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.361 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.361 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.13 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-22.13 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.13 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.058 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.058 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.058 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-29.893 40.312) AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-65,276 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65,276 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65,276 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.008 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.008 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.008 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13,327 46.822)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.327 46.822)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.327 46.822)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.671 40.312)' AS TEXT), 4326)) AND enabled = "V') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.nfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.671 40.312)' AS TEXT), 4326)) AND enabled = "V) UNION ALL (SELECT 3 as indexRS, 'POINT(-25.671 40.312)' AS TEXT), 4326)) AND enabled = "V) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.671 40.312)' AS TEXT), 4326)) AND enabled = "V) UNION ALL (SELECT 5 as indexRS, 'STATS, 'AS26)) AND enabled = "V) UNION ALL (SELECT 5 as indexRS, 'STATS, 'AS26)) AND enabled = "V) UNION ALL (SELECT 5 as indexRS, 'STATS, 'AS26)) AND enabled = "V) UNION ALL (SELECT 5 as indexRS, 'STATS, 'AS26)) AND enabled = "V) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.671 40.312)' AS TEXT), 4326)) AND enabled = "V) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.431 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.431 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.431 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.227 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.227 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.227 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.227 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-42.227 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.725 51.424)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.725 51.424)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.725 51.424)' 'AS TEXT), 4326) <-y geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.464 50.685)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.464 50.685)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.464 50.685)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.464 50.685)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.464 50.685)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-17.053 43.096)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.053 43.096)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.053 43.096)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.053 43.096)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-17.053 43.096)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-22.991 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-43.621 40.312)' AS TEXT), 4326) NAD enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-43.621 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.621 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.621 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.621 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-44.719 40.312) 'AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-44.719 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-44.719 40.312)' AS TEXT), 4259)) AND enabled = Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-44.719 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.719 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.183 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.183 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.183 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.183 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.183 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-59.994 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.994 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.994 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.994 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.994 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.271 41.878)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.271 41.878)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.271 41.878)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.892 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.892 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.892 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.936 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.936 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.936 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.936 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.936 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.628 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.628 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.628 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.628 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.628 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.125 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.125 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.125 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.125 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.125 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.168 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.168 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-68.168 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.021 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.021 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-68.021 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-13.173 46.976)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.173 46.976)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.173 46.976)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.183 45.966)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.183 45.966)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.183 45.966)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.183 45.966)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.183 45.966)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.727 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.727 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.727 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.622 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.622 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.622 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.622 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.622 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.622 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.622 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.622 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.622 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.622 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromTex	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-51.856 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-51.856 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-51.856 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-51.856 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-51.856 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-62.91 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-62.91 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-62.91 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-62.91 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-62.91 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-62.91 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "F"	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.008 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.008 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-54.008 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.48 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.48 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.48 40.312)' AS TEXT), 4326) <->, geom LIMIT to)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.001 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.001 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.001 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.713 44.436)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.713 44.436)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.713 44.436)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.713 44.436)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.713 44.436)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.696 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.575 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_DWITHIN(ST_AUS)) AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.575 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.791 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.791 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.791 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53,729 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_DOMFROMTCAST, ('POINT(-53.729 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.729 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.387 40.312)' AS TEXT), 4326)) AND enabled = '') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'FORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.387 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.R.)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.382 47.767)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.382 47.767)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.382 47.767)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.382 47.767)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.382 47.767)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.681 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.681 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.681 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.778 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.778 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-63.778 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.755 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.755 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.755 40.312)' AS TEXT), 4326) <-> CENTRAL PROPERTY OF THE PROPERTY O	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.217 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.217 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.217 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.217 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.217 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select *from ((SELECT 4 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.353 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.353 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.353 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.353 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.353 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.R. 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.R. 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.R. 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.R. 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.R. 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.R. 'GFOM' as TEXT), 4326)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.456 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.456 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.456 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.462 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.462 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.462 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.8 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.8 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.8 40.312)' AS TEXT), 4326) <> geom LIMIT 10.	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.559 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.559 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.559 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.559 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.559 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.747 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.747 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.747 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.747 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.747 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.")	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.096 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.096 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.096 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.573 50.576)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.573 50.576)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.573 50.576)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.25 40.281)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.25 40.281)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.25 40.281)' AS TEXT), 4326) <->, geom LIMIT to)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.801 43.348)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.801 43.348)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.801 43.348)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.801 43.348)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.801 43.348)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.801 43.348)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.801 43.348)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.801 43.348)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-16.801 43.348)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.668 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.668 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.668 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.428 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.428 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.428 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.428 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.428 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.655 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.655 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.655 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.655 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.655 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.003 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.776 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.776 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.776 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.529 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.529 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.529 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.163 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.163 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.163 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.024 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.024 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.024 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.992 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.992 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.992 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.992 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.992 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.97 40.281)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.97 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.97 40.281)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.562 48.587)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.562 48.587)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.562 48.587)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.562 48.587)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.562 48.587)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.161 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.161 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.161 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.161 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.161 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.613 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.613 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-66.613 40.312)' AS TEXT), 4326) = -2 geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.965 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.779 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.779 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.779 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.277 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.277 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.348 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.348 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.348 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.279 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.279 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.279 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.142 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.142 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.142 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.711 46.438)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.711 46.438)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.711 46.438)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.23 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.23 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.23 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.23 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.23 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.23 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.497 40.652)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.497 40.652)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.497 40.652)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.497 40.652)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.497 40.652)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.509 42.64)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.509 42.64)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.509 42.64)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.509 42.64)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.509 42.64)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, ST_CAST, AS26)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, ST_CAST, AS26)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, ST_CAST, AS26)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, ST_CAST, AS26)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, ST_CAST, AS26)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, ST_CAST, AS26)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.668 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.668 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.668 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.668 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.668 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-41.773 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIstin(ST_GeomFromText(CAST ('POINT-41.773 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT-41.773 40.312)' AS TEXT), 4326), ~ geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.209 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.209 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-68.209 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.45 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.45 40.312)' AS TEXT), 4326), geom, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-50.45 40.312)' AS TEXT), 4326)  experimental ("Point Annual Casta") ("Point	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.596 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.596 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.596 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.168 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.168 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.168 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.505 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.505 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-67.505 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.361 44.788)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.361 44.788)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.361 44.788)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.361 44.788)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.361 44.788)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.361 44.788)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.361 44.788)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.361 44.788)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.361 44.788)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.361 44.788)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POIN	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.1 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.1 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.1 40.312)' AS TEXT), 4326), espec mount of the complex of the comple	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.65 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.65 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.65 40.312)' AS TEXT), 4326 \( \cdots \) geom LIMIT (10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-23.49 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-23.49 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-23.49 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-23.49 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-23.49 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-23.49 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.039 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM, spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.039 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.039 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.039 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.039 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39,529 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39,529 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-39,529 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.48 40.669)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.48 40.669)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.48 40.669)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(tgeom, ST_GeomFromText(CAST ("POINT(-19.48 40.669)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.48 40.669)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.833 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.833 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.833 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.833 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.833 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.907 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.907 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.907 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.907 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.907 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.957 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.957 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.957 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.414 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.58 40.312)' AS TEXT), 4326),true) A36 (sistance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.58 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-65.58 40.312)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.688 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.688 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-65.688 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.049 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.049 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.049 40.312)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.253 40.312)' AS TEXT), 4326),true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.253 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-68.253 40.312)' AS 1271, 4326) ->> geom LMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.163 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.163 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.163 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.243 42.906)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.243 42.906)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.243 42.906)' AS TEXT), 4326), eye geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.848 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.848 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.848 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.257 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.257 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.257 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.257 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.257 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.004 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.004 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.004 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.004 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.004 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',62,752 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.752 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.752 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.079 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.686 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.686 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.686 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.88 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.88 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.88 40.312)' ASTEXT), 4326) <->9 geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.276 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.276 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.276 40.312)' AS TEXT), 4326), eye geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.985 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.985 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.985 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance) A326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.756 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.756 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.868 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.868 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.868 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.866 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.593 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.593 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.593 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )		1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.869 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.869 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.869 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)		1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.346 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.346 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.346 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.346 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-29.346 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.05.40.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.05.40.281)' AS TEXT), 4326) ("Segom LiMIT-10") TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-52.05.40.281)' AS TEXT), 4326) ("Segom LiMIT-10")	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.901 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.901 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.901 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.901 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.901 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.959 40.312)' AS TEXT), 4326), true) A Sidstance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.959 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-36.959 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.598 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.598 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.598 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.709 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.709 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.709 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.325 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.325 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.325 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.083 48.066)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.083 48.066)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.083 48.066)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.083 48.066)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.083 48.066)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.083 48.066)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.083 48.066)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.083 48.066)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.083 48.066)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.083 48.066)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.006 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.253 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.253 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.253 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.839 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.839 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.839 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFAT/RECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.839 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.839 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.839 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.757 41.392)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.757 41.392)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.757 41.392)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.757 41.392)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.757 41.392)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.757 41.392)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.757 41.392)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.757 41.392)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.757 41.392)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.681 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.681 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.681 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.681 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.681 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.55 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.55 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.55 40.312)' ASTEXT), 4326) <-y geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.868 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.868 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.868 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFAT/RECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.868 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.868 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.868 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.868 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.868 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.868 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
select from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std. rect WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.689 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.689 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.689 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.209 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.209 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.209 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-10.391 49.758)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-10.391 49.758)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-10.391 49.758)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-10.391 49.758)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-10.391 49.758)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.3 47.849)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(^1\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.3 47.849)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.3 47.849)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.268 46.881)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.268 46.881)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.268 46.881)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.268 46.881)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.268 46.881)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.97 49.179)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \(^1\) AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-10.97 49.179)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.97 49.179)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.526 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.526 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.526 40.312)' AS TEXT), 4326) - geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.002 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.002 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.002 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.002 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.166 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.166 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.166 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.186 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.186 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-67.186 40.312)' AS TEXT), 4326) (SS geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-63.481 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-63.481 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-63.481 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-63.481 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-63.481 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.48 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.48 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.48 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.48 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-35.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-35.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-35.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-35.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.8 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.8 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.8 40.312)' AS TEXT), 4326) <>-yeom LIMIT 10	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.868 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.868 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.868 40.312)' AS TEXT), 4326) - geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-12.529 47.62)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-12.529 47.62)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-12.529 47.62)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-12.529 47.62)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.529 47.62)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.195 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.195 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.195 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.195 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.195 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.195 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.619 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.619 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.619 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.665 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.665 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.665 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.454 48.695)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.454 48.695)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.454 48.695)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-46.431 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-46.431 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-46.431 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-46.431 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-46.431 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.113 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.113 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.113 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA		1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-53,08 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST (POINT(-53,08 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-53.08 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.118 43.031)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.118 43.031)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-17.118 43.031)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.051 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.051 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.051 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.051 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.051 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.229 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.229 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.229 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.229 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.229 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.33 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-9,952 50.197)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9,952 50.197)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9,952 50.197)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)' AS TEXT), 4326) \(^2\) "SOBER BY ST_GEOMFROMTEXT(CAST ('POINT(-31,77 40.312)'	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.099 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.099 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.099 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.343 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-56.343 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-56.343 40.312)' AS TEXT), 14326) <-> geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.395 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.395 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.395 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.395 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.395 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.397 40.312)' AS TEXT), 4226)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.575 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.575 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.575 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.925 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.866 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.866 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.866 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.342 49.807)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.342 49.807)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.342 49.807)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.342 49.807)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.342 49.807)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.753 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.753 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.753 40.312)' AS TEXT), 4326) = 2 GeomFromText(CAST ('POINT(-49.753 40.312)' AS TEXT), 4326)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.008 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.008 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.008 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.73 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.73 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.73 40.281)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.935 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.935 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.935 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.703 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.703 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.703 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.892 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.892 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.892 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.904 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.904 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.904 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.238 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.238 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.238 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.238 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.238 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.057 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.057 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.057 40.312)' AS TEXT), 4326) ->> geom LMIIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.557 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.557 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.557 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.485 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.485 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.485 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.251 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.251 40.312)' AS TEXT), 4326), geom, 22224) (ADBER BY ST_GeomFromText(CAST ('POINT(-24.251 40.312)' ASTEXT), 4326) ->>> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.19 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST (POINT(-33.19 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-33.19 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.104 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.104 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-37.104 40.312)' AS TEXT), 4326) ->> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.544 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.544 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-58.544 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.917 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.917 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.917 40.312)' AS TEXT), 4326) ~> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.666 41.483)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.666 41.483)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.666 41.483)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.56 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST (POINT(-65.56 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-65.56 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.036 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.036 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.036 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.718 45.431)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.718 45.431)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.718 45.431)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.718 45.431)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.718 45.431)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.231 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.231 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.231 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.231 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-68.231 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.288 42.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.288 42.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.288 42.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.288 42.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.288 42.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.288 42.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.288 42.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.288 42.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.288 42.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.288 42.861)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.838 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.838 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.838 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.385 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.385 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.385 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.87 44.301)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.87 44.301)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.87 44.301)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.87 44.301)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.87 44.301)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.981 43.168)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.981 43.168)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.981 43.168)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.972 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.972 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.972 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.464 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.464 40.312)' AS TEXT), 4326), geom, 22224) (ADBER BY ST_GeomFromText(CAST ('POINT(-55.464 40.312)' AS TEXT), 4326), exp. geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.544 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.544 40.312)' AS TEXT), 4326), geom, 2224) (ADBER BY ST_GeomFromText(CAST ('POINT(-43.544 40.312)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.139 51.01)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.139 51.01)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.139 51.01)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.695 44.454)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.695 44.454)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.695 44.454)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.695 44.454)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.695 44.454)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.768 48.381)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.768 48.381)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.768 48.381)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.768 48.381)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.768 48.381)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.631 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.631 40.312)' AS TEXT), 4326), ageom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.631 40.312)' AS TEXT), 4326) ageom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.526 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.526 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.526 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.179 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.179 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.179 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.812 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.812 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.812 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.403 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.403 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-28.403 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.618 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.618 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-64.618 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.095 45.054)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.095 45.054)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.095 45.054)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.095 45.054)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.095 45.054)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.401 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.401 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.401 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.401 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.401 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.849 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.849 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.849 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.849 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.849 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.808 41.341)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.808 41.341)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.808 41.341)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.808 41.341)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-18.808 41.341)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.163 47.986)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.163 47.986)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.163 47.986)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44,165 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÄLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44,165 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44,165 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44,165 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44,165 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44,165 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44,165 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44,165 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44,165 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44,165 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.645 41.504)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.645 41.504)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.645 41.504)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.645 41.504)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.645 41.504)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.645 41.504)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.645 41.504)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.645 41.504)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.645 41.504)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.645 41.504)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-51.598 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWItin(ST_GeomFromText(CAST (POINT(-51.598 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-51.598 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POIN	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.912 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.912 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.912 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial-eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.14 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.14 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.14 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
Select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial-eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial-frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.183 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.183 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.183 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.03 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.03 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.03 40.312)' AS TEXT), 4328) <-> geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.119 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.119 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-31.119 40.312)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.835 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.835 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-57.835 40.312)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.258 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST (POINT(-66.258 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-66.258 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.979 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.62 49.529)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.62 49.529)' AS TEXT), 4328), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-10.62 49.529)' AS TEXT), 4328) <-> geom LiMIT (10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.162 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.162 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.162 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.162 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.162 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-24.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-24.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49,933 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = YY AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49,933 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-49,933 40.312)' AS TEXT), 4326) <-> ————————————————————————————————————	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.65.40.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.65.40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.65.40.281)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS: EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.765 40.312) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.765 40.312)) AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS; PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.765 40.312)) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.765 40.312)) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-20.765 40.312)) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.358 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.358 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.358 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.358 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.358 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.358 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.358 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.194 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.194 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.194 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.255 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.255 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.255 40.312)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.348 44.801)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.348 44.801)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.348 44.801)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.348 44.801)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.348 44.801)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-54,052 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54,052 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54,052 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.466 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.466 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.466 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.953 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.953 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.953 40.312)' AS TEXT), 4326)) IND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.953 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.953 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.987 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.987 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.987 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.987 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.987 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.956 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.956 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.956 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.734 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.734 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.734 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.549 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.549 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.549 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.568 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39,426 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.426 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.426 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.565 43.584)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.565 43.584)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.565 43.584)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.565 43.584)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.565 43.584)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.673 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.673 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.673 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.11 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial, port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.11 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.11 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.45.40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.45.40.312)' AS TEXT), 4326), geom, 2224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.45.40.312)' AS TEXT), 4326 \( \text{ > 9 geom LiMIT 10} \)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.096 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.096 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.096 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.309 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.309 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.309 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.987 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.987 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.987 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.964 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(C	0	1	2	2	0	0,00
UNION ALL (SELECT 6 as index  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.412 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.412 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.412 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.266 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.266 40.312)' AS	0	1	2	2	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.266 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.53 40.281)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.53 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.53 40.281)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.53 40.281)' AS TEXT), 4326) <-> geom LIMIT 10 ) select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.486 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.486 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.486 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.486 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.486 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index  UNION ALL (SELECT 6 as index  UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.181 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.181 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.181 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.742 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.742 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.742 40.312)' AS TEXT), 4326), esom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial-sez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.427 41.722)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial-frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.427 41.722)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.427 41.722)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.427 41.722)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.427 41.722)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.427 41.722)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.427 41.722)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.155 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.155 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.155 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.954 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.696 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.696 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.696 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.827 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.827 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.827 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.827 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.827 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
[SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.171 40.978)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.171 40.978)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.171 40.978)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.485 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.485 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.485 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.485 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.485 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.421 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWINI(ST_GeomFromText(CAST ('POINT(-27.421 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.421 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-28.828 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.828 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.828 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.156 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.156 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.156 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.156 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.156 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.418 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-47.418 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.418 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-57,189 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST (POINT(-57.189 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-57.189 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.995 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \(^1\)" AND ST_DWISHIN(ST_GeomFromText(CAST ('POINT(-34.995 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-34.995 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.186 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.186 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.186 40.312)' AS TEXT), 4326) <-> CENTRAL ('POINT(-65.186 40.312)' AS TEXT), 4326) <-> C	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-35.669 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.669 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.669 40.312)' AS TEXT), 4226)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.669 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.669 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.835 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.835 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.835 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_DistanceType) (POINT(-24.689 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.689 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.689 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.488 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.488 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.575 51.574)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.575 51.574)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.575 51.574)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.575 51.574)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.575 51.574)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "SFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.575 51.574)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "F"	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.826 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.826 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.826 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.826 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.826 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-10,733 44,416)' AS TEXT), 4326)) AND enabled = "V 'U NION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-10,733 49.416)' AS TEXT), 4326)) AND enabled = "Y UNION ALL (SELECT 2 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10,733 49.416)' AS TEXT), 4326)) AND enabled = "Y UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10,733 49.416)' AS TEXT), 4326)) AND enabled = "Y UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10,733 49.416)' AS TEXT), 4326)) AND enabled = "Y UNION ALL (SELECT 5 as index.")	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.701 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.701 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-47.701 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.08 45.069)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.08 45.069)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.08 45.069)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.382 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.382 40.312)' AS TEXT), 4326), geom, 22224) (ADREB BY ST_GeomFromText(CAST ('POINT(-57.382 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.536 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.536 40.312)' AS TEXT), 4329), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.536 40.312)' AS TEXT), 4329), as geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial sez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.277 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.821 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.271 48.878)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.271 48.878)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.271 48.878)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.271 48.878)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.271 48.878)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.271 48.878)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.271 48.878)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.541 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.541 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-51.541 40.312)' AS TEXT), 4326), geom (LMT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.726 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.726 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.726 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.99 40.281)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.99 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.99 40.281)' AS TEXT), 4326) \( \text{ > geom LIMIT 10} \)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.218 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.218 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.218 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.218 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.218 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.739 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-60.739 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.739 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.667 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.667 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.667 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.667 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.667 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.33 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "\" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.33 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.34 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.989 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.989 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-62.989 40.312)' AS TEXT), 4326) ->> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.446 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.446 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-41.446 40.312)' AS TEXT), 4326) (seem, 2224) (RDBE BY ST_GeomFromText(CAST ('POINT(-41.446 40.312)' AS TEXT), 4326)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.069 43.08)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.069 43.08)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.069 43.08)' AS TEXT), 3250 <>> geom LIMIT to)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.886 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = YY AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.886 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-62.886 40.312)' AS TEXT), 4326) (>>> geom LiMT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.776 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.776 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.776 40.312)' AS TEXT), 4326) = 9 geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.55 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.07 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.07 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.07 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.41 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.41 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.41 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.195 42.954)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.195 42.954)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.195 42.954)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.195 42.954)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.195 42.954)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.848 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.848 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.848 40.312)' AS TEXT), 4326) - geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.27 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "\"AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.27 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.27 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.773 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.773 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.773 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.773 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.773 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.773 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.773 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.747 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.747 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.747 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.062 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.062 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.062 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.201 45.948)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.201 45.948)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.201 45.948)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.201 45.948)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.201 45.948)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.601 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.601 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.601 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.876 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.876 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.876 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.876 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.876 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.876 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.614 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-25.614 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-25.614 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.397 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.397 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.397 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.397 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.397 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.776 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.776 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.776 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.776 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.776 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.881 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.881 40.312)' AS TEXT), 4326), geom, 22224) (ARDER BY ST_GeomFromText(CAST ('POINT(-65.881 40.312)' AS TEXT), 4326) = 'ye' geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.179 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.179 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.179 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.179 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.179 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.209 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.209 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-41.209 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.26 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.26 40.312)' AS TEXT), 4329), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-48.26 40.312)' AS TEXT), 4326) <-> geom LiMIT to)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.821 48.328)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.821 48.328)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.821 48.328)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.821 48.328)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.821 48.328)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.39 44.759)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.39 44.759)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.39 44.759)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.39 44.759)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.39 44.759)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.39 44.759)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.116 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.116 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.116 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.116 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.116 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.116 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.116 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.116 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.116 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.116 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.375 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.375 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.375 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.915 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.626 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.626 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.626 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.626 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.626 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.626 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.315 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.315 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.315 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_DeomFromText(CAST ('POINT(-57.562 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.562 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.562 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
Select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-20.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial trimo WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-20.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-20.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.stat_rect WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-20.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gorm WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-20.544 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.745 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.745 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.745 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.745 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.745 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34,348 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34,348 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34,348 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34,348 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34,348 40,312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54, 387 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54, 387 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54, 387 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.502 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.502 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.502 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.502 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.502 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.168 43.981)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.168 43.981)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.168 43.981)' AS TEXT), 4326) <->	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.637 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.637 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.637 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.248 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.248 40.312)' AS TEXT), 4326), geom, 22224) (ADREB BY ST_GeomFromText(CAST ('POINT(-59.248 40.312)' AS TEXT), 4326) <->, geom LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.398 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.398 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.398 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.398 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.398 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-44.023 40.312) 'AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-44.023 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.ord area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-44.023 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-44.023 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFGM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-44.023 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.235 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.235 40.312)' AS TEXT), 4326), acom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.235 40.312)' AS TEXT), 4326) - x-9 geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.598 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-43.451 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.451 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.451 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.451 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.451 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.814 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.814 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-66.814 40.312)' AS TEXT), 4326) <-> geom LMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.134 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.134 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.134 40.312)' AS TEXT), 4326) <-> CENTRAL PROPERTY OF THE PROPERTY O	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.227 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.227 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.227 40.312)' AS TEXT), 4326) <-> ————————————————————————————————————	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distancs(geom, ST_GeomFromText(CAST ('POINT(-9.148 51.001)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.148 51.001)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.148 51.001)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.623 44.526)' AS TEXT), 4326)) AND enabled = (''') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.623 44.526)' AS TEXT), 4326)) AND enabled = ('') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.623 44.526)) AS TEXT), 4326)) AND enabled = ('') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial, stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.623 44.526)) AS TEXT), 4326)) AND enabled = ('') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.623 44.526)' AS TEXT), 4326)) AND enabled = ('') UNION ALL (SELECT 6 as index.")	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.694 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.694 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.694 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.113 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.113 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.113 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.113 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.113 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44,288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44,288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44,288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44,288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44,288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44,288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.097 50.052)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.097 50.052)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.097 50.052)' AS TEXT), 4326) ->> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.62 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.966 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^1\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.966 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.966 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.806 40.343)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.806 40.343)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.806 40.343)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.806 40.343)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.806 40.343)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.817 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "X ND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.817 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.817 40.312)' AS TEXT), 4326) < yet with the complex of the complex	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.284 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.284 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.284 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.387 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.387 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.387 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.935 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.935 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.935 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.935 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.935 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.658 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.658 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.658 40.312)' AS TEXT), 4326) <-> CENTRAL PROPERTY OF THE PROPERTY O	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.237 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POIN	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.57 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.57 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.57 40.281)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'POTRATREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.255 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as index.RS, 'GFCM' as type, gid, code, name FROM spatial.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.639 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.639 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.639 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT PORT as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.974 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.974 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.974 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.034 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.034 40.312)' AS TEXT), 4326), agom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.034 40.312)' AS TEXT), 4326) = 2 ogeom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.371 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.371 40.312)' AS TEXT), 4326), geom, 22224) (ADDE BY ST_GeomFromText(CAST ('POINT(-62.371 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.372 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.372 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.372 40.312)' AS TEXT), 4326) - geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.464 40.312)' AS TEXT), 3250)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.464 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.464 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STAFRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.464 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.464 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.049 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.049 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.049 40.312)' AS TEXT), 4326) are specified by the complex of the c	0	1	2	2	0	0,00
select *from ((SELECT1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.788 44.361)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.788 44.361)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.788 44.361)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.788 44.361)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.788 44.361)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexR.)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.377 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.377 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.377 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.111 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.111 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.111 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-54.992 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-54.992 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.992 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.992 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.992 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	<b>time</b> 0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.806 44.343)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.806 44.343)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.806 44.343)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.889 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.889 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.889 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.217 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.217 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.217 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.49 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.49 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.49 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-(40.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y' UNION ALL (SELECT 2 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.364 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.364 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.364 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-C2-4.012 4).312)' AS TEXT), 4328)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.012 40.312)' AS TEXT), 4328)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.203 46.946)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÄLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.203 46.946)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.203 46.946)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.203 46.946)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glrcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.203 46.946)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.97 47.179)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.97 47.179)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.97 47.179)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.97 47.179)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.97 47.179)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.148 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.148 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.148 40.312)' AS TEXT), 4326) <->	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.204 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.204 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.204 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.951 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.951 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.951 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.942 47.207)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.942 47.207)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.942 47.207)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.942 47.207)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.942 47.207)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.292 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.292 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.292 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.451 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.451 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.451 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.079 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.079 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.079 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.079 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.079 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.079 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 6 as index.RS, GFCM as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.079 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 6 as index.RS, GFCM as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.079 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 6 as index.RS, GFCM as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.079 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 6 as index.RS, GFCM as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.079 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 6 as index.RS, GFCM	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.031 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.031 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.031 40.312)' AS TEXT), 4326) - 2 geom LiMT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.333 40.312)' AS TEXT), 3250)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.333 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.333 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.333 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.333 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.799 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.799 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.799 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.289 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAS	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.701 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.701 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-32.701 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.38 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.38 40.312)' AS TEXT), 4329), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.38 40.312)' AS TEXT), 4326) <->, geom LIMIT to)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.564 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.564 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.564 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.914 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.914 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.914 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.614 47.535)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.614 47.535)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.614 47.535)' AS TEXT), 4326) - S geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.124 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.124 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.124 40.312)' AS TEXT), 4326) = 9 geom Limit 10)	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.306 41.843)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.306 41.843)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.306 41.843)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.22 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.22 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.22 40.312)' AS TEXT), 4326) (>> geom LIMIT to)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.819 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.819 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.819 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.487 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.487 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.487 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.436 48.713)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.436 48.713)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.436 48.713)' AS TEXT), 4326), expend_LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.722 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.722 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.722 40.312)' AS TEXT), 4326) = 9 geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.731 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.731 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.731 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.524 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.524 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.524 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.524 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.524 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.524 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.524 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	2	2	0	0,00
UNION ALL (SELECT 6 as index  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.086 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.086 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.086 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.515 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.515 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.515 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.018 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.018 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.018 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.048 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.048 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.048 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.048 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.048 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.29 42.859)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.29 42.859)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.29 42.859)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53,786 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.786 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.786 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-47.685 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.685 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREÂ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.685 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.685 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.685 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.446 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.446 40.312)' AS TEXT), 4326), agom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.446 40.312)' AS TEXT), 4326) = 3 common from the co	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.065 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.065 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.065 40.312)' AS TEXT), 4326) = 9 geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.086 43.063)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.086 43.063)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.086 43.063)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.086 43.063)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.086 43.063)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.475 43.674)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.475 43.674)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.475 43.674)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.475 43.674)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.475 43.674)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.283 41.866)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.283 41.866)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.283 41.866)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.283 41.866)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.283 41.866)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.001 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.649 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.649 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.649 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64,379 40,312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(FROMFROMFROMFROMFROMFROMFROMFROMFROMFROM	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.083 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(TS comFromText(CAST ('POINT(-55.083 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.083 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.442 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.442 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.442 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.442 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.442 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.356 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.356 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.356 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.008 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.008 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.008 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.008 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.008 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.519 44.63)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.519 44.63)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.519 44.63)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.519 44.63)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.519 44.63)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.268 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.268 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.268 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.832 42.317)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.832 42.317)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.832 42.317)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.832 42.317)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.832 42.317)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.123 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.199 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.199 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.199 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 57, 428 40.312)' AS TEXT), 4328), true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57, 428 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57, 428 40.312)' AS TEXT), 4328) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.61 40.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.61 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.61 40.281)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.698 41.451)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.698 41.451)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.698 41.451)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.835 42.314)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.835 42.314)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.835 42.314)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.285 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.285 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.285 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.285 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.285 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.285 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.285 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.79 51.381)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.79 51.381)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.79 51.381)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.173.40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.173.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.173.40.312)' AS TEXT), 4326), exp. geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.423 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.423 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.423 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.873 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.873 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.873 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12,701 47,448)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12,701 47,448)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12,701 47,448)' AS TEXT), 4226)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12,701 47,448)' AS TEXT), 4226)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12,701 47,448)')) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12,701 47,448)')) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12,701 47,448)')) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'POINT(-12,701 47,448)') AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'POINT(-12,701 47,448)') AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'POINT(-12,701 47,448)') AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'POINT(-12,701 47,448)') AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'POINT(-12,701 47,448)') AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'POINT(-12,701 47,448)') AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'POINT(-12,701 47,448)') AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'POINT(-12,701 47,448)') AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'POINT(-12,701 47,448)') AND enabled = "Y') UNION ALL (SELECT 4 as indexRS	0	1	2	2	0	0,00
4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-12.701 47.448) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-12.701 47.448)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.701 47.448)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index						
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.81 41.339)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-18.81 41.339)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-18.81 41.339)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.559 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.559 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.559 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.559 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.g/cm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.559 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.851 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.851 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.851 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.928 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.928 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.928 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.714 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.714 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.714 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.22 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.22 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.22 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.723 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.723 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.723 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.723 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.g/cm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.723 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.**	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.876 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.876 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.876 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST (POINT(-58.673 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-58.673 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.825 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.825 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.825 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.825 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.825 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.") UNION ALL (SELECT 6 as index.") UNION ALL (SELECT 6 as index.")	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.752 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.752 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.752 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.752 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.752 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.752 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.752 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.752 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.752 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.752 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.894 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-66.894 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.894 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.129 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.129 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.129 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 28.138.40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT', 28.138.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT', 28.138.40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-36.83 46.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-36.835 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.835 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.835 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.835 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.513 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.513 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.513 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.241 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.241 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.241 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.158 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.158 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.158 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.021 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMC) as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.021 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.021 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.021 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.021 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.286 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.286 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.286 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.80) 48.34)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.80) 48.34)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(sporm, ST_GeomFromText(CAST ('POINT(-11.80) 48.34)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(tygeom, ST_GeomFromText(CAST ('POINT(-11.80) 48.34)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.80) 48.34)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-30.628 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-30.628 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST. Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.628 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.628 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST. Intersects(geom, ST_GeomFromText(CAST (*POINT(-30.628 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.04 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.04 40.312)' AS TEXT), 4329), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-65.04 40.312)' AS TEXT), 4326) <-y geom LIMIT to)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.016 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.016 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.016 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.483 51.666)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.483 51.666)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-8.483 51.666)' AS TEXT), 4326) ~ geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.9 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.9 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.9 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.9 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.9 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.381 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.381 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.381 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.381 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.381 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39,941 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39,941 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39,941 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port.area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.921 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.R.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.737 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.737 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.737 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.733 40.416)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.733 40.416)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.733 40.416)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.733 40.416)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.733 40.416)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.733 40.416)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.733 40.416)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.733 40.416)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.733 40.416)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.733 40.416)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS.'	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.995 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.995 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.995 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.995 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.995 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.974 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.974 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.974 40.312)' AS TEXT), 4326), as geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.948 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.948 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.948 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.948 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.948 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.458 48.691)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-11.458 48.691)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-11.458 48.691)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.052 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.052 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.052 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.052 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.052 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.052 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.745 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.745 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.745 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.283 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.283 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.283 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.283 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.283 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.173 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial, eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT-62-59 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62-59 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, order as WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-62-59 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATREOT' as type, gid, code, name FROM spatial, stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52-59 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52-59 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52-59 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52-59 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52-59 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52-59 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST (*POINT(-52-59 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFCM as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST (*POINT(-52-59 40.312)' AS TEX	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.368 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.368 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.368 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.368 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.368 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.213 48.936)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.213 48.936)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.213 48.936)' AS TEXT), 4326) <-> Company of the com	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.227 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.227 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.227 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.085 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.085 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.085 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.658 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.658 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.658 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.491 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWINI(ST_GeomFromText(CAST ('POINT(-29.491 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.491 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-33,594 40,312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33,594 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33,594 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33,594 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33,594 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33,594 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33,594 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33,594 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33,594 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33,594 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index.R.	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.93 46.219)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.93 46.219)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.93 46.219)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT1 as indexRS,'EEZ' as type, gid, code, name FROM spatial seez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.215 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS,'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.215 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.215 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.215 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.215 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.215 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.215 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.215 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.215 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS, '	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.71 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.71 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.71 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.713 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.713 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.713 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.588 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.588 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.588 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.034 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-57.034 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.034 40.312)' AS TEXT), 4326) <-> CENTRAL ('POINT(-57.034 40.312)' AS TEXT), 4326) <-> CE	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.225 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-48.225 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.225 40.312)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59,011 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-59,011 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59,011 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.287 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWININ(ST_GEOMETROMTEXT(CAST ('POINT(-23.287 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.287 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-66.728 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.728 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.728 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.728 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.728 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.29 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.29 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.29 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-58.701 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.701 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.701 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.701 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.701 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.992 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.992 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.992 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.657 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.657 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.657 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.63 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.11 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.11 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.11 40.312)' AS TEXT), 4326  geom LIMIT (10)	0	1	2	2	0	0,00
select *from ((SELECT 4 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial-from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial-port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STAFTRECT' as type, gid, code, name FROM spatial-stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial-gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial-gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial-gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial-gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial-gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial-gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.742 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.97 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.97 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.97 40.312)' AS TEXT), 4326) <->	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.011 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.011 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.011 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.341 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.341 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.341 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.341 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.341 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.407 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.407 40.312)' AS TEXT), 4326), geom, 22240) (RDBE BY ST_GeomFromText(CAST ('POINT(-51.407 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.944 44.205)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.944 44.205)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-15.944 44.205)' AS TEXT), 4326) <-> geom LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.947 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.947 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.947 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.947 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.947 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.357 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.357 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.357 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.543 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.543 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.543 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.543 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.543 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.543 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.543 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.543 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.543 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.543 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.068 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.068 40.312)' AS TEXT), 4326), acom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.068 40.312)' AS TEXT), 4326) = -x geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.742 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.742 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.742 40.312)' AS TEXT), 4326) <-> geom LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.684 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.8 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.8 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.8 40.312)' AS TEXT), 4326) <>-yeom LIMIT 10.	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.183 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.183 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_INTERSECT.	0	1	2	2	0	0,00
UNION ALL (SELECT 6 as index  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.874 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.874 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.874 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.64 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.64 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.64 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.225 40.312)' AS TEXT), 4326), geom, 22224) ORDER B1 3T_GEOMFromText(CAST ('POINT(-35.225 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.225 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.812 40.312)' AS TEXT), 4326), especially as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.812 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.812 40.312)' AS TEXT), 4326), especially as the standard of	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.789 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.789 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.789 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.212 48.937)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.212 48.937)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.212 48.937)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.212 48.937)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.212 48.937)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.478 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.478 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.478 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.478 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.478 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.644 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.644 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.644 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.644 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.644 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.436 50.713)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.436 50.713)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.436 50.713)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.246 42.903)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.46 42.903)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.246 42.903)' AS TEXT), 14326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.246 42.903)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.246 42.903)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index			2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23,171 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.171 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.171 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.84 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.84 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.plon area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.84 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.84 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.84 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.84 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.036 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.036 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.036 40.312)' AS TEXT), 4326) = 9 geom Limit 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.178 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.178 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.178 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.178 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.178 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST (POINT(-28.565 40.312)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-28.565 40.312)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-28.565 40.312)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ("POINT(-28.565 40.312)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ("POINT(-28.565 40.312)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.068 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.068 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.068 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.943 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.943 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.943 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial statt rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.943 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.943 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.943 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.943 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.943 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS.'	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.795 40.354)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.795 40.354)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.795 40.354)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.795 40.354)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.795 40.354)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.849 44.3)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.849 44.3)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.849 44.3)' AS TEXT), 4326), espec mLIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.164 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.164 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.164 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.164 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.164 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.164 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.696 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.696 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.696 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.039 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.039 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.039 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.858 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.858 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.858 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.894 43.255)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.894 43.255)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.1 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.1 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.1 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial mow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type_gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.505 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.505 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.505 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.505 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.505 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.128 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.128 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.128 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.128 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.128 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.19 47.959)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.19 47.959)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREÄ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.19 47.959)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.19 47.959)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.19 47.959)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.19 47.959)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.19 47.959)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.078 41.071)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.078 41.071)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.078 41.071)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-35.928 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.928 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.928 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.946 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.946 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.946 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44,41 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44,41 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44,41 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64, 765 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64, 765 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64, 765 40.312)' AS TEXT), 4326) <-> — geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.831 42.318)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.831 42.318)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-17.831 42.318)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-23.05 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-23.05 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-23.05 40.312)' AS TEXT), 3250)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-23.05 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-23.05 40.312)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.405 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.405 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.405 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance) as distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.678 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.678 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as 122e, y order to "Second Stance (geom, ST_GeomFromText(CAST ('POINT(-67.402 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.402 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.402 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.518 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.518 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.518 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.243 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.243 40.312)' AS TEXT), 4326), eye geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.015 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial. from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.015 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.015 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.015 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-47.015 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.624 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.624 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.624 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.286 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.286 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.286 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.286 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.286 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.129 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.129 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-53.129 40.312)' AS TEXT), 4326) ->> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.783 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.783 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.783 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.158 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.158 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.158 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.95 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.95 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.95 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.387 44.762)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.387 44.762)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.387 44.762)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.387 44.762)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.387 44.762)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.812 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.812 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.812 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.812 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.812 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.109 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.109 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.109 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.65 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.65 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.65 40.281)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.059 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.059 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.059 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.059 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.059 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.72 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.72 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.72 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.013 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.013 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.013 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)		1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.876 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.876 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.876 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT1-39,762 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ntmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39,762 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39,762 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39,762 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39,762 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.34 48.809)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.34 48.809)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.34 48.809)' AS TEXT), 3256) <> geom LIMIT to)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.659 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.659 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.659 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.659 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.659 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.173 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.173 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.173 40.312)' AS TEXT), 4326) -> geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.516 40.312)' AS TEXT), 4326),true) AS distance FROM spatial, port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.516 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.516 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32,6.40,312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32,6.40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32,6.40,312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55,7.40,312)' AS TEXT), 4326), frue) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55,7.40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.7.40,312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.219 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.219 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.219 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.533 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.533 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.533 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.039 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.039 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.039 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.851 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.851 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.851 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS,'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT-65.1 40.312)' AS TEXT), 4326) AND enabled = 'VI) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT-65.1 40.312)' AS TEXT), 4326)) AND enabled = "VI) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT-65.1 40.312)' AS TEXT), 4326)) AND enabled = "VI) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT-65.1 40.312)' AS TEXT), 4326)) AND enabled = "VI) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT-65.1 40.312)' AS TEXT), 4326)) AND enabled = "VI) UNION ALL (SELECT 6 as indexRS, 'FAO' as type.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.676 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.676 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.676 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.855 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.855 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.855 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.783 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.783 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.783 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.783 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.783 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as Yep, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.783 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as Yep, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.783 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as Yep, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.783 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as Yep, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.783 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as Yep, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.783 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as Yep, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.	0	1	2	2	0	0,00
(SELECT 'PORT's as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.513 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.513 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.513 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance (geom, ST_Distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-54.948 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-54.948 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.029 51.12)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.029 51.12)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.029 51.12)' AS TEXT), 4326) <> geom LIMIT 10;	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.655 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.655 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.655 40.312)' AS TEXT), 4326) <-> ————————————————————————————————————	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58,969 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-58,969 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58,969 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56, 338 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.338 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.338 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-47.109 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.109 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.109 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.568 46.581)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.568 46.581)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.568 46.581)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.088 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-63.088 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.088 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.847 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.847 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.847 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.847 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.847 40.312)' AS TEXT), 4326)) AND enabled = 'V') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.731 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.731 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.731 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.731 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.731 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.57 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.57 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.57 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.716 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-66.716 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.716 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.624 40.312)' AS TEXT), 4326)) AND enabled = (')' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, drino WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.624 40.312)' AS TEXT), 4326)) AND enabled = (')' UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial, port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.624 40.312)' AS TEXT), 4326)) AND enabled = (')' UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial, stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.624 40.312)' AS TEXT), 4326)) AND enabled = (')' UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-31.624 40.312)' AS TEXT), 4326)) AND enabled = (')' UNION ALL (SELECT 6 as index.")	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT, 53.247 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT, 63.247 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT, 63.247 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT, 63.247 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT, 43.247 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT, 43.247 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT, 43.247 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT, 43.247 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT, 43.247 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT, 43.247 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.94 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.127 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.916 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.916 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.916 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.916 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.916 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.815 50.334)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.815 50.334)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.815 50.334)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.602 45.547)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.602 45.547)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.602 45.547)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.602 45.547)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.602 45.547)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.602 45.547)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.602 45.547)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.069 41.08)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.069 41.08)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.069 41.08)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stl_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.069 41.08)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.069 41.08)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.245 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.245 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-52.245 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.516 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.516 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.516 40.312)' AS TEXT), 4326), as geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.269 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.269 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.269 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.013 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-66.013 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-66.013 40.312)' AS TEXT), 4326) < geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.178 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.178 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.178 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.178 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-65.178 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.679 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.679 40.312)' AS TEXT), 4326), geom, 22224) (ADREA BY ST_GeomFromText(CAST ('POINT(-29.679 40.312)' AS TEXT), 4326) = 9 geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.176 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.176 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.176 40.312)' AS TEXT), 4326) = 2 geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.742 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.742 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-53.742 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.629 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.629 40.312)' AS TEXT), 4326), geom, 2224) (ARDER BY ST_GeomFromText(CAST ('POINT(-46.629 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.244 41.905)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.244 41.905)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.244 41.905)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.244 41.905)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.244 41.905)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.698 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.698 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.698 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.698 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.698 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.698 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.698 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.583 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.583 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.583 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.719 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.719 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.719 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.335 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIT(-64.335 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.335 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58,853 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(IST_DWITHIN(TS), 2224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.853 40.312)' AS TEXT), 4326), esom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.853 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.675 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.675 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.675 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-10.618 49.531)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-10.618 49.531)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_intersects(geom, ST_GeomFromText(CAST ('POINT(-10.618 49.531)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.618 49.531)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.618 49.531)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.673 47.476)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.673 47.476)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.673 47.476)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.673 47.476)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.673 47.476)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.673 47.476)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.673 47.476)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.673 47.476)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.673 47.476)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.673 47.476)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAS	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.513 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.513 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.513 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial-eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.674 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.674 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.674 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-34.674 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-34.674 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-34.674 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-34.674 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-34.674 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-34.674 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as indexRS,	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.103 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.103 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.103 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.833 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.833 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.833 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.425 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.425 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.425 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.447 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.832 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \( \frac{1}{2} \) 'AND ST_DWISHIN(ST_GeomFromText(CAST ('POINT(-52.832 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-52.832 40.312)' AS TEXT), 4326) ->> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.496 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.496 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-39.496 40.312)' ASTEXT), 4326) ->> geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.102 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.102 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.102 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.102 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.102 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.113 47.036)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.113 47.036)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-13.113 47.036)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.42 46.729)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.mfo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.42 46.729)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.42 46.729)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.42 46.729)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.42 46.729)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, T	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.089 46.06)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.089 46.06)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.089 46.06)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.089 46.06)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.089 46.06)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.373 41.776)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.373 41.776)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.373 41.776)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.373 41.776)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.373 41.776)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.518 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.518 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.518 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.112 42.037)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.112 42.037)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.112 42.037)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.112 42.037)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.112 42.037)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.**)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.46 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.46 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.46 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.788 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.788 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.788 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.581 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.581 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.581 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.581 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.581 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.581 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.581 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.581 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.581 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.581 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS.	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.187 43.962)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.187 43.962)' AS TEXT), 4326), geom, 22224) (ASDER BY ST_GeomFromText(CAST ('POINT(-16.187 43.962)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.261 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.261 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-33.261 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38,748 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38,748 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-38,748 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.534 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.534 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.534 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-33.334 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-33.334 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-33.334 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-33.334 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.334 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.334 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.334 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.334 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.334 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.R.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.307 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.307 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.307 40.312)' AS TEXT), 4326), e> geom LIMIT 10)	0	1	2	2	0	0,00
[EAT], 4326), geom, 22224) ORDER BY ST_GEORIFORM EXILOAST (POINT(-44.307 40.312) AS TEXT), 4326) <-> geom Limit 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.441 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.441 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.441 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.95 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.95 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.95 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance) (ST_GeomFromText(CAST ('POINT(-20.835 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.835 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.835 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.015 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.015 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.015 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.015 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.015 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.995 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.995 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.995 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.957 42.192)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.957 42.192)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.957 42.192)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.212 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.212 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.212 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.212 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.212 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-36.488 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = 'Y AND ST_DWIthin(ST_GeomFromText(CAST (POINT(-36.488 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-36.488 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.271 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.271 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.271 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.271 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.271 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.781 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.781 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.781 40.312)' AS 1241 (A) 242)' AS 1241 (A) 242 (A) 2432 (	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.026 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.026 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.026 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.982 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.982 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.982 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.701 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-34.701 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.701 40.312)' AS 125(-34.701	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.014 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-25.014 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.014 40.312)' AS TEXT), 4326) <-> CENTRAL PROPERTY OF THE PROPERTY O	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.454 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.454 40.312)' AS TEXT), 4326), geom, 2224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.454 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.415 43.734)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.415 43.734)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.415 43.734)' AS TEXT), 4326) -> geom LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.963 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAS	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.814 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.814 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.814 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.572 48.577)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.572 48.577)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.572 48.577)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.572 48.577)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.572 48.577)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.466 40.683)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.466 40.683)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.466 40.683)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.068 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.068 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.068 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-51,734 40.312)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = \(^1\) AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-51,734 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51,734 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.49.98 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT'.49.98 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'.49.98 40.312)' AS TEXT), 4326) <>-9 geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.876 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.176 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.176 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.176 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.176 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.176 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.411 46.738)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.411 46.738)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.411 46.738)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.411 46.738)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.411 46.738)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14,678 45.471)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14,678 45.471)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.678 45.471)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.034 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWISHIN(ST_GeomFromText(CAST ('POINT(-68.034 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-68.034 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.562 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.562 40.312)' AS TEXT), 4326), geom, 22224) (ADBER BY ST_GeomFromText(CAST ('POINT(-44.562 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.258 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.258 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.258 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.258 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-38.258 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.281 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.281 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.281 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.281 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.281 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.26 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.415 44.734)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.415 44.734)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.415 44.734)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.415 44.734)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.415 44.734)' AS TEXT), 4326)). AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.67 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.67 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.67 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.201 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.201 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.201 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.094 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.821 44.328)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.821 44.328)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.821 44.328)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.837 43.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.837 43.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.837 43.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.837 43.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.837 43.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.934 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.934 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.934 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.934 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.934 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.242 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.242 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.242 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.242 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.242 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.243 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.243 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.243 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.243 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.243 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.933 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.933 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.933 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.933 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.933 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.46 46.689)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.46 46.689)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.46 46.689)' ASTEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(tygeom, ST_GeomFromText(CAST ('POINT(-13.46 46.689)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.46 46.689)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(*-10.836 49.313) ÅS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(*-10.836 49.313)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(*-10.836 49.313)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(*-10.836 49.313)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(*-10.836 49.313)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.881 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.213 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.213 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.213 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.213 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.213 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.786 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.786 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.786 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.786 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtd; WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.786 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.393 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.393 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.393 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.393 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.393 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.784 40.312)' AS TEXT), 4259)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.134 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.134 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.134 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.889 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.889 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.889 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.998 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.998 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.998 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.998 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.998 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-27.851 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-27.851 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-27.851 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-27.851 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-27.851 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.**	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.31 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.31 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.31 40.312)' AS TEXT), 4328) (>> geom_LiMIT (0)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.684 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.684 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.684 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.256 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.256 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.256 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.13 40.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.13 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.13 40.281)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.907 43.242)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-16.907 43.242)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-16.907 43.242)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-16.907 43.242)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-16.907 43.242)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.596 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.596 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.596 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.268 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.268 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.268 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.105 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.105 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.105 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.105 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.105 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.105 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.062 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.062 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.062 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.242 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.242 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.242 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.518 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DWITC) AS (STEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.518 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-42.20 40.312)' AS TEXT), 4326)) AND enabled = ''') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-42.202 40.312)' AS TEXT), 4326)) AND enabled = ''') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-42.202 40.312)' AS TEXT), 4326)) AND enabled = ''') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-42.202 40.312)' AS TEXT), 4326)) AND enabled = ''') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-42.202 40.312)' AS TEXT), 4326)) AND enabled = '') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.86 40.312)' AS TEXT), 4326), true   AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-46.86 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-46.86 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.74 41.409)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.74 41.409)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.74 41.409)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.74 41.409)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.74 41.409)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.587 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÄLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.025 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.757 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.997 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.997 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.997 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.677 48.472)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.677 48.472)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.569 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.569 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.sport_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.569 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.569 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.569 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.569 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.569 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.569 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.569 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.569 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.523 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.523 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.523 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.08 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.08 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.08 40.312)' AS TEXT), 4326), sey geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-21.481 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.819 45.33)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.819 45.33)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.819 45.33)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.508 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.508 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.508 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.726 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS_TEXT, 4326)	0	1	2	2	0	0,00
UNION ALL (SELECT to as index  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.011 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.011 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.011 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.94 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.94 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.94 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.289 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.289 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.289 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.356 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.356 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.356 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.652 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.652 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.652 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.816 40.333)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.816 40.333)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.816 40.333)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.816 40.333)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-19.816 40.333)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.188 40.961)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.188 40.961)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.188 40.961)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.877 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.152 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.152 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.152 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.119 51.03)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.119 51.03)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.119 51.03)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.119 51.03)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.119 51.03)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.797 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.797 40.312)' AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.797 40.312)' AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.797 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.797 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.608 40.312)' AS TEXT), 4326),true) AS distance FROM spatial, port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.608 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.608 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.82 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.82 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.82 40.312)' AS TEXT), 4326) <>= geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.364 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial, port WHERE enabled = "V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.364 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.364 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEz' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.332 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.332 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.332 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.332 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SCFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.332 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.184 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.184 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.184 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.247 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.247 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.247 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.247 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.247 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.247 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.247 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.247 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.247 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.247 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.645 40.312)' AS TEXT), 4326),true) AS distance FROM spatial, port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.645 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.645 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.379 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.379 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.379 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.626 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.626 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.626 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POINT(-44.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.601 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.601 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.601 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.13 49.019) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.13 49.019)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.13 49.019)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_INTERSECTS(geom, ST_GeomFromText(CAST ('POINT(-11.13 49.019)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.13 49.019)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.13 49.019)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.953 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.953 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.953 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.498 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.498 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.498 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.333 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.333 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.333 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.333 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.333 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.239 49.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.239 49.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.239 49.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.239 49.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.239 49.91)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.027 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.027 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-39.027 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.203 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.203 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.203 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.203 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.203 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.594 41.555)' AS TEXT), 4326), true) A Sidstance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.594 41.555)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-18.594 41.555)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-32.117 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-32.117 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-32.117 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-32.117 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-32.117 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.546 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.546 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.546 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.891 50.258)' AS TEXT), 4326),true), A distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.891 50.258)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.891 50.258)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.118 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.118 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.118 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.118 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.118 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.477 40.312)* AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.#no WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.477 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.477 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.477 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.477 40.312)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.36.509 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.36.509 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.36.509 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.36.509 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.36.509 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.446 40.312)' AS TEXT), 4326),true) A Sitsance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.446 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.446 40.312)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.613 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.613 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.613 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.613 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.613 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.032 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.032 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.032 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.977 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.977 40.312)' AS TEXT), 4326), c-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, S	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.85 43.299)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.85 43.299)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.85 43.299)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.85 43.299)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.85 43.299)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.85 43.299)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.53 40.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.53 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.53 40.281)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.497 43.652)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.497 43.652)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.497 43.652)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.932 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.963 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.963 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-60.963 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.417 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.417 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.417 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.417 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.417 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54,904 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54,904 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54,904 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.926 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.926 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.489 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.498 43.651)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.498 43.651)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.498 43.651)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.498 43.651)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.498 43.651)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.985 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POIN	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "F"	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.905 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.905 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-27.905 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.144 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.56 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.56 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-30.56 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.289 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.289 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.289 40.312)' AS TEXT), 4326) <->	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.544 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWINIn(ST_GeomFromText(CAST ('POINT(-45.544 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-45.544 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.048 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.048 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.048 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.048 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.048 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.124 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.124 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-68.124 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.051 46.098)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.051 46.098)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.051 46.098)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.051 46.098)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.051 46.098)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.197 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.837 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \( \frac{1}{2} \) 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.837 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-64.837 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.485 43.664)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.485 43.664)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.485 43.664)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.485 43.664)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.485 43.664)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.552 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.552 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.552 40.312)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.655 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.655 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.655 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.655 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.655 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-46.424 40.312)', AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-46.424 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.424 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.424 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.424 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.237 43.912)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.237 43.912)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.237 43.912)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.367 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.367 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.367 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.664 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.664 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(tgeom, ST_GeomFromText(CAST ('POINT(-39.664 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.664 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.664 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.664 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.664 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.664 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.664 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.329 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.21 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.21 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.21 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.026 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.026 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.026 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.026 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.026 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.026 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.026 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.026 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.026 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.026 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as index.RS, 'GFCM' as type, gid, code, name FROM spatia	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.835 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.835 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.835 40.312)' AS TEXT), 4326), expend_spatial.port.pdf.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.93 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.93 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.93 40.312)' AS TEXT), 4326), egom_DMINT (20)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.207 40.942)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.207 40.942)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.207 40.942)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.207 40.942)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.207 40.942)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.207 40.942)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.207 40.942)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.'	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.794 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.794 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.794 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.767 40.312) AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.767 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.767 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.767 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.767 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type.gfc.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.091 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.091 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.091 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.791 42.358)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, drmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.791 42.358)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.791 42.358)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.791 42.358)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.791 42.358)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.807 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.807 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.807 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.807 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.807 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.288 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.111 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.111 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.111 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.67 40.479)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'V' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.67 40.479)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.67 40.479)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.951 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.951 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.951 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.328 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.328 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.328 40.312)' AS TEXT), 4326), ~ geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.643 45.506)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.643 45.506)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.643 45.506)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.876 41.273)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.876 41.273)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.876 41.273)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.55.40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.55.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.55.40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.07 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.07 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.07 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56,781 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-56.781 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.781 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45,6 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45,6 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45,6 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.227 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.227 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.227 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.855 48.294)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-11.855 48.294)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.855 48.294)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.961 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.961 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.961 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.827 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.827 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.827 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.806 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.806 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.806 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.047 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.047 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.047 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.294 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.294 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.294 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.307 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = 'Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-45.307 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.307 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.797 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.797 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.797 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.732 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.732 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.732 40.312)" AS TEXT), 4226)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.732 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.732 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-33.732 40.312)" AS TEXT), 4326)) AND enabled = "Y)	0	1	2	2	0	0,00
UNION ALL (SELECT 6 as index  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.054 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.054 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.054 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.85 42.321)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.85 42.321)' AS	0	1	2	2	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.85 42.321)' AS TEXT), 4326) <> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.99 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.99 40.312)' AS TEXT), 4326), pages 1,2321, ASPER BY ST_GEOMFROMTEX (CAST ('POINT(-49.99 40.312)' AS TEXT), 4326), pages 1,3321, ASPER BY ST_GEOMFROMTEX (CAST ('POINT(-49.99 40.312)' AS TEXT), 4326), pages 1,3321, ASPER BY ST_GEOMFROMTEX (CAST ('POINT(-49.99 40.312)' ASPER BY ST_GEOMFROMTEX (CAST ('POINT(-49.99 40.312)' ASPER BY ST_GEOMFROMTEX (CAST ('POINT(-49.99 40.312)' ASPER BY ST_GEOMFROMTEX ('AST ('POINT(-49.99 40.312)') ASPER BY ST_GEOMFROMTEX ('AST ('POINT(-49.99 40.312)' ASPER BY ST_GEOMFROMTEX ('AST ('POINT(-49.99 40.312)') ASPER BY ST_GEOMFR	0	1	2	2	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.99 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.05 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.05 40.281)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.355 42.794)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.355 42.794)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.355 42.794)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.355 42.794)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.355 42.794)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.355 42.794)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.355 42.794)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.248 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.483 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.483 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.483 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.483 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.483 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',52,881 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIstin(ST_GeomFromText(CAST ('POINT',62.881 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT',62.881 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.741 40.408)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.741 40.408)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.741 40.408)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.197 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.197 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-22.197 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.63 46.519)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIstin(ST_GeomFromText(CAST ('POINT(-13.63 46.519)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-13.63 46.519)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.304 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.304 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.304 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.304 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.304 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.676 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.676 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.676 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.676 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.676 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.397 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.397 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.397 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.103 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.103 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.103 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.103 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.103 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.567 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.567 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.567 40.312)' AS TEXT), 4326), exp. geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.973 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.973 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.973 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.973 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.973 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-43.078 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.224 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.224 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.224 40.312)' AS TEXT), 4326), -2 geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT:42 621 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText)(CAST (POINT:4.2621 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT:4.2.621 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.34 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.34 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.34 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.34 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.34 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.36.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.36.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFOMT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.214 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.214 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.214 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.624 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.624 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.624 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.624 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.624 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index		1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.995 41.154)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.995 41.154)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.995 41.154)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.995 41.154)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.995 41.154)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.499 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-35.481 40.312)' AS TEXT), 4326)) AND enabled = "V") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-35.481 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'POINT(-35.481 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-35.481 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-35.481 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-35.481 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index.")	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.703 44.446)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.703 44.446)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.703 44.446)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.703 44.446)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.703 44.446)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.539 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.539 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREÄ as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.539 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.539 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.539 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45,217 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45,217 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45,217 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.042 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.042 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-21.042 40.312)' AS TEXT), 4326) - geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.49.462 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT'.49.462 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT'.49.462 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.287 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.287 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-21.287 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20,951 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20,951 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-20,951 40.312)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.927 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.927 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.927 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.927 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.927 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.374 40.312)' AS TEXT), 4326), true) A Sistance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.374 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.374 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.482 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.407 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.407 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.407 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.477 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.477 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.477 40.312)' AS TEXT), 4326) - 2 geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.961 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.961 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.961 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-15.755 44.394)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-15.755 44.394)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-15.755 44.394)' AS TEXT), 4226)) AND enabled = Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-15.755 44.394)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.g/cm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-15.755 44.394)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as lye, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.974 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.974 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.974 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial-eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-38.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial-from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-38.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial-port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-38.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial-stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-38.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial-grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-38.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44,733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.733 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.18 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.18 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-68.18 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-\$2,533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-\$2,533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-\$2,533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-\$2,533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-\$2,533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-\$2,533 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50,92 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST (POINT(-50.92 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-50.92 40.312)' AS TEXT), 4326) <-> geom LIMIT to)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.688 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.688 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.688 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.688 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.688 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.719 48.43)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.719 48.43)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.719 48.43)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.606 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.299 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.299 40.312)' AS TEXT), 4326), year, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-61.299 40.312)' ASTEXT), 4326) ->> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.052 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.052 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.052 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)		1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52.917 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.007 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.007 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.007 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.007 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.007 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.007 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.007 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.007 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.007 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.007 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as indexRS,	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.87 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.87 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.87 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.87 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.87 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.002 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.099 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.099 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.099 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.301 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.301 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.301 40.312)' AS TEXT), 4326) <->, geom LMIII' 10)		1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.926 41.223)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.926 41.223)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.926 41.223)' AS TEXT), 4326), sey geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.361 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.85 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.85 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.85 40.312)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.607 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.304 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.304 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.304 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-31.911 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-31.911 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-31.911 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-31.911 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-31.911 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select *from ((SELECT 4 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.206 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STAFRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.206 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.206 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.206 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.206 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.206 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.206 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.206 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.128 41.021)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.128 41.021)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.128 41.021)' AS TEXT), 4326) + 25 geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.042 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.201 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "\" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.201 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.201 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.824 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.824 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.824 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.824 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.824 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.196 49.953)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.196 49.953)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.196 49.953)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.196 49.953)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.196 49.953)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.31 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.31 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.31 40.312)' AS TEXT), 4326  geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.021 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.021 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-55.021 40.312)' AS TEXT), 4326) -> geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.814 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GEOMFromText(CA	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.525 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.774 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.774 40.312)' AS TEXT), 4326), geom, 2224) (AND ST_DWITH 10) TEXT), 4326), geom (EMITH 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.027 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POIN	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.619 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.619 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.619 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.666 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.666 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.666 40.312)' AS TEXT), 4326) = 9 geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.271.40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.271.40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-68.271.40.312)' AS TEXT), 4326) = 9 geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.386 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.809 47.34)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.809 47.34)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.809 47.34)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.809 47.34)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.809 47.34)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.636 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.636 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.636 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.897 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.897 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-56.897 40.312)' AS TEXT), 4326) ~ geom Limit 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.046 50.103)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.046 50.103)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.046 50.103)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.046 50.103)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-10.046 50.103)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.597 45.552)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.597 45.552)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.597 45.552)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.597 45.552)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.597 45.552)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.418 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.418 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.418 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.846 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.846 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.846 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.392 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.392 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.392 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.44 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, T	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.727 47.422)* AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.727 47.422)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.727 47.422)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.727 47.422)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-12.727 47.422)* AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-20.134 40.312) 'AS TEXT), 34326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-20.134 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-20.134 40.312) 'AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.134 40.312)" AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-20.134 40.312)" AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.026 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.026 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.026 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.816 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.816 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.816 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.003 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.003 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.003 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.668 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.668 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.668 40.312)' AS TEXT), 4326), exp. geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.032 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.032 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.032 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.032 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.032 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.778 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.773 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.773 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.773 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.44 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.44 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.44 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.44 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.44 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'E	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.4 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.4 40.312)' AS TEXT), 4326) <>> geom LIMIT 10) TEXT), 4326, geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.4 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.498 40.651)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.498 40.651)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.498 40.651)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.094 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.094 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.094 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.431 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.431 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.431 40.312)' AS TEXT), 4326), expend_LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.08 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.641 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.641 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.641 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.641 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-40.641 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-54.096 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.096 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.096 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.139 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial. from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.139 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.139 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.139 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.139 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.206 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.206 40.312)' AS TEXT), 4326), geom_22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.206 40.312)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-24.031 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.031 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.031 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.031 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.031 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.937 48.212)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.937 48.212)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.937 48.212)' AS TEXT), 4326), expend_LIMIT 10)	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.488 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.488 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.488 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.431 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.431 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.431 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.11 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.11 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.11 40.281)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.181 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.181 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.181 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.235 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.235 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.235 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.963 48.186)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.963 48.186)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.963 48.186)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.963 48.186)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.963 48.186)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.963 48.186)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.963 48.186)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.963 48.186)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.809 46.34)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.809 46.34)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.809 46.34)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.809 46.34)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.809 46.34)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mfm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.19 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.757 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.757 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.757 40.312)' AS TEXT), 4326), expend_LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-49.676 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.676 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.676 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.676 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.676 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.729 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.729 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.729 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.184 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.184 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.184 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,743 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,743 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,743 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,743 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,743 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,743 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,743 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,743 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,743 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46,743 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.052 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-67.052 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-67.052 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.909 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.909 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-64.909 40.312)' AS TEXT), 4326) ->> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.336 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.487 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.487 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.487 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.602 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.602 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.602 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.602 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.602 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.848 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.848 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.848 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.433 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'V' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.433 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.433 40.312)' AS TEXT), 4326) - geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POIN	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.939 46.21)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.939 46.21)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.939 46.21)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.939 46.21)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.939 46.21)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gform WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.939 46.21)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.528 40.621)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.528 40.621)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.528 40.621)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.528 40.621)* AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-19.528 40.621)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.376 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.376 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.376 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.376 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.376 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.114 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.114 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.114 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.114 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.114 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.186 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.186 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.186 40.312)' AS TEXT), 4326) = 2 geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.773 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.773 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.773 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.066 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.066 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.066 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.066 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.066 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.066 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.066 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.066 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.066 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.066 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.237 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.237 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.237 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.237 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.237 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.956 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-31.956 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.956 40.312)' AS TEXT), 4326), ~ geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.164 43.985)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.164 43.985)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.164 43.985)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.164 43.985)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.164 43.985)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.168 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.168 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.168 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.458 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.369 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "\"AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.369 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.369 40.312)' AS TEXT), 4326) - geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.451 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.451 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.451 40.312)' AS TEXT), 4326) - 2 geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.572 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.572 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.572 40.312)' AS TEXT), 4326) <-x geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.485 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.485 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.485 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.51 44.661)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rimo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.51 44.661)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.51 44.661)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-15.51 44.661)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.51 44.661)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.51 44.661)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.58.395 40.312)' AS TEXT), 4326),true) AS distance FROM spatial, port WHERE enabled = "X AND ST_DWIthin(ST_GeomFromText(CAST ('POINT'.58.395 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'.58.395 40.312)' AS TEXT), 4326), ~ geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.209 40.312)' AS TEXT), 4326),true) AS distance FROM spatial, port WHERE enabled = "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.209 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.209 40.312)' AS TEXT), 4326) - geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.597 44.552)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.597 44.552)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.597 44.552)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.729 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÄLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.729 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.729 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.729 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.729 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.819 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.819 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.819 40.312)' AS TEXT), 4326). <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 26.954 40.312)' AS TEXT), 4326),true) AS distance FROM Spatial,port WHERE enabled = \(^1\) AND ST_DWISTON ("POINT', 26.954 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT', 26.954 40.312)' AS TEXT), 4326), geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT, 33,982 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT, 33,982 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT, 33,982 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',58.732 40.312)' AS TEXT), 4326),true) AS distance FROM Spatial,port WHERE enabled = "X AND ST_DWIthin(ST_GeomFromText(CAST ('POINT',58.732 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT',58.732 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.45.145 40.312)' AS TEXT), 4326),true) AS distance FROM Spatial,port WHERE enabled = \(^1\) AND ST_DWISTON ("POINT'.45.145 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT'.45.145 40.312)' AS TEXT), 4326), geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.002 46.147)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.002 46.147)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.002 46.147)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.002 46.147)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.002 46.147)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.521 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CA	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST ('POINT(-48.492 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CA	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.914 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.914 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.914 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.869 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.665 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.665 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.665 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.322 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.322 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.322 40.312)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.779 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.779 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.779 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.779 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-66.779 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.502 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.502 40.312)' AS TEXT), 4326), geom, 2224) (ANDER BY ST_GeomFromText(CAST ('POINT(-63.502 40.312)' AS TEXT), 4326), exp. geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.258 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.258 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-54.258 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.638 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.638 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.638 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.638 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.638 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-55.078 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST (POINT(-55.078 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-55.078 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom. ST_GeomFromText(CAST ('POINT(-30.09 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.09 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.09 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.09 40.312)' ASTEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.09 40.312)' ASTEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.729 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.729 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-66.729 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.012 46.137)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.012 46.137)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.012 46.137)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.012 46.137)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.012 46.137)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.012 46.137)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.012 46.137)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.012 46.137)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.012 46.137)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.012 46.137)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.689 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.689 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.689 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.625 42.524)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.625 42.524)' AS TEXT), 4326), geom, 22224) (ADER BY ST_GeomFromText(CAST ('POINT(-17.625 42.524)' AS TEXT), 4326) ->> geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.51 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-55.51 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.932 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.932 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.932 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19,531 40.618)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.531 40.618)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.531 40.618)' AS TEXT), 4326), <a ("point(-27.036="" 40.312)"="" 4326))="" <="" and="" area="" as="" code,="" enabled="Y) UNION ALL (SELECT 6 as index&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;1&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;0,00&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.163 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.163 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.163 40.312)' AS TEXT), 4326) &lt;-&gt; geom LIMIT 10)&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;1&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;0,00&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT-67-391 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-67.391 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-67.391 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-67.391 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.391 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index." from="" gfcm"="" gid,="" href="https://example.com/spatial-restriction-restric&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;1&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;0,00&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (" name="" point(-27.036="" portarea"="" rfmo'="" spatial.fmo="" spatial.gtm="" spatial.port,="" spatial.stat_rect="" st_geomfromtext(cast="" st_intersects(geom,="" statrect"="" td="" text),="" type,="" where=""><td>0</td><td>1</td><td>2</td><td>2</td><td>0</td><td>0,00</td></a>	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.153 49.996)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.153 49.996)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.153 49.996)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.933 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.933 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.933 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.168 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.168 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.168 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.505 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.505 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.505 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.575 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.575 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.575 40.312)' AS TEXT), 4326) = 9 geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.528 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.528 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.528 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.822 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.822 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.822 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.15 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.985 43.164)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.985 43.164)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.985 43.164)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.04 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.04 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.04 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.187 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.187 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.187 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.187 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.187 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.005 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = \(^1\) AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-62.005 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.005 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.186 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "\" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.186 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.186 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.064 46.085)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.064 46.085)' AS TEXT), 4326)). AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.064 46.085)' AS TEXT), 4326)). AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.064 46.085)' AS TEXT), 4326)). AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.064 46.085)' AS TEXT), 4326)). AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.597 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERES ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.836 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS_TEXT, 4326)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.626 50.523)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.626 50.523)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.626 50.523)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.626 50.523)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.626 50.523)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.077 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.157 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.157 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.157 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.157 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.157 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.668 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.668 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.668 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.7 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.7 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.7 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.143 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.143 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.143 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.612 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.612 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.612 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.612 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.612 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.245 48.904)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.245 48.904)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.245 48.904)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.245 48.904)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.245 48.904)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.367 48.782)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.367 48.782)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.367 48.782)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.367 48.782)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.367 48.782)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.716 44.433)', AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-15.716 44.433)', AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-15.716 44.433)', AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-15.716 44.433)', AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-15.716 44.433)', AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.008 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.008 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.008 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.572 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.572 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-51.572 40.312)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.436 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.436 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.436 40.312)' ASTEXT), 4326) ->>> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.96 51.189)' AS TEXT), 4326),true), 328 (sistance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.96 51.189)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.96 51.189)' AS TEXT), 4326), espe (speem LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.616 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.616 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.616 40.312)' ASTEXT), 4326) ->> geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.709 40.312)' AS TEXT), 4326),true), AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.709 40.312)' AS TEXT), 4326), exp. 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.709 40.312)' AS TEXT), 4326), exp. 2500 LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.35 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.35 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.35 40.312)' AS TEXT), 4328) (-y geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.83 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.83 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.83 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.213 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.213 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.213 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.213 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.213 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.337 44.812)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.337 44.812)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.337 44.812)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_INTERS TAX ('TOINT(-28.246 40.3	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.503 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.503 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.503 40.312)' AS TEXT), 4326) <-y> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.519 46.63)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.519 46.63)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.519 46.63)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.519 46.63)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.519 46.63)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.519 46.63)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.6 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.6 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.6 40.312)' AS TEXT), 4326) <> geom LIMIT 10.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.73 40.281)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.73 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.73 40.281)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.515 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.515 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.515 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.515 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.515 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.7 40.312)' AS TEXT), 4326), true, AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-48.7 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.7 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.755 47.394)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.755 47.394)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.755 47.394)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.205 43.944)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.205 43.944)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.205 43.944)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.467 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.467 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.467 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.467 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.467 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.523 48.626)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.523 48.626)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.523 48.626)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatials eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.608 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.608 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.608 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.608 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.608 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.608 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.608 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.608 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.608 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.608 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CA	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.663 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.663 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.663 40.312)' AS TEXT), 4326) = 9 geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.345 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.345 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.345 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.345 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.345 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.345 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.079 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial port WHERE enabled = "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.079 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.079 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.323 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.323 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.323 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.348 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.348 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.348 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.916 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.916 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.916 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.916 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.916 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.619 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.619 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.619 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.455 47.694)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.455 47.694)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.455 47.694)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.455 47.694)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.455 47.694)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.163 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.163 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.163 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS,'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.909 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.909 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.909 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.909 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.909 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.909 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.909 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.909 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.909 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.909 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAST	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.845 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.845 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.845 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.502 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.502 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.502 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.598 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.598 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.598 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.258 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.258 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.258 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.614 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAS	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.006 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.006 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.006 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.211 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.412 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.412 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.412 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.412 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.412 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.412 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.412 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.412 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.412 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.412 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'FFOMText' AS TEXT, 4326) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'FFOMText' AS TEXT, 4	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.03 48.141)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.03 48.141)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.03 48.141)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.96 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.96 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.96 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.438 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.438 40.312)' AS TEXT), 4326), yeen, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.438 40.312)' AS TEXT), 4326) ->> geom LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.794 46.355)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.794 46.355)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.794 46.355)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.794 46.355)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.794 46.355)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.794 46.355)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.794 46.355)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.794 46.355)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM'	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.163 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.163 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.163 40.312)' AS TEXT), 4326) <->, geom LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.557 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.073 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.073 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.073 40.312)' AS TEXT), 4326) ~ geom LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.314 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.314 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.314 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.314 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.314 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.314 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.314 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS,	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.614 50.535)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.614 50.535)' AS TEXT), 4326), geom_ 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.614 50.535)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.924 48.225)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.924 48.225)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.924 48.225)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.924 48.225)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.924 48.225)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.924 48.225)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.848 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.848 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.848 40.312)' AS TEXT), 4326) ->> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.616 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.616 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.616 40.312)' AS TEXT), 4326) ->> geom LIMIT 10)	0	1	2	2	0	0,00
select from ((SELECT 1 as indexRS; FEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.088 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.088 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS; PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.088 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS; STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.088 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS; GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.088 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.522 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48,256 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48,256 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.256 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.9 49.249)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.9 49.249)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.9 49.249)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.9 49.249)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.9 49.249)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.893 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.436 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.436 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.436 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.253 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.253 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.253 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.121 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.121 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.121 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.121 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.121 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-9.904 50.245)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-9.904 50.245)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-9.904 50.245)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-9.904 50.245)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-9.904 50.245)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-51.438 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST. DWithin(ST_GeomFromText(CAST ('POINT(-51.438 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.438 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez. WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-20.66 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-20.66 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-20.66 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-20.66 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-20.66 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-20.66 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST (*POINT(-20.66 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.593 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.593 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.593 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.003 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.003 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.003 40.312)' AS TEXT), 4326) -> geom LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.273 45.876)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.273 45.876)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.273 45.876)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.273 45.876)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.273 45.876)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.708 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.708 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.708 40.312)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.128 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.128 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.128 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.128 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.128 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.128 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.563 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.563 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.563 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.563 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.563 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.843 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.843 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.843 40.312)' AS TEXT), 4326) <->, geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.938 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.938 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.938 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.659 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.659 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.659 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.659 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.659 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.984 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.984 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.984 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.844 48.305)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.844 48.305)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.844 48.305)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.844 48.305)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.844 48.305)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.393 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.393 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.393 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.393 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.393 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.46 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.46 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-67.46 40.312)' AS TEXT), 4326) <>-geomLiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.939 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.939 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.939 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.654 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.465 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.465 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.465 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.998 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.998 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.998 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.998 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-37.998 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.271 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.271 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.271 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.572 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.572 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.572 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.572 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.572 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.691 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.691 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.691 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.6 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'FACT 5 as index	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.69 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'E	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.633 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.633 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.633 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.633 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.633 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.633 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÅLL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromT	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.699 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.699 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.699 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.699 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.699 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.817 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.tmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.817 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.817 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.817 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.817 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.858 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-21.858 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-21.858 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-21.858 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-21.858 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.918 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.918 40.312)' AS TEXT), 4326), geom_22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.918 40.312)' AS TEXT), 4326) <-> geom_LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.292 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.292 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.292 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.599 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.599 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.599 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.477 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.477 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.477 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
Select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.058 44.091)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.058 44.091)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.058 44.091)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.058 44.091)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.058 44.091)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.931 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.931 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-29.931 40.312)' AS TEXT), 4326) ->> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.063 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.063 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.063 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.063 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.063 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.048 46.101)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.048 46.101)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREĂ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.048 46.101)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.048 46.101)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtor WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-14.048 46.101)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	O	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.351 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.351 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.351 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.946 50.203)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.946 50.203)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.946 50.203)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.946 50.203)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.946 50.203)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.397 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.397 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-51.397 40.312)' AS TEXT), 4326) ->>> geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.794 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.794 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.794 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.794 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.794 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.098 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.098 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.098 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.02 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.02 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.02 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.798 42.351)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.798 42.351)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.798 42.351)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'GRTARECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS, 'GFCM	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.845 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.845 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.845 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.38 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.38 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.38 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.359 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_GeomFromText(CAST ('POINT(-35.359 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.359 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58, 204 40, 312)' AS TEXT), 4326), true, AS distance FROM spatial port WHERE enabled = "Y AND ST_DOWITHIN(FS, 100, 100, 100, 110, 110, 110, 110, 11	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINTI-62.832 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINTI-62.832 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-62.832 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-62.832 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-62.832 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-62.832 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-62.832 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-62.832 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-62.832 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.141 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.141 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.141 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.141 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.141 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.968 49.181)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.968 49.181)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.968 49.181)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.968 49.181)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.968 49.181)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.451 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.451 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.451 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.508 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.508 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.508 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.508 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.508 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.425 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.425 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.425 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.598 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.598 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.598 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT-12.807 47.342)' AS TEXT), 4326)) AND enabled = ''Y UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-12.807 47.342)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.807 47.342)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.star.ect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.807 47.342)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.807 47.342)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 31,853 40,312)' AS TEXT), 4326), true) AS distance FROM spatial,port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31,853 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31,853 40,312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.577 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.577 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.577 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.577 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.577 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.992 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.992 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.992 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.124 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.124 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.124 40.312)' AS TEXT), 4326) - 2 geom LiMT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.899 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.899 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.899 40.312)' AS TEXT), 4326) - 2 geom LiMT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.089 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.279 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.279 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.279 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.621 43.528)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.621 43.528)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.621 43.528)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.451 40.698)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.451 40.698)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.451 40.698)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.451 40.698)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.451 40.698)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.725 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.725 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.725 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.725 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.725 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.247 50.902)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.247 50.902)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.247 50.902)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.247 50.902)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-9.247 50.902)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.083 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.083 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.083 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.083 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.083 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.979 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.979 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.979 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.629 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.629 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.629 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.529 49.62)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.529 49.62)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.529 49.62)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.529 49.62)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.529 49.62)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.757 41.392)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.757 41.392)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.757 41.392)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.62 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.62 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.62 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_INTERSECTS(geom, ST_GeomFromText(CAST ('POINT(-32.62 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.62 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.62 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.55 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.55 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-65.55 40.312)' AS TEXT), 4326) <->, geom LIMIT to)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.485 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.485 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.485 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.485 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.485 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.485 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.485 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-39.967 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWIthin(ST_GeomFromText(CAST (POINT(-39.967 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST (POINT(-39.967 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.039 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.039 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-53.039 40.312)' AS TEXT), 4326) = 2-2 geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.286 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.286 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.286 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.518 46.631)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.518 46.631)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.518 46.631)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.101 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.101 40.312)' AS TEXT), 4326), acom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.101 40.312)' AS TEXT), 4326) = -x geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.77 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.77 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.77 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.77 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.77 40.281)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.119 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.119 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.119 40.312)' AS TEXT), 4326), as geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.773 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.773 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.773 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial-esz WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.198 46.951)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.198 46.951)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.198 46.951)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.198 46.951)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.198 46.951)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.198 46.951)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.198 46.951)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.198 46.951)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.24 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST DWithin(ST GeomFromText(CAST ('POINT(-43.24 40.312)' AS	0	1	2	2	0	0,00
TEXŤ), 4326), geom, 22224) ORĎER BY ST_GeomFromText(CAST ('POINT(-43.24 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )  select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-31.161 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.03 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.03 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-42.03 40.312)' AS TEXT), 4326) <->, geom LIMIT to)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.982 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.982 40.312)' AS TEXT), 4326), geom, 22224) (ARDER BY ST_GeomFromText(CAST ('POINT(-59.982 40.312)' AS TEXT), 4326) = Yes geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.822 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.822 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.822 40.312)' AS TEXT), 4326), as geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.536 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.536 40.312)' AS TEXT), 4326), geom, 22224) (ADREB BY ST_GeomFromText(CAST ('POINT(-41.536 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.42 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.42 40.312)' AS TEXT), 4329), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.42 40.312)' AS TEXT), 4326) <-y geom LIMIT to)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-59.649 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom,	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.472 40.312)' AS TEXT), 4326), tue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.472 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.472 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_DeomFromText(CAST ('POINT(-15.164 44.985)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.164 44.985)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.164 44.985)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.354 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.354 40.312)' AS	0	1	2	2	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.354 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.199 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.199 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.199 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-47.902 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-47.902 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.902 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.902 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.902 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.902 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.902 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.295 48.854)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.295 48.854)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.295 48.854)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.709 46.44)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.709 46.44)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.709 46.44)' AS TEXT), 4326) <-y geom LIMIT to)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.776 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.776 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.776 40.312)' AS TEXT), 4326) as geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.891 41.258)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.891 41.258)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.891 41.258)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.925 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.925 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.925 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.731 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.731 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.731 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.731 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.731 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.369 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.369 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.369 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.376 40.312)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = \(^2\) AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-60.376 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.376 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.93 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-54.93 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.93 40.281)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.363 41.786)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.363 41.786)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.363 41.786)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.363 41.786)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SGFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.363 41.786)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.591 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.591 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.591 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.22 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.08 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.08 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.08 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.206 40.312)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.206 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.206 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.601 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-26.601 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.601 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.963 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.963 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.963 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.963 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.963 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.613 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.613 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.613 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.209 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.209 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-55.209 40.312)' AS TEXT), 4326) (som, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-55.209 40.312)' AS TEXT), 4326)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.863 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.863 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.863 40.312)' AS TEXT), 4326) = 9 geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.785 40.364)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.785 40.364)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.785 40.364)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.785 40.364)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.785 40.364)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.209 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.209 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.209 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.209 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.209 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT' 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.22 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.876 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.876 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.876 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.456 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.456 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.456 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.023 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.023 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.023 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.023 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.023 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.716 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.716 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.716 40.312)' AS TEXT), 4326) < geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.651 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.978 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.978 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.978 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.978 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.978 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.759 41.39)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.759 41.39)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.759 41.39)' AS TEXT), 3256 \times geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.806 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.806 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.806 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.366 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.366 40.312)' AS TEXT), 4326), geom, 22224) (ADDE BY ST_GeomFromText(CAST ('POINT(-64.366 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.258 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.258 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.258 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.258 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.258 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.259 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.259 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.259 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.259 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.259 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.21 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.21 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.21 40.312)' AS TEXT), 4326 (>> geom LIMIT to)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.995 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.995 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.995 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.681 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.681 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.681 40.312)' AS TEXT), 4326) - S geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.965 45.184)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.965 45.184)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.965 45.184)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.965 45.184)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.965 45.184)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.965 45.184)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.965 45.184)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.965 45.184)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.965 45.184)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.965 45.184)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POIN	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.941 41.208)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.941 41.208)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.941 41.208)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.418 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = YY AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.418 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.418 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.197 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.197 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.197 40.312)' AS TEXT), 4326) <-> CENTRAL (**)  **TOTAL (**)  **TO	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.322 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "\" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.322 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.322 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST (POINT(-11.328 48.821)' AS TEXT), 3250)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-11.328 48.821)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-11.328 48.821)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.328 48.821)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-11.328 48.821)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-14.025 46.124) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ÄLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.025 46.124)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.025 46.124)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.025 46.124)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.025 46.124)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.027 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.027 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.027 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.767 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.767 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.767 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.767 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.767 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.727 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.727 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.727 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.088 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.088 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.088 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.088 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.088 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50,721 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.721 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.721 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.521 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.521 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.521 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.543 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.543 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.543 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.543 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gram WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.543 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.287 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.287 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.287 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.314 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.314 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.314 40.312)' AS TEXT), 4326) <-> geom LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.835 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.835 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.835 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.835 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.835 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.138 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.138 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.138 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.138 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.138 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.138 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.138 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.138 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.398 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.398 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.398 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.398 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.398 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.941 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.941 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.941 40.312)' AS TEXT), 4326) -> geom LMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.114 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.114 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.114 40.312)' AS TEXT), 4326) <->	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.567 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.567 40.312)' AS TEXT), 4326), geom, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-53.567 40.312)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.207 49.942)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.207 49.942)' AS TEXT), 4326), geom, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-10.207 49.942)' AS TEXT), 4326) <->, geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.302 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.302 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.302 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.194 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.194 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.194 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.194 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.194 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.885 42.264)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.885 42.264)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.885 42.264)' AS TEXT), 4326) ->> geom LMIDT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.'	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.881 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.881 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.881 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.408 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.408 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.408 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance), ASC (POINT(-48.668 40.312)' ASTEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST (POINT(-48.668 40.312)' ASTEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.668 40.312)' ASTEXT), 4326) <>> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.509 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.509 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.509 40.312)' AS TEXT), A326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.509 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-57.509 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.735 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.735 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.735 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.735 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.735 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.555 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.555 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.555 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.127 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-47.127 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.127 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.418 51.731)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.418 51.731)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.418 51.731)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.418 51.731)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-8.418 51.731)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.383 45.766)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.383 45.766)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.383 45.766)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.983 44.166)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.983 44.166)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.983 44.166)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.983 44.166)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.983 44.166)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	2	2	0	.,,,
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.708 40.312)' AS TEXT), 4326)) INJON ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.708 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.48 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.48 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.48 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT-46.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.135 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.889 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.889 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.889 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance), roully as distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.843 46.306)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.843 46.306)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-24.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-24.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.994 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS, 'GF	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.658 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.41 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-31.41 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.41 40.281)' AS TEXT), 4326) &> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.515 49.634)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.515 49.634)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.515 49.634)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.515 49.634)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.515 49.634)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.515 49.634)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.515 49.634)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.828 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.828 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.828 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT3 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.681 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_INDEXTEX ('FOINT(-34.681 40.312)' AS TEXT), 432	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.181 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.181 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.181 40.312)' AS TEXT), 4326) - geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.055 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.055 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.055 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.568 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.568 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.568 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.103 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.103 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.103 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.103 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.103 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index		1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-52.407 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.407 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.407 40.312)' AS TEXT), 4326). <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.53 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.53 40.281)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-34.53 40.281)' AS TEXT), 4326) <>> geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.446 43.703)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMC' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.446 43.703)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.446 43.703)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.446 43.703)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.446 43.703)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.446 43.703)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.446 43.703)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.446 43.703)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.446 43.703)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.446 43.703)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'FCM' as type, gid, code, name FROM spatial.gfcm which is the spatial profile type from the s	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.395 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(^1\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.395 40.312)' AS TEXT), 4326), geom, 2224) (ARDER BY ST_GeomFromText(CAST ('POINT(-46.395 40.312)' AS TEXT), 4326), geom (LMT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.521 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.521 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.521 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.531 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.531 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.531 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.531 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.531 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.398 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.398 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.398 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.457 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.457 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.457 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.697 41.452)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.697 41.452)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.697 41.452)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.697 41.452)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.697 41.452)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.214 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.214 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.214 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.882 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.882 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.882 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText)(CAST ('POINT(-67.361 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText)(CAST ('POINT(-67.361 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.361 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
Select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.913 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.913 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.913 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.913 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.913 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.913 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.913 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.913 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.913 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.913 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.222 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.222 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-57.222 40.312)' AS TEXT), 4326), geom (2224) (RDER BY ST_GeomFromText(CAST ('POINT(-57.222 40.312)' AS TEXT), 4326).	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.912 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.912 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.912 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.912 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.912 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.377 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.377 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.377 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom. ST_GeomFromText(CAST ('POINT(-32,711 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom. ST_GeomFromText(CAST ('POINT(-32,711 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.potn_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32,711 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32,711 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32,711 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.R).	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.201 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.201 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-66.201 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.819 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.819 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.819 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.194 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.194 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.194 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.382 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.382 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.382 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.544 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.544 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.544 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.964 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.964 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.964 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.711 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.711 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.711 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.255 46.894)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.255 46.894)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.255 46.894)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.st_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.255 46.894)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.255 46.894)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.255 46.894)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.255 46.894)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.938 42.211)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.938 42.211)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREĀ' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.938 42.211)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.938 42.211)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.938 42.211)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65,541 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^1\) "AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-65,541 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65,541 40.312)' AS TEXT), 4326) <->9\) geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.297 40.312)' AS TEXT), 4326), true) AS distance FROM spatial,port WHERE enabled = "Y "AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-56.297 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.297 40.312)' AS TEXT), 4326) < geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.217 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \(^1\) 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.217 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.217 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.801 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-67.801 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.801 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.557 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWISHIN(ST_GeomFromText(CAST ('POINT(-58.557 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.557 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.192 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.192 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.192 40.312)' AS TEXT), 4326) <->	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-51.139 40.312)' ÅS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('DINT(-51.139 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST. GeomFromText(CAST ('POINT(-51.139 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.139 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.139 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.139 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.139 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.139 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.139 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.139 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as index.R.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.739 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.739 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.739 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-44.172 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stl_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.169 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.96 45.189)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWISHIN(ST_GeomFromText(CAST ('POINT(-14.96 45.189)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.96 45.189)' AS TEXT), 4326) - geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.714 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.714 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.714 40.312)' AS TEXT), 4326) <-> ————————————————————————————————————	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.389 46.76)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.389 46.76)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.389 46.76)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.825 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.825 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.plord. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.825 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.825 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.825 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.107 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.107 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.107 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.107 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.107 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.917 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.917 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.917 40.312)' AS TEXT), 4326) <-> CENTRAL PROPERTY OF THE PROPERTY	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.817 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.817 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-20.817 40.312)' AS TEXT), 4326) - 25 geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.875 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.875 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.875 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.875 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.875 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-17.441 42.708)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-17.441 42.708)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-17.441 42.708)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-17.441 42.708)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-17.441 42.708)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-17.441 42.708)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-17.441 42.708)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.989 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.989 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.989 40.312)' AS TEXT), 4326), geom (LMT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.089 47.06)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM, spatial, from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.089 47.06)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial, port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.089 47.06)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial, stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.089 47.06)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial, grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.089 47.06)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.479 40.312)' AS TEXT), 4329) NND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial, ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.479 40.312)' AS TEXT), 4329)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.479 40.312)' AS TEXT), 4329)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial, stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.479 40.312)' AS TEXT), 4329)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.479 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index.")	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.802 46.347)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.802 46.347)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.802 46.347)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.802 46.347)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.802 46.347)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.054 45.095)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.054 45.095)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.054 45.095)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.112 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.112 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.112 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.909 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.909 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.909 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.909 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.909 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.307 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.307 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.307 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.79 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.79 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.797 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.644 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.644 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.644 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.375 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.375 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.375 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.361 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.361 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.361 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.829 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.829 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.829 40.312)' AS TEXT), 4326), as geom LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.422 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.422 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.422 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.422 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.422 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.422 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.422 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.422 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.422 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.422 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.63.384 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIstin(ST_GeomFromText(CAST ('POINT'.63.384 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'.63.384 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.212 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.212 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.212 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.897 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.897 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.897 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.218 43.931)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.218 43.931)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.218 43.931)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.218 43.931)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.218 43.931)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.851 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.851 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.851 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.851 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-34.851 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.894 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.894 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.894 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText)(CAST ('POINT(-13.533 46.616)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText)(CAST ('POINT(-13.533 46.616)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText)(CAST ('POINT(-13.533 46.616)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.147 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.147 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.147 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.297 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.297 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.297 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.227 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.227 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.227 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.817 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, "RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.817 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.817 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.817 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.817 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.242 44.907)' ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.242 44.907)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.242 44.907)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.242 44.907)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.242 44.907)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.281 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.281 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.281 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.281 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.281 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.814 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.814 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.814 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.203 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.203 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.203 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.203 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-67.203 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.062 49.087)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.062 49.087)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.062 49.087)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.062 49.087)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.062 49.087)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43,634 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43,634 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43,634 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.202 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.266 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.266 40.312)' AS TEXT), 4326), expen Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.09 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.09 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.09 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.16 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.16 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.16 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.16 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.16 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT-52.966 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST (POINT-62.966 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT-62.966 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.042 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.042 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.042 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.844 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.844 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.844 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.844 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.844 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.016 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.016 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.016 40.312)' AS TEXT), 4326), expend_LMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.969 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.969 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.969 40.312)' AS TEXT), 4326), expen_stant 11 to)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, "STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.16 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.287 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.287 40.312)' AS TEXT), 4326), geom, 22224) (RDBR BY ST_GeomFromText(CAST ('POINT(-35.287 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.378 43.771)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.378 43.771)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.378 43.771)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.887 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.887 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.887 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.132 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.132 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.132 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.356 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.356 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.356 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_DeomFromText(CAST ('POINT(-56.356 40.312)' AS TEXT), 4326) <-> geom Limit 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_DeomFromText(CAST ('POINT(-15.647 44.502)' AS TEXT), 4326), geom, ST_Distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.647 44.502)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.647 44.502)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.192 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.192 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.192 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.192 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.192 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.192 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.176 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.176 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.176 40.312)' AS TEXT), 4326) - Second Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.902 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.902 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.902 40.312)' AS TEXT), 4326)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.876 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.876 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.876 40.312)' AS TEXT), 4326) - 25 geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.948 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.948 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.948 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.721 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.721 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.721 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.469 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.469 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port.area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.469 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.469 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-50.469 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.853 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.853 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.853 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.806 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.806 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.806 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT-65-2584 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial,rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52-584 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52-584 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial,stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52-584 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-52-584 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.469 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.469 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.469 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.029 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.029 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.029 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.029 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.029 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.029 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.029 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.029 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.029 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.029 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(C	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.593 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.593 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.593 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.593 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.593 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.495 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.495 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.495 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.832 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.832 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.832 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.559 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.559 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.559 40.312)' AS TEXT), 4326) - 25 geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT /PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.245 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.245 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.245 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.413 50.736)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.413 50.736)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.413 50.736)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.38 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.38 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.38 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	2	2	0	0,00
select *from ((SELECT1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.627 40.312)' AS TEXT), 4326)) AND enabled = 'Y)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.3 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'FAO' a	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.44 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.44 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-45.44 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-45.44 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-45.44 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as indexRS, "F"	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez, WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-29.879 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-29.879 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-29.879 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-29.879 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-29.879 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-29.879 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.207 50.942)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.207 50.942)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.207 50.942)' AS TEXT), 4328) <-> geom LiMIT (10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.315 42.834)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.315 42.834)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.315 42.834)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29,581 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29,581 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-29,581 40.312)' AS TEXT), 4326) ~ geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.957 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-59, 467 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.467 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.467 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.652 44.497)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.652 44.497)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.652 44.497)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.514 d.312) AS TEXT), 4329). AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.514 40.312)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.514 40.312)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.514 40.312)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.514 40.312)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.514 40.312)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.514 40.312)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.514 40.312)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-28.514 40.312)' AS TEXT), 4326)). AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.058 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.058 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.058 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.058 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.058 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.058 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.058 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.058 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.191 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.191 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.191 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.332 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.332 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.332 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.424 44.725)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.424 44.725)' AS TEXT), 4326), geom_22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.424 44.725)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez, WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.236 42.913)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.236 42.913)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.236 42.913)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.236 42.913)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.236 42.913)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.488 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.488 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.488 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.488 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.488 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.488 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.488 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-29.488 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS."	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.723 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.723 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.723 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.723 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.723 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.83 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.83 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.83 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.83 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.83 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.83 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.83 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.318 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.318 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.318 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-27.087 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-27.087 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.087 40.312)' AS TEXT), 4326)) IND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.087 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.087 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.753 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.753 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.753 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.753 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-41.753 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.369 45.78)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.369 45.78)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.369 45.78)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.369 45.78)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.369 45.78)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.51 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.51 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.51 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.904 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.904 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.904 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.899 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.899 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.899 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STA'TRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.899 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.899 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.525 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.525 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.525 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.525 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.525 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.163 40.312)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.163 40.312)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 3 as indexRS, 'FORTAREA' as type, gid, code, name FROM spatial.pd. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.163 40.312)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.163 40.312)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-60.163 40.312)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.59 40.281)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.59 40.281)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-22.59 40.281)' AS TEXT), 4326) <->9 geom LIMIT to)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-33.59 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.216 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.216 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.216 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.216 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.216 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.335 44.814)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.335 44.814)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.335 44.814)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.335 44.814)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.335 44.814)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.307 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.307 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.307 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.714 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.714 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.714 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.65 40.281)' AS TEXT), 4326),rue) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.65 40.281)' AS TEXT), 4326) <->, geom_LiMIT 10) TEXT), 4326), geom_22224) (RDER BY ST_GeomFromText(CAST ('POINT(-55.65 40.281)' AS TEXT), 4326) <->, geom_LiMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS; 'EEZ' as type, gid, code, name FROM spatial eez, WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS; 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-30.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS; 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-30.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-30.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-30.922 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.154 46.995)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.154 46.995)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.154 46.995)' AS TEXT), 4326) <-y> geom LMINT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.433 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.433 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.433 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.433 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.433 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.032 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.d mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.032 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.032 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.032 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-35.032 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.104 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.104 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.104 40.312)' AS TEXT), 4326) <->, geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.693 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.693 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-63.693 40.312)' AS 1271, 4326) -> geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-39.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.12.04)2') AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.12.40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.12.40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.12.40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.12.40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, GFOM as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.12.40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.747 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.747 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.747 40.312)' AS TEXT), 4326), ~ geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.837 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.837 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.837 40.312)' AS TEXT), 4326), ~ geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.628 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.ifmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.628 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.628 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.628 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-51.628 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.594 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.594 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.594 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.594 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.594 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.02 50.129)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.02 50.129)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.02 50.129)' AS TEXT), 4326) <-y geom LIMIT (10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.379 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.379 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.379 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.304 47.845)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.304 47.845)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.304 47.845)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.787 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.787 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.787 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.787 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.787 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.787 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.602 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.602 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.602 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.602 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.602 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.671 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.671 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.671 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.671 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.671 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.794 49.35)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.794 94.35)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'POTRAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.7994 94.35)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.7994 93.35)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.7994 93.35)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.7994 94.35)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.274 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.274 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.274 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.274 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.274 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-56.006 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-17.298 42.851)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-17.298 42.851)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.298 42.851)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.298 42.851)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.298 42.851)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(.31.773 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.376 40.312) ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.376 40.312) ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.376 40.312) ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.376 40.312) ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.376 40.312) ÅS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.428 44.721)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.428 44.721)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.428 44.721)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.428 44.721)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.428 44.721)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.879 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.879 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.879 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 28.787 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-28.787 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.787 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.19 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.19 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.19 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.19 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.19 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(.39.04 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(.39.04 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(.39.04 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(.39.04 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(.39.04 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(.39.04 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.804 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.835 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.835 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.835 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.407 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.407 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.407 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.407 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-58.407 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
SELECT SRID FROM GEOGRAPHY_COLUMNS WHERE F_TABLE_SCHEMA = 'spatial' AND F_TABLE_NAME = 'port_area' AND F_GEOGRAPHY_COLUMN = 'geom'	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.443 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-25.443 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-25.443 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.443 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.443 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.19 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.19 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.19 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.969 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.969 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.969 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.042 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.042 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.042 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.042 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.042 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.562 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.562 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.562 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.703 41.446)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.703 41.446)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.703 41.446)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.472 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.472 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.472 40.312)' AS TEXT), 4326) -> geom LiMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.803 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.803 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.803 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.803 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-36.803 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT:41.786 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT:41.786 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT:41.786 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.165 41.984)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.165 41.984)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.165 41.984)' AS TEXT), 4326) <>> geom LIMIT 10)		1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST GeomFromText(CAST ('POINT(-27.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.355 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.8 43.349)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.mno WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.8 43.349)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.8 43.349)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.8 43.349)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.8 43.349)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'FAO' a	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT-(2-5.33 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT-(25.33 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAFEA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT-(25.33 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT-(25.33 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT-(25.33 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT-(25.33 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-31.715 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.715 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.715 40.312) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.715 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-31.715 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.066 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.066 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.066 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-27.40.281)' A& TEXT), 4236)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from VHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-27.27 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-27.27 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.27 40.281)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.27 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.673 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.673 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.673 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.919 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.919 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.919 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat. rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.919 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.919 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS; EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-36.151 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS; RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-36.151 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-36.151 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-36.151 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-36.151 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFOM" as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.266 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.266 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.423 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWINT(3 GeomFromText(CAST ('POINT(-33.423 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-33.423 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.763 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.763 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.763 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.269 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.269 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.269 40.312)' AS TEXT), 4326) ->> geom LMIII' 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.923 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.923 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.923 40.312)' AS TEXT), 4326) <->, geom LMIII' 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.638 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.638 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.638 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.638 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.638 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-34.869 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.869 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.869 40.312) 'AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.869 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-34.869 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.013 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.013 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.013 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.106 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.106 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.106 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.434 46.715)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.434 46.715)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.434 46.715)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.434 46.715)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-13.434 46.715)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.782 49.367)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.782 49.367)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.782 49.367)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.782 49.367)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.782 49.367)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.783 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.783 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.783 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.783 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.783 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.107 43.042)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.107 43.042)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.107 43.042)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.107 43.042)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.107 43.042)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.382 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.382 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.382 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.382 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-24.382 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.R. 'GFOM' as index.R.	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.665 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-43.665 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.")	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST GeomFromText(CAST (POINT-62.948 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÄLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-62.948 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-62.948 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-62.948 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-62.948 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-30.81 40.281)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-30.81 40.281)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-30.81 40.281)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-30.81 40.281)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-30.81 40.281)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-30.81 40.281)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "F"	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.36 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.36 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.36 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial-sez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial-rimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as index.RS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.264 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.RS, 'GFCM' as index.RS, 'GFCM' as type, gid, code, name FROM spatial.glcm	0	1	2	2	0	0,00
(SELECT PORT as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.331 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.331 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.331 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.425 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.425 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.425 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.988 45.161)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.988 45.161)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.988 45.161)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.988 45.161)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.988 45.161)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.338 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.338 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.338 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.514 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.514 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.514 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.514 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.514 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.514 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.514 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.853 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "\" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.853 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.853 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÄLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-48.532 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.153 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.153 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.153 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.678 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.678 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.678 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.608 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.608 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.608 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.095 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.095 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.095 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.095 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-52.095 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.745 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.745 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-20.745 40.312)' AS TEXT), 4326), geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.05 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.511 42.638)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-17.511 42.638)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-17.511 42.638) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.511 42.638)) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.511 42.638)) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.174 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.174 40.312)' AS TEXT), 4326), geom, 2224) (AND SR_DST_ST_ST_ST_ST_ST_ST_ST_ST_ST_ST_ST_ST_S	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.91 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.91 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.91 40.281)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.91 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-26.91 40.281)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.171 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.171 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-48.171 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.915 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.915 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.915 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.915 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.915 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.699 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.699 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.699 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-48.29 40.312)" AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-48.29 40.312)" AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.637 46.512)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.637 46.512)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.637 46.512)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.671 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.671 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.671 40.312)' AS TEXT), 4326), expent_LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.23 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.23 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.23 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.23 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "GFOM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-50.23 40.312)* AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, "F"	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.922 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-65.922 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.922 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.242 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.242 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.242 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',52.335 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT',52.335 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT',52.335 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.428 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.428 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.428 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.763 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.763 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.763 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.044 49.105)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.044 49.105)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.044 49.105)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-22.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'FORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-22.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATREOT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as index.RS, 'SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-22.488 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.536 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.536 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.536 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText)(CAST ('POINT-55.446 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText)(CAST ('POINT(-55.446 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText)(CAST ('POINT(-55.446 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.087 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.087 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.087 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.087 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.087 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-51, 103 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51, 103 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.03 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.838 50.311)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWISHIN(ST_GeomFromText(CAST ('POINT(-9.838 50.311)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.838 50.311)' AS TEXT), 4326) <>9.960m LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-28.637 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.086 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWINI(ST_GeomFromText(CAST ('POINT(-59.086 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.086 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.083 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial, port WHERE enabled = \(^1\) YAID ST_DWISHIN(ST_GeomFromText(CAST ('POINT(-67.083 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.083 40.312)' AS TEXT), 4326), ~ geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.765 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.765 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.765 40.312)' AS TEXT), 4326) -> geom LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.433 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.433 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.433 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.433 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.433 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.438 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.268 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.268 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.268 40.312)' AS TEXT), 4326) <-> geom LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-61.811 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as indexRS_TEXT, 4326)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-12.753 47.396)) AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.753 47.396)) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.753 47.396)) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.753 47.396)) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.753 47.396)) 'AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.246 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.246 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-27.246 40.312)' AS TEXT), 4326) <-> geom LMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.491 45.658)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.491 45.658)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.491 45.658)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.491 45.658)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.491 45.658)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.471 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.471 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.471 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.471 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.471 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.471 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.471 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.471 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.471 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.471 40.312)" AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.499 45.65)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.499 45.65)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.499 45.65)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.012 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GEOMFromText(CAS	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.719 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.719 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.719 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.719 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.719 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.719 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.719 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-30.719 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.493 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.493 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.493 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.268 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.268 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.268 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.268 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfor WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.268 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-55,768 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55,768 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55,768 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.576 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.576 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.pdr area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.576 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.576 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gdrcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.576 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.083 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.083 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-54.083 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.108 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.108 40.312)' AS TEXT), 4326), geom, 22224) (ARDER BY ST_GeomFromText(CAST ('POINT(-61.108 40.312)' AS TEXT), 4326) <->	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.946 40.312)' AS TEXT), 4326), true, AS distance FROM spatial.port WHERE enabled = "Y AND ST_DOWITH(16.946 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.946 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.993 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.993 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.993 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial, eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.379 49.77)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.379 49.77)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.379 49.77)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.379 49.77)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.379 49.77)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.379 49.77)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.379 49.77)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.379 49.77)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.379 49.77)') AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.379 49.77)') AS TEXT).	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.658 49.491)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.658 49.491)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-10.658 49.491)' AS TEXT), 4326) ->>> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.336 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.336 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-26.336 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.std_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.784 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS.	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.84 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.84 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-46.84 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.456 41.693)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.456 41.693)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.456 41.693)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.456 41.693)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.456 41.693)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.3 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.3 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.3 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.675 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.675 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.675 40.312)' AS TEXT), 4326), as geom Limit 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.263 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.263 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.263 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.263 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.263 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.263 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.263 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.263 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.263 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-23.263 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.182 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.182 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.182 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.182 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.182 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.089 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.089 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.089 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.757 40.312)' AS TEXT), 4326)) AND enabled = 'Y')	0	1	2	2	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.814 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.814 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.814 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.814 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.std rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.814 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-49.814 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.423 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.423 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.423 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distancs(geom, ST_GeomFromText(CAST ('POINT(-55.17 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-55.17 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.17 40.281)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.671 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.671 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.671 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.671 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-39.671 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.232 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.232 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.232 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.232 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gtom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-20.232 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37,179 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_080) GeomFromText(CAST ('POINT(-37.179 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.179 40.312)' AS TEXT), 4326), <a "and="" 'gfcm'="" 'rfmo'="" 'statect'="" ('point(-35.109="" ('point(-44.237="" (rder="" (select="" 2="" 22224)="" 4="" 40.312)'="" 4326)="" 4326))="" 4326),="" 5="" <-="" all="" and="" as="" by="" code,="" enabled="Y) UNION ALL (SELECT 5 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;1&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;0,00&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.173 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.173 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.173 40.312)' AS TEXT), 4326) &lt;-&gt; geom LIMIT 10)&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;1&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;0,00&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.605 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.605 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-62.605 40.312)' AS TEXT), 4326) -&gt;&gt; geom LMIT 10)&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;1&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;0,00&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.011 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;1&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;0,00&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-42.66 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'F&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;1&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;0,00&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-38.186 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(C&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;1&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;0,00&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.109 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = " from="" geom,="" geomfromtext(cast="" gid,="" href="https://example.com/spatial-com/spatial-case-spa&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;1&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;0,00&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-44.237 40.312)' AS TEXT), 4326)) AND enabled = " index.rs,="" indexrs,="" name="" spatial.gfcm="" spatial.rfmo="" spatial.stat_rect="" st.="" st_dwithin(st_geomfromtext(cast="" st_geomfromtext(cast="" st_intersects(geom,="" text),="" type,="" union="" where="" y="" y')="" y)=""></a>	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.522 45.627)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.522 45.627)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.522 45.627)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.522 45.627)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.522 45.627)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index.RS, 'GFOM' as TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index."	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.756 44.393)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.756 44.393)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.756 44.393)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.089 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.089 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-25.089 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.856 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWINIn(ST_GeomFromText(CAST ('POINT(-49.856 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-49.856 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.555 43.594)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.555 43.594)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.555 43.594)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.555 43.594)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.555 43.594)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.293 41.856)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.293 41.856)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.293 41.856)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.293 41.856)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.293 41.856)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	2	2	0	0,00

select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.834 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÂLL (SELECT 2 as indexRS,RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.834 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ÂLL (SELECT 5 as indexRS, 'SFOM' as type, gid, code, name FROM	1	2			
S2.53 40.312/ AS TEXT), 4326)) AND enabled = 1) UNION ALL (SELECT 5 as indexAs, Grown as type, gid, code, finite rROW spatial, Grown WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.834 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		-	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.426 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.426 40.312)' AS TEXT), 4326), 250e, 2224) (AND ST_DWITCAST) (POINT(-25.426 40.312)' AS TEXT), 4326) -> geom Limit 10)	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.858 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.858 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.858 40.312)' AS TEXT), 4326) ->> geom LMIT 10)	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.008 41.141)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.008 41.141)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.008 41.141)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.008 41.141)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-19.008 41.141)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText((CAST ('POINT(-25.606 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.606 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.606 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.606 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-25.606 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46, 423 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46, 423 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46, 423 40.312)' AS TEXT), 4326) <pre>c&gt; geom LIMIT 10</pre>	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.pdr. area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-63.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-53.808 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.147 48.002)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.147 48.002)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.147 48.002)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.147 48.002)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.147 48.002)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.269 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.269 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.269 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.41 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.41 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.41 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatiale ez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.841 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.841 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.841 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.841 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.841 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.538 49.611)' AS TEXT), 4326)) AND enabled = "Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.538 49.611)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.538 49.611)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.538 49.611)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.grow WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-10.538 49.611)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.109 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.109 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.109 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	1	2	2	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.641 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.641 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.pdm where ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.641 40.312)' AS TEXT), 4326)) AND enabled = "Y' UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.641 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.641 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.641 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.641 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.641 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.641 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-54.641 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POI	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.358 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.358 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.358 40.312)' AS TEXT), 4326) -> geom LMIT 10)	1	2	2	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-64.842 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	1	2	2	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.505 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.505 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.505 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.933 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.933 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.933 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.863 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.863 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.863 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.584 43.565)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.584 43.565)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.584 43.565)' AS TEXT), 4326) <> geom LIMIT 10)	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.259 43.89)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.259 43.89)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.259 43.89)' AS TEXT), 4326), cygeom LIMIT 10)	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.706 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.706 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.706 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.006 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.006 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-37.006 40.312)' AS TEXT), 4326) (SS geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.506 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.506 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.506 40.312)' AS TEXT), 4326) - 3 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.608 50.541)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.608 50.541)' AS TEXT), 4326), geom, 2224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.608 50.541)' AS TEXT), 4326) <>= geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.43 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.43 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.43 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.009 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'V' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.009 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.009 40.312)' AS TEXT), 4326) < GeomFromText(CAST ('POINT(-27.009 40.312)' AS TEXT), 4326) < GeomFromText(CAST ('POINT(-27.009 40.312)' AS TEXT), 4326) < GeomFromText(CAST ('POINT(-27.009 40.312)') AS TEXT), 4326) < GeomFromText(-27.009 40.312)' AS TEXT), 4326) < GeomFromText(-27.009 40	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT; 26.787 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^1\) AND ST_DWIthin(ST_GeomFromText(CAST ('POINT; 26.787 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT; 26.787 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.46 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "\" AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-49.46 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.46 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT: 48.302 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWItin(ST_GeomFromText(CAST ('POINT: 48.302 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT: 48.302 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.635 40.514)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(SC GeomFromText(CAST ('POINT(-19.635 40.514)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.635 40.514)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT;27.712 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT;2.77.12 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT;2.77.12 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.508 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWIthIn(ST_GeomFromText(CAST ('POINT(-45.508 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.508 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.439 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.439 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.439 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.95 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-26.95 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.95 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.44 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.44 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.44 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.369 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.369 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.369 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.62 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-63.62 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.62 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.663 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-49.663 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.663 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.641 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^1\) AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-60.641 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.641 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.354 47.795)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "V AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-12.354 47.795)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.354 47.795)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT;-37.573 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.573 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.573 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 22.578 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT', 22.578 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT', 22.578 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.052 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.052 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.052 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT; 33,364 40,312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-33,364 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33,364 40,312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.645 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.645 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.645 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.591 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.591 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.591 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.839 49.31)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-10.839 49.31)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.839 49.31)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.761 46.388)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.761 46.388)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.761 46.388)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.863 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.863 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.863 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64,77 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.77 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.77 40.281)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.898 43.251)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.898 43.251)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.898 43.251)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.599 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.599 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.599 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.15 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.15 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.15 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.031 49.118)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.031 49.118)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.031 49.118)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.521 42.628)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.521 42.628)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.521 42.628)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.274 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-21.274 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.274 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.297 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.297 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.297 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT/PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.523 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.523 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.523 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.796 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.796 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.796 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.679 48.47)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.679 48.47)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.679 48.47)' AS TEXT), 4326), sey geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.657 40.492)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.657 40.492)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.657 40.492)' AS TEXT), 4326), expend_LMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.737 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.737 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.737 40.312)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.847 45.302)' AS TEXT), 4326), true) A Sdistance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.847 45.302)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.847 45.302)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25,148 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-25,148 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-25,148 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57,884 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.884 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.884 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.794 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.794 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.794 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.409 44.74)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(IST_DOMFROMEX(CAST ('POINT(-15.409 44.74)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.409 44.74)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34,861 40.312)' AS TEXT), 4326), true, AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(IST_DWITH)(RST_COMFTCAST_POINT(-34,861 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.861 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.572 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DWITH)(AST_CAUCAST ('POINT(-64.572 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.572 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.224 43.925)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.224 43.925)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.224 43.925)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.938 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.938 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.938 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.23.418 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_DWITCAST.418 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.418 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.714 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.714 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.714 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.572 40.577)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.572 40.577)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.572 40.577)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.273 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.273 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.273 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.486 48.663)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.486 48.663)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.486 48.663)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.7 43.449)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.7 43.449)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.7 43.449)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.282 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.282 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.282 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.665 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.665 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.665 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.861 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.861 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.861 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.147 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.147 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.147 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.53 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.53 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.53 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.343 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.343 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.343 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.37 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.37 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.37 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.599 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.599 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.599 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.21 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.21 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.21 40.281)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.578 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.578 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.578 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.575 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.575 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.575 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.779 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.779 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.779 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (CSLECT IPORT) AS TEXT), 4326)> GEOMETRIC AS TEXT)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.003 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.003 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.003 40.312)' AS TEXT), 4326)> geom LIMIT 10)  (SELECT 'PORT' or type, gid, god, name, geom, ST_Distance(geom, ST_CampErgray(CAST ('POINT(-54.075 40.312)' AS TEXT).	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.075 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.075 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.075 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.637 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_OEOMFROME) AV (CAST ('POINT(-36.637 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.637 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.729 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.729 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.729 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.429 48.72)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.429 48.72)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.429 48.72)' AS TEXT), 4326) (>> geom LiMIT to)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.258 46.891)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.258 46.891)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.258 46.891)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.145 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.145 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.145 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.161 41.988)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.161 41.988)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.161 41.988)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.195 47.954)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.195 47.954)' AS TEXT), 4326), geom, 22224) (ADDE BY ST_GeomFromText(CAST ('POINT(-12.195 47.954)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.642 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.642 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.642 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.148 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.148 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.148 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.165 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.165 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.165 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POIN	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.817 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.817 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-48.817 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-48.817 40.312)') AS TEXT), 4326) - SecomFromText('POINT(-48.817 40.312)') AS TEXT), 4326) - SecomFr	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.738 43.411)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.738 43.411)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.738 43.411)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.076 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'YO' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.076 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.076 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.297 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.297 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-32.297 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-32.297 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-32.297 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-32.297 40.312)') AS TEXT), 4326) -	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.709 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.709 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.709 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.81 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.81 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.81 40.312)' AS TEXT), 4326 \( \cdots \) geom LiMIT 10 \)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.215 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.215 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-26.215 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.433 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.433 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.433 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.868 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.868 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.868 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.504 49.645)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.504 49.645)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.504 49.645)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.796 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.796 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.796 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.361 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.361 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.361 40.312)' AS TEXT), 4326) -> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.864 49.285)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.864 49.285)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-10.864 49.285)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-10.864 49.285)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-10.864 49.285)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-10.864 49.285)' AS TEXT), 14326) - SecomFromText(-10.864 49.285)' AS TEXT),	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.99 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.99 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.99 40.312)' AS TEXT), 4326 \( >> geom LIMIT 10 \)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.485 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'YO' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.485 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.485 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.438 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.438 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-66.438 40.312)' AS TEXT), 4326) - 2 geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.459 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.459 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.459 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.302 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.302 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.302 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.055 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.055 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.055 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.294 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.294 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-66.294 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.42 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.42 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.42 40.312)' AS TEXT), 326) <> geom LIMIT to)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.5 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.5 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.5 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.456 42.693)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.456 42.693)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.456 42.693)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.425 41.724)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.425 41.724)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.425 41.724)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.639 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.639 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.639 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.327 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.327 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.327 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.026 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.026 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.026 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.982 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.982 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.982 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.56 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.56 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.56 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.861 51.288)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.861 51.288)' AS TEXT), 4329), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.861 51.288)' AS TEXT), 4326) \( \text{ < geom LIMIT 10} \)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.59 42.559)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.59 42.559)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.59 42.559)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.256 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.256 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.256 40.312)' AS TEXT), 4326) <-> geom LiMiT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.39 50.759)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.39 50.759)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.39 50.759)' AS TEXT), 4326) <> geom LIMIT 10;	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.7 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.7 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.7 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.616 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.616 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.616 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.912 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-31.912 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.912 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.232 40.312)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = \(^1\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.232 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.232 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.982 44.187)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.962 44.187)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.962 44.187)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.74 40.409)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-19.74 40.409)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.74 40.409)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.591 40.312)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = \(^1\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.591 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.591 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.573 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y( AND ST_DWIbin(ST_GeomFromText(CAST, ('POINT(-39.573 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.573 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.688 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-51.688 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.688 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT):64.662 40.312)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = \(^1\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT):64.662 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT):64.662 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.093 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y( AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-62.093 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.093 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT; 37,709 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT; 37.709 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT; 37.709 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.634 44.515)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.634 44.515)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.634 44.515)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',25.094 40.312)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT',25.094 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT',25.094 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT; 32.395 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT; 32.395 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT; 32.395 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT; 33.189 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT; 33.189 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT; 33.189 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.819 40.312)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.819 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.819 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 27.483 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT', 27.483 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT', 27.483 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.091 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.091 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.091 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',58.866 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT',58.866 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT',58.866 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'-62.842 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT'-62.842 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'-62.842 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.222 49.927)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.222 49.927)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.222 49.927)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.895 40.312)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = \(^1\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.895 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.895 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.415 40.312)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.415 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.415 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.502 43.647)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.502 43.647)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.502 43.647)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.099 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_Within(ST_GeomFromText(CAST ('POINT(-35.099 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.099 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.343 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.343 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.343 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.139 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.139 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.139 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.37 47.779)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_Within(ST_GeomFromText(CAST ('POINT(-12.37 47.779)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.37 47.779)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.413 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.413 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.413 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.599 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.599 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.599 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.707 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.704 0.312)' AS TEXT)	0	1	1	1	0	0,00
4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-27.707 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial stat rect WHERE ST Intersects(geom, ST, GeomFromText(CAST ("POINT(-27.707 40.312)" AS TEXT), 4326))						
27.707 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS,'GFCM' as type, gid, code, name FROM spatial-gram WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-27.707 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.021 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.021 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.021 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.65C)') AS TEXT).	0	1	'	1	0	
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.52 45.629)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.52 45.629)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.52 45.629)' AS TEXT), 4326) <> geom LIMIT 10)  (CSLECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_CampText(CAST ('POINT(-35.29, 40.340)' AS TEXT), 4326).		'	'	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.238 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.238 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.238 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	'	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.346 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.346 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.346 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT PORT as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.346 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT PORT as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.346 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT PORT as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.346 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT PORT as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.346 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT PORT as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.346 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT PORT as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.346 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT PORT as type, gid, code, name, geom, status gid, gid, gid, gid, gid, gid, gid, gid,			'	'	Ů	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.141 47.008)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.141 47.008)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.141 47.008)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	<u>'</u>	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.668 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.668 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.668 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.636 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.636 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.636 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.174 42.975)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.174 42.975)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.174 42.975)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.328 42.821)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.328 42.821)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.328 42.821)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.307 49.842)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.307 49.842)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.307 49.842)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.704 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.704 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.704 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.04 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.04 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.04 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.918 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-26.918 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.918 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.707 41.442)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DOMFromText(CAST ('POINT(-18.707 41.442)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.707 41.442)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-11.081 49.068)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.081 49.068)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.081 49.068)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-60.453 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.453 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.453 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.768 48.381)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.768 48.381)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.768 48.381)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.11 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.11 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.11 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST. Distance(geom, ST. GeomFromText(CAST ('POINT(-33,508 40,312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33,508 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33,508 40,312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.571 42.578)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.571 42.578)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.571 42.578)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66,78 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66,78 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-66,78 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.755 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.755 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.755 40.312)' AS TEXT), 4326), ~ geom LIMIT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.656 40.312) 'AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-45.656 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE	0	1	1	1	0	0,00
4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-4.6.565 40.312)" AS TEXT), 2526)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-45.656 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-45.656 40.312)" AS TEXT), 4326)) AND enabled = "Y)						
spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.656 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.308 47.841)' AS TEXT),	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-12.308 47.841)" AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-12.308 47.841)" AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-16.706 43.443)" AS TEXT),	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.706 43.443)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.706 43.443)' AS TEXT), 4326) <-> geom LIMIT 10)	0	. 1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.488 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.488 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.488 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.732.40.312)' AS TEXT).	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.732 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.732 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.732 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.078,40.312)' AS TEXT).	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.078 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.078 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.078 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.322,40.312)' AS TEXT).	0	1		1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.322 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.322 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.322 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.5' (POINT(-63.5' (POINT(-63.	0		1	1	0	
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.958 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.958 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.958 40.312)' AS TEXT), 4326) <> geom LIMIT 10)  (SELECT 'PORT' as type, gid, edge, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-0.908 50.451)' AS TEXT))	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.998 50.151)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(FS_00F) GeomFromText(CAST ('POINT(-9.998 50.151)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.998 50.151)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.683 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.683 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.683 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.433 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.433 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.433 40.312)' AS TEXT), 4326), expen Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.434 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.434 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.434 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.406 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.406 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.406 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.406 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.406 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index.**)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.165 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.165 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.165 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.186 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.186 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.186 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.933 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.933 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.934 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	1	1	0	0,00
select *from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.433 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.433 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.433 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.433 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.433 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.433 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFOM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-23.433 40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as index	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.241 48.908)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y ** AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.241 48.908)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.241 48.908)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.166 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.166 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.166 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.753 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.753 40.312)' AS TEXT), 4326), geom, 22224) (ADBER BY ST_GeomFromText(CAST ('POINT(-37.753 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.377 46.772)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.377 46.772)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-13.377 46.772)' AS TEXT), 4326) ~ geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.001 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.001 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-27.001 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.01 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.01 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.01 40.312)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.935 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.935 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-40.935 40.312)' AS TEXT), 4326) ->>> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.758 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.758 40.312)' AS TEXT), 4326), geom, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-20.758 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.76 49.389)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.76 49.389)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-10.76 49.389)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 22.436 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT', 22.436 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT', 22.436 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-30,235 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST (POINT(-30.235 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-30.235 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-33.418 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST (POINT(-33.418 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-33.418 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, georn, ST_Distance(georn, ST_GeomFromText(CAST (POINT(-43.593 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.593 40.312)' AS TEXT), 4326), georn, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-43.593 40.312)' AS TEXT), 4326) <-> georn LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-28.35 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST (POINT(-28.35 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-28.35 40.312)' AS TEXT), 4326) &> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-33.279 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST (POINT(-33.279 40.312)' AS TEXT), 4326), geom, 22224) (RDBR BY ST_GeomFromText(CAST (POINT(-33.279 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17,488 42.661)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17,488 42.661)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17,488 42.661)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-48.596 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST (POINT(-48.596 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.596 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.778 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.778 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-51.778 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.052 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.052 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.052 40.312)' AS TEXT), 14326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.052 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.052 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.524 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.524 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.524 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.58 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.58 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.58 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.416 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.416 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.416 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.28 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.28 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.28 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.706 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.706 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.706 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINTC-24.076 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINTC-24.076 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINTC-24.076 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText)(CAST ('POINT(-39.393 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText)(CAST ('POINT(-39.393 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText)(CAST ('POINT(-39.393 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.096 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.096 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.096 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.026 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.026 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.026 40.312)' AS TEXT), 4326), expen LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.668 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.668 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.668 40.312)' AS TEXT), 4326), geom (LMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.029 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.029 40.312)' AS TEXT), 4326), geom, 22224) (ARDER BY ST_GeomFromText(CAST ('POINT(-58.029 40.312)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.663 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.663 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.663 40.312)' AS TEXT), 4326), even Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54' 613 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54 613 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-54 613 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.369 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWIbin(\(^3\)T_GeomFromText(CAST ('POINT(-45.369 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-45.369 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.536 49.613)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.536 49.613)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.536 49.613)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.475 41.674)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.475 41.674)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.475 41.674)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 22.346 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT', 22.346 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT', 22.346 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.69 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.69 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.69 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORR' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT; 39,349 40,312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWINIGST_GeomFromText(CAST ('POINT; 39,349 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT; 39,349 40,312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.845 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.845 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.845 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.63.116 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT'.63.116 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'.63.116 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.975 45.174)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.975 45.174)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.975 45.174)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.3 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.3 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.3 40.312)' AS TEXT), 4326) <> geom LiMit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT:23.238 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.238 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.238 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.451.40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.451.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.451.40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.803 42.346)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.803 42.346)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.803 42.346)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.011 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.011 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.011 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.985 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.985 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.985 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.699 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.699 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.699 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.089 45.06)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.089 45.06)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.089 45.06)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.484 42.665)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.484 42.665)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.484 42.665)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.886 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.686 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.686 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.192 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.192 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.192 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.5 40.312)' AS TEXT), 4328), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.5 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.5 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.758 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.758 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.758 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.678 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.678 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.678 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.892 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.892 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.892 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.778 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.778 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.778 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.384 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.384 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.384 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.752 45.397)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.752 45.397)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.752 45.397)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

SELECT 'PORT' as type, gid. code, name, geom. ST. Distance(geom. ST. GeomFromText(CAST (POINT(-41.598 40.312)' AS TEXT), 4326), Inc. (1, 4326), Inc.) AS distance FROM spatial port WHERE enabled = "Y AND ST. DWithin(ST. GeomFromText(CAST (POINT(-41.598 40.312)' AS TEXT), 4326), geom. 2224) ORDER BY ST. GeomFromText(CAST (POINT(-41.598 40.312)' AS TEXT), 4326), geom. 2224) ORDER BY ST. GeomFromText(CAST (POINT(-41.598 40.312)' AS TEXT), 4326) (speem). LEICH TO THE ASSETT OF
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.5 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.5 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.5 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.93 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.93 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.93 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.93 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.93 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326), geom LiMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326), geom LiMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326), geom LiMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326), geom LiMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT),
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.993 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.993 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.993 40.312)' AS TEXT), 4326) <-> geom LIMIT 10' O O,00
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.125 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.125 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.125 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.125 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.171 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.171 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.171 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.171 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.979 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.979 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.979 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.979 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.979 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.91 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.91 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.91 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.91 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.91 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.91 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.91 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.91 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.91 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.91 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.91
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.171 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.171 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.171 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.171 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.979 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.979 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.979 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.91 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.91 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.91 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.91 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.91 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.91 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.91 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.91 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.4 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.91 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.4 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.4 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.4 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.4 40.312)' AS TEXT), 4326), egom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 4326), egom LIMI
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-40.979 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.4 40.312)' AS TEXT), 43.26), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(IST_GeomFromText(CAST ('POINT(-35.4 40.312)' AS TEXT), 43.26), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.4 40.312)' AS TEXT), 43.26), eyeom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.26), rue) AS distance FROM, spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 0 1 1 1 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 1 1 1 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 1 1 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 1 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.312)' AS TEXT), 0 0 0,000 eyes ("ASSENTIAL PROPROGRAM OF THE POINT (-45.4 40.31
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 0 1 1 1 0 0,000 (43.26),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.4 40.312)' AS
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(), egom, 22.24() ADREB Y ST_GeomFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(), egom, 22.24() ADREB Y ST_GeomFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(), egom, 22.24() ADREB Y ST_GeomFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(), egom, 22.24() ADREB Y ST_GeomFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(), egom, 22.24() ADREB Y ST_GeomFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(), egom, 22.24() ADREB Y ST_GEOMFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(), egom, 22.24() ADREB Y ST_GEOMFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(), egom, 22.24() ADREB Y ST_GEOMFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(), egom, 22.24() ADREB Y ST_GEOMFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(), egom, 22.24() ADREB Y ST_GEOMFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(), egom, 22.4() ADREB Y ST_GEOMFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(), egom, 22.4() ADREB Y ST_GEOMFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(), egom, 22.4() ADREB Y ST_GEOMFromText(CAST ('POINT(-45.4 40.312)' AS TEXT), 43.6(), egom, 22.4(), egom, 22.4()
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.112.40.312)' AS TEXT), 0 1 1 1 0 0,00 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.112.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.112.40.312)' AS TEXT), 4326) <-> geom LIMIT 10) 1 1 1 0 0,00 1 1 1 1 1 0 0,00 1 1 1 1 1
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.704.40.312)' AS TEXT), 0 1 1 0 0,00 4328),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText)(CAST ('POINT(-39.704.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.704.40.312)' AS TEXT), 4326) <> geom LiMIT 10 ) 1 1 1 0 0,00 1 1 1 1 1 0 0,00 1 1 1 1 1
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.37 40.312)' AS TEXT), 0 1 1 0 0,00 4326),true) AS distance FROM spatial.port WHERE enabled = "V AND ST_DWithin(ST_GEOMFromText(CAST ('POINT(-52.37 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.37 40.312)' AS TEXT), 4326), geom LIMIT 10 )
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.616 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "V" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.616 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.616 40.312)' AS TEXT), 4326), <>>> geom LiMiT 10)
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.405.40.312)' AS TEXT),
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.712 42.437)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "V" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.712 42.437)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.712 42.437)' AS TEXT), 4326) <> geom LIMIT 10)
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "V" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-17.261 42.888)' AS TEXT), 4326), specific ('POINT(-17.261 42.888)' AS TEXT), specific ('POINT(-17.261 42.888)' AS TEXT), specific ('POINT(-17.261 42.88
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.393 40.312)' AS TEXT),
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.051 43.098)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.051 43.098)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.051 43.098)' AS TEXT), 4326) <-> geom LiMIT 10
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.325 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "V" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.325 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.325 40.312)' AS TEXT), 4326) <-> geom LiMiT 10
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.21 40.312)' AS TEXT),
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.551 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.551 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.551 40.312)' AS TEXT), 4326) <> geom LiMIT 10)
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "V" AND ST_DWiftin(ST_GeomFromText(CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-26.032 40.312)' AS TEXT), 4326), speom, 22224) ORDER BY ST_GEOMFROMTEX (CAST ('POINT(-26.032 40.312)' AS TEXT)
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.841 44.308)' AS TEXT), 43226)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.from WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.841 44.308)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.841 44.308)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.841 44.308)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.841 44.308)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.841 44.308)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.841 44.308)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.841 44.308)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.841 44.308)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.841 44.308)' AS TEXT, 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, POINT AS TEXT, 4326) AND enabled = "Y) UNION ALL (SELECT 3
ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.841 44.308)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.841 44.308)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 5 as indexMS, SFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.841 44.308)' AS TEXT), 4326)). AND enabled = 'Y') UNION ALL (SELECT 6 as index UNION ALL (SELECT 6 as index
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.809 40.312)' AS TEXT), 0 1 1 0 0,00 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.809 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.809 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.109 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.109 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.109 40.312)' AS TEXT), 4326), <-> geom LiMiT 10)
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Description, ST_OBJECT, A0250); A0250;
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT), 4326, geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT), 4326, geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT), 4326, geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT), 4326, geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT), 4326, geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT), 4326, geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT), 4326, geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT), 4326, geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT), 4326, geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT), 4326, geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT), 4326, geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.092 44.057)' AS TEXT),  TEXT
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, 0 1 1 1 0 0,00
type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.359 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.359 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.359 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.359 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.359 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.359 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.359 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.359 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.359 40.312)' AS TEXT), 4326)) AND enabled = "Y')
UNION ALL (SELECT 6 as index  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.255 44.894)' AS TEXT), 0 1 1 1 0 0,00 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST DWithin(ST GeomFromText(CAST ('POINT(-15.255 44.894)' AS 1 0 0,00 0 0,00 0 0 0 0 0 0 0 0 0 0 0 0
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.255 44.894)' AS TEXT), 4326) <> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.887 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.887 40.312)' AS TEXT)
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.887 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.325 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326), true) AS distance FROM spatial, port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.325 40.312)' AS TEXT)
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 0 1 1 0 0,00 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 0 1 1 0 0,00 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 0 1 1 0 0,00 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326), true AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326), true AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326), true AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326), true AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GEOMFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326), true AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GEOMFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326), true AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GEOMFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 0 1 1 1 1 0 0,00 4326, true AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWITHING STANCE FROM STANC
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.044 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.765 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.765 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.765 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.763 40.386)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.763 40.386)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.763 40.386)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.472 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.472 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.472 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.314 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.314 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.314 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.694 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.694 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.694 40.312)' AS TEXT), 4326) <-> geom LiMiT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.705 47.444)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.705 47.444)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.705 47.444)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.542 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.542 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-38.542 40.312)' AS TEXT), 4326), geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.132 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIbini(ST_GeomFromText(CAST ('POINT(-57.132 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.132 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(.41.876 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(.41.876 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(.41.876 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46,346 40,312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46,346 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46,346 40,312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.516 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.516 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.516 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35,753 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_OGMFromText(CAST ('POINT(-35,753 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35,753 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',52,662 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText)(CAST ('POINT',52,662 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT',52,662 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.681 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.681 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.681 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(:34.109.40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.109.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.109.40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.853 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.853 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.853 40.312)' AS TEXT), 4326) <> geom LiMiT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.157 49.992)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.157 49.992)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.157 49.992)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.427 47.722)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_DWithin(ST_00mFromText)(CAST ('POINT(-12.427 47.722)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.427 47.722)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(35.462.40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.462.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.462.40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.608 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.608 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.608 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.596 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText)(CAST ('POINT(-46.596 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.596 40.312)' AS TEXT), 4326) <> geom LiMiT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT-10, 898 49.251) 'AS TEXT), 432(B) 'AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-10,898 49.251)' AS TEXT), 432(B) 'AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS (SOPTED EA) as type, gid, code, name FROM spatial cost, area WHERE	0	1	1	1	0	0,00
4326) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS: "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.898 49.251)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.898 49.251)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-10.898 49.251)" AS TEXT), 4326)) AND enabled = "Y)						
spatial.grcm where S1_Intersects(geom, S1_GeomFromText(CAST (POINT(-10.896 49.251) AS TEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 6 as index  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.833 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.833 40.312)' AS	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.833 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )  (SELECT 'PORT' as type, qid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.287 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326), true) AS distance FROM spatial.port WHERE enabled = YT AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.287 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.287 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.05 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = YT AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.05 40.312)' AS	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = 1 AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.05 40.312)' AS TEXT), 4326) <> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.473 47.676)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.473 47.676)' AS TEXT),	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.473 47.676)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.827 40.312)' AS TEXT).	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.827 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.827 40.312)' AS TEXT), 4326) <> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.469 40.312)' AS TEXT), 4326) Live AS Control of the Control of the Cast ('ASC AST ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4326) Live AS Control of the Cast ('POINT -52.469 40.312)' AS TEXT), 4	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.469 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.469 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.127 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.127 40.312)' AS	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = 1 AND ST_OWNITHINGT_GEOTIFICHTEXT(CAST (POINT (-46.127 40.312) AS TEXT), 4326), geom, 2224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.127 40.312)' AS TEXT), 4326) <-> geom LIMIT 10) (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.004 45.145)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.004 45.145)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.004 45.145)' AS	0	1	1	1	0	0,00
4326), ituby A326), geom, 22224) RDER BY ST_GeomFromText(CAST (POINT(-15.004 43.145) A3 TEXT), 4326), geom, 22224) RDER BY ST_GeomFromText(CAST (POINT(-15.004 43.145) A3 TEXT), 4326) -> geom LIMIT 10)  select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-17.004 43.145) AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.time WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-17.004 43.145) AS TEXT), 4326) AND A3 TEXT).	0	1	1	1	0	0,00
4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS; "PORTAR' as type, gid, code, name FROM spatial.port_area WHERE   ST Intersects(geom, ST GeomFromText(CAST ("POINT-(17.004 43.145)" AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as						
indexRS, 'STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(- 17.004 43.145)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial_gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.004 43.145)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index						
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.33 47.841)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.33 47.841)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.33 47.841)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.905 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.905 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.905 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.117 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.117 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.117 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.758 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.758 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.758 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.861 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.861 40.312)' AS TEXT), 4326), geom, 2224) (AND ST_DWITH 10) TEXT), 4326), geom (ST_DWITH 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.683 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.683 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.683 40.312)' AS TEXT), 4326) = 9 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.642 50.507)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.642 50.507)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.642 50.507)' AS TEXT), 4326) \(  \	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.999 41.15)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.999 41.15)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.999 41.15)' AS TEXT), 4326) <> geom LIMIT to)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22 619 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \(^1\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22 619 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22 619 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-30.603 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST (POINT(-30.603 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-30.603 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.248 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.248 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.248 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36 825 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.825 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.825 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.924 47.225)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.924 47.225)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.924 47.225)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-15.838 44.311)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST (POINT(-15.838 44.311)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-15.838 44.311)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-46.307 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.307 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.307 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.624 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.624 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.624 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.613.51.536)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.613.51.536)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.613.51.536)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 27.478 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT', 27.478 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT', 27.478 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.398 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.398 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.398 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT;27.671 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(^1\) AND ST_DWIthin(ST_GeomFromText(CAST ('POINT;27.671 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT;27.671 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.31.034 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT'.3-1.034 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'.3-1.034 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-26.318 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-26.318 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.318 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.107 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-29.107 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.107 40.312)' AS TEXT), 4326), geom (LMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT;29,259 40,312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT;29,259 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT;29,259 40,312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.428 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.428 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.428 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.781 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.781 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.781 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT;30,755 40,312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT;30,755 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT;30,755 40,312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.282 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.282 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.282 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.534 43.615)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.534 43.615)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.534 43.615)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT; 24.954.40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.954.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.954.40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.467 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.467 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.467 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.341 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.341 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.341 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48,9.40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48,9.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48,9.40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.703 50.446)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.703 50.446)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.703 50.446)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.135 48.014)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.135 48.014)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.135 48.014)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.714 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.714 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.714 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.642 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.642 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.642 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.31 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.31 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.31 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.41 40.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.41 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.41 40.281)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.265 42.884)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.265 42.884)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.265 42.884)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.794 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.794 40.312)' AS TEXT), 4326), agom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.794 40.312)' AS TEXT), 4326) = 3 com FromText(CAST ('POINT(-43.794 40.312)' AS TEXT), 4326) =	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.874 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.874 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.874 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.009 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.009 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.009 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.214 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.214 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.214 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.047 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.047 40.312)' AS TEXT), 4326), geom, 22224) (ADDE BY ST_GeomFromText(CAST ('POINT(-55.047 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.294 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.294 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.294 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.714 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.714 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.714 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.232 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.232 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.232 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-67.232 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-67.232 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-67.232 40.312)') AS TEXT), 4326) -	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.57 43.579)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.57 43.579)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-16.57 43.579)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.261 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.261 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.261 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.041 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.041 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.041 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.36 43.789)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.36 43.789)' AS TEXT), 4326), geom, 2224) (POEME BY ST_GeomFromText(CAST ('POINT(-16.36 43.789)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.797 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.797 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.797 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.861 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.861 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.861 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-22.861 40.312)' AS TEXT), 4326) - SecomFromText(-22.861 40.312)' AS TEXT), 4326) - SecomFromText(-22	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.25 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.25 40.312)' AS TEXT), 4326), geom, 2224) (AND ST_BY ST_GEOMFROMTEX) AS TEXT), 4326 (>> geom EMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.207 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.207 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.207 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.894 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.894 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.894 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.51 41.639)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.51 41.639)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.51 41.639)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.681 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.681 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.681 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.557 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.557 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-33.557 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.801 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.801 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-42.801 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-42.801 40.312)') AS TEXT), 4326) - SecomFromText('POINT(-42.801 40.312)') AS TEXT), 4326) - SecomFr	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.041 46.108)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.041 46.108)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.041 46.108)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.428 43.721)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.428 43.721)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.428 43.721)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.869 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.869 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-22.869 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-22.869 40.312)') AS TEXT), 4326) - SecomFromText('POINT(-22.869 40.312)') AS TEXT), 4326) - SecomFr	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.441 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.441 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.441 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.147 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.147 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.147 40.312)' AS TEXT), 4326) -> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.616 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.616 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-30.616 40.312)' AS TEXT), 4326) - 2 geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.961 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.961 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-43.961 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-43.961 40.312)') AS TEXT), 4326) - SecomFromText('POINT(-43.961 40.312)') AS TEXT), 4326) - SecomFr	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.822 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.822 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.822 40.312)' AS TEXT), 4326) - geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.578 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.578 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.578 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.277 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.277 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.277 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.521 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.521 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.521 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.343 43.806)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.343 43.806)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.343 43.806)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.868 49.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.868 49.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.868 49.281)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.671 43.478)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.671 43.478)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.671 43.478)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.305 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.305 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.305 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.094 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.094 40.312)' AS TEXT), 4326), geom, 22224) (ADDE BY ST_GeomFromText(CAST ('POINT(-35.094 40.312)' AS TEXT), 4326) = 9 geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.716 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.716 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.716 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.286 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.286 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.286 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.08 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.08 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.08 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.969 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.969 40.312)' AS TEXT), 4326), geom, 22224) (ADDE BY ST_GeomFromText(CAST ('POINT(-43.969 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.482 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.482 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.482 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.095 46.054)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.095 46.054)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.095 46.054)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.224 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.224 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.224 40.312)' AS TEXT), 4326) -> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.005 41.144)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.005 41.144)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-19.005 41.144)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.644 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.644 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.644 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.317 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.317 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.317 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.691 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.691 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-31.691 40.312)' AS TEXT), 4326) - 2 geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.237 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.237 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.237 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.271 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.271 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.271 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-41.271 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-41.271 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-41.271 40.312)') AS TEXT), 4326) -	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.894 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.894 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-40.894 40.312)' AS TEXT), 4326) ->> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.724 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.724 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.724 40.312)' AS TEXT), 4326) = SeconFromText(CAST ('POINT(-43.724 40.312)') AS TEXT), 4326) = Se	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.79 51.359)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.79 51.359)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.79 51.359)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.774 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.774 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.774 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.771 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.771 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.771 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.978 47.171)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.978 47.171)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.978 47.171)' AS TEXT), 4326) - S geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.452 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.452 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-28.452 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.902 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.902 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.902 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.644 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.644 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.644 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.431 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.431 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-22.431 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-22.431 40.312)') AS TEXT), 4326) - SecomFromText(-22.431 40.312)' AS TEXT), 4326) - SecomFro	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.977 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.977 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.977 40.312)' AS TEXT), 4326) <->	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.99 48.159)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.99 48.159)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.99 48.159)' AS TEXT), 4326  'Se geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.184 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.184 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-21.184 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-21.184 40.312)' AS TEXT), 4326) - SecomFromText(-21.184 40.312)'	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.129 47.02)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.129 47.02)' AS TEXT), 4326), geom, 2224) (RDBER BY ST_GeomFromText(CAST ('POINT(-13.129 47.02)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.245 48.904)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.245 48.904)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.245 48.904)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.842 49.307)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.842 49.307)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.842 49.307)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.534 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.534 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.534 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.212 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.212 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.212 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.45 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.45 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.45 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.737 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.737 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.737 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.559 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.559 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.559 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.655 46.494)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.655 46.494)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.655 46.494)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.271 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.271 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-67.271 40.312)' AS TEXT), 4326) (SS geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.555 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.555 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.555 40.312)' AS TEXT), 4326) - S geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.405 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.405 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.405 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.327 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.327 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.327 40.312)' AS TEXT), 4326) <-> CENTRAL PROPERTY OF THE PROPERTY	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.055 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'V' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.055 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.055 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.815 40.312)' AS TEXT), 4326), true) AS distance FROM spatial_port WHERE enabled = "X AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-29.815 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.815 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.377 40.312)' AS TEXT), 4326), true) AS distance FROM spatial_port WHERE enabled = "V AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-33.377 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.377 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.61 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-26.61 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.61 40.281)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.328 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.328 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.328 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 22.15 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT', 22.15 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT', 22.15 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.127 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-33.127 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.127 'A0.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.02 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.02 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.02 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.457 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWT(-35.457 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('PDINT(-36.457 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT:64.191.40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.191.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.191.40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.278 50.871)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.278 50.871)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.278 50.871)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.301 45.848)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.301 45.848)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.301 45.848)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.567 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE e-nabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-54.567 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.567 'Q-0.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.711.40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.711.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.711.40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18,753 41.396)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.753 41.396)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.753 41.396)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.364 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.364 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.364 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.398 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.398 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.398 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.964 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.964 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.964 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.047 43.102)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.047 43.102)' AS TEXT),	0	1	1	1	0	0,00
4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTÂREA' as type, gid, code, name FROM spatial port area WHERÉ ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-1.047 43 102)' AS TEXT), \$250) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.047 43.102)' AS TEXT), \$4250)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.047 43.102)' AS TEXT), 4326)) AND enabled = "Y')						
UNION ALL (SELECT 6 as index  (SELECT 'PORT' as type, gid, code, name, geom, ST Distance(geom, ST GeomFromText(CAST ('POINT(-25.135 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.135 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.135 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.284 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-42.284 40.312)" AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-42.284 40.312)" AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-47.145 40.312)" AS TEXT),	0	1	1	1	0	0,00
4326), true) AS distance FROM spatial port WHERE enabled = Y <sup>T</sup> AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.145 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.145 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.883 48.266)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.883 48.266)' AS	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.883 48.266)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.863 50.286)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.863 50.286)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.863 50.286)' AS TEXT), 4326) <-> geom LIMIT 10) (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.893 47.256)' AS TEXT),	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.893 47.256)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.893 47.256)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.893 47.256)' AS TEXT), 4326) <-> geom LIMIT 10) (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.91 40.312)' AS TEXT),	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.91 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.91 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.91 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.289 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.289 40.312)' AS TEXT),	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.289 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.562 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326), true) AS distance FROM spatial port WHERE enabled = "Y' AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-55.562 40.312)" AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-55.562 40.312)" AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.196 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.196 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.196 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)		,				0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.946 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.946 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.946 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.155 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.155 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.155 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.739 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.739 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.739 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.899 44.25)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.899 44.25)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.899 44.25)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.943 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.943 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.943 40.312)' AS TEXT), 4326), geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.062 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.062 40.312)' AS TEXT), 4326), geom, 22224) (ARDER BY ST_GeomFromText(CAST ('POINT(-64.062 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.717 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-27.717 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.717 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.493 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'V' AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-34.493 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.493 40.312)' AS TEXT), 4326)> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT:48.449 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWItin(ST_GeomFromText(CAST ('POINT:48.449 40.312)' AS TEXT), 4326), geom, 22224) (RDBC BY ST_GeomFromText(CAST ('POINT:48.449 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.425 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.425 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-52.425 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15,721 44.428)' AS TEXT), 4328), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.721 44.428)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.721 44.428)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',53.922 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT',65.922 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT',65.922 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.211 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.211 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.211 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 37,856 40,312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT', 37,856 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT', 37,856 40,312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORR' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.784 45.365)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.784 45.365)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.784 45.365)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT;-33.132 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT;-33.132 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT;-33.132 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.121 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-51.121 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-51.121 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.287 44.862)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.287 44.862)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.287 44.862)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.714 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.714 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.714 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.696 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.696 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.696 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.222 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.222 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.222 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.17 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.17 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.17 40.281)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.153 40.312)' AS TEXT), 4328), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.153 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.153 40.312)' AS TEXT), 4328), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.152 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.152 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.152 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.312 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.312 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.312 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.887 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.887 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.887 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.048 48.101)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.048 48.101)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.048 48.101)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.99 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.99 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.99 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.217 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.217 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.217 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.951 50.198)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.951 50.198)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.951 50.198)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 22_068 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT', 22_068 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT', 22_068 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.219 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.219 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.219 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.307 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.307 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.307 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.857 42.292)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.857 42.292)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.857 42.292)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.859 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.859 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.859 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.4 46.749)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.4 46.749)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.4 46.749)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.997 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.997 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.997 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-14.535 45.614)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT(-14.535 45.614)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-14.535 45.614)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST GeomFromText(CAST ('POINT(-14.535 45.614)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.535 45.614)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.057 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.057 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.057 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.687 46.462)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.687 46.462)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.687 46.462)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.146 43.003)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.146 43.003)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.146 43.003)' AS TEXT), 4326), expent LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.493 44.656)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.493 44.656)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.493 44.656)' AS TEXT), 4326), expent_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.03 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.03 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-24.03 40.312)' AS TEXT), 4326) <>> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.949 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.949 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.949 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT:42,858 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText)(CAST ('POINT(-42,858 40.312)' AS TEXT), 4326), geom, 22224) (RDBR BY ST_GeomFromText)(CAST ('POINT(-42,858 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distancs(geom, ST_GeomFromText(CAST ('POINT(-65.52 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-65.52 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.52 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.63.783 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-63.783 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-63.783 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORR' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.618 47.531)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-12.618 47.531)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.618 47.531)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.444 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.444 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.444 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distancs(geom, ST_GeomFromText(CAST ('POINT(-46.34 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.34 40.312)' AS TEXT), 4326) <-> geom LIMIT-10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.879 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.879 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.879 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.9 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.9 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.9 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.106.40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.106.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-68.106.40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.789 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-21.789 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.789 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48,534 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.54 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.534 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.998 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.998 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.998 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46,248 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DOMFROME) (CAST ('POINT(-46,248 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.248 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.991 42.158)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.991 42.158)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.991 42.158)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.191 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.191 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.191 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.29.298 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DOMFROMTCAST_CPOINT'.29.298 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'.29.298 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.081 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.081 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.081 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.03 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.03 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.03 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.292 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.292 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.292 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.814 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.814 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.814 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.748 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.748 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.748 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.724 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.724 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.724 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.194 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.194 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.194 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	-,
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.395 49.754)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.395 49.754)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.395 49.754)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.281 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.281 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.281 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.846 49.303)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.846 49.303)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.846 49.303)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.391 49.758)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.391 49.758)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.391 49.758)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.351 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.351 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.351 40.312)' AS TEXT), 4326), exp. geom Limit 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.134 40.312)' AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-41.134 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.385 40.312)' AS TEXT), 4328), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.385 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.385 40.312)' AS TEXT), 4328), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, georn, ST_Distance(georn, ST_GeomFromText(CAST (POINT; 31,73 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT; 31.73 40.312)' AS TEXT), 4326), georn, 22224) (RDER BY ST_GeomFromText(CAST ('POINT; 31.73 40.312)' AS TEXT), 4326) «> georn LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.442.46.707)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.442.46.707)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.442.46.707)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.944 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.944 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.944 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.295 40.312)' AS TEXT), 4328), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-37.295 40.312)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.295 40.312)' AS TEXT), 4328), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38, 792 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.792 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.792 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.037 41.112)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DWITEN(CAST ('POINT(-19.037 41.112)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.037 41.112)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.498 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.498 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.498 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial, eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-46.443 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.443 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.443 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.443 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.443 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.443 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.443 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.443 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.443 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.443 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.RS, 'GFCM' as type, gid, code, name FROM spatial.gfcm wHERE ST_Intersects(geom, ST_GEOMFromText(	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.689 48.46)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.689 48.46)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.689 48.46)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.135 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.135 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.135 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.629 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.629 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.629 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.449 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.449 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.449 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.53 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.53 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.53 40.312)' AS TEXT), 4326), expert LIMIT ()	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.153 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.153 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.153 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.807 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.807 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.807 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.6 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.6 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.6 40.312)' AS TEXT), 4326), espec mLIMIT 10;	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.856 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.856 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-22.856 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.853 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.853 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-30.853 40.312)' AS TEXT), 4326) ~ geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.132 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.132 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.132 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.338 41.811)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.338 41.811)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.338 41.811)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.335 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWISTING" FromText(CAST ('POINT(-40.335 40.312)' AS TEXT), 4326), geom, 22224) (NDER BY ST_GeomFromText(CAST ('POINT(-40.335 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.382 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.382 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-44.382 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.792 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.792 40.312)' AS TEXT), 4326), geom, 22224) (ADBER BY ST_GeomFromText(CAST ('POINT(-25.792 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.495 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.495 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.495 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.256 40.893)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.256 40.893)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.256 40.893)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.722 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.722 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.722 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.585 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.585 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.585 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.377 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.377 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.377 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.353 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.353 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.353 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.733 47.416)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.733 47.416)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.733 47.416)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.263 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.263 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.263 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.564 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.564 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.564 40.312)' AS TEXT), 4326), exp. geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.214 40.312)' AS TEXT), 4326), true) A Gistance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.214 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-68.214 40.312)' AS TEXT), 4326) <->	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.088 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.088 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-65.088 40.312)' AS TEXT), 4326) ~ geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.6.862 51.287)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT'.6.862 51.287)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT'.6.862 51.287)' AS TEXT), 4326) <>>> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19,722 40.427)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.722 40.427)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.722 40.427)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.472 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-30.472 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.472 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.565 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.565 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.565 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.083 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.083 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.083 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.268 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_ORDIFFCMST_CAST ('POINT(-63.268 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.268 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.374 44.775)' AS TEXT), 4326), true, AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.374 44.775)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.374 44.775)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.496 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.496 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.496 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.825 44.324)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.825 44.324)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.825 44.324)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.312 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.312 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.312 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.23 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DOWITHIN(TEX) GeomFromText(CAST ('POINT(-25.23 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.23 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.014 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.014 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.014 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.243 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWIthin(FR) CoemFromText(CAST ('POINT(-49.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.243 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.993 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DOWITH(197.993 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.993 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.649 49.5)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.649 49.5)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.649 49.5)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ĀLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText).CAST ('POINT(-35.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexPS ("POINTAPEA" as type, gid, code, name FROM spatial port, area WHERE	0	1	1	1	0	0,00
4326) AND enabled = 'Y' UNION ALL (SELECT 3 as indexRS: PORTAREA' as type, gid, code, name FROM spatial, port area WHERE' ST Intersects(geom, ST. GeomFromText(CAST ('POINT(-35.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS; STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.246 40.312)' AS TEXT), 4326)) AND enabled = 'Y')						
UNION ALL (SELECT 6 as index  (SELECT 'PORT' as type, qid, code, name, geom, ST Distance(geom, ST GeomFromText(CAST ('POINT(-36.972 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.972 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.972 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT "PORT" as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.199 40.312)' AS TEXT), 4326) <-> GEOMETRIC TEXT ('POINT(-42.199 40.312)' AS TEXT ('POINT(-	0	1	1	1	0	0,00
\(\frac{\partial ABC}{\partial ABC}\), 4326), true) AS distance FROM spatial.port WHERE enabled = \(\frac{\partial Y}{\partial ADD}\) ST_DWithin(ST_GeomFromText(CAST (POINT(-42.199 40.312)' AS TEXT), 4326) <-> geom LIMIT 10) (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.443 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(\frac{\partial Y}{\partial ADD}\) AS T_DWithin(ST_GeomFromText(CAST ('POINT(-51.443 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(\frac{\partial Y}{\partial ADD}\) AS T_DWithin(ST_GeomFromText(CAST ('POINT(-51.443 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(\frac{\partial Y}{\partial ADD}\) AS T_DWithin(ST_GeomFromText(CAST ('POINT(-51.443 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(\frac{\partial Y}{\partial ADD}\) AS T_DWithin(ST_GeomFromText(CAST ('POINT(-51.443 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(\frac{\partial Y}{\partial ADD}\) AS T_DWITHIN(ST_GEOMFromText(CAST ('POINT(-51.443 40.312)' AS TEXT), 4326), true) AS TEXT ('POINT(-51.443 40.312)' AS TEXT), 4326), true) AS TEXT ('POINT(-51.443 40.312)' AS TEXT ('POINT(-51	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST (POINT(-31.443 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.2 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.2 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.2 40.312)' AS	0	1	1	1	0	0,00
4329, Intel® AS distance Provin spatial point where an abilities 1.4 AND \$1_5000 tilling 1. Gettiment (CAST (POINT(-48.2 40.3.12) AS TEXT), 4326), eyem, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.2 40.3.12) AS TEXT), 4326), eyem, 2324) ORDER BY ST_GeomFromText(CAST (POINT(-9.036 51.113) AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y'AND ST_DWINIn(ST_GeomFromText(CAST (POINT(-9.036 51.113) AS TEXT), 4326), eyem, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-9.036 51.113) AS TEXT), 4326), eyem, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-9.036 51.113) AS TEXT), 4326), eyem, 22240 (POINT(-9.036 51.113) AS TEXT), 4326), eyem, 23241 (POI	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.174 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-28.174 40.312)" AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-28.174 40.312)" AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT "PORT" as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-35.475 40.312)" AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-35.475 40.312)" AS	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-33.475 40.312)' AS TEXT), 4326) -> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.785 41.364)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.785 41.364)' AS TEXT),	0	1	1	1	0	0,00
TEXŤ), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POIÑT(-18.785 41.364)' AS TEXŤ), 4326) <-> geom LIMIT 10 )  select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST Intersects(geom.	0	1	1	1	0	0,00
ST_GeomFromText(CAST ('POINT(-36.48 40.312)' ÅŠ TEXT), 4326)) AND enabled = "V") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.48 40.312)' AS TEXT), 4326)) AND enabled = "V") UNION ALL (SELECT 2 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.48 40.312)' AS TEXT), 4326)) AND enabled = "V") UNION ALL (SELECT 4 as						
indexRS, 'STAÎTRECT' as Type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.48 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F						
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.222 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.222 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.222 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.539 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.539 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.539 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.655 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.655 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.655 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.483 46.666)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.483 46.666)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.483 46.666)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.104.40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.104.40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-39.104.40.312)' AS TEXT), 4326) (SS_geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.23 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.23 40.312)' AS TEXT), 4326 ), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.23 40.312)' AS TEXT), 4326   <>>> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.716 42.433)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.716 42.433)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.716 42.433)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.59 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.59 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.582 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'V' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.582 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.582 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.838 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-23.838 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.838 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.333 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIthin(ST_GeomFromText(CAST, ('POINT(-35.333 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.333 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.809 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.809 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.809 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.101 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.101 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.101 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.971.45.178)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.971.45.178)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.971.45.178)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINTI-20.333 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINTI-20.333 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINTI-20.333 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.518 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.518 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.518 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.883 40.312)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = \(^2\) AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-48.883 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.883 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 26.089 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT', 26.089 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT', 26.089 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 27,609 40,312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT', 27,609 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT', 27,609 40,312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.577 48.572)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.577 48.572)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.577 48.572)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.036 45.113)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-15.036 45.113)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.036 45.113)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.365 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.365 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE	0	1	1	1	0	0,00
ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.365 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.365 40.312)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM						
spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-36.365 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.606 40.312)' AS TEXT),	0	1	1	1	0	0,00
\$\frac{\partial 256}{\partial 256}\$, true) AS distance FROM spatial.port WHERE enabled = \text{Y}^2 AND ST_OWithin(ST_GeomFromText(CAST ('POINT(-37.606 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.606 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.626 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \text{Y}^2 AND ST_OWithin(ST_GeomFromText(CAST ('POINT(-54.626 40.312)' AS	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.626 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, qid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.748 42.401)' AS TEXT),	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.748 42.401)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.748 42.401)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.859 40.312)' AS TEXT),	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.859 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.859 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.859 40.312)' AS TEXT), 4326), specific properties of the state of	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.266 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, qid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.248 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.248 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.248 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.423 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.423 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.423 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  [SELECT 'PORT' as type, gid, code, name, geom, ST Distance(geom, ST GeomFromText(CAST ('POINT(-38.179 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = 'Ȳ AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.179 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.179 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 24.676 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT', 24.676 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT', 24.676 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 32.423 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.423 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.423 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.423 40.312)' AS TEXT), 4326) <-> geom LIMIT 10) (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.969 40.312)' AS TEXT),	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.969 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "X ND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.969 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.969 40.312)' AS TEXT), 4326) - geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.948 40.312)' AS TEXT).	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.948 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.948 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.948 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.302 41.847)' AS TEXT),	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.302 41.847)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.302 41.847)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.302 41.847)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.179 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = "Y' AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-23.179 40.312)" AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-23.179 40.312)" AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.719 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.719 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.719 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0			1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.444 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.444 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.444 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.016 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.016 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.016 40.312)' AS TEXT), 4326) = 9 geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.068 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.068 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.068 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.011 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.011 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.011 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.354 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.354 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.354 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.727 49.422)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.727 49.422)' AS TEXT), 4326), geom, 22224) (ASDER BY ST_GeomFromText(CAST ('POINT(-10.727 49.422)' AS TEXT), 4326) ->> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.027 43.122)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.027 43.122)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.027 43.122)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.676 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.676 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.676 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.498 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.498 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.498 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-31.498 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-31.498 40.312)' AS TEXT), 4326) - SecomFromText(CAST ('POINT(-31.498 40.312)' AS TEXT), 14326) -	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.673 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.673 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-34.673 40.312)' AS TEXT), 4326) - 2 geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.266 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.266 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.266 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.266 40.312)' AS TEXT), 4326) - 29 geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.796 48.353)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.796 48.353)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-11.796 48.353)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.655 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.655 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.655 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.766 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.766 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.766 40.312)' AS TEXT), 4326) ->> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.742 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.742 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-40.742 40.312)' AS TEXT), 4326) ->> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.15 45.999)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.15 45.999)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.15 45.999)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.763 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.763 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.763 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.495 49.654)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.495 49.654)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.495 49.654)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.854 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.854 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.854 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.601 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.601 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.601 40.312)' AS TEXT), 4326) -> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.992 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.992 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-66.992 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.498 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.498 40.312)' AS TEXT), 4326), geom, 2224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.498 40.312)' AS TEXT), 4326) - 29 geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.063 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.063 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.063 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.323 46.826)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.323 46.826)' AS TEXT), 4326), geom, 2224) (ADREA BY ST_GeomFromText(CAST ('POINT(-13.323 46.826)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.086 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.086 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.086 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.624 45.525)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.624 45.525)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.624 45.525)' AS TEXT), 4326) -> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.835 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.835 40.312)' AS TEXT), 4326), geom, 22224) (ADDE BY ST_GeomFromText(CAST ('POINT(-31.835 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.426 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.426 40.312)' AS TEXT), 4326), geom, 22224) (ORDER BY ST_GeomFromText(CAST ('POINT(-37.426 40.312)' AS TEXT), 4326) - 2 geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.653 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.653 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.653 40.312)' AS TEXT), 4326) <-> CENTRAL ('POINT(-28.653 40.312)' AS TEXT), 4326) <->	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.359 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.359 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.359 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.539 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.539 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.539 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.988 45.161)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.988 45.161)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.988 45.161)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.763 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.763 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.763 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.338 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.338 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.338 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.156 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.156 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.156 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.428 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.428 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.428 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.018 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.018 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.018 40.312)' AS TEXT), 4326) are specified by the compression of the compressi	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.106 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.106 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.106 40.312)' AS TEXT), 4326) - geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.28 45.869)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.28 45.869)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.28 45.869)' AS TEXT), 326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.246 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.246 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.246 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.925 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.925 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.925 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.881 41.568)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-18.581 41.568)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.581 41.568)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.421 40.312)' AS TEXT), 4326),true) AS distance FROM Spatial.port WHERE enabled = "X AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-29.421 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.421 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',51.585 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWINT(ST.GeomFromText(CAST ('POINT',51.585 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT',51.585 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.288 40.861)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.288 40.861)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.288 40.861)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT):24,856 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^3\) AND ST_DWINIO(ST_GeomFromText(CAST ('POINT):4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT):24.856 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(41.173 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-41.173 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.173 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.699 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.699 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.699 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.449 44.7)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.449 44.7)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.449 44.7)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINTI-17.297 42.852)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y AND ST_DWININ(ST_GeomFromText(CAST ('POINTI-17.297 42.852)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINTI-17.297 42.852)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40,992 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40,992 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.992 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.512 41.637)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.512 41.637)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.512 41.637)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.85 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE e-nabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-46.85 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.85 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.655 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.655 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.655 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT; 23.915 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT; 23.915 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT; 23.915 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT:24.735 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y AND ST_DWININ(ST_GeomText(CAST ('POINT:24.735 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT:24.735 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.from WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE	0	1	1	1	0	0,00
ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-12.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM						
spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.253 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.013 40.312)' AS TEXT),	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.013 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.013 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.013 40.312)' AS TEXT), 4326), geom, 2224) ORDER BY ST_GEOMFROMTEXT(CAST ('POINT(-52.554 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y' AND ST_DWithin(ST_GEOMFromText(CAST ('POINT(-52.554 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y' AND ST_DWithin(ST_GEOMFROMTEXT(CAST ('POINT(-52.554 40.312)' AS	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.554 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.554 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.72 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.72 40.312)' AS	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.72 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.775 43.374)' AS TEXT),	0	1	1	1	0	0,00
4326), true) AS distance FROM spatial.port WHERE enabled = 'Ȳ AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.775 43.374)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.775 43.374)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.882 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326), true) AS distance FROM spatial port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.882 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.882 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.284 41.865)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.284 41.865)' AS	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.284 41.865)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.927 50.222)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.927 50.222)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.927 50.222)' AS TEXT), 4326) <> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.269 40.312)' AS TEXT),	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.269 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, provided the standard = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.269 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.269 40.312)' AS TEXT), 4326) <-> geom LIMIT 10) (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.074 41.075)' AS TEXT),	0	1	1	1	0	0,00
A326), true) AS distancé FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST (POINT(-19.074 41.075)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.074 41.075)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.161 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.161 40.312)' AS	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.161 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.93 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326), true) AS distance FROM spatial port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-67.93 40.312)" AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-67.93 40.312)" AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',62,693 40,312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT',62,693 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62,693 40,312)' AS TEXT), 4326) <-> geom LIMIT 10)	J	'				0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.87 43.279)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.87 43.279)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.87 43.279)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.768 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.768 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.768 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.233 44.916)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.233 44.916)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.233 44.916)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.521 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.521 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.521 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.706 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.706 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.706 40.312)' AS TEXT), 4326), expen Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.496 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.496 40.312)' AS TEXT), 4326), geom, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-28.496 40.312)' AS TEXT), 4326), exp. geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.121 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.121 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.121 40.312)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',37,928 40,312)' AS TEXT), 4328),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-37,928 40,312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-37,928 40,312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 25.807 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-25.807 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-25.807 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.382 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.382 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.382 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.122 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-23.122 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.122 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67,639 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.639 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.639 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.583 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.583 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.583 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.302 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.302 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.302 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10,723.49.426)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(15.725 GeomFromText(CAST ('POINT(-10.723.49.426)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.723.49.426)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.676 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST GeomFromText(CAST ('POINT(-37.676 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.676 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.022 47.127)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.022 47.127)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.022 47.127)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31,629 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(IST_DOMFROMFROMFROMFROMFROMFROMFROMFROMFROMFR	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.135 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DOMFROMT) AS (1901NT(-37.135 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.135 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.547 43.602)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.547 43.602)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.547 43.602)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.26.44 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DWITC). AVAID (CAST ('POINT'.26.44 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'.26.44 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.042 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.042 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.042 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33,776 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.776 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.776 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.176 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DWITC(CAST ('POINT(-46.176 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.176 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.461 44.688)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.461 44.688)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.461 44.688)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.089 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.089 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.089 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.088 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.088 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.088 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.152 40.997)' AS TEXT), 4326),trup) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.152 40.997)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.152 40.997)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.97 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DWITC(AST ('POINT(-49.97 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.97 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.181 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.181 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.181 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34,055 40,312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DOMFROME) COMFROME (CAST ('POINT(-34,055 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34,055 40,312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.395 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.395 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.395 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.462 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.462 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.462 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.415 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.415 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.415 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.637 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.637 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.637 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.209 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.209 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.209 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.843 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.843 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.843 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST Intersects(geom, ST GeomFromText(CAST (*POINT(-47.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ÄLL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST GeomFromText(CAST (*POINT(-47.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST Intersects(geom, ST GeomFromText(CAST (*POINT(-47.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST Intersects(geom, ST GeomFromText(CAST (*POINT(-47.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.glcm WHERE ST Intersects(geom, ST GeomFromText(CAST (*POINT(-47.373 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.855 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.855 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.855 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.168 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.168 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.168 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.719 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.719 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.719 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.019 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.019 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.019 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.016 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.016 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.016 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.71 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.71 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.71 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.456 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.456 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.456 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.536 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.536 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.536 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.32 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.32 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.32 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36,766 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36,766 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36,766 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.322 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.322 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.322 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.686 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.686 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.686 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.472 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.472 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.472 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.933 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.933 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.933 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.485 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.485 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.485 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.69 48.459)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.69 48.459)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.69 48.459)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.717 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.717 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.717 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.036 49.113)' AS TEXT), 4326)) AND enabled = 'Y' UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.036 49.113)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.036 49.113)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.036 49.113)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-11.036 49.113)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index."	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.673 49.476)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.673 49.476)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.673 49.476)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.039 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \(^1\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.039 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.039 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.732 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-46.732 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.732 40.312)' AS TEXT), 4326), geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.445 49.704)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.445 49.704)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.445 49.704)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.8.636.51.513)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT'.6.636.51.513)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'.6.636.51.513)' AS TEXT), 4326) &> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.271 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = \(^1\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.271 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.271 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.774 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.774 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.774 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.30.809 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT'.03.809 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'.30.809 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.603 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.603 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.603 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.511 44.638)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.511 44.638)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.511 44.638)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.119 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.119 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.119 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.552 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.552 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.552 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.825 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.825 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.825 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.412 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.412 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.412 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.351 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.351 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.351 40.312)' AS TEXT), 4326) = 9 geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.578 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.578 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.578 40.312)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.838 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.838 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.838 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.624 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.624 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.624 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.58 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "\"AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.58 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.58 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.332 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = 'X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.332 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.332 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.594 40.312)' AS TEXT), 4326), true) AS distance FROM spatial_port WHERE enabled = 'V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.594 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.594 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.366 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.366 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.366 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.951 49.198)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.951 49.198)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.951 49.198)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',65.232 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^3\) AND ST_DWINTONTEXT(CAST ('POINT',65.232 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT',65.232 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.745 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "X AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.745 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.745 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid. code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.54 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-30.54 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.54 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.238 40.911)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-19.238 40.911)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.238 40.911)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid. code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.392 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-41.392 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.392 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.117 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.117 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.117 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid. code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.43 43.719)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-16.43 43.719)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.43 43.719)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid. code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.431.40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWINT(-36.431.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.431.40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 22.024 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT', 22.024 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT', 22.024 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.611 40.312)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = \(^1\) AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-35.611 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.611 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT; 39,511 40,312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWININGST_GeomFromText(CAST ('POINT; 39,511 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT; 39,511 40,312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT; 35,668 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT; 35.668 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT; 35.668 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.199 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^3\) AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-66.199 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.199 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid. code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.472 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-45.472 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.472 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid. code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.536 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^1\) AND ST_DWININ(ST_GEOMFROMTEXT(CAST ('POINT(-53.536 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.536 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.804 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWININGST_GeomFromText(CAST ('POINT(-58.804 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.804 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.953 43.196)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-16.953 43.196)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.953 43.196)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.292 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.292 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.292 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid. code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT):23,33 40,312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWININ(ST_GEOMFROMTEXT): AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.33 40,312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.964 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^3\) AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-33.964 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.964 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.037 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.037 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.037 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.711 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.711 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.711 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.068 44.081)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.068 44.081)' AS TEXT), 1000 April 1000 A	0	1	1	1	0	0,00
ST_GeomFromText(CAST ("POINT(-16.068 44.081)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-16.068 44.081)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-16.068 44.081)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-16.068 44.081)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'SFCM' as type, gid, code, name FROM						
spatial.g/cm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.068 44.081)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.031 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.031 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.031 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)		'	<u>'</u>	,		0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.716 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.716 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.716 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.024 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.024 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.024 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.334 41.815)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.334 41.815)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.334 41.815)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.045 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.045 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.045 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.042 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.042 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.042 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.817 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.817 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.817 40.312)' AS TEXT), 4326) = 9 geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.464 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.464 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.464 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.377 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.377 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.377 40.312)' AS TEXT), 4326) = SecomFromText(CAST ('POINT(-20.377 40.312)' AS TEXT), 4326)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.104 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.104 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.104 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.465 43.684)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.465 43.684)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-16.465 43.684)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.972 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.972 40.312)' AS TEXT), 4326), geom, 22224) (ARDER BY ST_GeomFromText(CAST ('POINT(-25.972 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.204 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.204 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.204 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.75 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.75 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-25.75 40.312)' AS TEXT), 4326  eye geom LIMIT (0)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.825 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.825 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.825 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.799 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.799 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-54.799 40.312)' AS TEXT), 4326) = 2 GeomFromText(CAST ('POINT(-54.799 40.312)' AS TEXT), 4326)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.628 45.521)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.628 45.521)' AS TEXT), 4326), geom, 22224) (ADREB BY ST_GeomFromText(CAST ('POINT(-14.628 45.521)' AS TEXT), 4326) = 9 geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.065 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.065 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.065 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.871 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.871 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.871 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.158 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.158 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.158 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.384 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.384 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.384 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.368 45.781)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.368 45.781)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-14.368 45.781)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.872 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.872 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.872 40.312)' AS TEXT), 4326) = 9 GeomFromText(CAST ('POINT(-29.872 40.312)' AS TEXT), 4326)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.902 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.902 40.312)' AS TEXT), 4326), geom, 22224) (ARDER BY ST_GeomFromText(CAST ('POINT(-48.902 40.312)' AS TEXT), 4326) = 2 geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.444 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.444 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.444 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.98 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "\"AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.98 40.312)' AS TEXT), 4326), geom, 2224) (RDER BY ST_GeomFromText(CAST ('POINT(-32.98 40.312)' AS TEXT), 4326  geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.791 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.791 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.791 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.19 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.19 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-68.19 40.312)' AS TEXT), 4326  eye geom LIMIT (0)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.691 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.691 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-57.691 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.904 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.904 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-53.904 40.312)' AS TEXT), 4326) -> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.317 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.317 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.317 40.312)' AS TEXT), 4326) <-> CENTRAL AS	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.657 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.657 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.657 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.499 50.65)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.499 50.65)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.499 50.65)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.313 48.836)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.313 48.836)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.313 48.836)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.405 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.405 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.405 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.364 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.364 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.364 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.647 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.647 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.647 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.531 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.531 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.531 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.34 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.34 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.34 40.312)' AS TEXT), 4326) \(	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.537 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.537 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.537 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.225 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.225 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.225 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.977 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.977 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.977 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.577 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.577 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-62.577 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.287 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.287 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.287 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.874 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.874 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.874 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.464 46.685)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.464 46.685)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.464 46.685)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.701 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.701 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.701 40.312)' AS TEXT), 4326(->> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.726 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.726 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.726 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.457 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.457 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.457 40.312)' AS TEXT), 4326(-) SecomFromText(CAST ('POINT(-24.457 40.312)' AS TEXT), 4326(-) SecomFromText(CAST ('POINT(-24.457 40.312)' AS TEXT), 4326(-) SecomFromText(CAST ('POINT(-24.457 40.312)') AS TEXT), 4326(-) SecomFromText(CAST ('POINT(-24.457 40.312)') AS TEXT), 4326(-) SecomFromText(-10.512) AS TEXT), 4326(-) SecomFromTexT), 4326(-) SecomFromTexT), 4326(-) SecomFromTexT), 4326(-) SecomFromTexT), 4326(-) S	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.108 45.041)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.108 45.041)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.108 45.041)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.044 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.044 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.044 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.907 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.907 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-32.907 40.312)' AS TEXT), 4326) (SS_geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.232 47.917)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.232 47.917)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.232 47.917)' AS TEXT), 4326) = 9 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.282 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.282 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.282 40.312)' AS TEXT), 4326) = 3 (SECTION 10.1828)   CONTINUE OF TEXTS   CONTINUE OF TEXTS	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.979 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.979 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.979 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.467 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.467 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.467 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.694 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.694 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.694 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.902 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.902 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.902 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.9 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.9 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.9 40.312)' AS TEXT), 4326) <-> geom LIMIT 01	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.015 50.134)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.015 50.134)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.015 50.134)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.363 49.786)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.363 49.786)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.363 49.786)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.861 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.861 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.861 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.377 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.377 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.377 40.312)' AS TEXT), 4326( >>> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.441 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.441 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.441 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.964 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.964 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.964 40.312)' AS TEXT), 4326) = 9 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.192 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.192 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.192 40.312)' AS TEXT), 4326) = 9 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.547 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.547 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.547 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.78 51.369)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.78 51.369)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.78 51.369)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.724 46.425)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.724 46.425)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.724 46.425)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_DistanceText), ASE(STEECT 'POINT(-42.374 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.374 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.374 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.123 45.026)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.123 45.026)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.123 45.026)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance) AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-18.48 41.669)" AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-18.48 41.669)" AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.57 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.57 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.57 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.135 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.135 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.135 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.887 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.887 40.312)' AS TEXT), 4326), agom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.887 40.312)' AS TEXT), 4326) compared to the complex of the compared to the compare	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.88 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.88 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.88 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.634 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.634 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.634 40.312)' AS TEXT), 4326) <-> geom LiMiT 10 )	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.345 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.345 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.345 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS ("POINT(-46.345 40.312)' AS TEXT), 4326) AND enabled = 'Y') UNION ALL	0	1	1	1	0	0,00
4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.345 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.345 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-46.345 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index						
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.792 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.792 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.792 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.568 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.568 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.568 40.312)' AS TEXT), 4326) (>>> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.194 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.194 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.194 40.312)' AS TEXT), 4326  expert = 1 Limit of the common for the comm	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.917 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.917 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.917 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.81 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.81 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.81 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.5 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "VAND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.5 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.5 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.317 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.317 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.317 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.644 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.644 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.644 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.6 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.6 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.6 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.132 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.132 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.132 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.397 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "\" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.397 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.397 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.554 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'V AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-53.554 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.554 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.202 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-27.202 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.202 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.134 40.312)' AS TEXT), 4326), true) AS distance FROM Spatial, port WHERE enabled = \(^{Y}\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.134 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.134 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14,856 45.293)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^2\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14,856 45.293)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14,856 45.293)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.367 48.782)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-11.367 48.782)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.367 48.782)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.222 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^3\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.222 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.222 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT; 22_637 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^{Y}\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT; 22_637 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT; 22_637 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.897 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-44.897 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.897 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.822 41.327)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.822 41.327)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.822 41.327)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT; 24,807 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT; 24.807 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT; 24.807 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT; 34,874.40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT; 34.874.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT; 34.874.40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT, 60, 474 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT, 60, 474 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT, 60, 474 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.29 49.859)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.29 49.859)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.29 49.859)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.708 49.441)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.708 49.441)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.708 49.441)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial sez WHERE ST Intersects(geom, ST GeomFromText(CAST ('POINT-15-499 44.65)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial from WHERE ST Intersects(geom, ST, GeomFromText(CAST ('POINT(-15.499 44.65)' AS TEXT), the second state of the second	0	1	1	1	0	0,00
4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTÂREĀ' as type, gid, code, name FROM spatial.port area WHEŘE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.499 44.65)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.499 44.65)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-15.499 44.65)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F						
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.907 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.907 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.907 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.962 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.962 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.962 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.478 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.478 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.478 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.006 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.006 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.006 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.389 50.76)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.389 50.76)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.389 50.76)' AS TEXT), 4326), eye geom LIMIT 10	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.528 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.528 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.528 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.956 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIstin(ST_GeomFromText(CAST ('POINT(-43.956 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-43.956 40.312)' AS TEXT), 4326) ~ geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.276 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-53.276 40.312)' AS TEXT), 4326), geom, 22224) (RDRE BY ST_GeomFromText(CAST ('POINT(-53.276 40.312)' AS TEXT), 4326), ~ geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distancs(geom, ST_GeomFromText(CAST ('POINT(-46.526 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.526 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.526 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT'(-45.584 4) 312)' AS TEXT), 4329) N.ND enabled = "Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rtmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.584 40.312)' AS TEXT), 4329)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.584 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.584 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.584 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as index."	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.279 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.279 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-58.279 40.312)' AS TEXT), 4326), geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-11.05.49.099)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-11.05.49.099)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-11.05.49.099)' AS TEXT), 4326) «>> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-51.662 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWITHIN(ST_GeomFromText(CAST (POINT(-51.662 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-51.662 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.663 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.663 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.663 40.312)' AS TEXT), 4326), <a ('point(-32.95="" 22224)="" 40.312)'="" 4326)="" 4326),="" <="" and="" as="" by="" geom,="" href="https://doi.org/10.1016/j.new10.1016/j.n&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;1&lt;/td&gt;&lt;td&gt;1&lt;/td&gt;&lt;td&gt;1&lt;/td&gt;&lt;td&gt;0&lt;/td&gt;&lt;td&gt;0,00&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.95 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = " order="" st_dwithin(st_geomfromtext(cast="" st_geomfromtext(cast="" text),="" y=""> geom LIMIT 10)</a>	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.235 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWitthin(ST_GeomFromText(CAST ('POINT(-44.235 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.235 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.932 50.217)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.932 50.217)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.932 50.217)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST. Intersects(geom, ST. GeomFromText(CAST (POINT(-21.865 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST Intersects(geom, ST. GeomFromText(CAST ('POINT(-21.865 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.865 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.865 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfom WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-21.865 40.312)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 6 as index.")	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.323 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(^{Y}\) AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.323 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-39.323 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.21 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWINIC(ST_GEOMFromText(CAST ('POINT(-37.21 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.21 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.346 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.346 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.346 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.396 50.753)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.396 50.753)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.396 50.753)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.778 46.371)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.778 46.371)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.778 46.371)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.709 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.709 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.709 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.436 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.436 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.436 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.238 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.238 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.238 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.412 40.737)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.412 40.737)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.412 40.737)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.277 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.277 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.277 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.737 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.737 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.737 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.917 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.917 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.917 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (STLECT PORT on the crid and page access ST_Distance(geom, ST_CasmFromText(CAST ('POINT(-45.51' (POINT(-45.51' (POINT(-4	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.887 48.262)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.887 48.262)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.887 48.262)' AS TEXT), 4326) <-y geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.122 48.027)' AS TEXT),	0	1		1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = 'Y <sup>7</sup> AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.122 48.027)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.122 48.027)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.077 44.072)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.077 44.072)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.077 44.072)' AS TEXT), 4326) <> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.341.40.312)' AS TEXT))	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.341 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.341 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.341 40.312)' AS TEXT), 4326) <> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.388.40.312)' AS TEXT))	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.398 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.398 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.398 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)		1		1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.184 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.184 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.184 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.863 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.863 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.863 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.951 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.951 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-21.951 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.114 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.114 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.114 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.557 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-31.557 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-31.557 40.312)' AS TEXT), 4326( >>> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.142 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.142 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-67.142 40.312)' AS TEXT), 4326), geom (2012) (RDER BY ST_GeomFromText(CAST ('POINT(-67.142 40.312)' AS TEXT), 4326).	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.593 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.593 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.593 40.312)' AS TEXT), 4326), geom_EVATEAT, 4326) - 2 geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.735 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(^1\) "AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-25.735 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-25.735 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-39.895 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.895 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.895 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.418 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.418 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.418 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-41.523 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(^1\) AND ST_DWIthin(ST_GeomFromText(CAST (POINT(-41.523 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-41.523 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.218 44.931)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.218 44.931)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.218 44.931)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.938 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.938 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.938 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-54.78 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.78 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.78 40.312)' AS TEXT), 4326) &> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT-63.412 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT-63.412 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT-63.412 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19,726 40.423)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.726 40.423)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.726 40.423)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',27.465 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.465 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.465 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.137 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.137 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.137 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56,724 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.724 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.724 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.634 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.634 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.634 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.962 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.962 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.962 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.253 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.253 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.253 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.047 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.047 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.047 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50,734 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.734 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.734 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.274 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.274 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.274 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT;25,251 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = \(^1\) AND ST_DWIthin(ST_GeomFromText(CAST ('POINT;25,251 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT;25,251 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-26.47 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.47 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.47 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.275 40.312)" ÅS TEXT), 4326)) AND enabled = "Y) 1010N ALL (SELECT 2 as indexRS, "RFMO" as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.275 40.312)" ÅS TEXT),	0	1	1	1	0	0,00
type, gid, code, name FROM spatial.rfmo WHERE ST Intersect's(geom, ST. GeomFromText(CAST ("POINT(-47.275 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, PORTAREA" as type, gid, code, name FROM spatial.port area WHERE ST Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.275 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, "STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-47.275 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, "GFCM" as type, gid, code, name FROM						
spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-47.275 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.021 40.312)' AS TEXT), 4326), frue) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.021 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.021 40.312)' AS TEXT), 4326) -> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.314 45.835)' AS TEXT),	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.314 45.835)' AS TEXT), 4326), frue) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.314 45.835)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.314 45.835)' AS TEXT), 4326) -> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.395 40.312)' AS TEXT),	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.395 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.395 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.395 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.339 40.81)' AS TEXT),	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.339 40.81)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.339 40.81)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.339 40.81)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.57 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-30.57 40.312)" AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-30.57 40.312)" AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.985 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.985 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.985 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )		1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.55 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.55 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.55 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.078 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.078 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.078 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.954 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.954 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.954 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.642 48.507)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.642 48.507)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.642 48.507)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.549 47.6)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.549 47.6)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.549 47.6)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.828 46.321)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.828 46.321)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.828 46.321)' AS TEXT), 4326), as geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.646 47.503)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.646 47.503)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.646 47.503)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.418 45.731)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.418 45.731)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.418 45.731)' AS TEXT), 4326), expend_LMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.892 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.892 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.892 40.312)' AS TEXT), 4326) <-> CENTRAL PROPERTY OF THE PROPERTY AS THE PROPERTY OF THE PROPERTY	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.791 40.358)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.791 40.358)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.791 40.358)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.555 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.555 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.555 40.312)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.874 47.275)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.874 47.275)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.874 47.275)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.251 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.251 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.251 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.575 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.575 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.575 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.116 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = YY AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.116 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-64.116 40.312)' AS TEXT), 4326) (SS geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.887 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.887 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.887 40.312)' AS TEXT), 4326) = 3 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.771 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.771 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.771 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.892 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.892 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.892 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.611 45.538)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.611 45.538)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.611 45.538)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.521 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.521 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.521 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.799 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.799 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.799 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.492 47.657)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.492 47.657)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.492 47.657)' AS TEXT), 4326) = 9 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.145 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.145 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.145 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.864 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.864 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.864 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.642 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.642 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.642 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.143 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.143 40.312)' AS TEXT), 4326), geom, 22240) AND ERB YS T_GeomFromText(CAST ('POINT(-28.143 40.312)' AS TEXT), 4326( >>> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.822 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.822 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.822 40.312)' AS TEXT), 4326) ->>> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.389 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.389 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.389 40.312)' AS TEXT), 4326), as geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.367 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.367 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.367 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.302 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.302 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.302 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.776 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.776 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.776 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.866 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.866 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.866 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.864 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.864 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.864 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.866 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.866 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.866 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.97 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.97 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.97 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.415 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.415 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.415 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.889 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.889 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.889 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.577 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.577 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.577 40.312)' AS TEXT), 4326), according to the component of the	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.972 42.177)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.972 42.177)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.972 42.177)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.023 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.023 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.023 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.912 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.912 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.912 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.251 44.898)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.251 44.898)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.251 44.898)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.187 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.187 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.187 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.549 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.549 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.549 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.111 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.111 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.111 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.684 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.684 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance), as Text), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.078 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.078 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.954 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.954 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.954 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.936 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.936 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.936 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Dwithin(ST_GeomFromText(CAST ('POINT(-59.526 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_Dwithin(ST_GeomFromText(CAST ('POINT(-59.526 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.526 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.756 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.756 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.756 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.415 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.415 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.415 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.27 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.27 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.27 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.755 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.755 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.755 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.251 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.251 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.251 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.253 40.312)' AS TEXT), 4326), true). AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.253 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.253 40.312)' AS TEXT), 4326)> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.938 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.938 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.938 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.709 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.709 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.709 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.83 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.83 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.83 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.596 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.596 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.596 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.753 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.753 40.312)' AS	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.753 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.003 48.146)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.003 48.146)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.003 48.146)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomEromText(CAST_(PO)NT(-32,787.40.312)) ASTEXT_(4328)) AND enabled = 'Y') [NII(ON ALL (SELECT 2 as indexRS 'REMO' as	0	1	1	1	0	0,00
type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.787 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.787 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-						
32.787 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial, Grow WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.787 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index						
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.892 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.892 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.892 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	-,
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.845 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.845 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.845 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.325 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.325 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.325 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.076 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.076 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.076 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.53 40.619)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.53 40.619)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.53 40.619)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.116 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.116 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.116 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.252 42.897)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.252 42.897)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.252 42.897)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.252 42.897)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.252 42.897)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index		1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.433 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.433 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-42.433 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.369 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.369 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.369 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.683 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.683 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.683 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.618 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.618 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.618 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as Igeom, page), gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.565 44.584)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.565 44.584)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.565 44.584)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(13.446 46.703)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.446 46.703)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.446 46.703)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.099 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.099 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.099 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(20.505 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.575 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.575 40.312)' AS TEXT), 4326), e> qeom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.74 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.74 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.74 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.768 51.381)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.768 51.381)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.768 51.381)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.619 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.619 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.619 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.169 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.169 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.169 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.073 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.073 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.073 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.341 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.341 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.341 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.863 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.863 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.863 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.6 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.6 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.6 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.084 50.065)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.084 50.065)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.084 50.065)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial-eez WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.875 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.875 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port, area WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.875 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 4 as indexRS, 'SFATRECT' as type, gid, code, name FROM spatial.stat rect WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.875 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.875 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST Intersects(geom, ST_GeomFromText(CAST ('POINT(-37.875 40.312)' AS TEXT), 4326)) AND enabled = 'Y) UNION ALL (SELECT 6 as index.R.)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.752 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.752 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.752 40.312)' AS TEXT), 4326), exp.	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.67 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.67 40.281)' AS TEXT), 4328), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.67 40.281)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.529 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.529 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.529 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.369 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.369 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.369 40.312)' AS TEXT), 4326), exp. geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.276 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.276 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.276 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.349 42.8)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.349 42.8)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.349 42.8)' AS TEXT), 4326), eyem, 22241) ORDER BY ST_GeomFromText(CAST ('POINT(-17.349 42.8)' AS TEXT), 4326) <-y geom LIMIT 10	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.233 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.233 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.233 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.438 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.438 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.438 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.866 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.866 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.866 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.869 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.869 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.869 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.674 46.475)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.674 46.475)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.674 46.475)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.185 49.964)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.185 49.964)' AS TEXT), 4326), c-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.071 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.071 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.071 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.259 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.259 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.259 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.161 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.161 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.161 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.751 48.398)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.751 48.398)' AS TEXT), 4329), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.751 48.398)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.13 44.019)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.13 44.019)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.13 44.019)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.709 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.709 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.709 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.706 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.706 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.706 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.528 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.528 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.528 40.312)' AS TEXT), 4326) = 9 geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.505 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.505 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.505 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.983 49.166)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.983 49.166)' AS TEXT), 4326), geom, 2224) (ARDER BY ST_GeomFromText(CAST ('POINT(-10.983 49.166)' AS TEXT), 4326) = 25 geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.008 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-40.008 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-40.008 40.312)' AS TEXT), 4326) - 2 geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.105 42.044)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.105 42.044)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-18.105 42.044)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.407 51.742)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.407 51.742)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.407 51.742)' AS TEXT), 4326 \\ \text{ > geom LiMIT 10} \)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.758 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.758 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-33.758 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.529 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.529 40.312)' AS TEXT), 4326), geom, 2224) (RDBER BY ST_GeomFromText(CAST ('POINT(-37.529 40.312)' AS TEXT), 4326) -> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.508 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.508 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.508 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.346 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.346 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-48.346 40.312)' AS TEXT), 4326) = 2 GeomFromText(CAST ('POINT(-48.346 40.312)' AS TEXT), 4326)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.706 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.706 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.706 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.53 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.53 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.53 40.312)' AS TEXT), 4326 (>> geom LIMIT to)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.009 46.14)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.009 46.14)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.009 46.14)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.661 45.488)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.661 45.488)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.661 45.488)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.096 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.096 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.096 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.003 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.003 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-44.003 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.093 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.093 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.093 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.9 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.9 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.9 40.312)' AS TEXT), 4326) <>-yeom LIMIT 10'	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.483 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.483 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.483 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.189 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.189 40.312)' AS TEXT), 4326), geom, 2224) (RDBER BY ST_GeomFromText(CAST ('POINT(-59.189 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.846 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.846 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.846 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.169 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.169 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.169 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.618 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.618 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.618 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.905 48.244)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.905 48.244)' AS TEXT), 4326), geom, 22224) (ADREB BY ST_GeomFromText(CAST ('POINT(-11.905 48.244)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.283 44.866)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.283 44.866)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.283 44.866)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.772 41.377)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.772 41.377)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.772 41.377)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.96 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.96 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.96 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.279 50.87)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.279 50.87)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.573 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.573 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.573 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.09 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.09 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.753 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.753 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.753 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.096 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.096 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.096 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.61 48.561)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.61 48.561)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-11.61 48.561)' AS TEXT), 4326) \(	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.779 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.779 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.779 40.312)' AS TEXT), 4326) - S geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.62 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.62 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.62 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.527 47.622)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.527 47.622)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.527 47.622)' AS TEXT), 4326) <-> CENTRAL PROPERTY OF THE PROPERTY	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.529 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'V' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.529 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.529 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.001 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "V AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-39.001 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.001 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.618 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-50.618 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.618 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'-61.842 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.842 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.842 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.853 42.296)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.853 42.296)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.853 42.296)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.17 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.17 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.17 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35,8.40,312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35,8.40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35,8.40,312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.467 49.682)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.467 49.682)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.467 49.682)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',27.259 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.259 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.259 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.006 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWINICST_GeomFromText(CAST ('POINT(-35.006 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.006 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.544 41.605)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.544 41.605)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.544 41.605)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39,058 40,312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39,058 40,312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39,058 40,312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.724.40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE e-nabled = "Y AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-42.724.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.724.40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.498 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.498 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.498 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48,771.40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.771.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.771.40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19,143 41,006)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19,143 41,006)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19,143 1,006)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.737 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.737 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.737 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.237 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.237 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.237 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.347 42.802)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.347 42.802)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.347 42.802)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.665 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.665 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.665 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.103 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.103 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.103 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',9,408 50,741)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT',9,408 50,741)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT',9,408 50,741)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.221 40.928)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.221 40.928)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.221 40.928)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.531 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.531 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.531 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.29 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.29 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.29 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
select *from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT'-45.943 40.312)' AS TEXT), 4329) AND enabled = "Y' UNION ALL ('SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-45.943 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326)] AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial port area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.943.40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 4 as indexRS, STATRECT" as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.943.40.312)' AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-45.943.40.312)' AS TEXT), 4326)) AND enabled = "Y")						
UNION ALL (SELECT 6 as index  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.263 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.263 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.263 40.312)' AS TEXT), 4326) < geom LIMIT 10)  [SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.158 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326), true) AS distance FROM spatial port WHERE enabled = "Y' AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-20.158 40.312)" AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-20.158 40.312)" AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.824 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.824 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.824 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)			<u>'</u>	<u>'</u>		0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.315 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.315 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.315 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.315 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-40.315 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.5 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.5 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.5 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance), rule) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-63.371 40.312)" AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-63.371 40.312)" AS TEXT), 4326), compact of the standard of the s	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.4 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.4 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.4 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.045 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.045 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.045 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.637 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.637 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.637 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.317 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.317 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.317 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.184 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.184 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.184 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.792 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.792 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.792 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.766 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.766 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.766 40.312)' AS TEXT), 4326), expen Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.338 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.338 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.338 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.611 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.611 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.611 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.178 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.178 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.178 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.573 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.573 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.573 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.632 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.632 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.632 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.06 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.06 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.06 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.145 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.145 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.145 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.132 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.132 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.132 40.312)' AS TEXT), 4326), expen _EMMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.909 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.909 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.909 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.438 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.438 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.438 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.19 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.19 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.19 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.653 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.653 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.653 40.312)' AS TEXT), 4326), expend_LMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.615 44.534)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.615 44.534)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.615 44.534)' AS TEXT), 4326), expen_stantal.pdf	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.336 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.336 40.312)' AS TEXT), 4326), geom, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-39.336 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.639 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.639 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.639 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.37 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.37 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-46.37 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.971 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.971 40.312)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-50.971 40.312)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.166 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.166 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.166 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.732 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.732 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.732 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.787 47.362)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.787 47.362)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.787 47.362)' AS TEXT), 4326) = 9 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.743 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.743 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.743 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.608 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.608 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.608 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.34 41.809)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.34 41.809)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.34 41.809)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.686 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.686 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.686 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.61 40.281)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.61 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.61 40.281)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.346 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.346 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.346 40.312)' AS TEXT), 4326) = 3 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.413 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.413 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.413 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.47 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.47 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.47 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.312 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "V AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.312 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.312 40.312)' AS TEXT), 4326) -> geom LIMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.222 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "X AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-31.222 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.222 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.315 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^2\) AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-48.315 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.315 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.14 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "\" AND ST_DWINIn(ST_GeomFromText(CAST ('POINT(-39.14 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.14 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67,786 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-67,786 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.786 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.696 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.696 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.696 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.134 50.015)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-10.134 50.015)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.134 50.015)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.132 46.017)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.132 46.017)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.132 46.017)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.232 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.232 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.232 d.0.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.446 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.446 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.446 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14,045 46,104)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14,045 46,104)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14,045 46,104)' AS TEXT), 4326), -> geom LIMIT 19.	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT', 28.009 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.009 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.009 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.101 43.048)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-17.101 43.048)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.101 43.048)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT;27.18 40.312)' AS TEXT), 4326),true) AS distance FROM spatial,port WHERE enabled = "Y AND ST_DWIthin(ST_GeomFromText(CAST ('POINT;2-7.18 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT;2-7.18 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT;-27.761 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^1\) AND ST_DWIthin(ST_GeomFromText(CAST ('POINT;-27.761 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT;-27.761 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.097 40.312)' AS TEXT), 4326), true) AS distance FROM spatial_port WHERE enabled = "X AND ST_DWIbin(ST_GeomFromText(CAST ('POINT(-28.097 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.097 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.928 47.221)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.928 47.221)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.928 47.221)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.35 46.821)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.35 46.821)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.35 46.821)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.943 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.943 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.943 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT;-32.382 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT;-32.382 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT;-32.382 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.142 44.007)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.142 44.007)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.142 44.007)' AS TEXT), 4326), -> geom LIMIT ('POINT(-16.142 44.007)' AS TEXT), -> geom LIMIT ('POINT(-16.1	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.654 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE enabled = \(^2\) AND ST_DWIthin(ST_GeomFromText(CAST ('POINT(-60.654 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.654 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT',66.626 40.312)' AS TEXT), 4326), true) AS distance FROM spatial, port WHERE e-nabled = "Y AND ST_DWINT', GEOMFromText(CAST ('POINT',66.626 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT',66.626 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.488 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.488 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.488 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.616 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.616 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.615 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.062 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.062 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.062 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.982 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.982 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.982 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.392 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.392 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.392 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.848 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.848 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.848 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.392 46.757)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.392 46.757)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.392 46.757)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.126 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.126 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.126 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.508 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.508 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.508 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.129 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.129 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.129 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.101.40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.101.40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.101.40.312)' AS TEXT), 4326), expent_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.76 42.389)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.76 42.389)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.76 42.389)' AS TEXT), 4326) \( \text{ > 2 geom LiMIT (1)} \)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.734 43.415)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.734 43.415)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.734 43.415)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.734 43.415)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.734 43.415)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.734 43.415)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.734 43.415)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.734 43.415)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.734 43.415)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-16.734 43.415)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 5 as indexRS, 'GFOM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT;21.261 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE e-nabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT;21.261 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT;21.261 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.575 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.575 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-31.575 40.312)' AS TEXT), 4326) - geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.731 50.418)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.731 50.418)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-9.731 50.418)' AS TEXT), 4326) \( \text{ > geom LiMIT 10} \)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.351 45.798)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.351 45.798)' AS TEXT), 4326), geom, 22224) (ARDER BY ST_GeomFromText(CAST ('POINT(-14.351 45.798)' AS TEXT), 4326) = 9 geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.094 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.094 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-36.094 40.312)' AS TEXT), 4326) <-> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.356 41.793)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.356 41.793)' AS TEXT), 4326), geom, 2224) (ARDER BY ST_GeomFromText(CAST ('POINT(-18.356 41.793)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.928 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.928 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.928 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.15 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.15 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.15 40.312)' AS TEXT), 4326) \(	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.578 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.578 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.578 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.037 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.037 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.037 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.075 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.075 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.075 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.789 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.789 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.789 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.748 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.748 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.748 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.693 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.693 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.693 40.312)' AS TEXT), 4326(->>> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.902 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.902 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.902 40.312)' AS TEXT), 4326) = 9 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.93 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.93 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.93 40.312)' AS TEXT), 4326)  especim LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.616 41.533)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.616 41.533)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.616 41.533)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.508 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.508 40.312)' AS TEXT), 4326), geom, 2224) (ARDER BY ST_GeomFromText(CAST ('POINT(-47.508 40.312)' AS TEXT), 4326) = 25 geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.681 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.681 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.681 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.055 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.055 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.055 40.312)' AS TEXT), 4326) ->> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.788 44.361)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.788 44.361)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-15.788 44.361)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.281 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.281 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.281 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.021 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.021 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.021 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.647 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.647 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.647 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.694 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.694 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.694 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.2 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.2 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.2 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.215 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.215 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.215 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.734 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-64.734 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-64.734 40.312)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.542 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.542 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.542 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.fmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT' as type, gid, code, name FROM spatial stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-44.849 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.631 41.518)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.631 41.518)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-18.631 41.518)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.549 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.549 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.549 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.534 40.312)' AS TEXT), 4326), true), A distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.534 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.534 40.312)' AS TEXT), 4326) < geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.912 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.912 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-57.912 40.312)' AS TEXT), 4326) ~ geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.915 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.915 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.915 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.974 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.974 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-42.974 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-56.034 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-56.034 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-56.034 40.312)' AS TEXT), 4326) < geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.956 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.956 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-30.956 40.312)' AS TEXT), 4326) -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.977 40.312)' AS TEXT), 4326), true) A Sistance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.977 40.312)' AS TEXT), 4326), geom, 22224) (ROBER BY ST_GeomFromText(CAST ('POINT(-21.977 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.462 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.462 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.462 40.312)' AS TEXT), 4326) <->	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.54 44.609)' AS TEXT), 4326),true), AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.54 44.609)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.54 44.609)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.931 43.218)' AS TEXT), 4326),true), AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.931 43.218)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.931 43.218)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.784 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.784 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.784 40.312)' AS TEXT), 4326) <->	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.8 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.8 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.8 40.312)' AS TEXT), 4326) <> geom LIMIT 10;	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.405 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.405 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.405 40.312)' AS TEXT), 4326) <->	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.148 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.148 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.148 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.814 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.814 40.312)' AS TEXT), 4326), geom_22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.814 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.109 43.04)' AS TEXT), 4326),true), A distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.109 43.04)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.109 43.04)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.03 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.03 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.03 40.312)' AS TEXT), 4326) <->	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.374 40.312)' AS TEXT), 4326),true), AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.374 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.374 40.312)' AS TEXT), 4326) <->, geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.114 40.312)' AS TEXT), 4326),true) A Sistance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.114 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.114 40.312)' AS TEXT), 4326) <-> geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.49 40.312)' AS TEXT), 4326), true), AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.49 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.49 40.312)' AS TEXT), 4326) <-> geom LiMIT to)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.142 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.142 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.142 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.834 45.315)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.834 45.315)' AS TEXT), 4226), expen_22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.834 45.315)' AS TEXT), 4326), expen_22240 (ORDER BY ST_GeomFromText(CAST ('POINT(-14.834 45.315)' AS TEXT), 4326), expen_24240 (ORDER BY ST_GEOMFROMTEX)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-38.807 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.807 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.807 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.861 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.861 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.861 40.312)' AS TEXT), 4326), exp. geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.864 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.864 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.864 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.295 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.295 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.295 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.034 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.034 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.034 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.642 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.642 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.642 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.701 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.701 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.701 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.127 44.022)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.127 44.022)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.127 44.022)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.478 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.478 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.478 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.624 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.624 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.624 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.722 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.722 40.312)' AS TEXT), 4326), agom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.722 40.312)' AS TEXT), 4326) = 2 open fromText(CAST ('POINT(-37.722 40.312)' AS TEXT), 4 open fromText(CAST ('POINT(-37.722 40.312)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.402 42.747)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.402 42.747)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.402 42.747)' AS TEXT), 4326) <-> geom LiMiT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.475 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.475 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.475 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.464 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.464 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.464 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.461 50.688)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.461 50.688)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.461 50.688)' AS TEXT), 4326) \(  \	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.272 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.272 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.272 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.917 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.917 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.917 40.312)' AS TEXT), 4326) = SeconFromText(CAST ('POINT(-41.917 40.312)' AS TEXT), 4326)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.052 50.097)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.052 50.097)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.052 50.097)' AS TEXT), 4326) ->>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.17 44.979)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.17 44.979)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.17 44.979)' AS TEXT), 4326 \>= geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.39 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.39 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.39 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.467 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.467 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.467 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.725 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.725 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.725 40.312)' AS TEXT), 4326(->> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-68.137 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-68.137 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-68.137 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.451 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = YY AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.451 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-40.451 40.312)' AS TEXT), 4326) (SS geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.091 47.058)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.091 47.058)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-13.091 47.058)' AS TEXT), 4326) (>>> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.022 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.022 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.022 40.312)' AS TEXT), 4326)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.951 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.951 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.951 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.94 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.94 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.94 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.204 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.204 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.204 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.547 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.547 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.547 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.032 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.032 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.032 40.312)' AS TEXT), 4326) = 9 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.477 47.672)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.477 47.672)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.477 47.672)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.341 49.808)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.341 49.808)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.341 49.808)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.137 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.137 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.137 40.312)' AS TEXT), 4326) <-> CENTRAL PROPERTY OF THE PROPERTY AS THE PROPERTY OF THE PROPERTY	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.211 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.211 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.211 40.312)' AS TEXT), 4326) = 9 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.544 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.544 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.544 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.346 45.803)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.346 45.803)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.346 45.803)' AS TEXT), 4326), as geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.125 40.312)' AS TEXT), 4326(->> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-53.304 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-53.304 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-53.304 40.312)' AS TEXT), 4326( >>> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.364 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.364 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.364 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.464 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.464 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.464 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.255 50.894)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.255 50.894)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.255 50.894)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-66.904 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-66.904 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-66.904 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.055 42.094)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.055 42.094)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.055 42.094)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.817 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.817 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.817 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.907 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.907 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.907 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.554 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.554 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-40.554 40.312)' AS TEXT), 4326) (seem, 2224) (RDBE BY ST_GeomFromText(CAST ('POINT(-40.554 40.312)' AS TEXT), 4326)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.554 49.595)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.554 49.595)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.554 49.595)' AS TEXT), 4326) - S geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.827 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.827 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.827 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.801 48.348)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.801 48.348)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.801 48.348)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.388 41.761)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.388 41.761)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.388 41.761)' AS TEXT), 4326), as geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.884 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.884 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.884 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.551 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.551 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.551 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.575 42.574)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.575 42.574)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.575 42.574)' AS TEXT), 4326) ->>> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.461 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.461 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.461 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.212 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.212 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.212 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.444 40.705)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.444 40.705)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.444 40.705)' AS TEXT), 4326) - geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.887 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.887 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.887 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.304 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.304 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.304 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.794 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = YY AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.794 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-44.794 40.312)' AS TEXT), 4326)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.301 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.301 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-61.301 40.312)' AS TEXT), 4326), as geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.481 40.668)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.481 40.668)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.481 40.668)' AS TEXT), 4326), as geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.387 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.387 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.387 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.791 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.791 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.791 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.538 42.611)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.538 42.611)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.538 42.611)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.859 49.29)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.859 49.29)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.859 49.29)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.67 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.67 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.67 40.312)' AS TEXT), 4326) \(  \	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.044 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.044 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.044 40.312)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.651 47.498)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.651 47.498)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.651 47.498)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.742 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.742 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.742 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.423 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.423 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.423 40.312)' AS TEXT), 4326( >>>> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.74 47.409)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.74 47.409)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.74 47.409)' AS TEXT), 4326) \(  \	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-61.492 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-61.492 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-61.492 40.312)' AS TEXT), 4326) (seem, 2224) (RDBE BY ST_GeomFromText(CAST ('POINT(-61.492 40.312)' AS TEXT), 4326)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.197 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.197 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.197 40.312)' AS TEXT), 4326) = SecomFromText(CAST ('POINT(-23.197 40.312)' AS TEXT), 4326)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.694 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.694 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.694 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.516 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.516 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.516 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.766 42.383)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.766 42.383)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.766 42.383)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance) (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance) (SELECT 'PORT') (POINT(-25.25 40.312)' AS TEXT), 4326), type, gid, code, name, geom, ST_Distance(geom, ST_DWithin(ST_GeomFromText(CAST (POINT(-25.25 40.312)' AS TEXT), 4326) (SELECT) (POINT(-25.25 40.312)' AS TEXT)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.875 44.274)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.875 44.274)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.875 44.274)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINTc-51.66 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINTc-51.66 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINTc-51.66 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.809 43.34)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.809 43.34)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.809 43.34)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.745 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.745 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.745 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.923 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.923 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.923 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.977 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.977 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.977 40.312)' AS TEXT), 4326), -> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.063 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.063 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.063 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as Igne, gid, code, name, geom, ST_Distance(geom, S	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance(geom, ST_Distance(geom, ST_Distance), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.037 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.037 40.312)' AS TEXT), 4326), c-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT/PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.652 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.652 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.652 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.56 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.56 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.56 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.309 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.309 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.309 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.629 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.629 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.629 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.224 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.224 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.224 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.784 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.784 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.784 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.292 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.292 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.292 40.312)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.155 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.155 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.155 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.992 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.992 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.992 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-18.094 42.055) 'AS TEXT), 4326)) AND enabled = Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfm o WHERE ST_Intersects(geom, ST_GeomFromText(CAST (*POINT(-18.094 42.055)' AS TEXT),	0	1	1	1	0	0,00
bye, gid, code, name FROM spatial from WHERE ST Intersects/geom, ST GeomFromToxt(CAST ('POINT(-18.094 42.055)' AS TEXT) 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial,port area WHERE ST Intersects/geom, ST GeomFromText(CAST ('POINT(-18.094 42.055)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST. Intersects/geom, ST GeomFromText(CAST ('POINT(-18.094 42.055)' AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 5 as indexRS, GFCM" as type, gid, code, name FROM						
spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-18.094 42.055)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.583 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.583 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.583 40.312)' AS TEXT), 4326) <> geom LIMIT 10)  (SELECT 'PORT' as type, gid, god, name, geom, ST_Distance(geom, ST_ComFromText(CAST ('POINT(-21.683 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	'	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.48 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.48 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.48 40.312)' AS TEXT), 4326) <> geom LIMIT 10)  [(SELECT 'PORT' as type, gid, god, name, geom, ST_Distance(geom, ST_CampEromText(CAST ('POINT(-45.782,40.312)' AS TEXT), 4326) <> geom, 2224) ORDER BY ST_GEOMFROM ST_CAST ('POINT(-45.782,40.312)' AS TEXT)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.763 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.763 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.763 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)	0		'	'	0	
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.812 43.337)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.812 43.337)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.812 43.337)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	'	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'-23.081 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT'-23.081 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'-23.081 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	Ů		'	·		0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.326 49.823)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.326 49.823)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.326 49.823)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.388 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.388 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.388 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.127 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.127 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.127 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.14 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.14 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.14 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.874 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.874 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.874 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.781 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_DWITC) AST (CAST ('POINT(-31.781 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.781 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39,408 40,312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWIthin(FX) GeomFromText(CAST ('POINT(-39.408 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.408 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.588 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIthin(FS_0EOmFromText(CAST ('POINT(-31.588 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.588 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.601 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.601 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.601 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.624 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.624 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.624 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.519 45.63)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.519 45.63)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE	0	1	1	1	0	0,00
ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.519 45.63)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 4 as indexRS,'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.519 45.63)' AS TEXT), 4326)) AND enabled = "\") UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM						
spatial.g/cm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-14.519 45.63)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as indexRS, F  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.534 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.534 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.534 40.312)' AS TEXT), 4326) <>> geom LIMIT 10)						-,

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-49.153 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.153 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.153 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.111 41.038)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.111 41.038)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.111 41.038)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.263 48.886)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.263 48.886)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.263 48.886)' AS TEXT), 4326), expend LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.377 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.377 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.377 40.312)' AS TEXT), 4326), exp.	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.82 45.329)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.82 45.329)' AS TEXT), 4326), geom, 22224) (ADDER BY ST_GeomFromText(CAST ('POINT(-14.82 45.329)' AS TEXT), 4326  99 geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.361 43.788)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.361 43.788)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.361 43.788)' AS TEXT), 4326) ~ geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, georn, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-24.385 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWIthin(ST_GeomFromText(CAST ("POINT(-24.385 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ("POINT(-24.385 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distancs(geom, ST_GeomFromText(CAST ('POINT(-46.217 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.217 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.217 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.487 45.662)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.487 45.662)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.487 45.662)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.9 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(IST_DWITEN(ST_ORD) TO STATE ('POINT(-32.9 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.9 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.678 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DWITH)(ST_ORD) (TOUT) AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.678 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.804 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.804 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.804 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.532 49.617)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.532 49.617)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.532 49.617)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.815 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.815 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.815 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.57 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.57 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.57 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-32.124 40.312)" AS TEXT), 4326)) AND enabled = "Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.r/mo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ("POINT(-32.124 40.312)" AS TEXT), 4326)) AND enabled = "Y") UNION ALL (SELECT 3 as indexRS, "PORTAREA" as type, gid, code, name FROM spatial.port_area WHERE	0	1	1	1	0	0,00
ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-32.124 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index						
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.014 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.014 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.014 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.995 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.995 40.312)' AS TEXT), 4326), geom, 22224) (RDBER BY ST_GeomFromText(CAST ('POINT(-20.995 40.312)' AS TEXT), 4326) ->>> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.068 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.068 40.312)' AS TEXT), 4326), geom, 22224) (ADBER BY ST_GeomFromText(CAST ('POINT(-47.068 40.312)' AS TEXT), 4326) ->> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.81 40.281)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.81 40.281)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.81 40.281)' AS TEXT), 4326) <>> geom LiMIT 10)	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.318 40.312) Å STEXT), 4326)) AND enabled = Y) UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.rfmo WHERE ST_Intersects(geom, ST_GeomFromText(CAST (POINT(-35.318 40.312) 'AS TEXT),	0	1	1	1	0	0,00
4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, PORTÁREĀ as type, gid, còde, name FROM spatial,port área WHERÉ ST Intersects(geom, ST GeomFromText(CAST ('POINT(-35.318 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, STATRECT as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.318 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, GFCM' as type, gid, code, name FROM spatial.gfcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-35.318 40.312)' AS TEXT), 4326)) AND enabled = 'Y')						
UNION ALL (SELECT 6 as index  (SELECT 'PORT' as type, girl, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.261.40.312)' AS TEXT).	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-47.261 40.312)" AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-47.261 40.312)" AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-64.747 40.312)" AS TEXT),	0	1	1	1	0	0,00
4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-64.747 40.312)" AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-64.747 40.312)" AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT "PORT" as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ("POINT(-24.722 40.312)" AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ("POINT(-24.722 40.312)" AS	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.722 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.511 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST (POINT(-27.511 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-27.511 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-36.475 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST (POINT(-36.475 40.312)' AS	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.475 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.443 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.443 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.443 40.312)' AS TEXT), 4326) ->>> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.804 40.312)' AS TEXT),	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.804 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.804 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.804 40.312)' AS TEXT), 4326), -> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.351 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.351 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.351 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)  [SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.449 40.312)' AS TEXT),	0	1	1	1	0	0,00
4326), true) AS distance FROM spatial.port WHERE enabled = Y <sup>T</sup> AND ST_DWithin(ST_GeomFromText(CAST (POINT(-21.449 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.449 40.312)' AS TEXT), 4326) <-> geom LIMIT 10) (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.928 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y <sup>T</sup> AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.928 40.312)' AS	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.928 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.882 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWISTING" (FORT) TO STEXT), 43280, geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.882 40.312)' AS TEXT), 4326), exp. geom LIMIT 10)  [SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.068 40.312)' AS TEXT),	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.068 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.068 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.068 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)		'			Ů	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.533 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.533 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.533 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.264 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.264 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.264 40.312)' AS TEXT), 4326) = 9 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.076 47.073)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.076 47.073)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.076 47.073)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.699 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.699 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.699 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-37.972 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-37.972 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.972 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.86 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.86 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.86 40.312)' AS TEXT), 4326) \(	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.789 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.789 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.789 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.565 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.565 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.565 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.605 46.544)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.605 46.544)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.605 46.544)' AS TEXT), 4326) ->>> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.928 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.928 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.928 40.312)' AS TEXT), 4326(->2 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.699 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.699 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.699 40.312)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.171 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.171 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.171 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.46 49.689)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.46 49.689)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.46 49.689)' AS TEXT), 4326 \times geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.539 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.539 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.539 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.562 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.562 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.562 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.694 42.455)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.694 42.455)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-17.694 42.455)' AS TEXT), 4326) (>>> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-55.652 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-55.652 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-55.652 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.812 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.812 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.812 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.789 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.789 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.789 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.627 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.627 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.627 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.196 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.196 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.196 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.885 51.264)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.885 51.264)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.885 51.264)' AS TEXT), 4326  eye geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.315 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.315 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.315 40.312)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.565 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.565 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.565 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.158 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.158 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.158 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-63.61 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-63.61 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-63.61 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.289 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.289 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.289 40.312)' AS TEXT), 4326) ->>> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.7 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.7 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.7 40.312)' AS TEXT), 4326) <> geom LIMIT 10.	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.626 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.626 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.626 40.312)' AS TEXT), 4326) ->> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.742 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.742 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.742 40.312)' AS TEXT), 4326) <-> CENTRAL ('POINT(-67.742 40.312)' AS TEXT), 4326) <-> C	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.065 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.065 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.065 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-51.219 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-51.219 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-51.219 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.938 45.211)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.938 45.211)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.938 45.211)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.171 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.171 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.171 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.402 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.402 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.402 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.697 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.697 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.697 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.69 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.69 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.69 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.8 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.8 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.8 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.719 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.719 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.719 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.43 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.43 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.43 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.837 51.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWIN(TS, GeomFromText(CAST ('POINT(-8.837 51.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.837 51.312)' AS TEXT), 4326), geom, 22249 (ORDER BY ST_GeomFromText(CAST ('POINT(-8.837 51.312)' AS TEXT), 4326), geom, 2500 provided to the complex of the com	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.537 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-28.537 40.312)' AS TEXT), 4326), geom_ 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.537 40.312)' AS TEXT), 4326), geom_ LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.101 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.101 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.101 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.524 51.625)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.524 51.625)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.524 51.625)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.745 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.745 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.745 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.263 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.263 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.263 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.77 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.77 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.77 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.245 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.245 40.312)' AS TEXT), 4326, geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.245 40.312)' AS TEXT), 4326), come DIMIT (40.245 40.312) AS TEXT), 4326, geom LIMIT (40.245 40.312) AS TEXT, 4326, geom LIMIT (40.2	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.676 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.676 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.676 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.771 44.378)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.771 44.378)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.771 44.378)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.54 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.54 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.54 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-17.434 42.715)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.434 42.715)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.434 42.715)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_bistance(geom, ST_Distance) (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_Distance) (AST ('POINT(-37.766 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-37.766 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-44.016 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.016 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.016 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)		1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-57.338 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-57.338 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-57.338 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.553 40.596)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.553 40.596)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.553 40.596)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-41.742 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.742 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.742 40.312)' AS TEXT), 4326) <> geom LIMIT 10)		1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.992 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.992 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.992 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-17.662 42.487)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.662 42.487)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.662 42.487)' AS TEXT), 4326), company (22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.662 42.487)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-45.513 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.513 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.513 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-48.359 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.359 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-48.359 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-67.719 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-67.719 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ("POINT(-57.719 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-33.995 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.995 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.995 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)		1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-49.019 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-49.019 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-49.019 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromExt(CAST (POINT(-43.26) 43.26), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.948 43.201)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.948 43.201)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.948 43.201)' AS TEXT), 4326), complete the state of	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromExt(CAST (POINT(-1.946 43.20)) AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-38.426 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.426 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-38.426 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
[EEXT], 4326), geom, 22224) ORDER BY ST_GeomFromTlext(CAST (POINT(-38.426 40.312) AS TEXT), 4326) <-> geom LiMiT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-60.582 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-60.582 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-60.582 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.46 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.46 40.312)' AS	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.46 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.528 44.621)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.528 44.621)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.528 44.621)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
[EELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.528 44.621)' AS IEXT), 4326) <-> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.199 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.199 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.199 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)		1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-67.199 40.312)' AS TEXT), 4326) <> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.833 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.833 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.833 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	1	1	0	0,00

Indept	Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
TEXT), 428B, geom. 22224 ORDER BY ST. Geometrom text(LAST (POINT (4-8,529 40,312) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-8,285 40,312) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-8,285 40,312) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-4,586 40,312) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-4,586 40,312) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-4,586 40,312) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-4,586 40,312) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-4,586 40,242) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-3,865 40,244) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-3,865 40,244) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-3,865 40,244) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-3,865 40,244) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-8,864 40,312) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-8,864 40,312) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-8,864 40,312) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geometrom text(CAST (POINT (4-8,864 40,312) AS TEXT), as (SELECT PORT as type, gid, code, name, geom. ST. Distance(geom. ST. Geomet	select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-24.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 2 as indexRS, 'RFMO' as type, gid, code, name FROM spatial.frimo WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-24.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial.port_area WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-24.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT as type, gid, code, name FROM spatial.stat rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-24.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS, 'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINTI-24.889 40.312)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 6 as index	0	1	1	1	0	0,00
International Content   Inte	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.629 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.629 40.312)' AS TEXT), 4326), geom Z2224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.629 40.312)' AS TEXT), 4326) < geom LIMIT 10)	0	1	1	1	0	0,00
SELECT PORT as type, gld. code, name, geom. ST_Distance(geom, ST_GeomFromText(CAST (POINT(-44,588 40.312)' AS TEXT), 4226), geom. 22224 ORDER BY ST_GeomFromText(CAST (POINT(-44,588 40.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GeomFromText(CAST (POINT(-45,588 40.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-45,588 40.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-45,588 40.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-45,588 40.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-45,588 40.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom. 22224 ORDER BY ST_GEOMFROMTEX(CAST (POINT(-28,140.312)' AS TEXT), 4326), geom	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.835 40.312)' AS TEXT), 4326).true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.835 40.312)' AS	0	1	1	1	0	0,00
SELECT PORT: as type, gid. code, name, geom. ST. Distance(geom. ST. GeomFromText)(CAST (POINT)(13,855.46,284) Xs. TEXT), 4326), geom. 22224 (ORDER BY ST. GeomFromText)(CAST (POINT)(13,856.46,284) Xs. TEXT), 4326), geom. 22224 (ORDER BY ST. GeomFromText)(CAST (POINT)(13,856.46,284) Xs. TEXT), 4326), geom. 22224 (ORDER BY ST. GeomFromText)(CAST (POINT)(13,856.46,284) Xs. TEXT), 4326), geom. 22224 (ORDER BY ST. GeomFromText)(CAST (POINT)(13,856.46,284) Xs. TEXT), 4326), geom. 22224 (ORDER BY ST. GeomFromText)(CAST (POINT)(12,81.40,312) Xs. TEXT), 4326), geom. 22224 (ORDER BY ST. GeomFromText)(CAST (POINT)(12,81.40,312) Xs. TEXT), 4326), geom. 22224 (ORDER BY ST. GeomFromText)(CAST (POINT)(12,81.40,312) Xs. TEXT), 4326), geom. 22224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,812,412) Xs. TEXT), 4326), geom. 2224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,812,412) Xs. TEXT), 4326), geom. 22224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,812,412) Xs. TEXT), 4326), geom. 22224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,812,412) Xs. TEXT), 4326), geom. 22224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,812,412) Xs. TEXT), 4326), geom. 22224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,813,412) Xs. TEXT), 4326), geom. 2224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,813,412) Xs. TEXT), 4326), geom. 2224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,813,412) Xs. TEXT), 4326), geom. 2224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,813,412) Xs. TEXT), 4326), geom. 2224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,813,414,412) Xs. TEXT), 4326), geom. 2224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,813,412) Xs. TEXT), 4326), geom. 2224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,813,412) Xs. TEXT), 4326), geom. 2224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,814,416) Xs. TEXT), 4326), geom. 2224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,814,416) Xs. TEXT), 4326), geom. 2224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,914,416) Xs. TEXT), 4326), geom. 2224 (ORDER BY ST. GeomFromText)(CAST (POINT)(14,914,416) Xs. TEXT), 432	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.588 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.588 40.312)' AS	0	1	1	1	0	0,00
SELECT 'PORT' as type, gid: code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-28.14.0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-28.14.0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-28.14.0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-28.14.0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-28.14.0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22240 ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22240 ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22240 ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22240 ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 22240 ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 222240 ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326), geom, 222240 ORDER BY ST_GEOMFromText(CAST (POINT(-67.8884 0.312)' AS TEXT), 4326),	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.865 46.284)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.865 46.284)' AS	0	1	1	1	0	0,00
SELECT PORT as type, gid, code, name, geom. ST_Distance(geom. ST_GeomFromText(CAST (POINT(-67.888 40.312)' AS TEXT), 4326), spoon, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-67.888 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-67.888 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-68.884 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-68.884 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-68.383 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-68.383 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-68.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS TEXT), 4326), geom. 22224) ORDER BY ST_GeomFromText(CAST (POINT(-48.283 40.312)' AS		0	1	1	1	0	0,00
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-64.353 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-64.353 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFROMTEXT(CAST (POINT(-64.353 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFROMTEXT(CAST (POINT(-64.353 40.312)' AS TEXT), 4326), geom, geo	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-67.858 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-67.858 40.312)' AS	0	1	1	1	0	0,00
SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.243.40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.243.40.312)' AS TEXT), 4326)	(SELECT 'PORT' as type gid code name geom ST Distance(geom ST GeomFromText(CAST ('POINT'-64 353 40 312)' AS TEXT)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.063 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-6	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-48.243 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-48.243 40.312)' AS	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.568 50.581)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.568 50.581)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.568 50.581)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.568 50.581)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.063 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.063 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.063 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.063 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.063 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.063 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.266	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS TEXT), 4326).true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.543 44.606)' AS	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST (POINT(-24.063 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-24.063 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-24.063 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-24.063 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-29.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-29.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-29.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-29.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-65.585 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-65.585 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-65.585 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-65.585 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST (POINT(-65.585 40.312)' AS TEXT)	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.568 50.581)' AS TEXT), 4326).true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.568 50.581)' AS	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.59 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.59 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT),	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.063 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.063 40.312)' AS	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = "Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.266 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 ) (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 ) (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GEOMFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GEOMFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GEOMFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWIthin(ST_GEOMFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 0 0 1 1 1 1 0 0,00 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWITHIN(ST_GEOMFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 0 0 1 1 1 0 0,00 4326), true AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWITHIN(ST_GEOMFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 0 0 1 1 1 1 0 0,00 4326), true AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWITHIN(ST_GEOMFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 0 0 1 1 1 1 0 0,00 4326), true AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWITHIN(ST_GEOMFROM SPATIAL S	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.59 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.59 40.312)' AS	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.266.40.312)' AS TEXT).	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-65.585 40.312)' AS	0	1	1	1	0	0,00
select * from ((SELECT 1 as indexRS, 'EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom, 0 1 1 1 0 0,00	select * from ((SELECT 1 as indexRS, EEZ' as type, gid, code, name FROM spatial.eez WHERE ST_Intersects(geom,	0	1	1	1	0	0,00
type, gid, code, name FROM spatial, frno WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-17.076 43.073)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 3 as indexRS, 'PORTAREA' as type, gid, code, name FROM spatial, port area WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-17.076 43.073)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 4 as indexRS, 'STATRECT' as type, gid, code, name FROM spatial, stat. rect WHERE ST. Intersects(geom, ST. GeomFromText(CAST ('POINT(-17.076 43.073)' AS TEXT), 4326)) AND enabled = "Y') UNION ALL (SELECT 6 as index.".  UNION ALL (SELECT 6 as index  UNION ALL (SELECT 6 as index	indexRS,'STATRECT' as type, gid, code, name FROM spatial.stat_rect WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(- 17.076 43.073)' AS TEXT), 4326)) AND enabled = 'Y') UNION ALL (SELECT 5 as indexRS,'GFCM' as type, gid, code, name FROM spatial.gtcm WHERE ST_Intersects(geom, ST_GeomFromText(CAST ('POINT(-17.076 43.073)' AS TEXT), 4326)) AND enabled = 'Y')						
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.13 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.13 40.312)' AS TEXT), 4326), eyen, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.13 40.312)' AS TEXT), 4326), eyen, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.13 40.312)' AS TEXT), 4326), eyen, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.13 40.312)' AS TEXT), 4326), eyen, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.13 40.312)' AS TEXT), 4326), eyen, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.13 40.312)' AS TEXT), 4326), eyen, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.13 40.312)' AS TEXT), 4326), eyen, 22240 (ORDER BY ST_GEOMFROMTEX), exception of the second control of the sec	4326),true) AS distance FROM spatial port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.13 40.312)' AS	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.359 40.312)' AS TEXT), 0 1 1 0 0,00 4326),true) AS distance FROM spatial,port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.359 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.359 40.312)' AS TEXT), 4326) <> geom LIMIT 10)		0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.449 40.312)' AS TEXT), AS (19.10 to 19.10 to 19.1	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.449 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.449 40.312)' AS	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.603 40.312)' AS TEXT), 0 1 1 0 0,00 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.603 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.603 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.603.40.312)' AS TEXT).	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.356 40.312)' AS TEXT), AS (12224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.356 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.356 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.356 40.312)' AS TEXT), 4326).true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.356 40.312)' AS	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.31 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.31 40.312)' AS TEXT), 4326), epom, 22224) ORDER BY ST GeomFromText(CAST ('POINT(-58.31 40.312)' AS TEXT), 4326), epom (EVEXT), 4326), experience (EVEXT) (AST) (FOINT(-58.31 40.312)' AS TEXT), 4326), experience (EVEXT) (FOINT	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.31 40.312)' AS TEXT), 4326).true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.31 40.312)' AS	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText)(CAST ('POINT(-10.413 49.736)' AS TEXT), 0 1 1 0 0,00 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText)(CAST ('POINT(-10.413 49.736)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText)(CAST ('POINT(-10.413 49.736)' AS TEXT), 4326), egom LIMIT 10 )	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.413 49.736)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.413 49.736)' AS	0	1	1	1	0	0,00
(SELECT / PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.106 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.106 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.106 40.312)' AS TEXT), 4326) <> geom LIMIT 10 )		0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, S	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.678 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.678 40.312)' AS	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.946 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.946 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.946 40.312)' AS TEXT), 4326) <-> geom LIMIT 10	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.946.40.312)' AS TEXT).	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),  TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-12.336 47.813)' AS TEXT),	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.336 47.813)' AS TEXT), 4326).true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.336 47.813)' AS	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung A326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326), yeung 22224) ORDER BY ST_GEOMFROM BY	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.023 44.126)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.023 44.126)' AS	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.496 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.496 40.312)' AS	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.496 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.496 40.312)' AS	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.496 40.312)' AS TEXT), 4326) <> geom LIMIT 10)  (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GEOMFromText(CAST ('POINT(-22.243 40.312)' AS TEXT), 4326), geom, 2326), geom, 2326), geom, 2326), geom, 2326), g		0	1	1	1	0	0,00
IEAT), 4320), geom, 22224) ORDER BY ST_GeomFromText(CAST (POINT(-22.243 40.312) AS TEXT), 4320) <-> geom Limit 10)	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.62 42.529)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.62 42.529)' AS	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.428.40.312)' AS TEXT), 0 1 1 1 0 0,00 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.428.40.312)' AS	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.428 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.428 40.312)' AS	0	1	1	1	0	0,00
TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.428 40.312)' AS TEXT), 4326) <> geom LIMIT 10)   (SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52.922 40.312)' AS TEXT), 0 1 1 1 0 0,00 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-52.922 40.312)' AS TEXT), 4326), egom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-52.922 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-52,922 40.312)' AS TEXT).	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.539 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.539 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.539 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.792 49.357)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.792 49.357)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.792 49.357)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.564 47.585)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.564 47.585)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.564 47.585)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.518 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.518 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.518 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.906 45.243)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.906 45.243)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.906 45.243)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-42.768 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-42.768 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-42.768 40.312)' AS TEXT), 4326) = 9 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.018 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.018 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-62.018 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.178 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.178 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.178 40.312)' AS TEXT), 4326) = 9 geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.449 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.449 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.449 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-9.007 51.142)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-9.007 51.142)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-9.007 51.142)' AS TEXT), 4326  eye geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-50.515 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-50.515 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-50.515 40.312)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-19.585 40.564)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-19.585 40.564)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-19.585 40.564)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.16 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.16 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.16 40.312)' AS TEXT), 4326 \>= geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.28 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-31.28 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.28 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.96 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.96 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.96 40.312)' AS TEXT), 4326  eye geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.083 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.083 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-41.083 40.312)' AS TEXT), 4326) (seem, 2224) (RDBE BY ST_GeomFromText(CAST ('POINT(-41.083 40.312)' AS TEXT), 4326)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-35.243 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-35.243 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-35.243 40.312)' AS TEXT), 4326), expend_LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.586 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.586 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.586 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.333 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.333 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.333 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-54.858 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-54.858 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-54.858 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-62.855 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-62.855 40.312)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-62.856 40.312)' AS TEXT), 4326) (so geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-41.608 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-41.608 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-41.608 40.312)' AS TEXT), 4326), as geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.73 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.73 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.73 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.583 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.583 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.583 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-59.673 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-59.673 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-59.673 40.312)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.242 45.907)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.242 45.907)' AS TEXT), 4326), geom, 2224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.242 45.907)' AS TEXT), 4326( >>> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.333 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.333 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.333 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.086 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.086 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.086 40.312)' AS TEXT), 4326), as geom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.129 50.02)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.129 50.02)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.129 50.02)' AS TEXT), 4326  'so geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.859 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.859 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.859 40.312)' AS TEXT), 4326( >>> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.05 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.05 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.05 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.12 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.12 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.12 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.606 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.606 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.606 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.176 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.176 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.176 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.607 51.554)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.607 51.554)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-8.607 51.554)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	2	0	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.493 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.493 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.493 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.516 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.516 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.516 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-43.23 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-43.23 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-43.23 40.312)' AS TEXT), 4326) (>> geom LIMIT to)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-44.91 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-44.91 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-44.91 40.312)' AS TEXT), 4326) <>	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-34.89 40.312)' AS TEXT), 4326),true) AS distance FROM spatial port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-34.89 40.312)' AS TEXT), 4329), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-34.89 40.312)' AS TEXT), 4326) (>> geom LIMIT to)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.186 46.963)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.186 46.963)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.186 46.963)' AS TEXT), 4326) -> geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-46.086 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-46.086 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-46.086 40.312)' AS TEXT), 1326) <-> geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.513 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-58.513 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.513 40.312)' AS TEXT), 4326), geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-36.019 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-36.019 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-36.019 40.312)' AS TEXT), 4326), cgeom LiMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'.63.948 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT'.63.948 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'.63.948 40.312)' AS TEXT), 4326), ~ geom LIMIT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-58.176 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y 'AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-58.176 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-58.176 40.312)' AS TEXT), 4326), ~ geom Limit 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.714 48.435)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.714 48.435)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.714 48.435)' AS TEXT), 4326) -> geom LiMT 10)	0	1	1	1	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.503 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-23.503 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-23.503 40.312)' AS TEXT), 4326), ~ geom Limit 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.172 48.977)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.172 48.977)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-11.172 48.977)' AS TEXT), 4326) - geom Limit 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.6 44.549)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.6 44.549)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.6 44.549)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.003 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-32.003 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-32.003 40.312)' AS TEXT), 4326), ~ geom Limit 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-8.395 51.754)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-8.395 51.754)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-8.395 51.754)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.938 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.938 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.938 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.003 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-30.003 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-30.003 40.312)' AS TEXT), 4326) - geom Limit 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-23.274 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-23.274 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-23.274 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.049 43.1)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.049 43.1)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.049 43.1)' AS TEXT), 4326) <> geom LIMIT 10;	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.739 41.41)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.739 41.41)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.739 41.41)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.333 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-22.333 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-22.333 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.187 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.187 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.187 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.386 47.763)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.386 47.763)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.386 47.763)' AS TEXT), 4326), ~ geom Limit 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.158 45.991)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y 'AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-14.158 45.991)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.158 45.991)' AS TEXT), 4326), ~ geom Limit 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.697 45.452)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.697 45.452)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.697 45.452)' AS TEXT), 4326) -> geom Limit 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-15.214 44.935)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-15.214 44.935)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-15.214 44.935)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.735 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y 'AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.735 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-26.735 40.312)' AS TEXT), 4326) -> geom Limit 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.853 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT(-32.853 40.312)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-32.853 40.312)' AS TEXT), 4326) - 2 geom Limit 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-28.84 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-28.84 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-28.84 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.652 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.652 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.652 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.156 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.156 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.156 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.671 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.671 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.671 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.309 47.84)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.309 47.84)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.309 47.84)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-17.879 42.27)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-17.879 42.27)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-17.879 42.27)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.336 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.336 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.336 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00

Request	% of cumulative time	Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.995 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.995 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.995 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.189 40.312)' AS TEXT), 4326), rue) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.189 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.189 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.88 47.269)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.88 47.269)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.88 47.269)' AS TEXT), 4326) <>> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.952 46.197)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.952 46.197)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.952 46.197)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.717 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.717 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.717 40.312)' AS TEXT), 4326), expen Limit 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.439 48.71)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.439 48.71)' AS TEXT), 4326), geom, 22224) (ADRER BY ST_GeomFromText(CAST ('POINT(-11.439 48.71)' AS TEXT), 4326) <>= geom LiMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.547 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.547 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.547 40.312)' AS TEXT), 4326) <-> geom LiMT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18,648 41.501)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWININ(ST_GeomFromText(CAST ('POINT(-18,648 41.501)' AS TEXT), 4326), geom, 22224) (RDBE BY ST_GeomFromText(CAST ('POINT(-18,648 41.501)' AS TEXT), 4326) <-y geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.351 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.351 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.351 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-40.786 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-40.786 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-40.786 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-31.884 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_DWITH)(ST_COMPTONT(CAST ('POINT(-31.844 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-31.884 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-39.305 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-39.305 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-39.305 40.312)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-45.029 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-45.029 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-45.029 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-27.233 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-27.233 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-27.233 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.645 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.645 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.645 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-33.055 40.312)' AS TEXT), 4326), true) AS distance FROM spatial port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-33.055 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-33.055 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.279 47.87)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.279 47.87)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.279 47.87)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-26.323 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-26.323 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-26.323 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-32.073 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-32.073 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-32.073 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.131 49.018)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.131 49.018)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.131 49.018)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.793 46.356)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.793 46.356)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-13.793 46.356)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-30.07 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-30.07 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-30.07 40.312)' AS TEXT), 4326) <>> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-16.393 43.756)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-16.393 43.756)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-16.393 43.756)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-11.833 48.316)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-11.833 48.316)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-11.833 48.316)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.959 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.959 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.959 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.341 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.341 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.341 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-47.758 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-47.758 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-47.758 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-25.954 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-25.954 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-25.954 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-12.423 47.726)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-12.423 47.726)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-12.423 47.726)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-21.964 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-21.964 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-21.964 40.312)' AS TEXT), 4326) <-> geom LIMIT 10 )	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-20.804 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-20.804 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-20.804 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-10.289 49.86)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-10.289 49.86)' AS TEXT), 4326), com, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-10.289 49.86)' AS TEXT), 4326) <> geom LIMIT 10)  (STLECT PODT' as type, gid, and a same group ST_Distance (geom, ST_CAST_EXT), 4267 (AST_WONT) (AST_WO	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-14.5 45.649)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y" AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-14.5 45.649)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-14.5 45.649)' AS TEXT), 4326) <> geom Limit 10 )  (OFLECT INDEX : A CONTROLL OF CAST ("POINT OR CAST ("P	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-22.946 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-22.946 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-22.946 40.312)' AS TEXT), 4326)> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-24.838 40.312)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = 'Y' AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-24.838 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-24.838 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-29.519 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-29.519 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-29.519 40.312)' AS TEXT), 4326) <-> geom LIMIT 10)	0	1	0	0	0	0,00

Request		Hits	Mean time (ms)	Max time (ms)	Standard deviation	% of system error
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-18.189 41.96)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-18.189 41.96)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT(-18.189 41.96)' AS TEXT), 4326) <> geom LIMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT'c27.949 40.312)' AS TEXT), 4326),true) AS distance FROM spatial.port WHERE enabled = 'Y AND ST_DWIshin(ST_GeomFromText(CAST ('POINT'c27.949 40.312)' AS TEXT), 4326), geom, 22224) ORDER BY ST_GeomFromText(CAST ('POINT'c27.949 40.312)' AS TEXT), 4326), ~ geom LiMIT 10)	0	1	0	0	0	0,00
(SELECT 'PORT' as type, gid, code, name, geom, ST_Distance(geom, ST_GeomFromText(CAST ('POINT(-13.959 46.19)' AS TEXT), 4326), true) AS distance FROM spatial.port WHERE enabled = "Y "AND ST_DWithin(ST_GeomFromText(CAST ('POINT(-13.959 46.19)' AS TEXT), 4326), geom, 22224) (RDER BY ST_GeomFromText(CAST ('POINT(-13.959 46.19)' AS TEXT), 4326) ~9 geom LIMIT 10)	0	1	0	0	0	0,00

204 hits/min on 10 000 requests



## Detailed statistics ejb - all

Request	% of cumulativ e time		Mean time (ms)		deviation		Mean cpu time (ms)	% of system error	Mean hits sql	Mean time sql (ms)
SpatialEnrichmentServiceBean.getSpatialEnrichment	33	61 048	289	3 482	92	35	25	0,00	6	247
AreaServiceBean.getClosestArea		61 048	267	3 191	83	27	20	0,00	2	235
SpatialRepositoryBean.closestAreaByPoint	30	61 048	262	1 287	74	26	18	0,00	1	232
SpatialRepositoryBean.findBylsLocationAndIsSystemWide	1	183 144	4	350	7	3	0	0,00	1	2
AreaServiceBean.getAreasByPoint	1	61 048	12	397	12	2	2	0,00	2	7
AreaServiceBean.getClosestPointByPoint	1	61 048	8	310	10	2	2	0,00	2	4
SpatialRepositoryBean.intersectingArea	0	61 048	6	247	7	0	0	0,00	1	4
SpatialRepositoryBean.closestPointByPoint	0	61 048	4	206	5	1	0	0,00	1	2
PropertiesBean.getProperty	0	20	0	1	0	0	0	0,00	0	0

647 hits/min on 9 requests



## Detailed statistics http system errors - all

None



## Last http system errors - all

None



# 

Error	Hits
WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.	552 774
ERROR: WFLYEJB0034: EJB Invocation failed on component %s for method %s	456
WARN: SQL Error: 0, SQLState: 23505	84
WARN: WFLYEJB0043: A previous execution of timer %s is still in progress, skipping this overlapping scheduled execution at: %s.	72
ERROR: error dispatching message:	56
ERROR: ERROR: duplicate key value violates unique constraint "area_area_code_key" Detail: Key (area_code)=(IECOB) already exists.	18
ERROR: ERROR: duplicate key value violates unique constraint "areatype_areatype_name_key" Detail: Key (areatype_name)=(EEZ) already exists.	18
ERROR: ERROR: duplicate key value violates unique constraint "area_area_code_key" Detail: Key (area_code)=(30E0) already exists.	9
ERROR: ERROR: duplicate key value violates unique constraint "areatype_areatype_name_key" Detail: Key (areatype_name)=(STATRECT) already exists.	6
ERROR: ERROR: duplicate key value violates unique constraint "area_area_code_key" Detail: Key (area_code)=(21D5) already exists.	3
ERROR: ERROR: duplicate key value violates unique constraint "area_area_code_key" Detail: Key (area_code)=(24D7) already exists.	3
ERROR: ERROR: duplicate key value violates unique constraint "area_area_code_key" Detail: Key (area_code)=(27.VIIj2) already exists.	3
ERROR: ERROR: duplicate key value violates unique constraint "area_area_code_key"  Detail: Key (area_code)=(21.3N) already exists.	3
ERROR: ERROR: duplicate key value violates unique constraint "area_area_code_key" Detail: Key (area_code)=(23D7) already exists.	3
ERROR: ERROR: duplicate key value violates unique constraint "area_area_code_key" Detail: Key (area_code)=(14D2) already exists.	3
ERROR: ERROR: duplicate key value violates unique constraint "area_area_code_key" Detail: Key (area_code)=(09C3) already exists.	3
ERROR: ERROR: duplicate key value violates unique constraint "area_area_code_key" Detail: Key (area_code)=(23D6) already exists.	3
WARN: ARJUNA016027: {0} got XA exception {1}	3
ERROR: ERROR: duplicate key value violates unique constraint "area_area_code_key" Detail: Key (area_code)=(20D5) already exists.	3
ERROR: ERROR: duplicate key value violates unique constraint "area_area_code_key"  Detail: Key (area_code)=(09C4) already exists.	3
ERROR: ERROR: duplicate key value violates unique constraint "area_area_code_key"  Detail: Key (area_code)=(25D8) already exists.	3

588 hits/min on 21 errors



## 

#### Only the 100 last errors are displayed

Date	Error
2018-11-15 07:43:12	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:43:21	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:43:21	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:43:21	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:43:28	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:43:28	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.

Date	Error
2018-11-15 07:43:28	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:48:07	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.  WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:48:09	· · · · · · · · · · · · · · · · · · ·
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:48:09	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:48:12	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:48:12	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:48:12	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.  WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:50:00	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:50:00	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:50:00	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:53:07	
2018-11-15 07:53:07	
	· · · · · · · · · · · · · · · · · · ·
2018-11-15 07:53:09	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.  WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.  WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:53:12	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:53:12	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:53:21	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.  WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:55:00	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:55:00	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:58:07	· · · · · ·
2018-11-15 07:58:07	· · · · · ·
2018-11-15 07:58:07 2018-11-15 07:58:09	,
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:58:12	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:58:12	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:58:12	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:58:21	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 07:58:21 2018-11-15 07:58:29	
2018-11-15 07:58:29	
2018-11-15 07:58:29	· · · · ·
2018-11-15 08:00:00	
2018-11-15 08:00:00	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:00:00	
2018-11-15 08:03:07	
2018-11-15 08:03:07	· · · · ·
2018-11-15 08:03:07 2018-11-15 08:03:09	
2018-11-15 08:03:09	
	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:03:12	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:03:12	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:03:12	· · · · · · · · · · · · · · · · · · ·
2018-11-15 08:03:21	· · · · · · · · · · · · · · · · · · ·
2018-11-15 08:03:21	· · · · · · · · · · · · · · · · · · ·
2018-11-15 08:03:21 2018-11-15 08:03:29	· · · · · · · · · · · · · · · · · · ·
2018-11-15 08:03:29	· · · · · ·
2018-11-15 08:03:29	
2018-11-15 08:05:00	· · · · · · · · · · · · · · · · · · ·
2018-11-15 08:05:00	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:05:00	· · · · · · · · · · · · · · · · · · ·
2018-11-15 08:08:07	· · · · ·
2018-11-15 08:08:07	· · · · ·
2018-11-15 08:08:07	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.

Date	Error
2018-11-15 08:08:09	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:08:09	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:08:09	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:08:12	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:08:12	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:08:12	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:08:21	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:08:21	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:08:21	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:08:29	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:08:29	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:08:29	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:10:00	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:10:00	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.
2018-11-15 08:10:00	WARN: WFLYEJB0485: Transaction type %s is unspecified for the %s method of the %s message-driven bean. It will be handled as NOT_SUPPORTED.



### **Detailed current requests**

#### None



### **Detailed system information**

wildfly@172.17.0.4 Host 3 712 Mb / 5 978 Mb Java memory used: Nb of http sessions: Nb of active threads (current http requests): Nb of active jdbc connections: 0 Nb of used jdbc connections (opened if no datasource): 0 System load: % System CPU: 1,15 OS: △ Linux, 4.9.93-linuxkit-aufs , amd64/64 (4 cores) OpenJDK Runtime Environment, 1.8.0\_111-internal-alpine-r0-b14 Java: JVM: OpenJDK 64-Bit Server VM, 25.111-b14, mixed mode PID of process: 1 749 / 1 048 576 Nb of opened files: WildFly Full 14.0.1.Final (WildFly Core 6.0.2.Final) - 2.0.13.Final Webapp context: /unionvms/spatial Start: 2018-11-14 16:32 2018-11-14 16:32

D[Standalone]
-Xms1024m
-Xmx6096m
-XX:+AggressiveOpts
-XX:+DoEscapeAnalysis
-Djava.net.preferIPv4Stack=true
-Duser.timezone=UTC
-Dresteasy.preferJacksonOverJsonB=true
-Djboss.modules.system.pkgs=org.jboss.byteman
-Djava.awt.headless=true
-agentilib\_idwp=transport=dt\_socket\_address=8787.server=y,suspend=n
-Dorg.jboss.boot.log.file=/opt/jboss/wildfly/standalone/log/server.log
-Dlogging.configuration=file/opt/jboss/wildfly/standalone/configuration/logging.properties JVM arguments: Mean age of http sessions (min): Non heap memory = 549 Mb (Perm Gen, Code Cache), Buffered memory = 38 Mb, Loaded classes = 67.075, Garbage collection time = 288,628 ms, Process cpu time = 25,434,320 ms, Committed virtual memory = 8,899 Mb, Free physical memory = 1,120 Mb, Total physical memory = 1,754 Mb, Free swap space = 1,023 Mb, Total swap space = 1,023 Mb Memory

java:jboss/datasources/uvms\_spatial: jdbc:postgresql://postgres:5432/db71u PostgreSQL, 9.6.10 Driver JDBC: PostgreSQL JDBC Driver, 42.1.4.jre7 DataBase:

112 245 Mb



Free disk space:

### Detailed threads

Threads on wildfly@172.17.0.4: Number = 368, Maximum = 527, Total started = 9 082 095

Thread	Daemon ?	Priority	State	Executed method	Cpu time (ms)	User time (ms)
DEFAULT	yes	5	WAITING	java.lang.Object.wait(Native Method)	0	0
DEFAULT	yes	5	WAITING	java.lang.Object.wait(Native Method)	0	0
DEFAULT	yes	5	WAITING	java.lang.Object.wait(Native Method)	0	0
ActiveMQ InactivityMonitor ReadCheckTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	11 432	5 830
ActiveMQ InactivityMonitor Worker	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	10	10
ActiveMQ InactivityMonitor Worker	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	1	0
ActiveMQ InactivityMonitor Worker	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	15	10
ActiveMQ InactivityMonitor Worker	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	4	0
ActiveMQ InactivityMonitor Worker	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	16	10
ActiveMQ InactivityMonitor Worker	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	19	0
ActiveMQ InactivityMonitor Worker	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	123	40

Thread	Daemon ?	Priority	State Executed method		Cpu time (ms)	User time
ActiveMQ InactivityMonitor Worker	yes	5	TIMED WAITING sun.misc.Unsafe.park(Native Method)		20	(ms) 20
ActiveMQ InactivityMonitor Worker	yes	5	TIMED_WAITING  TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	52	20
ActiveMQ InactivityMonitor Worker	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	2	0
ActiveMQ InactivityMonitor Worker	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	246	60
ActiveMQ InactivityMonitor WriteCheckTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	17 299	4 600
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@40992	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	2 931	1 160
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41196	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	667	60
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41198	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	5 423	3 690
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41200	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	627	180
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41202	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	9 269	5 370
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41204	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	638	50
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41206	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	635	150
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41208	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	617	100
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41210	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	589	150
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41212	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	1 690	820
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41214	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	628	140
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41216	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	641	200
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41218	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	623	110
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41220	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	680	190
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41222	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	695	10
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41224	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	1 654	690
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41226	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	1 624	690
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41228	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	659	140
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41230	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	663	90
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41232	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	631	200
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41234	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	11 293	7 170
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41236	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	625	190
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41238	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	1 633	750
ActiveMQ Transport: tcp://activemg/172.17.0.2:61616@41240	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	593	90
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41242	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	665	180
ActiveMQ Transport: tcp://activemg/172.17.0.2:61616@41244	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	550	130
ActiveMQ Transport: tcp://activemg/172.17.0.2:61616@41246	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	681	150
ActiveMQ Transport: tcp://activemg/172.17.0.2:61616@41248	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	1 613	630
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41250	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	621	180
ActiveMQ Transport: tcp://activemg/172.17.0.2:61616@41252	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	1 658	770
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41254	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	703	210
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41256	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	1 568	730
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41258	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	612	150
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41260	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	6 219	3 000
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41262	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	1 634	700
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41264	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	615	180
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41266	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	602	190
ActiveMQ Transport: tcp://activemq/172.17.0.2:61616@41268	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	1 541	840
ActiveMQ Transport: tcp://activemg/172.17.0.2:61616@41270	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	620	160
ActiveMQ Transport: tcp://activemg/172.17.0.2:61616@41270	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	1 656	730
ActiveMQ Transport: tcp://activemg/172.17.0.2:61616@41274	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	647	230
ActiveMQ Transport:	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	622	180
tcp://activemq/172.17.0.2:61616@41276  ActiveMQ Transport:	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	701	200
tcp://activemq/172.17.0.2:61616@41278  ActiveMQ Transport:	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	678	180
ActiveMQ Transport:	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	3 060	1 360
tcp://activemq/172.17.0.2:61616@55798  ActiveMQ Transport:	no	5	RUNNABLE	java.net.SocketInputStream.socketRead0(Native Method)	3	0
tcp://activemq/172.17.0.2:61616@60662				610 / 615		

Thread	Daemon ?	Priority	State Executed method Cp		Cpu time (ms)	User time
ActiveMQConnection[ID:wildfly-45937-	yes	5	● WAITING	java.lang.Object.wait(Native Method)	0	(ms)
1542212874386-31:1] Scheduler ActiveMQConnection[ID:wildfly-45937-	yes	5	_	The second secon		0
1542212874386-35:1] Scheduler			WAITING	The second secon		
ActiveMQConnection[ID:wildfly-45937- 1542212874386-37:1] Scheduler	yes	5	WAITING			0
ActiveMQConnection[ID:wildfly-45937- 1542212874386-39:1] Scheduler	yes	5	WAITING	java.lang.Object.wait(Native Method)	0	0
ActiveMQConnection[ID:wildfly-45937- 1542212874386-41:1] Scheduler	yes	5	WAITING	java.lang.Object.wait(Native Method)	0	0
ActiveMQConnection[ID:wildfly-45937- 1542212874386-43:1] Scheduler	yes	5	WAITING	java.lang.Object.wait(Native Method)	0	0
ActiveMQConnection[ID:wildfly-45937- 1542212874386-47:1] Scheduler	yes	5	● WAITING	java.lang.Object.wait(Native Method)	0	0
ActiveMQConnection[ID:wildfly-45937- 1542212874386-49:1] Scheduler	yes	5	WAITING	java.lang.Object.wait(Native Method)	0	0
ActiveMQConnection[ID:wildfly-45937-	yes	5		java.lang.Object.wait(Native Method)	0	0
1542212874386-57:1] Scheduler ActiveMQConnection[ID:wildfly-45937-	yes	5		java.lang.Object.wait(Native Method)	0	0
1542212874386-59:1] Scheduler ActiveMQConnection[ID:wildfly-45937-	yes	5	WAITING	java.lang.Object.wait(Native Method)	0	0
1542212874386-63:1] Scheduler ActiveMQConnection[ID:wildfly-45937-	yes		WAITING	java.lang.Object.wait(Native Method)	0	0
1542212874386-73:1] Scheduler	•		_			
ActiveMQConnection[ID:wildfly-45937- 1542212874386-77:1] Scheduler	yes	5	WAITING	java.lang.Object.wait(Native Method)	1 042	1 010
ActiveMQConnection[ID:wildfly-45937- 1542212874386-81:1] Scheduler	yes	5	WAITING	java.lang.Object.wait(Native Method)	0	0
ActiveMQConnection[ID:wildfly-45937- 1542212874386-97:1] Scheduler	yes	5	WAITING	java.lang.Object.wait(Native Method)	1	0
Clean up old files	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	1	0
ConnectionValidator	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	0	0
default Accept default I/O-1	no no	5	RUNNABLE	sun.nio.ch.EPollArrayWrapper.epollWait(Native Method) sun.nio.ch.EPollArrayWrapper.epollWait(Native Method)	4 358	60 2 750
default I/O-2	no	5	RUNNABLE  RUNNABLE	sun.nio.ch.EPollArrayWrapper.epollWait(Native Method)	132	130
default I/O-3	no	5	RUNNABLE	sun.nio.ch.EPollArrayWrapper.epollWait(Native Method)	5 107	3 400
default I/O-4	no	5	RUNNABLE	sun.nio.ch.EPollArrayWrapper.epollWait(Native Method)	94	80
default I/O-5	no	5	RUNNABLE	sun.nio.ch.EPollArrayWrapper.epollWait(Native Method)	6 500	4 110
default I/O-6	no	5	RUNNABLE	sun.nio.ch.EPollArrayWrapper.epollWait(Native Method)	17 914	16 120
default I/O-7	no	5	RUNNABLE	sun.nio.ch.EPollArrayWrapper.epollWait(Native Method)	5 059	3 290
default I/O-8	no	5	RUNNABLE	sun.nio.ch.EPollArrayWrapper.epollWait(Native Method)	148	110
default task-197	no	5	RUNNABLE	java.lang.Thread.dumpThreads(Native Method)	3 951	3 860
default task-199	no	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	463	420
default task-202	no	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	110	110
default task-203	no	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method) sun.misc.Unsafe.park(Native Method)	90	90
default task-204 default task-205	no no	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	107	90
default-threads - 1	no		TIMED_WAITING WAITING	sun.misc.Unsafe.park(Native Method)	94 436	88 290
default-threads - 10	no	5		sun.misc.Unsafe.park(Native Method)	122 531	113 920
default-threads - 11	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	30 484	26 080
default-threads - 12	no	5		sun.misc.Unsafe.park(Native Method)	123 399	114 910
default-threads - 13	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	112 584	104 650
default-threads - 14	no	5	● WAITING	sun.misc.Unsafe.park(Native Method)	110 471	102 430
default-threads - 15	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	111 687	104 230
default-threads - 16	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	114 109	106 770
default-threads - 17	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	126 771	118 570
default-threads - 18	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	107 725	100 630
default-threads - 19 default-threads - 2	no no	5	WAITING	sun.misc.Unsafe.park(Native Method) sun.misc.Unsafe.park(Native Method)	114 844 119 928	107 180 111 870
default-threads - 20	no	5	<ul><li>● WAITING</li><li>● WAITING</li></ul>	sun.misc.Unsafe.park(Native Method)	39 509	34 700
default-threads - 21	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	119 362	111 280
default-threads - 22	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	115 074	107 230
default-threads - 23	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	122 678	114 560
default-threads - 24	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	116 017	107 880
default-threads - 25	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	122 944	114 810
default-threads - 26	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	111 954	104 450
default-threads - 27	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	100 881	93 600
default-threads - 28	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	119 631	111 080
default-threads - 29	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	129 143	120 510
default-threads - 3 default-threads - 30	no no	5	WAITING	sun.misc.Unsafe.park(Native Method) sun.misc.Unsafe.park(Native Method)	121 009 109 006	112 690 101 330
default-threads - 30	no	5	<ul><li>● WAITING</li><li>● WAITING</li></ul>	sun.misc.Unsafe.park(Native Method)	117 094	108 950
default-threads - 32	no	5	• WAITING • WAITING	sun.misc.Unsafe.park(Native Method)	39 620	34 880
default-threads - 33	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	113 922	105 940
default-threads - 34	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	113 922	106 220
default-threads - 35	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	114 458	107 020
default-threads - 36	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	116 295	107 870

Separation   1998   1	Thread	Daemon ?	Priority	State	State Executed method C		User time (ms)
Section   1965   1966   1967	default-threads - 37	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	110 861	103 180
Security	default-threads - 38					120 964	112 670
Marchardeneric -							110 090
Contributions	default-threads - 4	no			sun.misc.Unsafe.park(Native Method)	113 471	105 220
Contamination   Contaminatio	default-threads - 40	no	5	_	sun.misc.Unsafe.park(Native Method)	107 801	99 840
Contact Interests - Col.   C	default-threads - 41	no	5				104 700
American   Company   Com	default-threads - 42	no	5		sun.misc.Unsafe.park(Native Method)	102 616	94 710
Section   Control   Cont	default-threads - 43	no	5		sun.misc.Unsafe.park(Native Method)	124 796	116 400
September   Sept	default-threads - 44	no	5		sun.misc.Unsafe.park(Native Method)	31 048	26 560
Section   Communication   Co	default-threads - 45	no	5		sun.misc.Unsafe.park(Native Method)	112 111	104 420
Security	default-threads - 46	no	5	_	sun.misc.Unsafe.park(Native Method)	125 183	116 160
Search   S	default-threads - 47	no	5		sun.misc.Unsafe.park(Native Method)	116 934	108 880
Section   Sect	default-threads - 48	no	5		sun.misc.Unsafe.park(Native Method)	120 703	112 600
Section   Process   Company   Comp	default-threads - 49	no	5	-	sun.misc.Unsafe.park(Native Method)	118 283	110 170
20	default-threads - 5	no	5		sun.misc.Unsafe.park(Native Method)	107 543	100 150
Security	default-threads - 50	no	5		sun.misc.Unsafe.park(Native Method)	121 493	112 730
Separate	default-threads - 51	no	5		sun.misc.Unsafe.park(Native Method)	116 494	108 720
Separation   Sep	default-threads - 52	no	5	_	sun.misc.Unsafe.park(Native Method)	32 162	27 310
Section   Sect	default-threads - 53	no	5		sun.misc.Unsafe.park(Native Method)	117 253	109 390
default references   SE	default-threads - 54						114 960
	default-threads - 55			_		116 537	108 730
	default-threads - 56					118 281	110 630
Separate	default-threads - 57			_			118 460
Secular Serveds - 6					sun.misc.Unsafe.park(Native Method)		26 930
Security	default-threads - 59	no				113 693	106 030
Set   Debt   Principal   Pri				_			30 590
Sebalah Products - 61						116 987	109 160
Setup   Setu	default-threads - 61	no				108 960	101 350
default-threads-63				_			85 660
default-threads - 64							102 710
default-threads - 7	default-threads - 64	no			sun.misc.Unsafe.park(Native Method)	126 927	118 430
	default-threads - 7						102 730
default-threads - 9						30 938	26 620
DeploymentScanner-threads - 1	default-threads - 9	no		_	sun.misc.Unsafe.park(Native Method)	43 575	38 870
Deployment/Scanner-threads - 2         no         6         WAITING         sun_misc_Unsafe_park(Native Method)         66.447         62.25           EBB dafault - 1         no         5         ® RUNNABLE         1.136         1.18         1.136         1.18         1.136         1.18         1.136         1.18         1.136         1.18         1.136         1.18         1.133         1.65         1.133         1.65         1.133         1.65         1.133         1.65         1.133         1.65         1.133         1.65         1.65         1.133         1.65         1.65         1.133         1.65         1.65         1.133         1.65         1.65         1.133         1.65         1.65         1.133         1.65         1.65         1.134         1.100         1.05         2.04         1.110         1.00         1.03         2.04         1.100         1.00         1.00         1.00         2.04         2.04         1.100         1.00         1.00         1.00         2.04         2.04         1.00         1.00         1.00         1.00         1.00         1.00         1.00         1.00         1.00         1.00         1.00         1.00         1.00         1.00         1.00         1.00         <	DeploymentScanner-threads - 1						78 560
DestroyAvaVM	DeploymentScanner-threads - 2	no		_	sun.misc.Unsafe.park(Native Method)	66 447	62 200
EJB default - 1 EJB default - 1 EJB default - 1 EJB default - 10 EJB default - 10 EJB default - 10 EJB default - 10 EJB default - 12 EJB default - 12 EJB default - 13 EJB default - 14 EJB default - 15 EJB default - 15 EJB default - 15 EJB default - 16 EJB default - 17 EJB default - 17 EJB default - 18 EJB defau	DestroyJavaVM	no	5			1 286	1 180
EBB default - 10	EJB default - 1	no			sun.misc.Unsafe.park(Native Method)	767	490
EJB default - 11	EJB default - 10	no	5		sun.misc.Unsafe.park(Native Method)	1 033	690
EJB default - 12	EJB default - 11	no	5		sun.misc.Unsafe.park(Native Method)	1 060	820
EJB default - 13	EJB default - 12	no	5		sun.misc.Unsafe.park(Native Method)	937	710
EJB default - 14	EJB default - 13	no	5		sun.misc.Unsafe.park(Native Method)	958	620
EJB default - 15	EJB default - 14	no	5		sun.misc.Unsafe.park(Native Method)	962	670
EJB default - 16	EJB default - 15	no	5		sun.misc.Unsafe.park(Native Method)	928	540
EJB default - 17	EJB default - 16	no	5		sun.misc.Unsafe.park(Native Method)	745	550
EJB default - 18	EJB default - 17	no	5		sun.misc.Unsafe.park(Native Method)	870	640
EJB default - 2	EJB default - 18	no			sun.misc.Unsafe.park(Native Method)	860	640
EJB default - 2						-	600
EJB default - 20         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         846         63           EJB default - 21         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         886         56           EJB default - 22         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         912         62           EJB default - 23         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         881         56           EJB default - 24         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         951         73           EJB default - 25         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         889         63           EJB default - 26         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         791         55           EJB default - 27         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         896         67           EJB default - 28         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         833         55           EJB default - 3         no         5         WAITING         sun.misc.Unsafe.park(Native	EJB default - 2	no		_	sun.misc.Unsafe.park(Native Method)	1 028	690
EJB default - 21	EJB default - 20	no	5		sun.misc.Unsafe.park(Native Method)	846	630
EJB default - 22         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         912         62           EJB default - 23         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         851         56           EJB default - 24         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         951         73           EJB default - 25         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         889         63           EJB default - 26         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         791         56           EJB default - 27         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         806         57           EJB default - 28         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         958         60           EJB default - 29         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         833         55           EJB default - 3         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         861         60           EJB default - 31         no         5         WAITING         sun.misc.Unsafe.park(Native	EJB default - 21	no			sun.misc.Unsafe.park(Native Method)	886	560
EJB default - 23  no  5	EJB default - 22	no		_	sun.misc.Unsafe.park(Native Method)	912	620
EJB default - 24         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         951         73           EJB default - 25         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         889         63           EJB default - 26         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         791         58           EJB default - 27         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         806         57           EJB default - 28         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         958         60           EJB default - 29         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         833         55           EJB default - 3         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         851         61           EJB default - 30         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         851         61           EJB default - 31         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         831         54           EJB default - 32         no         5         WAITING         sun.misc.Unsafe.park(Native	EJB default - 23						560
EJB default - 25	EJB default - 24	no			sun.misc.Unsafe.park(Native Method)	951	730
EJB default - 26	EJB default - 25			_		-	630
EJB default - 27							580
EJB default - 28	EJB default - 27	no			sun.misc.Unsafe.park(Native Method)	806	570
EJB default - 29         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         833         55           EJB default - 3         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         760         50           EJB default - 30         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         851         61           EJB default - 31         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         831         54           EJB default - 32         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         845         54           EJB default - 33         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         809         62           EJB default - 34         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         859         64           EJB default - 35         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         860         62           EJB default - 36         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         860         62           EJB default - 36         no         5         •WAITING         sun.misc.Unsafe.p	EJB default - 28	no			sun.misc.Unsafe.park(Native Method)	958	600
EJB default - 3				_			550
EJB default - 30         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         851         61           EJB default - 31         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         831         54           EJB default - 32         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         845         54           EJB default - 33         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         809         62           EJB default - 34         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         859         64           EJB default - 35         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         860         62           EJB default - 36         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         860         62	EJB default - 3	no			sun.misc.Unsafe.park(Native Method)	760	500
EJB default - 31         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         831         54           EJB default - 32         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         845         54           EJB default - 33         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         809         62           EJB default - 34         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         859         64           EJB default - 35         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         860         62           EJB default - 36         no         5         •WAITING         sun.misc.Unsafe.park(Native Method)         860         62				_			610
EJB default - 32         no         5							540
EJB default - 33         no         5							540
EJB default - 34         no         5         • WAITING         sun.misc.Unsafe.park(Native Method)         859         64           EJB default - 35         no         5         • WAITING         sun.misc.Unsafe.park(Native Method)         860         62           EJB default - 36         no         5         • WAITING         sun.misc.Unsafe.park(Native Method)         860         62				_		-	620
EJB default - 35         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         860         62           EJB default - 36         no         5         WAITING         sun.misc.Unsafe.park(Native Method)         860         62				_			640
EJB default - 36 no 5 O WAITING sun.misc.Unsafe.park(Native Method) 860 62				-			620
				_			620
1.0 C VVALUE   CONTINUE   CONTINU	EJB default - 37	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	887	600

Thread	Daemon ?	Priority	State Executed method		Cpu time (ms)	User time (ms)
EJB default - 38	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	881	590
EJB default - 39	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	861	580
EJB default - 4	no	5	● WAITING	sun.misc.Unsafe.park(Native Method)	831	560
EJB default - 40	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	1 031	710
EJB default - 41	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	870	670
EJB default - 42	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	908	620
EJB default - 43	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	839	520
EJB default - 44	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	831	600
EJB default - 45	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	840	570
EJB default - 46	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	760	520
EJB default - 47	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	845	550
EJB default - 48  EJB default - 49	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	835 857	580 560
EJB default - 5	no	5	WAITING	sun.misc.Unsafe.park(Native Method) sun.misc.Unsafe.park(Native Method)	1 605	1 340
EJB default - 50	no no	5	WAITING	sun.misc.Unsafe.park(Native Method)	880	590
EJB default - 51	no	5	● WAITING ● WAITING	sun.misc.Unsafe.park(Native Method)	887	610
EJB default - 52	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	802	580
EJB default - 53	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	809	550
EJB default - 54	no	5	● WAITING	sun.misc.Unsafe.park(Native Method)	893	570
EJB default - 55	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	819	590
EJB default - 56	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	835	490
EJB default - 57	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	786	500
EJB default - 58	no	5	● WAITING	sun.misc.Unsafe.park(Native Method)	851	560
EJB default - 59	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	809	560
EJB default - 6	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	1 601	1 410
EJB default - 60	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	837	610
EJB default - 61	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	881	620
EJB default - 62	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	852	600
EJB default - 63	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	842	590
EJB default - 64	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	862	660
EJB default - 7	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	1 025	740
EJB default - 8	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	946	780
EJB default - 9	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	952	760
EMF Reference Cleaner	yes	5		java.lang.Object.wait(Native Method)	1	0
expiration-threadp5-t1	yes	1	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	62	40
expiration-threadp9-t1	yes	1	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	1 193	900
External Management Request Threads 1	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	469	450
FileSystemWatcher-1	yes	5	- 111125_11711110	sun.misc.Unsafe.park(Native Method)	890	500
Finalizer	yes	8	WAITING	java.lang.Object.wait(Native Method)	6 987	6 180
GC Daemon	yes	2	TIMED_WAITING	java.lang.Object.wait(Native Method)	0	0
GT authority factory disposer	yes	5	WAITING	java.lang.Object.wait(Native Method)	1	0
GT authority factory disposer	yes	5	WAITING	java.lang.Object.wait(Native Method)	0	0
GuavaAuthCache-0-1	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	11	10
GWC DiskQuota clean up thread-1	no	2	WAITING	sun.misc.Unsafe.park(Native Method)	356	350
GWC DiskQuota clean up thread-2 GWC DiskQuota Updates Gathering	no	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method) sun.misc.Unsafe.park(Native Method)	632 25 731	320 13 470
Thread-1	no	5	TIMED_WAITING	Sun.misc.onsaie.paik(Native Method)	25 / 51	13 470
GWC DiskQuota Usage Stats Gathering Thread-1	no	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	25 545	13 760
GWC GeoRSS Poll Tasks-1	yes	2	WAITING	sun.misc.Unsafe.park(Native Method)	1	0
IdleRemover	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	280	90
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 725	1 500
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 730	1 430
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 751	1 580
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 742	1 530
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 717	1 580
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 725	1 640
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 841	1 480
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 742	1 570
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 725	1 520
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 678	1 320
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 743	1 420
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 767	1 330
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 772	1 540
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 729	1 630
jaeger.RemoteReporter-FlushTimer	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	5 735	1 590
jaeger.RemoteReporter-QueueProcessor	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	4 125	2 380
jaeger.RemoteReporter-QueueProcessor	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	4 189	2 070
jaeger.RemoteReporter-QueueProcessor	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	4 046	2 190

Thread	Daemon ?	Priority	State	State Executed method C		User time (ms)
jaeger.RemoteReporter-QueueProcessor	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	4 113	2 380
jaeger.RemoteReporter-QueueProcessor	yes	5	● WAITING	sun.misc.Unsafe.park(Native Method)	3 940	1 980
jaeger.RemoteReporter-QueueProcessor	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	4 089	2 040
jaeger.RemoteReporter-QueueProcessor	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	4 210	2 470
jaeger.RemoteReporter-QueueProcessor	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	4 130	2 250
jaeger.RemoteReporter-QueueProcessor	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	4 024	2 160
jaeger.RemoteReporter-QueueProcessor	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	4 145	2 190
jaeger.RemoteReporter-QueueProcessor	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	4 040	2 300
jaeger.RemoteReporter-QueueProcessor	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	4 031	2 440
jaeger.RemoteReporter-QueueProcessor	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	4 247	2 410
jaeger.RemoteReporter-QueueProcessor	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	4 050	1 720
jaeger.RemoteReporter-QueueProcessor	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	3 999	2 510
Java2D Disposer javamelody unionvms asset	yes	10	WAITING	java.lang.Object.wait(Native Method)	19 18 097	10 8 450
javamelody unionyms movement	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method) java.lang.Object.wait(Native Method)	19 695	9 520
javamelody unionyms movement-rules	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	376	170
javamelody unionyms spatial	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	219 959	209 880
JCA PoolFiller	yes	5	TIMED_WAITING WAITING	java.lang.Object.wait(Native Method)	1 586	1 110
logback-1	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	541	430
logback-1	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	246	200
logback-1	yes	5	• WAITING • WAITING	sun.misc.Unsafe.park(Native Method)	260	190
logback-1	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	376	300
logback-2	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	343	290
logback-2	yes	5	• WAITING • WAITING	sun.misc.Unsafe.park(Native Method)	243	180
logback-2	yes	5	● WAITING	sun.misc.Unsafe.park(Native Method)	0	0
logback-2	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	290	270
logback-3	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	0	0
logback-3	yes	5	● WAITING	sun.misc.Unsafe.park(Native Method)	0	0
logback-3	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	354	280
logback-4	yes	5	● WAITING	sun.misc.Unsafe.park(Native Method)	0	0
logback-4	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	0	0
logback-4	yes	5	● WAITING	sun.misc.Unsafe.park(Native Method)	345	280
logback-5	yes	5	● WAITING	sun.misc.Unsafe.park(Native Method)	0	0
logback-5	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	0	0
logback-6	yes	5	● WAITING	sun.misc.Unsafe.park(Native Method)	0	0
logback-6	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	0	0
logback-7	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	0	0
logback-8	yes	5	WAITING	sun.misc.Unsafe.park(Native Method)	0	0
management Accept	no	5	RUNNABLE	sun.nio.ch.EPollArrayWrapper.epollWait(Native Method)	3	0
management I/O-1	no	5	RUNNABLE	sun.nio.ch.EPollArrayWrapper.epollWait(Native Method)	3	0
management I/O-2	no	5	RUNNABLE	sun.nio.ch.EPollArrayWrapper.epollWait(Native Method)	83	80
management task-1	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	367	270
management task-2	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	43	40
management task-3	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	2	0
MSC service thread 1-1	no	5	● WAITING	sun.misc.Unsafe.park(Native Method)	11 155	10 330
MSC service thread 1-2	no	5	● WAITING	sun.misc.Unsafe.park(Native Method)	12 896	11 980
MSC service thread 1-3	no	5	● WAITING	sun.misc.Unsafe.park(Native Method)	9 728	9 180
MSC service thread 1-4	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	13 372	12 460
MSC service thread 1-5	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	11 085	10 550
MSC service thread 1-6	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	10 563	10 010
MSC service thread 1-7	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	10 870	10 340
MSC service thread 1-8	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	13 609	12 970
Periodic Recovery	no	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	4 622 832	1 924 140
pool-13-thread-1	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	500	420
pool-15-thread-1	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	239	220
pool-17-thread-1	no	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	391	230
pool-18-thread-1	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	455	420
pool-19-thread-1	no	5	- 111125_17711110	sun.misc.Unsafe.park(Native Method)	416	200
pool-22-thread-1	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	489	470
pool-23-thread-1	no	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	412	260
pool-25-thread-1	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	484	440
pool-26-thread-1	no	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	399	230
pool-35-thread-1	no	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	402	280
pool-35-thread-2	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	470	310
pool-36-thread-1	no	5	○ WAITING	sun.misc.Unsafe.park(Native Method)	268	260
peer de ameda i			_			
pool-37-thread-1	no	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	440	310
	no no	5 5 5	TIMED_WAITING WAITING	sun.misc.Unsafe.park(Native Method) sun.misc.Unsafe.park(Native Method) sun.misc.Unsafe.park(Native Method)	440 2 6 343	310 0 3 960

# Monitoring JavaMelody on /unionvms/spatial\_wildfly - all

Thread	Daemon ?	Priority	State	State Executed method		User time (ms)
PostgreSQL-JDBC-SharedTimer-1	yes	5	WAITING	java.lang.Object.wait(Native Method)		370
Reference Handler	yes	10	WAITING	Java.lang.Object.wait(Native Method)		4 390
Reference Reaper	yes	5	WAITING	java.lang.Object.wait(Native Method)	0	0
ServerService Thread Pool 1	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	393	110
ServerService Thread Pool 38	no	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	536	220
ServerService Thread Pool 72	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	565	220
ServerService Thread Pool 73	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	397	150
ServerService Thread Pool 96	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	17 048	16 370
Signal Dispatcher	yes	9	RUNNABLE		0	0
Statistics ThreadDEFAULT1	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	42	40
Statistics ThreadDEFAULT1	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	45	40
Statistics ThreadDEFAULT1	yes	5	TIMED_WAITING	sun.misc.Unsafe.park(Native Method)	43	40
Thread-164	no	5	TIMED_WAITING	java.lang.Thread.sleep(Native Method)	943	660
Timer-0	no	5	WAITING	java.lang.Object.wait(Native Method)	0	0
Timer-1	no	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	1 230	550
Timer-10	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	1 328	920
Timer-11	yes	5	TIMED_WAITING			970
Timer-12	yes	5	TIMED_WAITING	TIMED_WAITING java.lang.Object.wait(Native Method)		910
Timer-13	yes	5	TIMED_WAITING	TIMED_WAITING java.lang.Object.wait(Native Method)		890
Timer-14	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	1 313	870
Timer-15	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	1 301	970
Timer-16	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	1 314	950
Timer-2	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)		930
Timer-3	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	1 362	900
Timer-4	yes	5	TIMED_WAITING	MED_WAITING java.lang.Object.wait(Native Method)		940
Timer-5	yes	5	TIMED_WAITING	IMED_WAITING java.lang.Object.wait(Native Method)		930
Timer-6	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	1 333	950
Timer-7	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	1 356	950
Timer-8	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	1 321	1 020
Timer-9	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	1 316	1 050
Transaction Expired Entry Monitor	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	0	0
Transaction Reaper	yes	5	TIMED_WAITING	java.lang.Object.wait(Native Method)	37	30
Transaction Reaper Worker 0	yes	5	WAITING java.lang.Object.wait(Native Method)		0	0
wcs111timerFactory-1	yes	5	TIMED_WAITING sun.misc.Unsafe.park(Native Method)		390	350
WeakCollectionCleaner	yes	8	→ java.lang.Object.wait(Native Method)		0	0
WeakCollectionCleaner	yes	8	WAITING java.lang.Object.wait(Native Method)		1	0
Weld Thread Pool 1	no	5	● WAITING sun.misc.Unsafe.park(Native Method)		1 006	910
Weld Thread Pool 2	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	1 203	1 090
Weld Thread Pool 3	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	1 230	1 170
Weld Thread Pool 4	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	1 285	1 170
Weld Thread Pool 5	no	5	WAITING	sun.misc.Unsafe.park(Native Method)	1 336	1 290

The cpu times and user times of these threads are measured from the start of the server

# **Total** Detailed caches

## 2 cache(s) on wildfly@172.17.0.4

Cache	% used of memory cache	Number of objects in memory	Number of objects on disk	% of efficiency of memory cache (memory hits/hits)	% of efficiency of cache (hits/accesses)	Configuration
appModuleCache	0	0	0	-1		ehcache [maxElementsInMemory = 20, overflowToDisk = false, eternal = true, diskPersistent = false]
userSessionCache	0	0	0	-1		ehcache [maxElementsInMemory = 1000, overflowToDisk = false, eternal = false, timeToLiveSeconds = 3000, timeToIdleSeconds = 3000, memoryStoreEvictionPolicy = LRU, diskPersistent = false]

Configuration reference

Last collect time: 43 ms Display time: 5146 ms Memory overhead estimate: < 19 Mb Disk usage: 5 Mb

JavaMelody 1.72.0.SE