


MICRODOWN CHALLENGE

Book Sanitizer

Antonin Deloison
& Matéo Da Costa

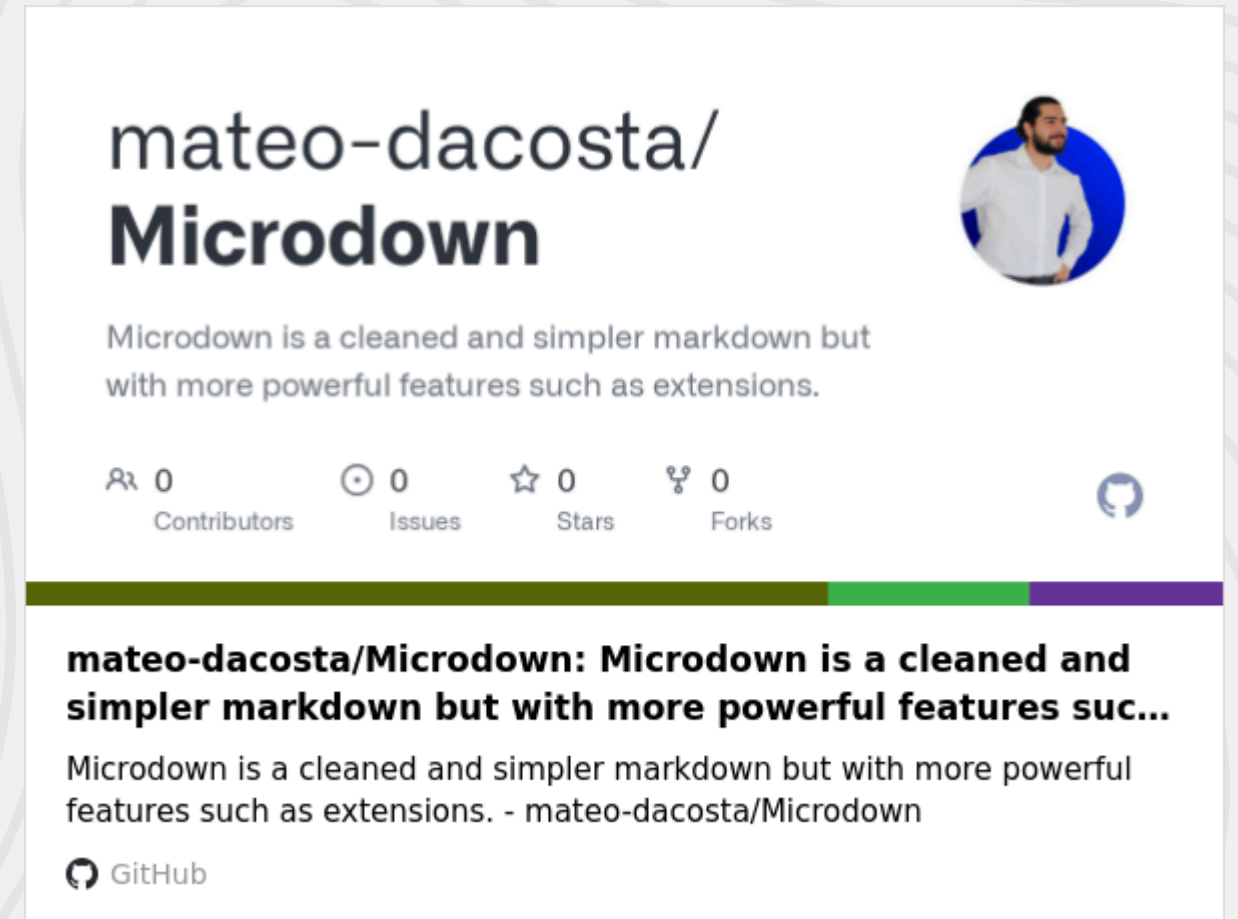


GITHUB



INITIAL DESIGN

→
Microdown Parser

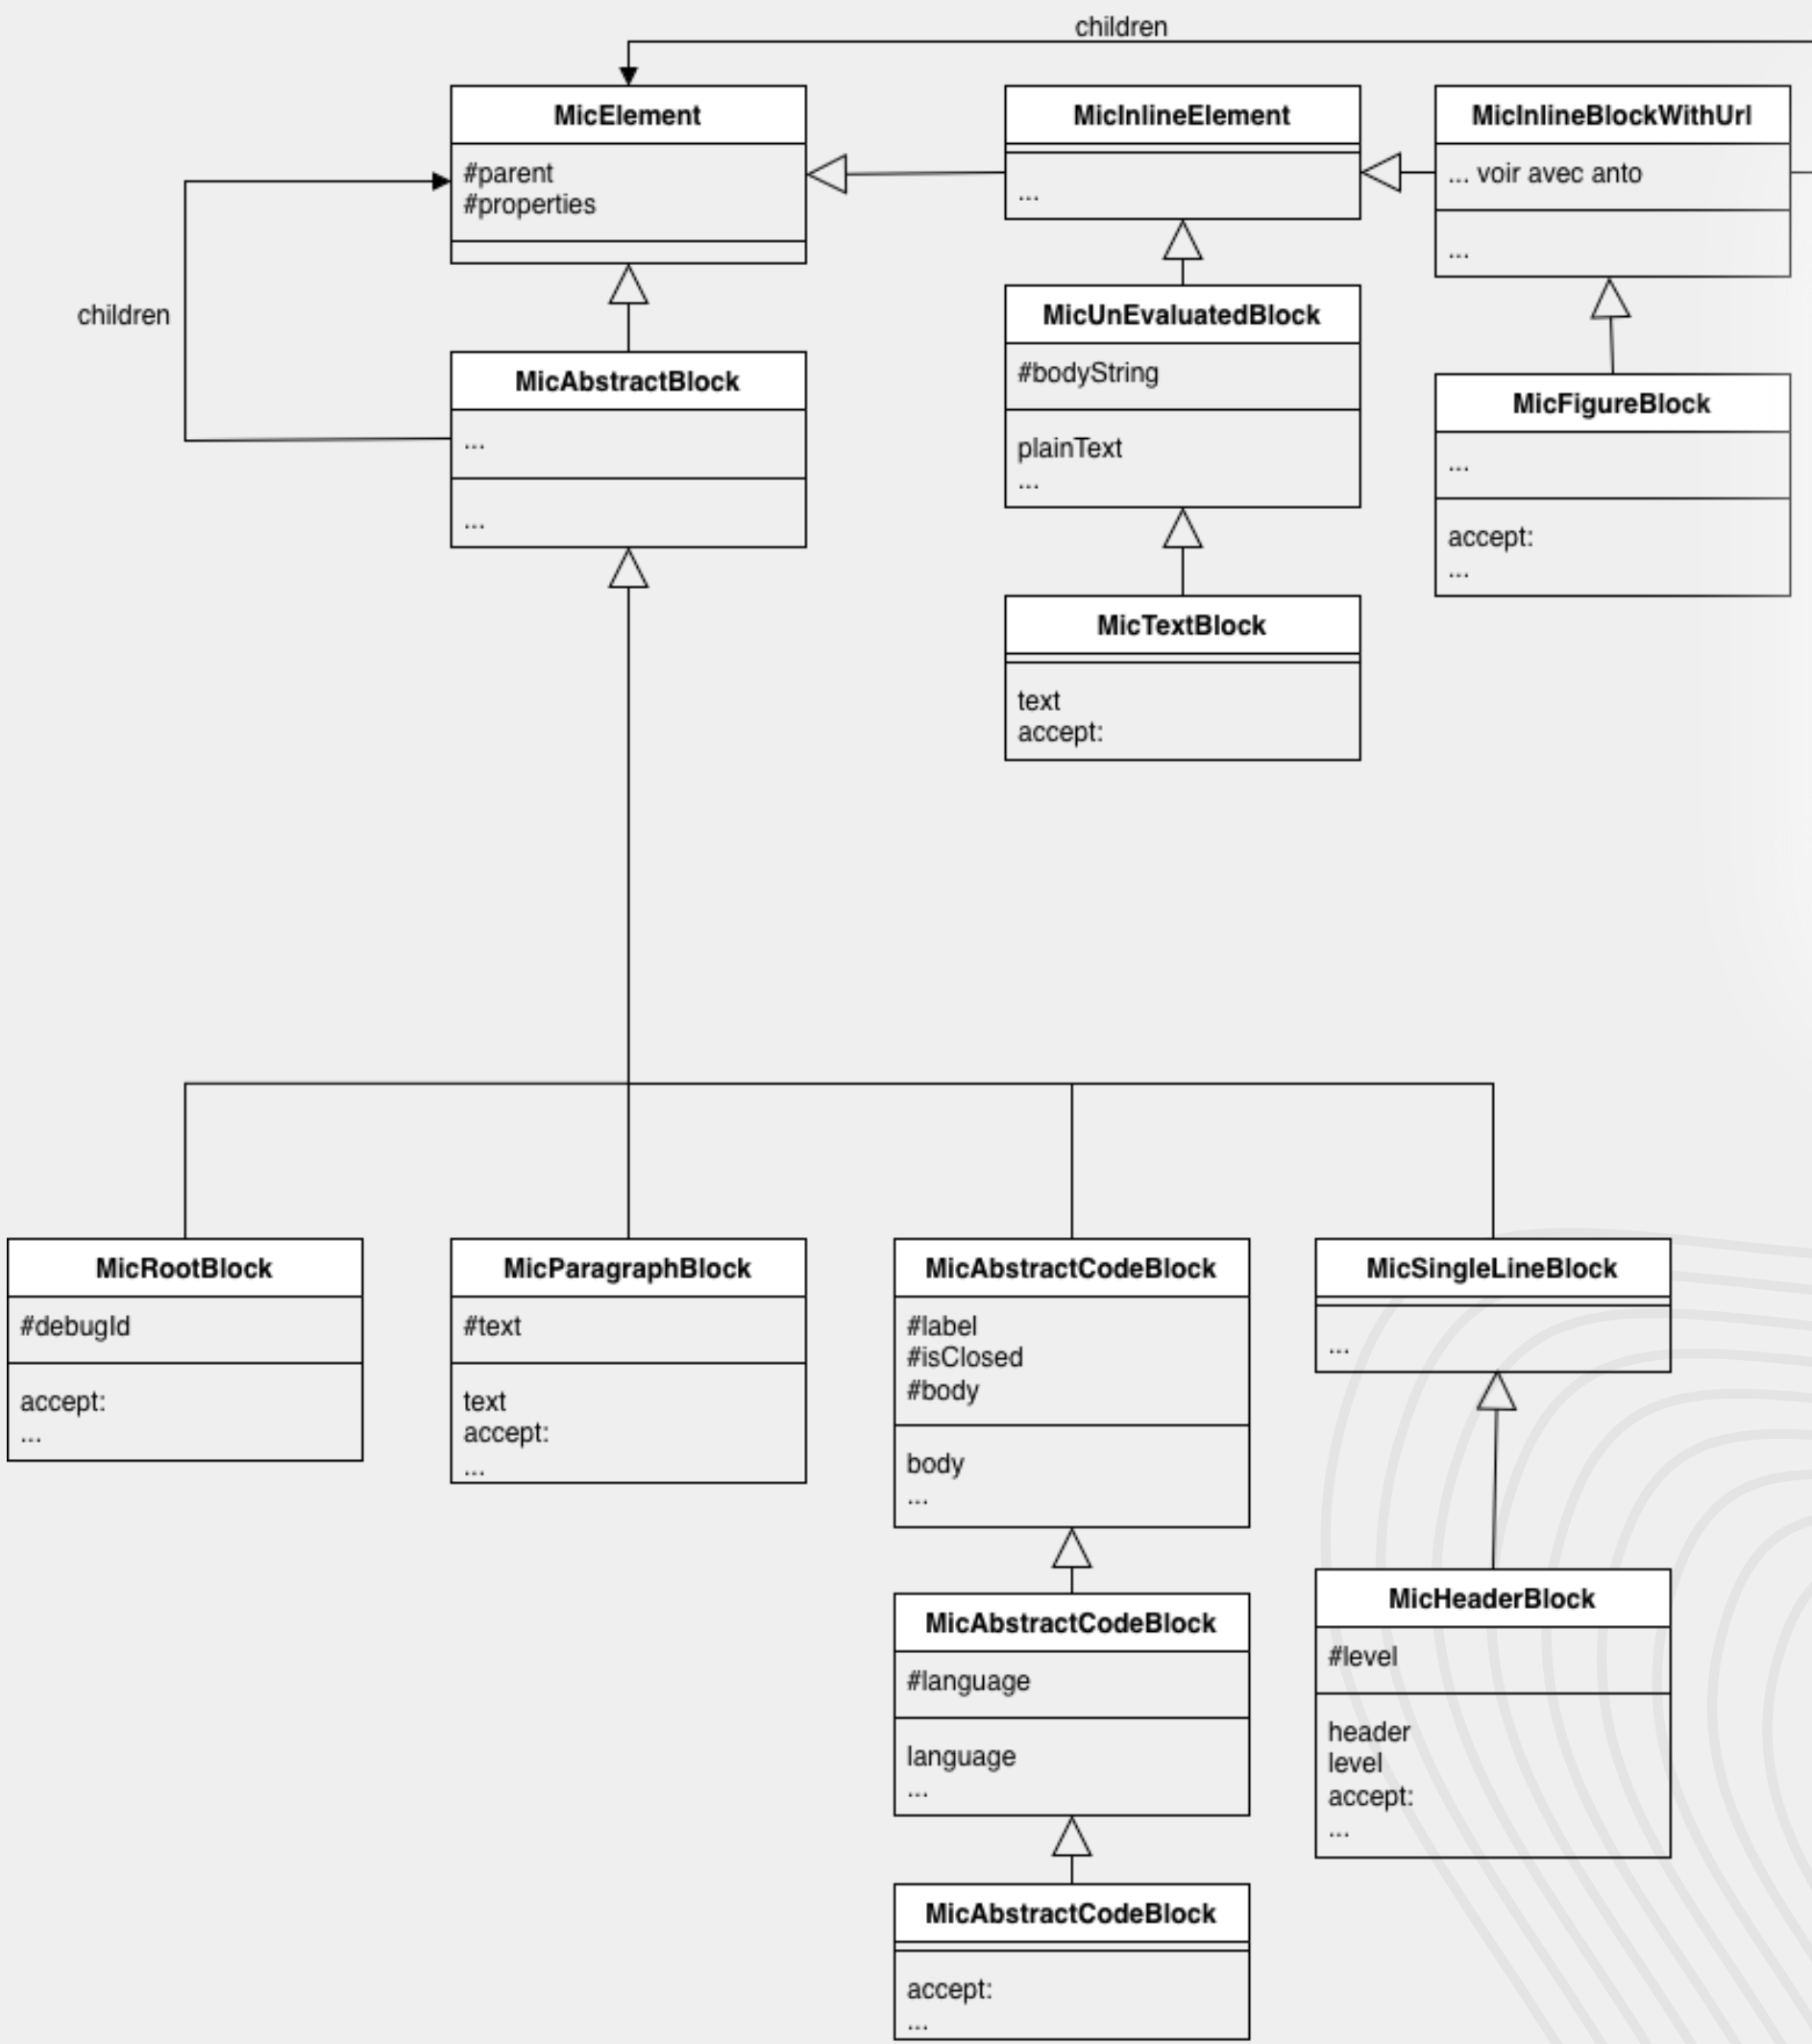


a Composite

- Tree data structure (parent - children)
- Text and body are leafs
- 39 types of nodes
- 42 accept: implementations


a Visitor

- 2 children
- 2 specific behaviours
- can visit 51 different elements

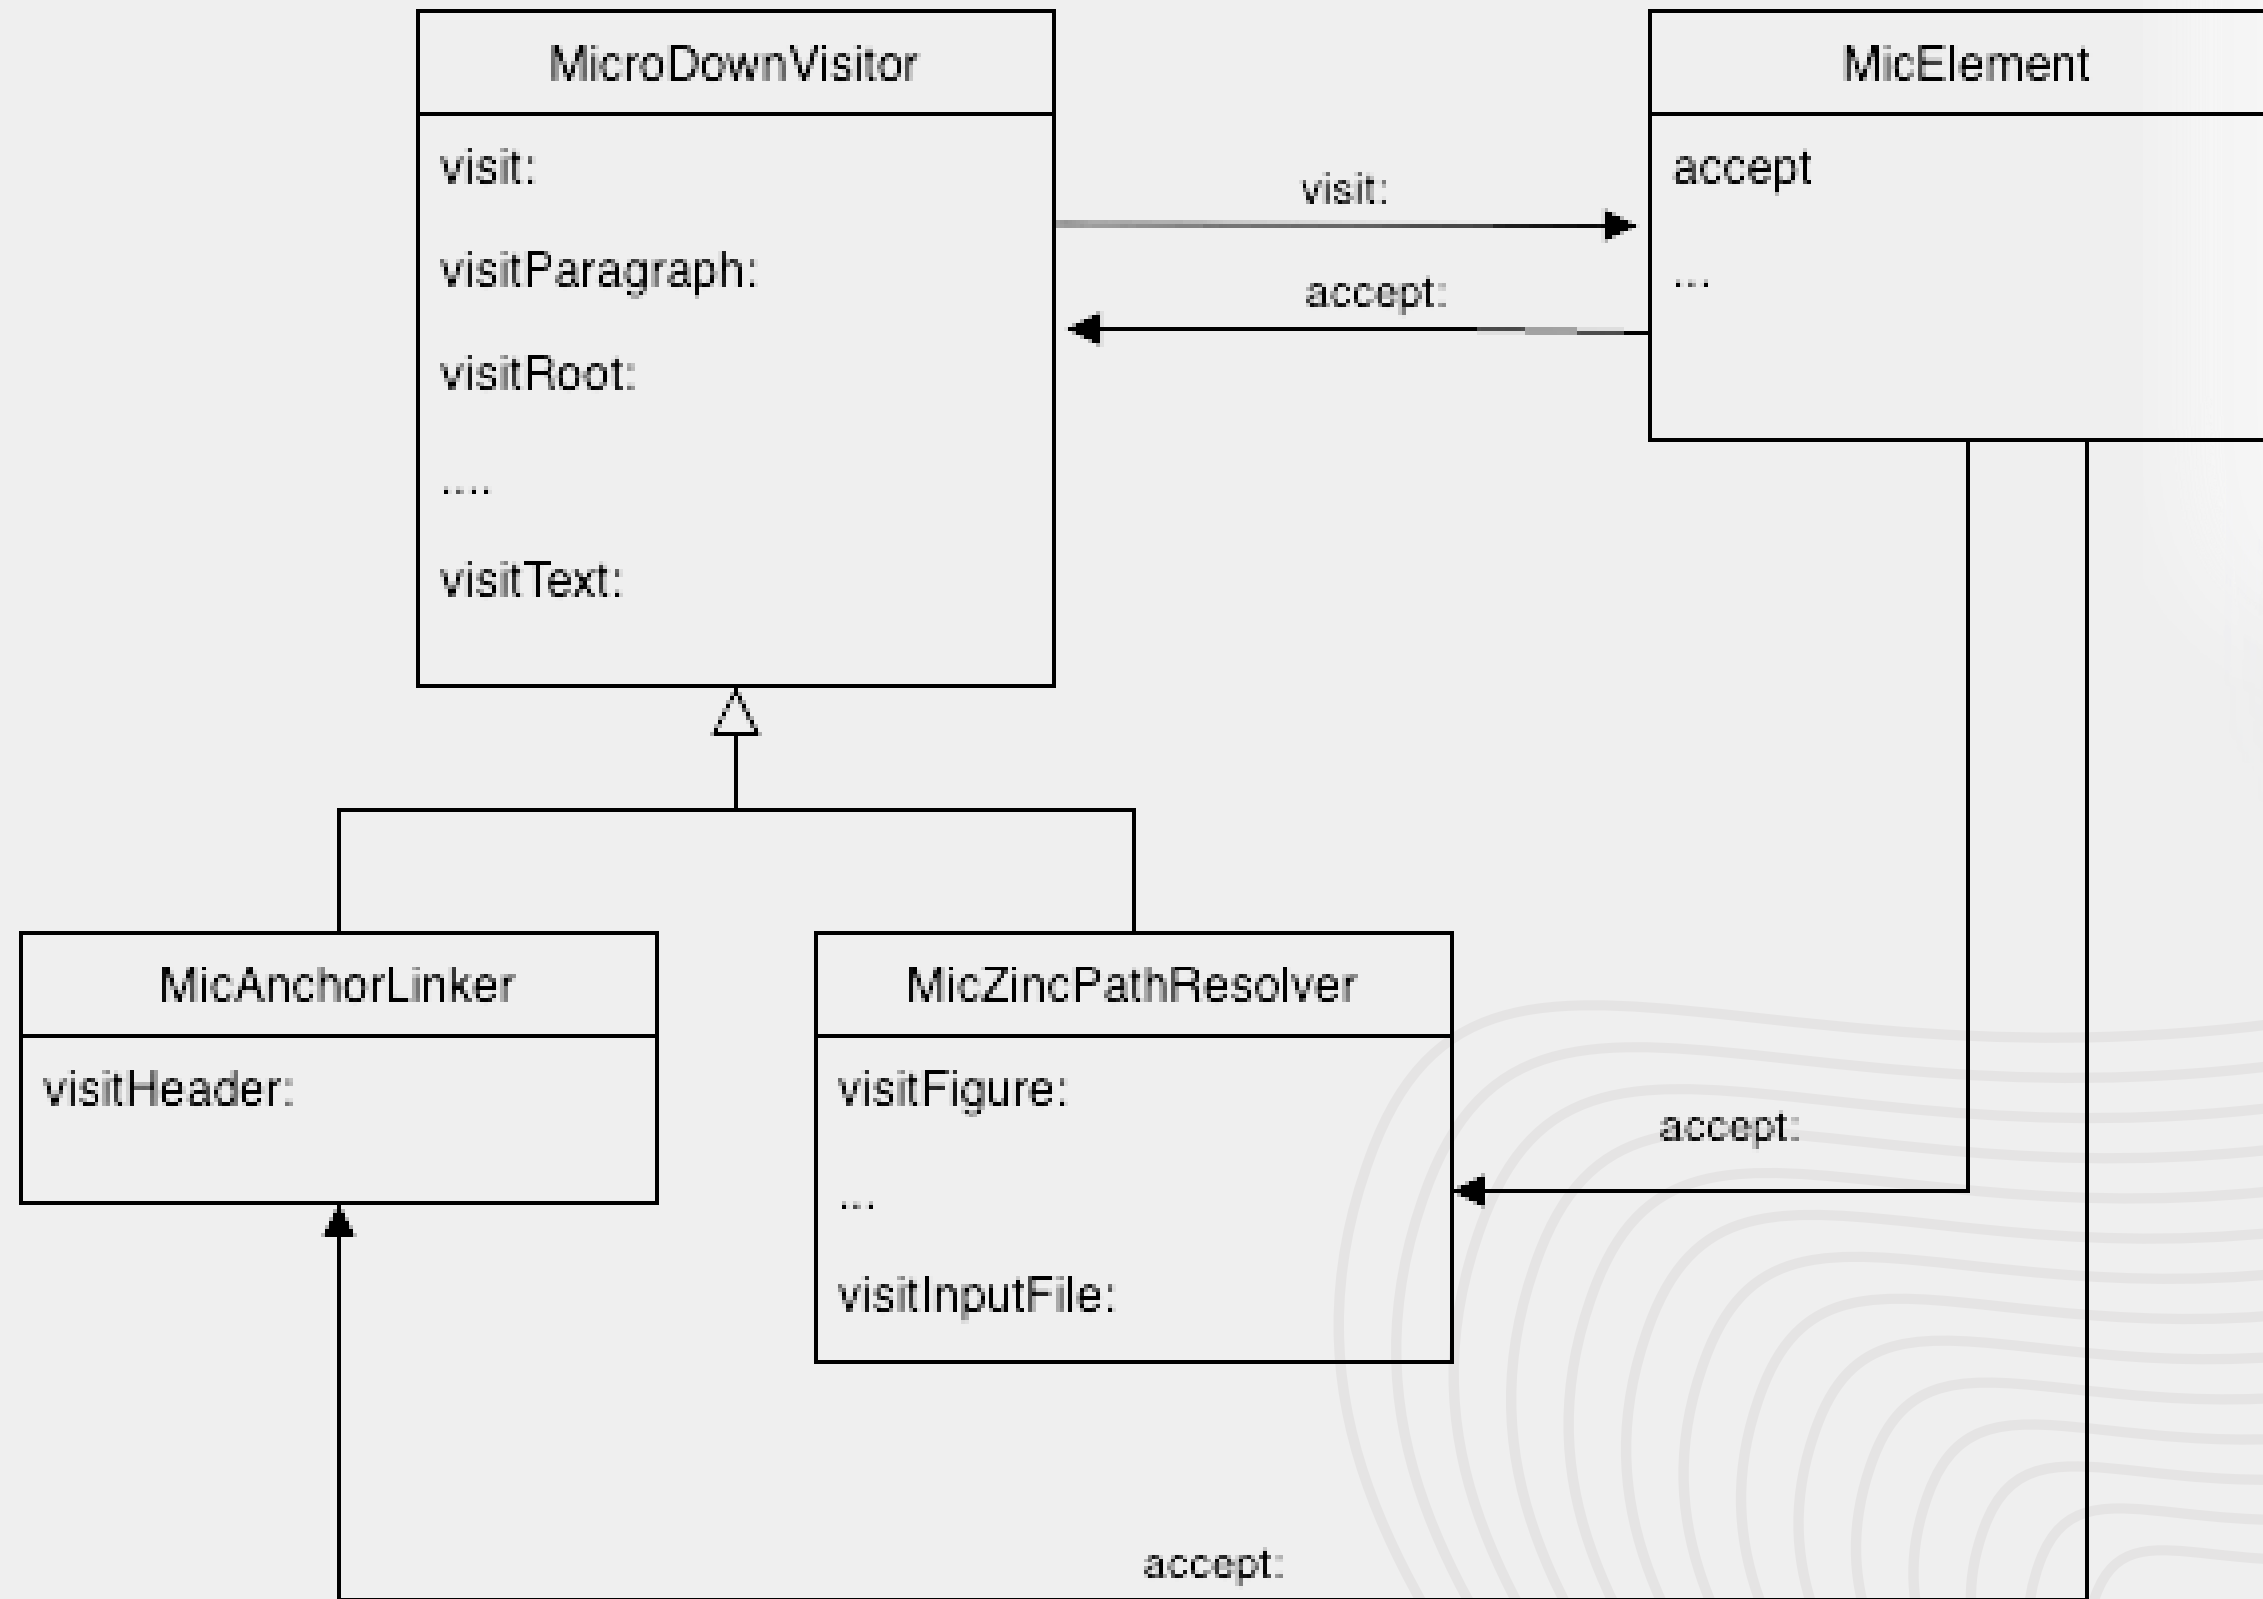

MicRules

- 2 rules by default

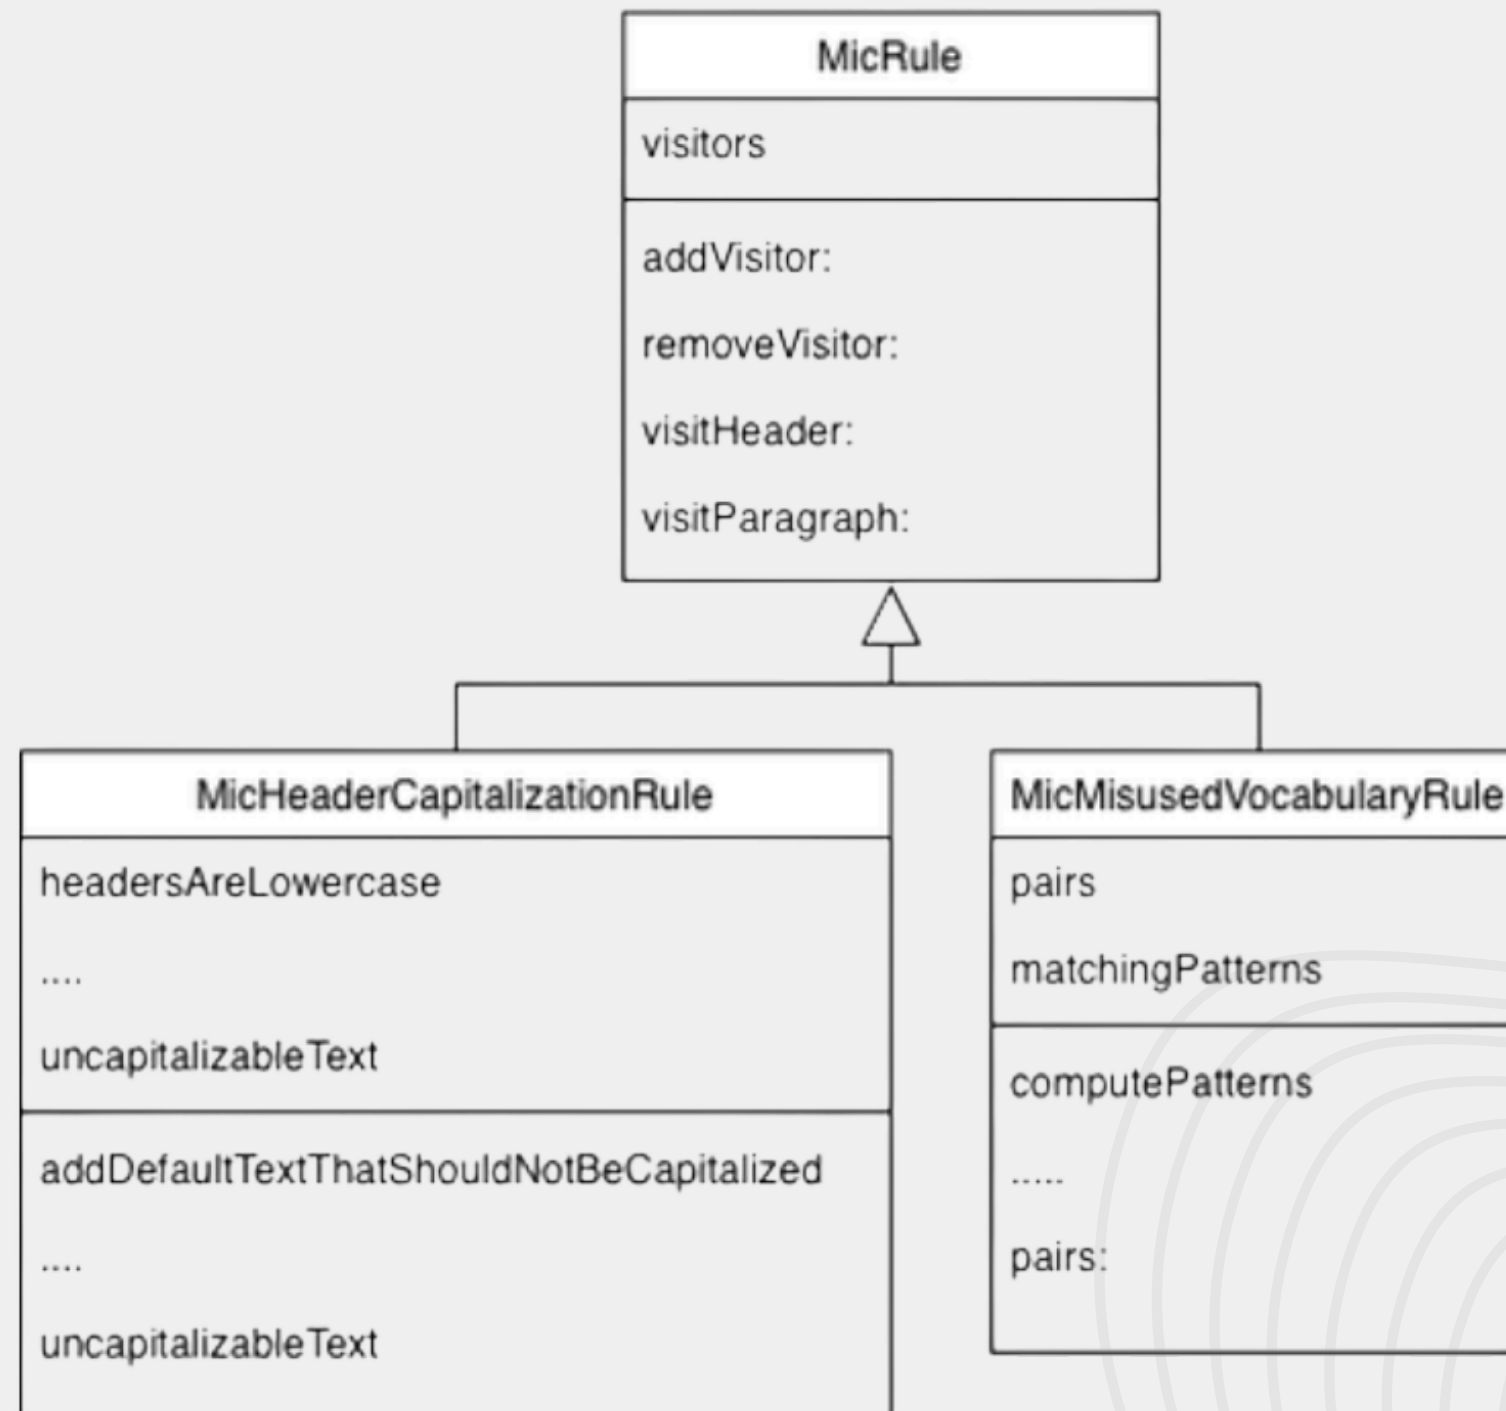

OUR NEW FEATURE

Book Sanitizer

Book Sanitizer

A Book Sanitizer is used to validate and clean the internal structure of a "MicElement" (a structured document), ensuring that all its components are consistent and compliant with the rules defined by the application.

Features

- Write "backend", not "back-end" or "back end".
- Write "subpresenter", not "sub-presenter".
- Methods without comment have an empty line after the method selector.
- Methods do not have a period on the last line.
- Write "Pharo image", not "Pharo Image".
- Write "Section 6.1", not "section 6.1 »".
- Write "Figure 6.2", not "figure 6.2 »".
- Caption should start with an uppercase and terminate by a period.
- Titles (section, chapter, ...) should just have the first letter capitalized.
- Figure caption should end with a period and be capitalized.
- Only use tab for code indentation
- For paragraphs terminate the label with a period


FINAL DESIGN

Extended Visitor


a BookSanitizerVisitor


- A specific visitor for each rule
- A list of BookSanitizerVisitors from which to choose the ones you wish to use

Package : Microdown-BookSanitizer

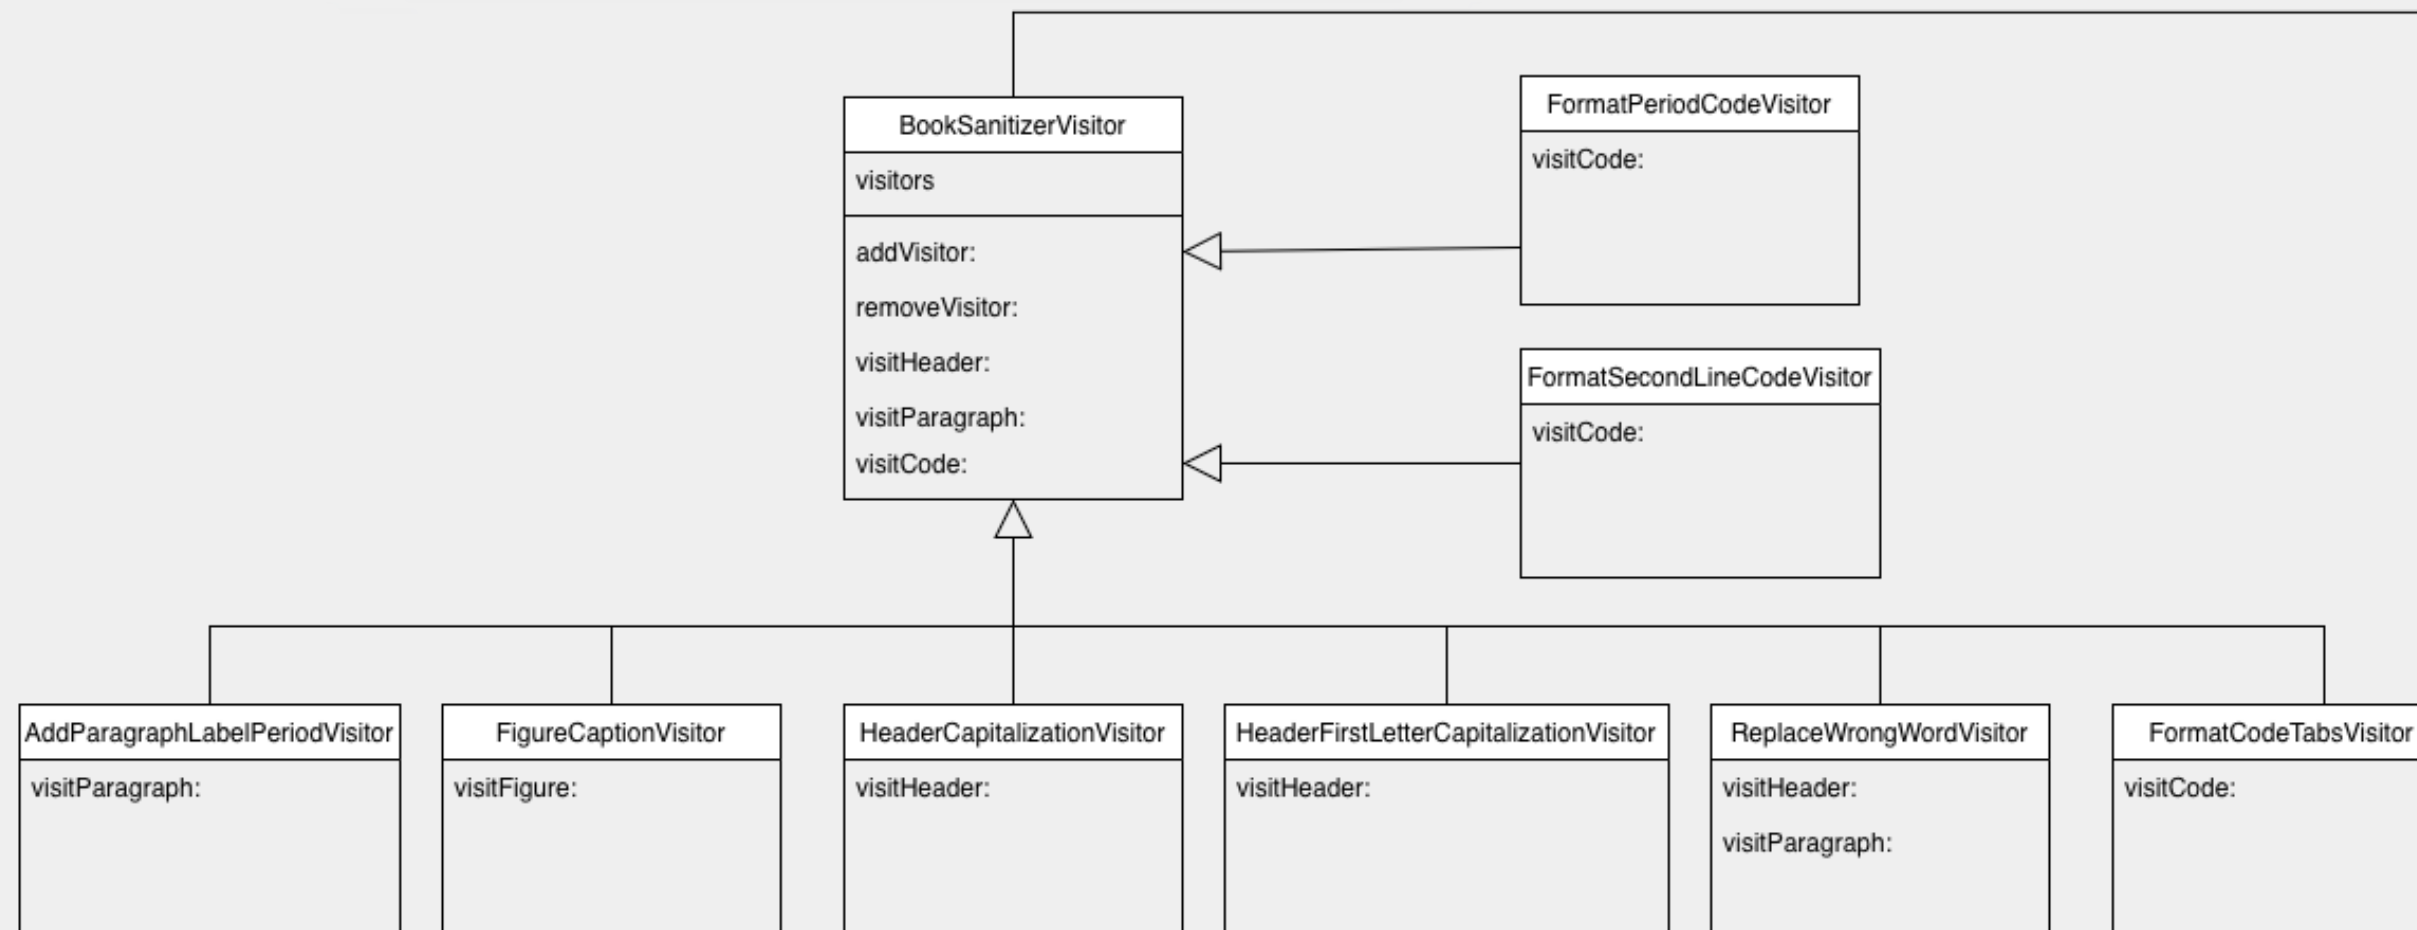


Package : Microdown

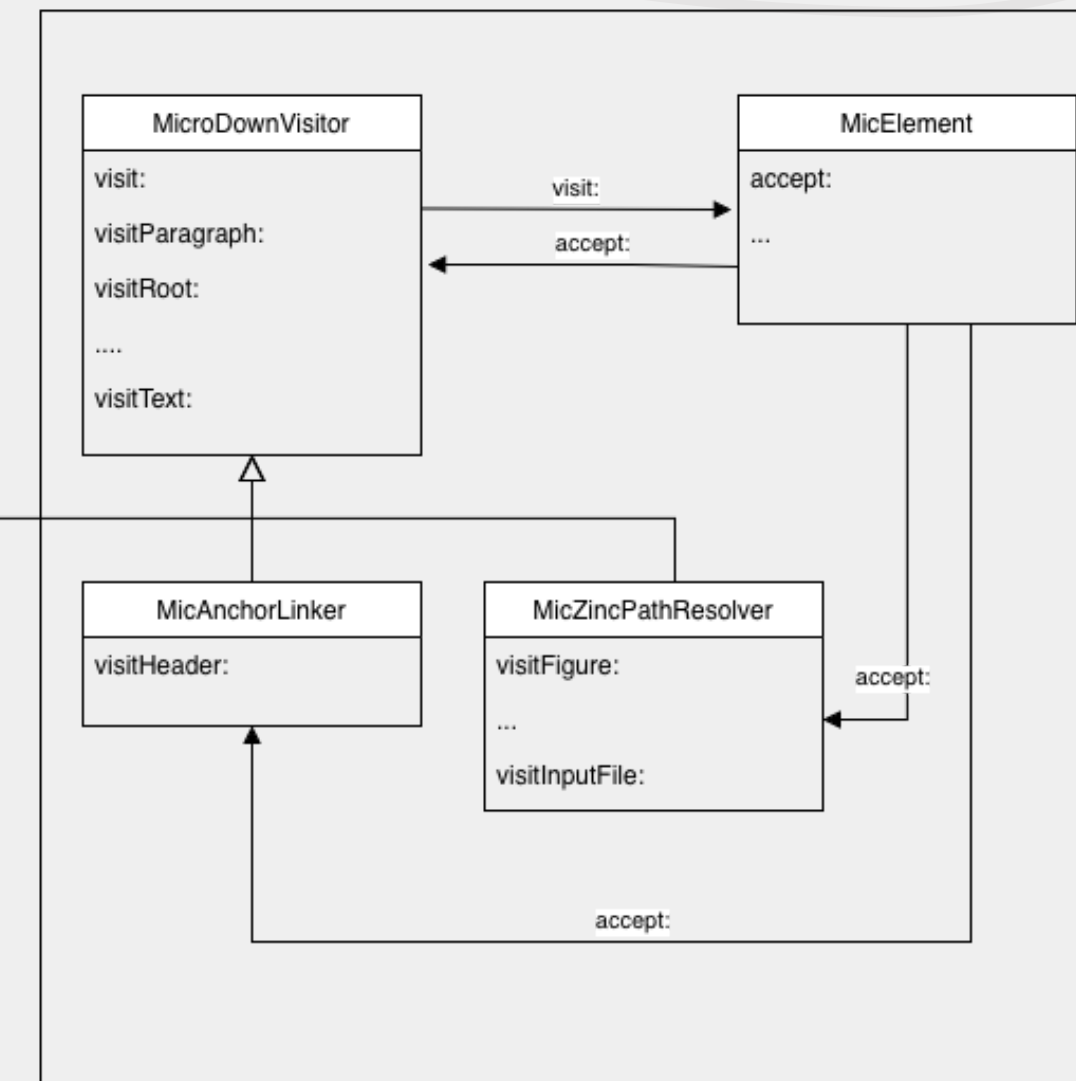

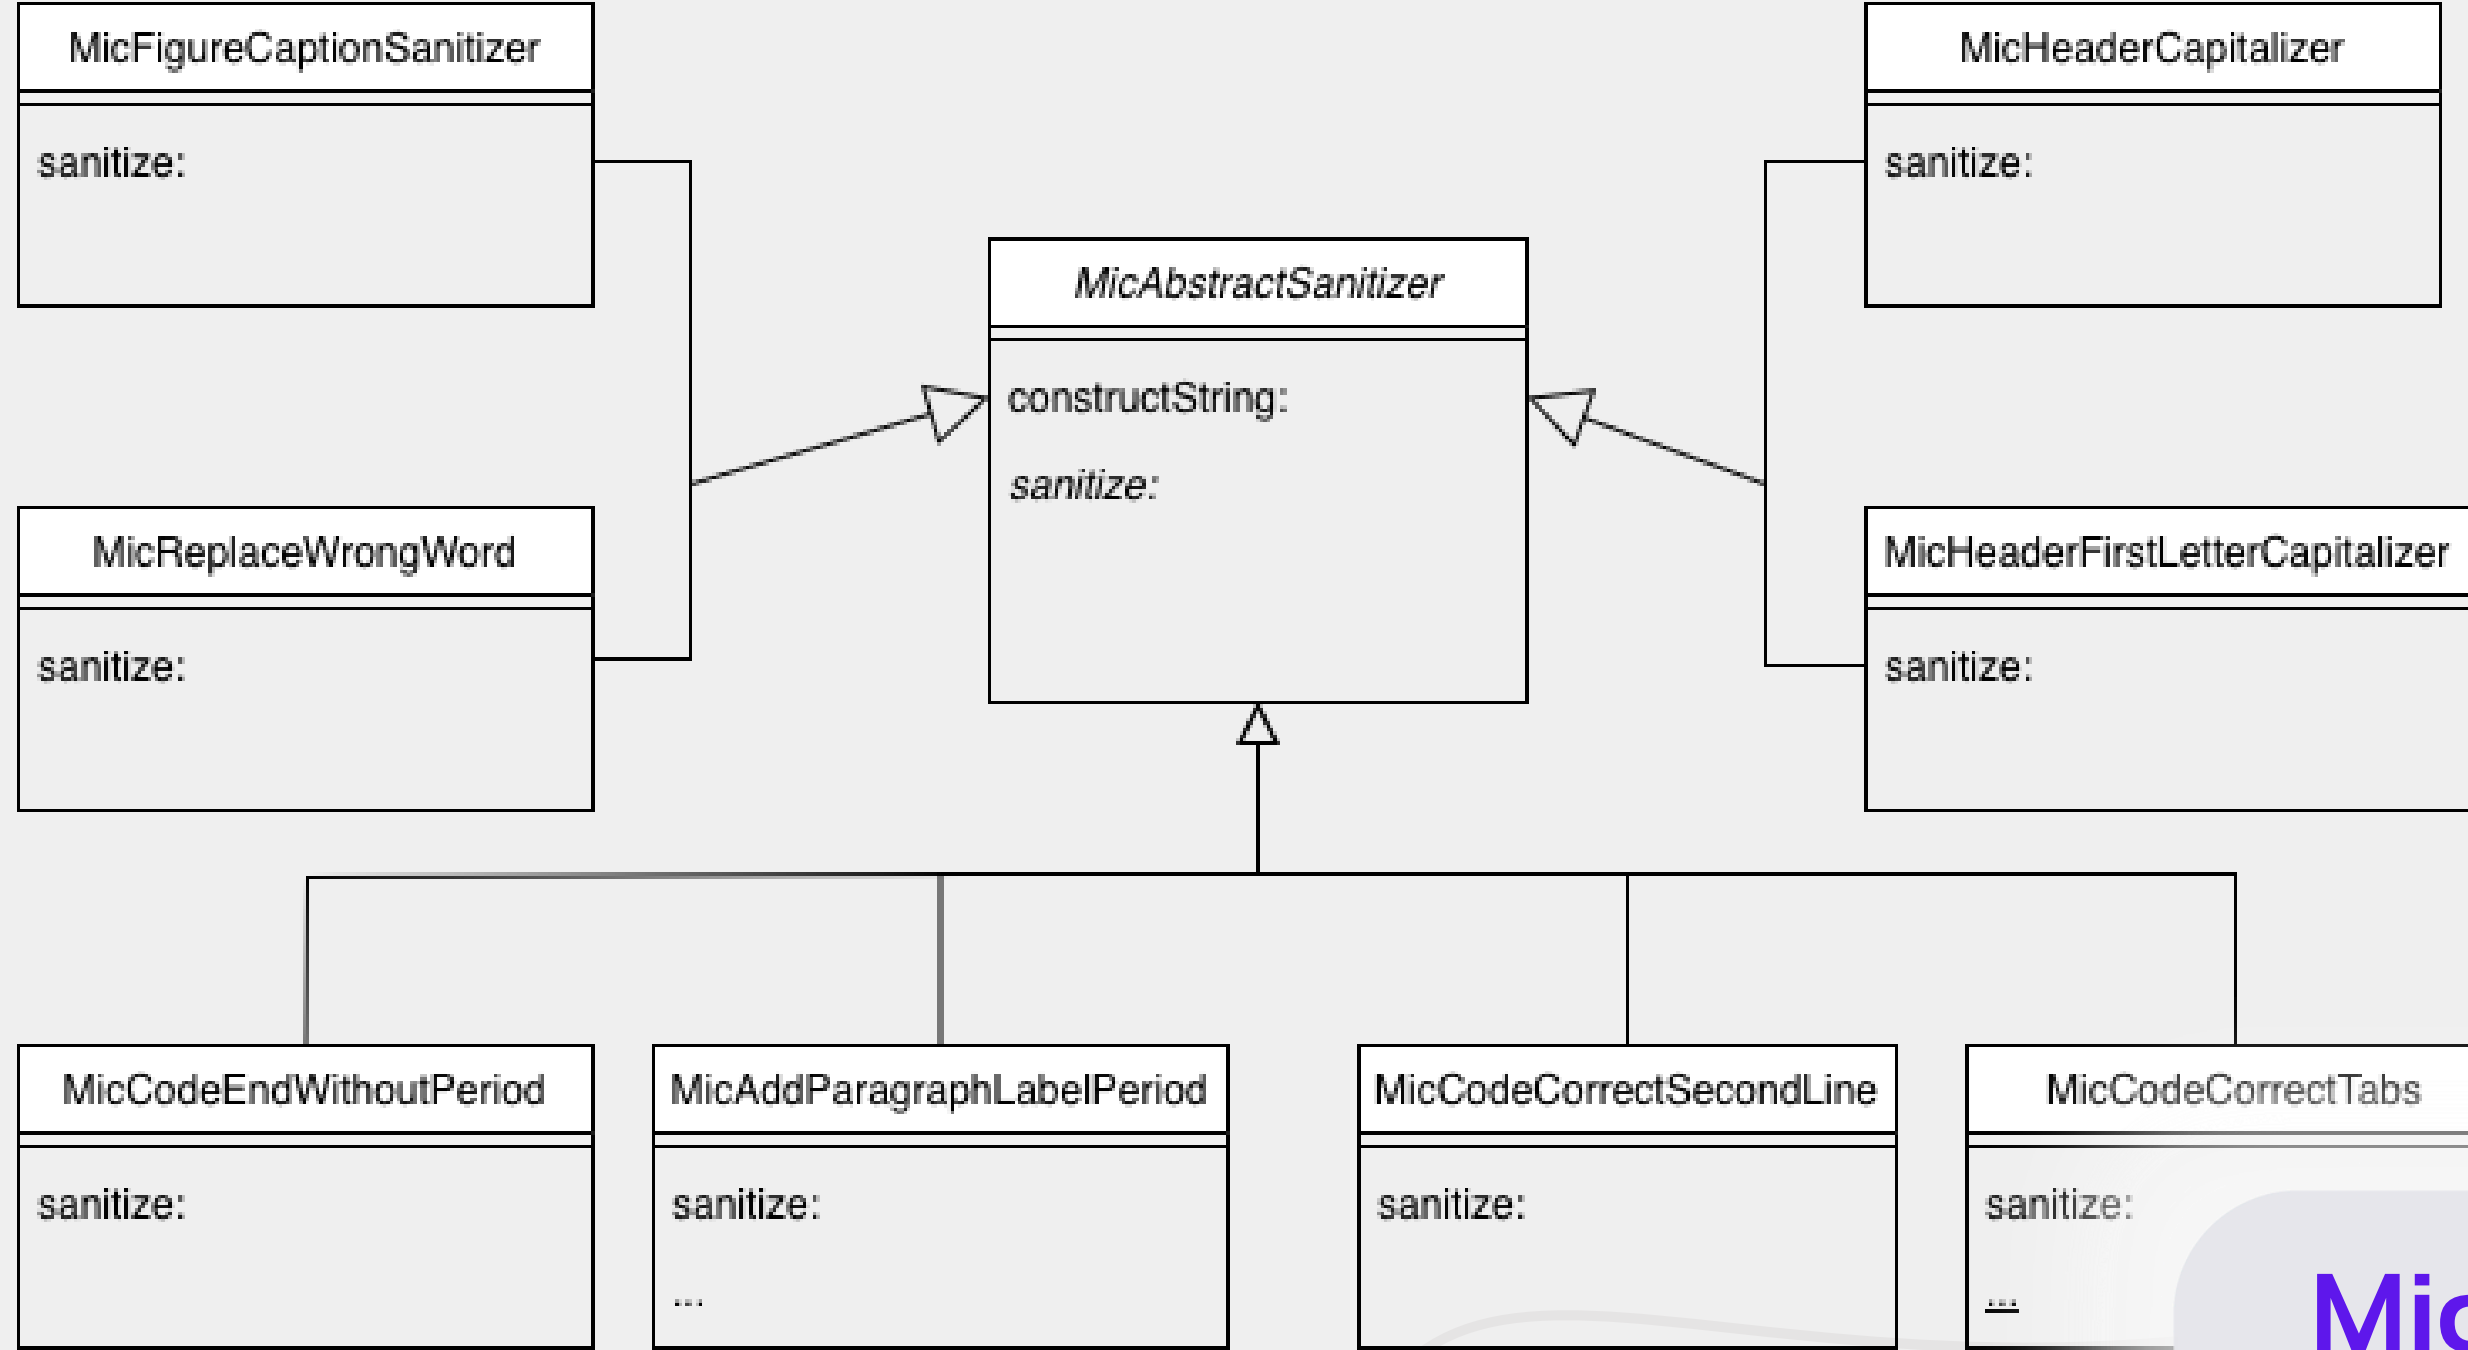

MicAbstractSanitizer

- 8 sanitizer features
- Separation of responsibilities
- Subtyping & polymorphism

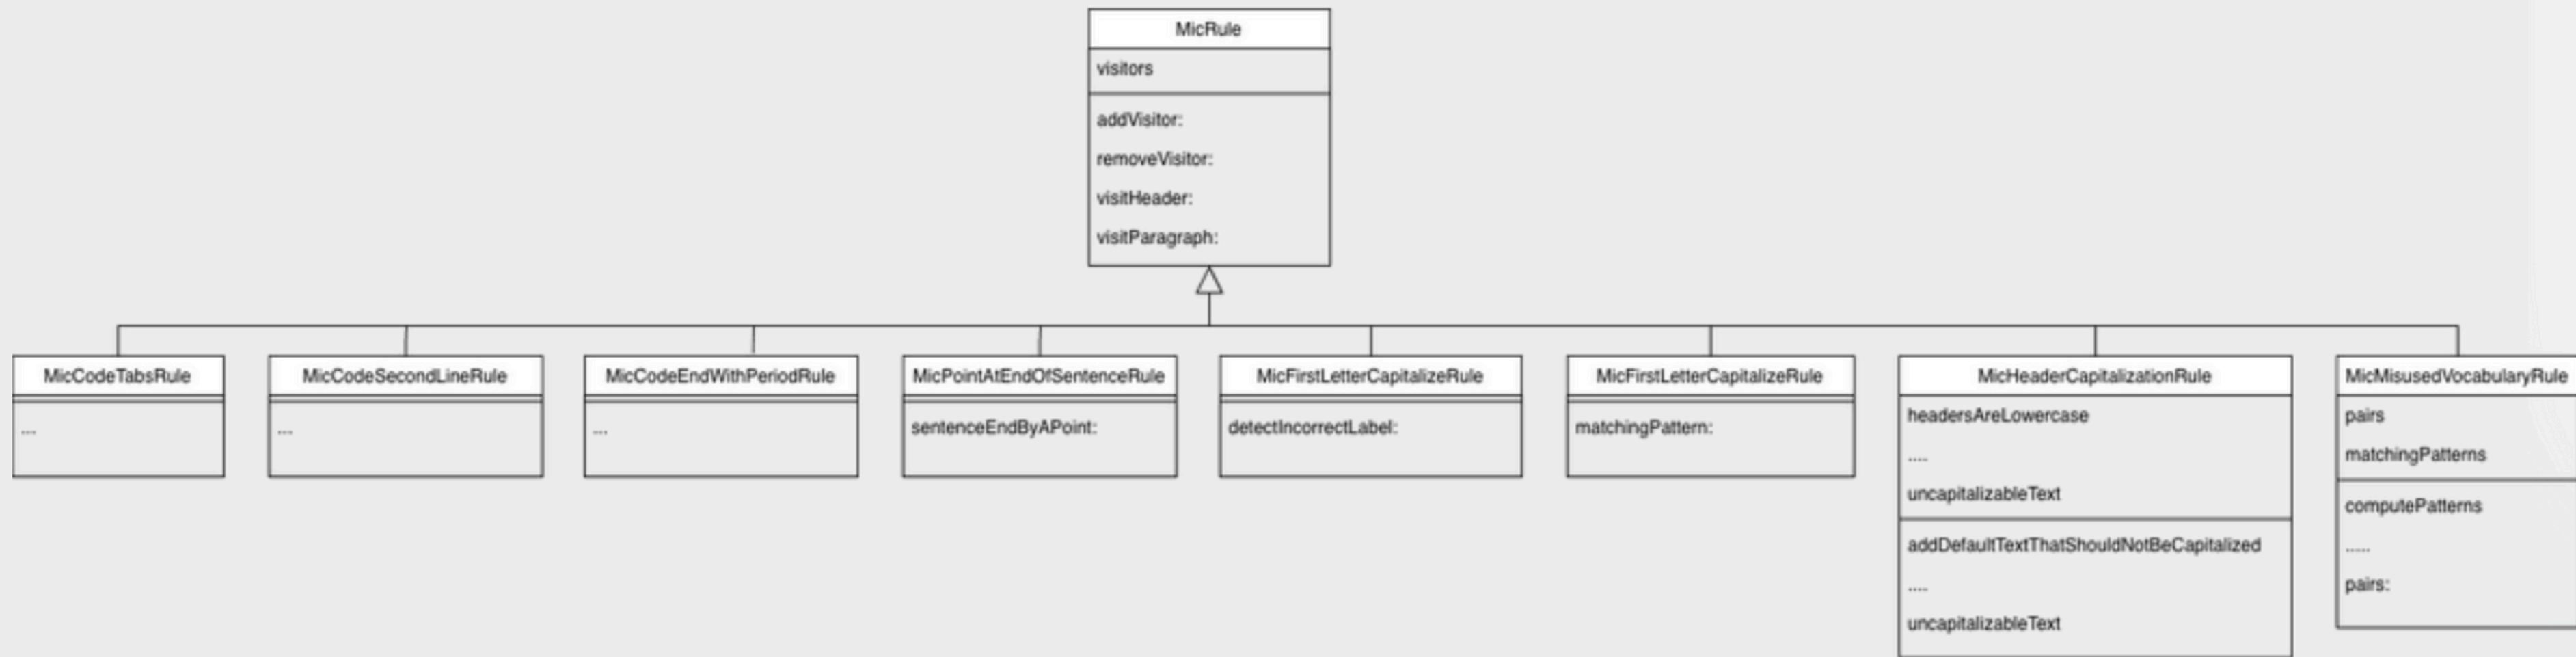

MicRules

- 8 unique rules
- Uses by each sanitizer

**THINK
ABOUT**

Important things

Encapsulation

- Indirect reference
- Break the LoD
- Risk of change waves

```
visitFigure: aFigure
```

```
| aText aFigureCaption atext2 |  
aText := aFigure children first text.  
aFigureCaption := MicFigureCaptionSanitizer new.  
atext2 := aFigureCaption sanitize: aText.  
aFigure children first bodyString: atext2
```

```
text
```

```
  ^ children first text
```

Resolution

- Uses the children instance variable
- Encapsulates reference access
- Respects LoD

```
visitFigure: aFigure
```

```
  | aText aFigureCaption atext2 |
```

```
  aText := aFigure text.
```

```
  aFigureCaption := MicFigureCaptionSanitizer new.
```

```
  atext2 := aFigureCaption sanitize: aText.
```

```
  aFigure children first bodyString: atext2
```


**TO
CONCLUDE**

Reminder

Lessons learned

- Don't over design
- Reuse code through polymorphism
- Focus on what really matters.

Mistakes

- Design before writing tests
- Trying to use the parser with files
- Don't write enough documentation

