

Idioms & Design Patterns Creational

Patterns and idioms can be grouped roughly into:

- Creational Patterns and idioms
 - Singleton, Factory Method, Abstract Factory
 - Named constructor
- Structural patterns and idioms
 - Composite, Facade, Adapter
 - Compiler Firewall
- Behavioral patterns and idioms
 - Observer, MVC - more
 - Double-dispatch
- Idioms are small-scale design patterns, in this context
- Design patterns come in two basic flavors:
 - Using one or more base classes to hide details from the client
 - One thing about most of the design patterns: presented in a very general form
 - E.g. normally everything has an abstract base class that defines the working interfaces between the parts of the pattern
 - But an actual implementation might not need this - the abstract base can be collapsed into a single concrete class
 - E.g. Factory
 - Other clever ideas using encapsulation, interfaces, class responsibilities to hide details from the client.
 - e.g. Singleton

Key concepts for using design patterns:

- Take the class relationships and the details seriously!

You aren't taking advantage of the design pattern just by having some classes with the "buzzword" names organized kinda like the pattern. The exact way in which the classes relate to each other, and how key details are handled, is where the real power of the pattern is!

- The goal of many of the patterns is to achieve easy extensibility, at the expense of some verbosity and some run-time overhead.

This means that a special case solution to a design problem will take less code, and maybe run faster, but it will be much harder to generalize when new features and capabilities get added to the code.

The need to extend a program is very common, even if it wasn't planned for.

Either use a design pattern from the beginning, to allow for future extensibility, or be ready to refactor the special case solution to make use of a design pattern so that future extensions will go more smoothly.

So the goal of the patterns is not short code, or fast code, but easy-to-extend code.

Singleton: Unique, globally-accessible Objects

- Sometimes you need exactly one object of a class and it should be globally accessible, but only in certain ways, relevant everywhere in the system, but there should be only one of them, and its creation, initialization, and destruction must be clear and well defined.
- Common use: This object provides resources - e.g. data that is needed widely, gets updated, has to be kept consistent - so easiest if in exactly one place.

```
Datum * get_datum_ptr(const std::string& name);
```

can we put this into an object somewhere so that it will be available everywhere, and easily kept accurate?

- What's wrong with global variables?

Access is open - anybody can change it in any way desired.

When is its initial value determined?

What if initial value requires run-time computation?

Common temptation to use global variables:

- there is a single repository or set of services in the program.
- If there really is only one, can't we treat this stuff as a global variable?
- But what's to stop code from accidentally modifying something directly?
- Also, how do we make sure it is always only one variable for each kind of data - no inadvertent copies to get out of synch?
- Need the encapsulation, access control of classes, but global access

- Singleton pattern solves these problems

Define a class that has the data members and services that you want

- E.g. map container of datum names to pointers
- `void add_Datum_ptr(Datum * ptr);`
- `bool is_datum_present(const std::string& name);`
- `Datum * get_datum_ptr(const std::string& name);`
- `void remove_datum_ptr(const std::string& name);`
- `void remove_datum_ptr(Datum * ptr);`

Ensure that only one object of that class can be created.

Ensure that this one object gets created when it needs to be created.

Provide a way to globally access the object's services, but control access as required.

- Basic pattern:

file Singleton.h

```
• class Singleton {  
    public:  
        static Singleton * get_Instance();  
        // services member functions  
    private:  
        // constructor is private - nobody else can create one  
        Singleton();  
        static Singleton * ptr;    // only one, class-wide  
  
        // services data members - initialized by ctor  
  
        // prevent accidental deletion  
        ~Singleton();  
        // prevent copy and assignment  
        Singleton(const Singleton&);  
        Singleton& operator= (const Singleton&);  
};
```

file Singleton.cpp

- Singleton * Singleton::ptr = 0; // initialized during or immediately after loading
- // create the object if it doesn't already exist
- Singleton * Singleton::get_Instance()
 - {
 - if (!ptr)
 - ptr = new Singleton();
 - return ptr;
- // code for ctor, dtor (if needed), service functions

Usage:

- class Data // the singleton class
 - Datum * find_datum(const string& name);
 - void add_datum(Datum *);
 - void remove_datum(Datum *)
 - etc
- // in other modules
 - #include "Data.h"
 - ...
 - cin >> name;
 - Datum * p = Data::get_Instance()->find_datum(name);

• Refinements:

have get_Instance return a reference instead of a pointer

- syntactically more convenient, less error prone
- Singleton& Singleton::getInstance()
 - {
 - if (!ptr)
 - ptr = new Singleton();
 - return *ptr;
-
- Datum * p = Data::getInstance().find_datum(name);
- or
- Data theData& = getInstance();
- Datum * p = theData.find_datum(name);

may work to make services static, put get_Instance call in them

- ```
static Datum * Data::get_datum(const string& name)
{
 return get_Instance()->find_datum(name);
}
```
- further simplify usage syntax
- ```
Datum * p = Data::get_datum(name);
```

How does it get destroyed?

- Singletons usually endure for the length of the program run.
- But more generally, we will want to follow the rule of cleaning up at program termination. How to do this?

When program terminates, all global/static objects are destroyed, so the `_destroyer` will be destroyed; its destructor will delete the Singleton, running its destructor.

Other ways of doing this - e.g. make the destroyer a static member of Singleton, have it initialized with the pointer by first call to `get_instance`, etc.

- Auxiliary Destructor Class

Can have an auxiliary static object `SingletonDestroyer`, from a friend class whose destructor reaches in and does a `delete ptr`; of the singleton object - for example

```
class Singleton {
    ...
    friend class Singleton_destroyer;
};

class Singleton_destroyer {
public:
    ~Singleton_destroyer()
    {
        Singleton * p = Singleton::get_Instance();
        delete p;
    }
};
```

// somewhere in code (Singleton.cpp is probably the best place)

// create a global static Singleton_destroyer object

`Singleton_destroyer the_destroyer;`

When program starts, the destroyer object will be created (does nothing).

- Cute solution: Scott Meyers: make the actual object a static local variable in the `get_Instance` function - "Meyers singleton"

just define the `get_Instance` function differently:

```
static Singleton& Singleton::get_Instance ()
{
    static Singleton s;
    return s;
}
```

Compiler automatically builds code that creates 's' first time through the declaration, not thereafter, and then deletes the static object at program

termination

- But can get into very difficult situation if objects rely on each other at the time of termination - when does the Singleton disappear relative to other objects? Can read further for various ideas. But for simple applications, this works fine.
- Why not simply use global/static variables to solve the problem, or just have static members for every member variable in the singleton?

Answer:

- If a bunch of naked static variables, no control over how they're accessed - just global variables.
- The static members will have their ctor's called during program startup, and before main() gets executed, but no guarantee on when or what order ACROSS translation units. Can get into strange and difficult situations if initializing a static member variable somewhere else requires the object, but its static member hasn't been initialized yet.
- But built-in types like pointers that are static and have constant initial values are always initialized before any initializations that involve function calls! Might even happen during loading (constant initial value might actually be part of program text in memory image loaded from disk).
- Therefore, Singleton using a static pointer initialized to zero or the Meyers singleton will always be well defined no matter when other code makes use of it! - it gets created the first time it is used, no matter what.

Named constructor idiom

- Control how an object is created
- common case - only on the heap, so e.g. refer to with a pointer or Smart_Pointer.

make the constructors private

- use a static "create" function that takes constructor parameters, constructs and returns the object

```
class Thing {
public:
    static Smart_Pointer<Thing> create(int i);
    ~Thing{};
private:
    Thing(int i = 0) : i_(i) {}

    int i_;
};

Smart_Pointer<Thing> Thing::create(int i)
{
    Smart_Pointer<Thing> p = new Thing(i);
    return p;
}
```

```
}
```

Common problem: create an object whose type and initial values are specified by run-time data

- Suppose we have a class hierarchy of polymorphic objects:

```
Ship
  • Warship
    Battleship
    Torpedo_boat
  • Merchant
    Trawler
    Freighter
```

We usually refer to all of the objects by base class pointers, `Ship *`

- Normally, to create an object of a particular type, you have to write explicit code in which the type explicitly appears

```
list<Ship *> ships;

// put some ships into the list

ships.push_back(new Torpedo_boat(data));
ships.push_back(new Battleship(data));
ships.push_back(new Trawler(data));
```

- but suppose information and data about which objects is coming in from outside ..

E.g. create a new ship from a user command:

- Enter command: create PT_boat PT109
- type and name of object not known until program is running.

E.g. create a bunch of ships from data in a file:

- BB Indefatigable 23000 12 15 24 18
- PT 109 5 4 0.5 4
- MF City_of_Peoria 10000
- ...

- Two problems: who decides what kind of object to create, and how do we get the objects initialized with the proper values?

Reminder: Constructors can have other parameters beside values for member variables, and can get those values from some other place besides the supplied parameters.

- e.g., a file can provide a source of the parameter data

```
ifstream infile;
```

```
...
```

```
ships.push_back(new Battleship(infile));
```

```
    constructor parses the data in the file, uses it to initialize the object.
```

```
ships.push_back(new Merchant_ship(infile));
```

```
    constructor parses the data in the file, uses it to initialize the object.
```

- So, once we know what kind of object to build, we can delegate to each class the responsibility of handling the details, instead of in a single "know-it-all" place in the code.

How to decide what kind of object to build?

Factory method/virtual constructor concept - several approaches

- Simplest idea: A parameterized factory function - given information, create and return the desired kind of object

simple factory function

```
Ship * build_ship(int ship_type_code)
{
    switch(ship_type_code)
    case 1:
        return new Battleship;
    case 2:
        return new PT_boat;
    etc
```

- Elementary *factory method* concept: A static member of the relevant class interprets the data and decides what kind of object to create, and makes the initialization data available to it.

```
class Ship: {
```

- static Ship * build_ship(int type_code, string name, int num_guns);

Or can give the functions different names to allow client to specify the type needed, and specify the parameters better:

- class Ship: {
 static Ship * build_PT_boat(string name);
 static Ship * build_submarine(string name);
 static Ship * build_battleship(string name, int gun_size, int num_guns, int armor_thickness);
 static Ship * build_cargoship(string name, int capacity, int max_speed);
 }

Can combine a factory method with constructors so that each subtype of Ship knows how to read its own initialization data

```
Ship * build_ship(istream& infile)
• {
    string ship_kind;
    infile >> ship_kind;
    if (ship_kind == "BB")
        return new Battleship(infile);
    else if (ship_kind == "PT")
        return new Torpedo_boat(infile);
    ...
    else
        throw Error("Unknown kind of ship");
• }
```

Client can then construct ships from a file:

- while(infile)
 ships.push_back(build_ship(infile));
- Instead of returning a pointer to the new object, the factory could simply supply the pointer directly to a "centralized data bank" that keeps it for rest of program to use.


A possible use of a Singleton - the centralized keeper of all the object pointers.

Concrete Factory/ Factory Method

- More sophisticated, a function for each type of object (possibly with parameters also), grouped into a concrete factory class - so-called Factory Method pattern, Concrete Factory version

```
class Ship_factory {  
public:  
    Ship * build_Battleship(string name, int armor, int guns);  
    Ship * build_PT_boat(string nsame);  
    Ship * build_merchant(string name, double cargo_cap);  
};
```

- Concrete Factory

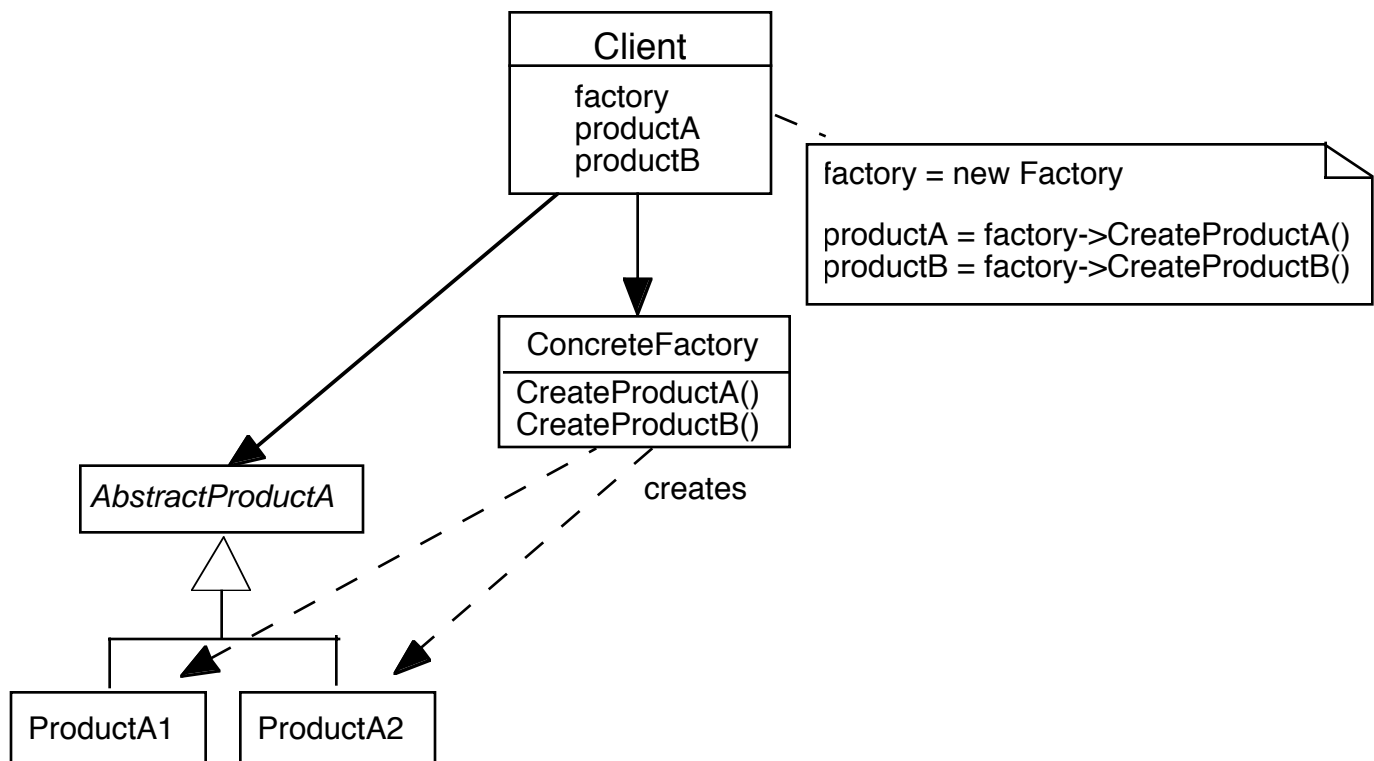

Abstract Factory

- Another problem - what if at run time we have different families of objects to create?

e.g. use either this GUI library or that GUI library - client decides which to use, creates the corresponding factory object.

uses the factory to create the objects it needs

generally, the products from different families will share interfaces

- Abstract Factory

