



● ProcessedDataDto		
🔞 😉 ProcessedDataDto(Long, byte[], Set <predicteddatadto>, Timestamp)</predicteddatadto>		
⊕ ProcessedDataDto ○ □ ProcessedDataDto □ Proce		
dateTime	Timestamp	
f • id	Long	
⊕ data	byte[]	
♠ predictedDatalDs	Set <predicteddatadto></predicteddatadto>	
serialVersionUID	long	
⊕ getId O	Long	
⊕ getPredictedDataIDs()	Set <predicteddatadto></predicteddatadto>	
m = setData(byte[])	void	
m = toString()	String	
m = setId(Long)	void	
m = setPredictedDatalDs(Set <predicteddatadto>)</predicteddatadto>	void	
™ getData 0	byte[]	
⊕ getDateTime()	Timestamp	
	void	

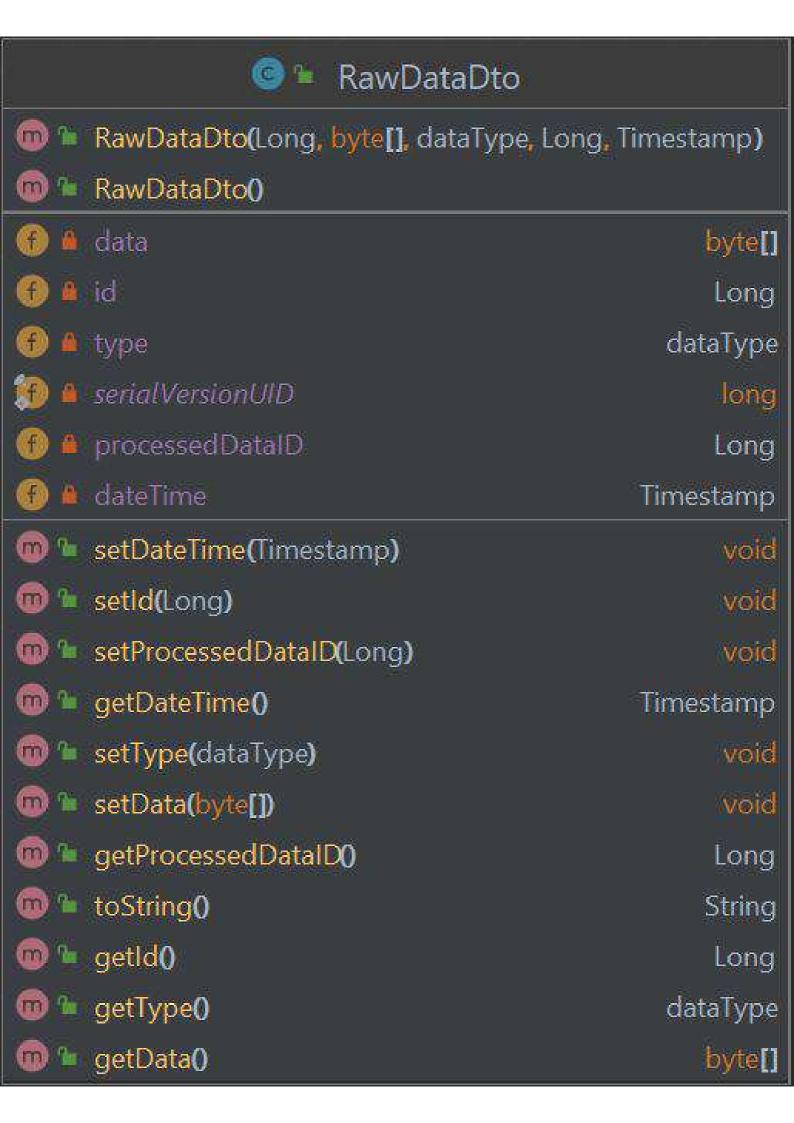

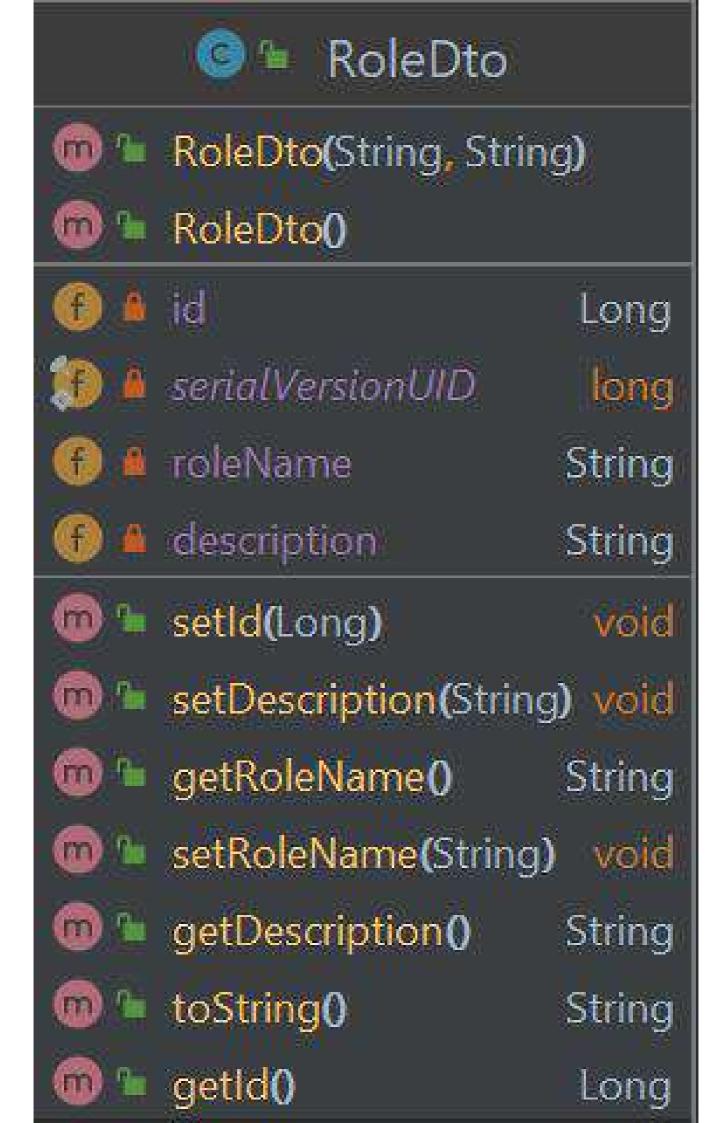

© ⁴ UserDto	
📵 😉 UserDto (Long, String, String, Set < AccessGroupDto >, Set < RoleDto >, Set < RawDataDto >, String, String)	
© № UserDto ()	
⊕ rawDatalDs	Set < Raw Data Dto >
	String
⊕ usemame	String
*** serialVersionUID	long
1 roleDtoIDs	Set <roledto></roledto>
accessGroupIDs	Set < AccessGroupDto >
password	String
	String
⊕ id	Long
setId (Long)	void
⊕ getFirstName 0	String
setFirstName (String)	yold
getPassword ()	String
getRoleDtolDs ()	Set <roledto></roledto>
setUsername (String)	void
getLastName ()	String
	Void
□ getRawDataIDs ()	Set < Raw Data Dto >
setRoleDtoIDs(Set <roledto>)</roledto>	void
getAccessGroupIDs ()	Set < AccessGroupDto >
getId ()	Long
getUsername ()	String
	yord.
make setPassword (String)	void

🕡 😉 toString ()

🗑 乍 setRawDatalDs (Set<RawDataDto>)