


Organizational Diagrams

Packages







Use-Case Diagram





Activity and State Diagrams



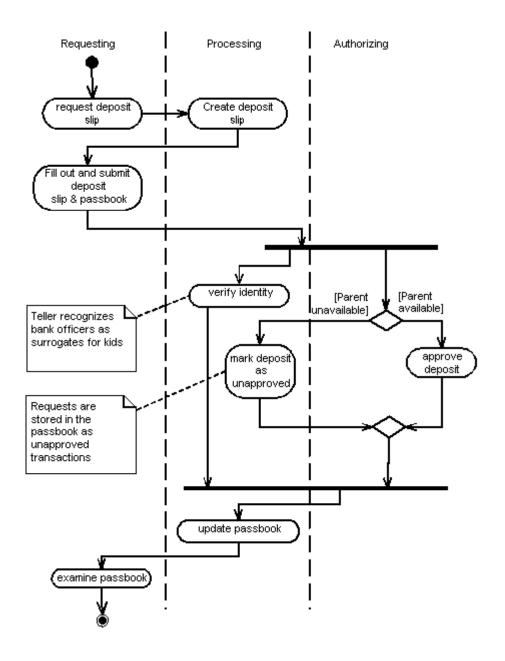

Static-Model (Class) Diagram

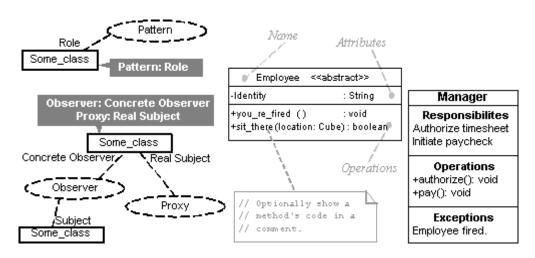


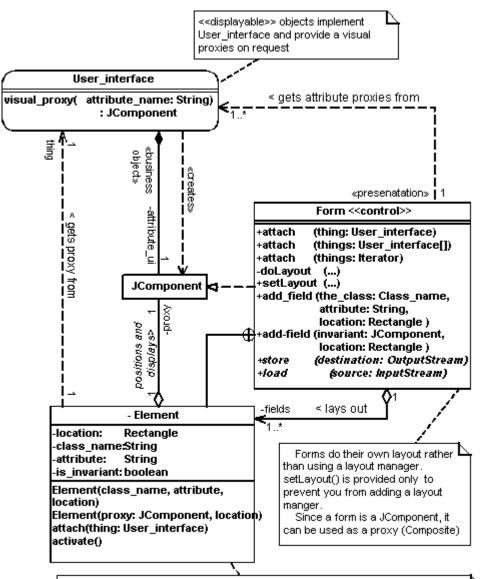

An Element can display a proxy for an abstraction-level object, but it can also just display an "invariant" object---one that's the same on every form and is effectively an attribute of the form itself (for example: a label). The class_namefield of an invariant element is nul and the proxyfield references the associated Component.

Dynamic-Model Diagrams

Sequence Diagram

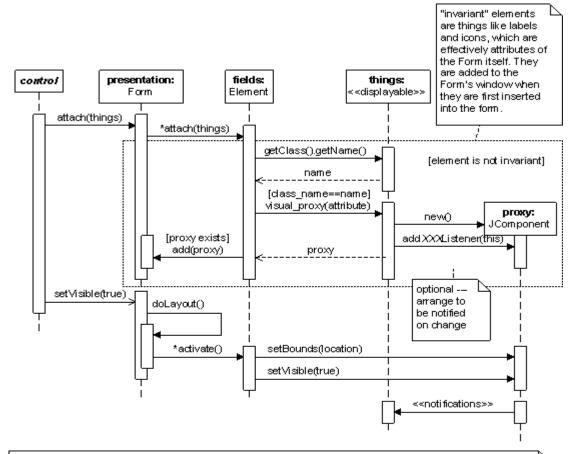

"Things" is a collection of ⊲displayable∞ objects—objects that implement User_interface. The form performs the indicated operations on each of them

When traversing the list of Elements in response to a display() request, note that only those elements whose class names correspond to the "thing" that was passed to the Element are created from scratch. The pre-existing proxies of "invariant" fields are not overwriteen, though they are added to the form.

Collaboration Diagram

