

Settings and presets


1. Press Ctrl+, to open **Settings**. On **Mouse**, the **UV** and **Rotation** pages have a preset list (MDLxL, MDLVis, Freeform, Manipulator) and every option. Small animated previews show what each one does.
2. On **Hotkeys**, every hotkey and mouse drag key can be rebound.
3. **Save as** and **Load from...** share hotkeys, drag settings and appearance as preset files. Ctrl+F2 searches commands; Shift+F3 switches the toolbar between **Graphic**, **Trim** and **Hidden**.

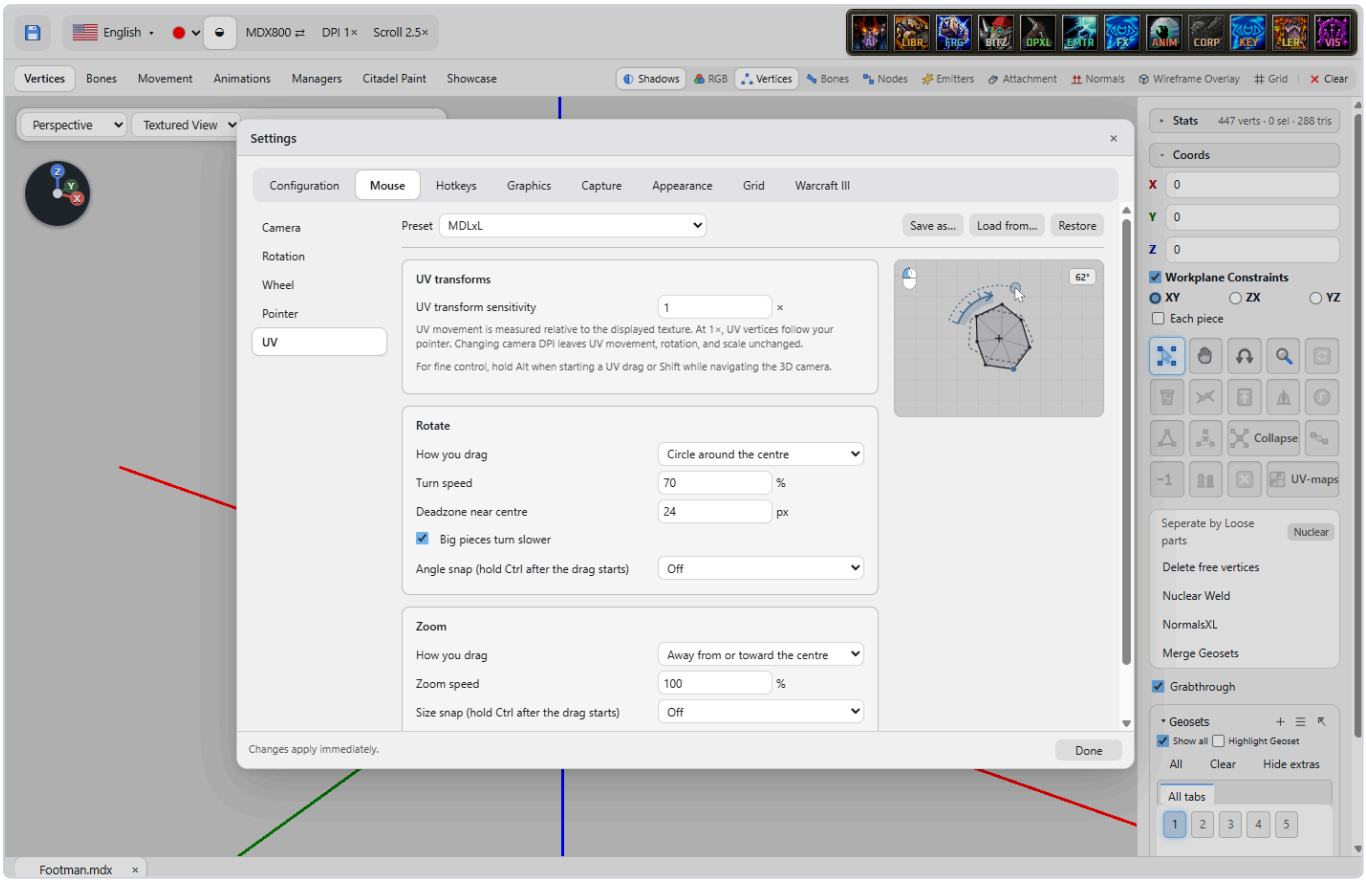

Citadel Paint - New base coat and Detail


1. Click **Citadel Paint**, choose **New base coat**, then **Begin painting**. Pieces are laid out upright with far fewer seams, and heads get more pixels.
2. Click **Select**, click a part on the model, then set **Detail** with the slider or the number box. 1 is normal. Other pieces make room, your paint moves with them, and Undo restores the old layout.
3. Also new: **Symmetry** (V), **Smoothing**, Alt-drag to turn the view, and Ctrl + right drag for brush size and softness.

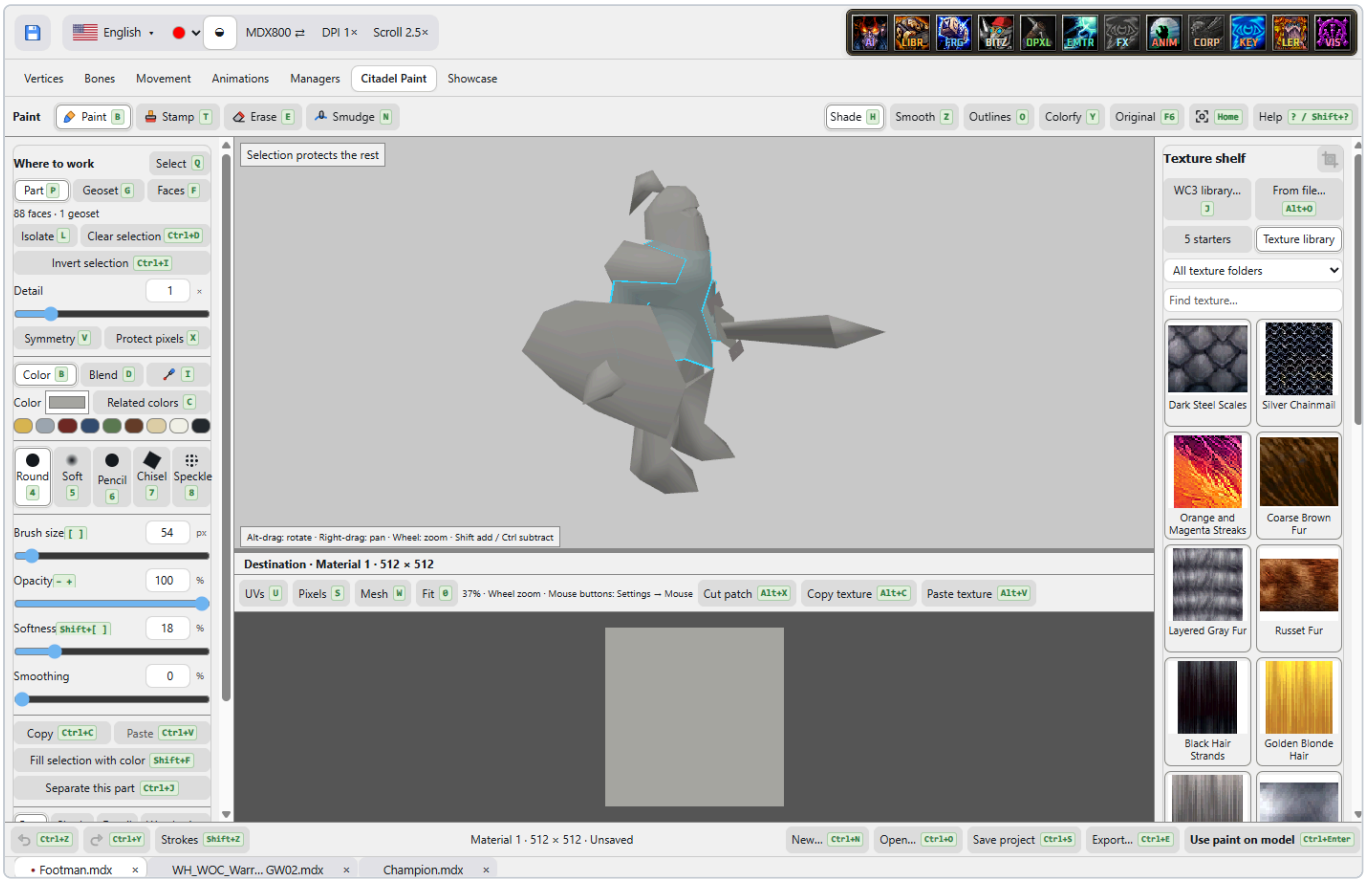


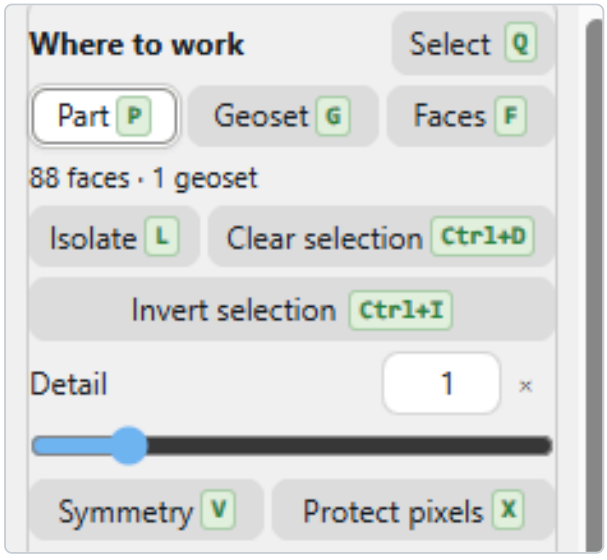

Bones - Wiggle


1. Open **Bones** and select a bone.
2. Click **Wiggle** in the tools (or press J). The selected bones swing in the preview, so parts bound wrong stretch or stay behind.
3. Pick another bone to wiggle that one. Bind and check again without switching it off. Wiggle never changes the model or its animations.

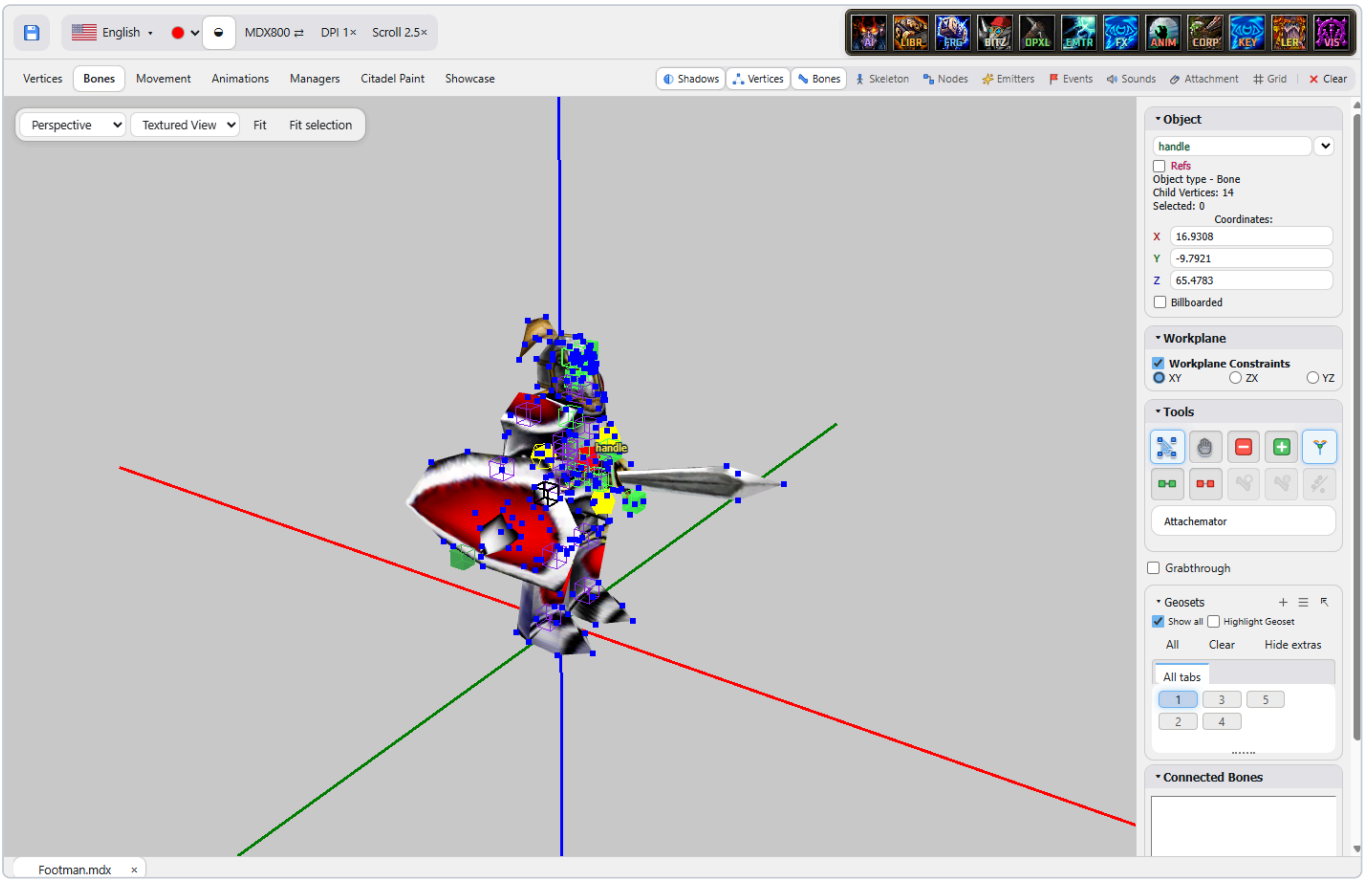


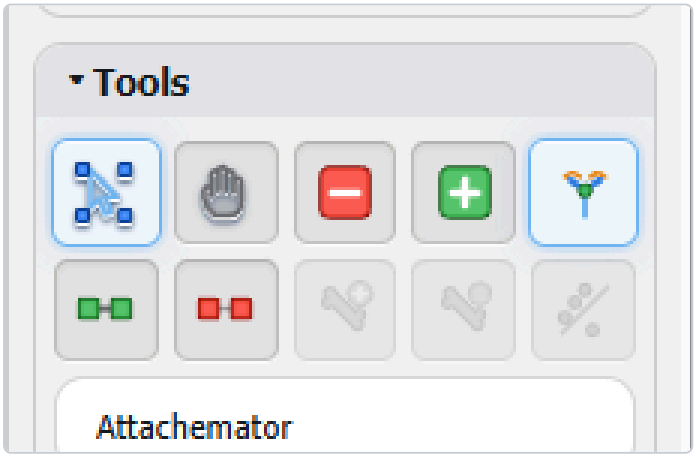

Uncouple and Resize


1. Right-click **Uncouple** to open the **Nuke** checkbox. On: separated corners are pulled apart. Off: vertices are separated, but every copy stays on its spot. The button and the U key both use this choice.
2. Hold Ctrl while dragging with **Resize**. Each piece moves toward or away from the pivot and keeps its size. Pull all the way in and matching pieces land exactly on top of each other.
3. Ctrl can be pressed or released during the drag. The whole drag is one Undo step.

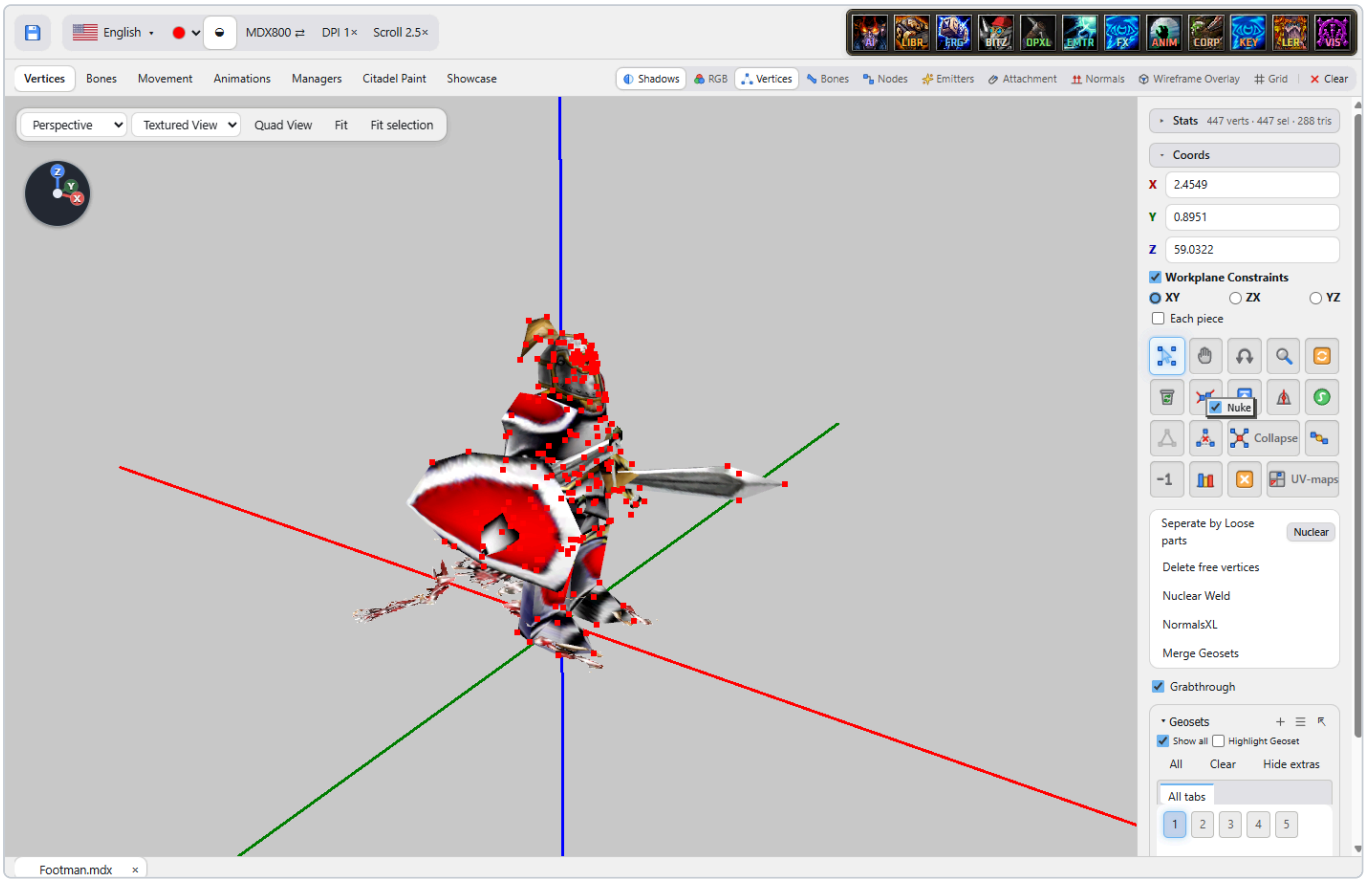


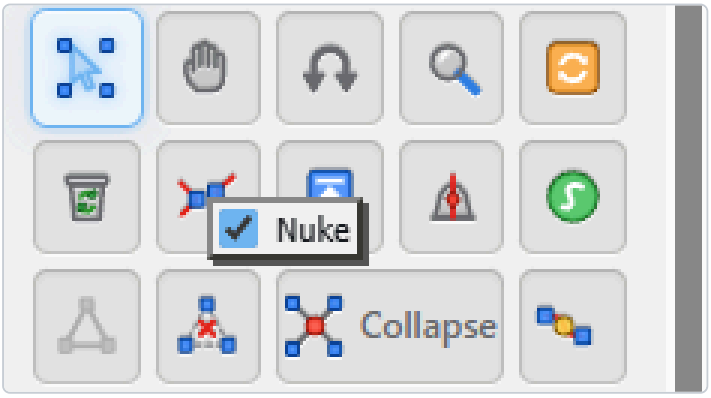


EMTR - Rotate and Add ribbon

1. Open **Emitter Editor**. On **Motion**, drag the main editor's Rotate handles in the preview to turn the emitter on X, Y and Z. **Glow Up** has the same handles.
2. With vertices selected, click **Add ribbon** and drag the handle to place it. The ribbon has a native weapon-trail look and shows only during the swing.
3. Ribbon fields update the trail while you change them, and Additive ribbons follow **Intensity**.

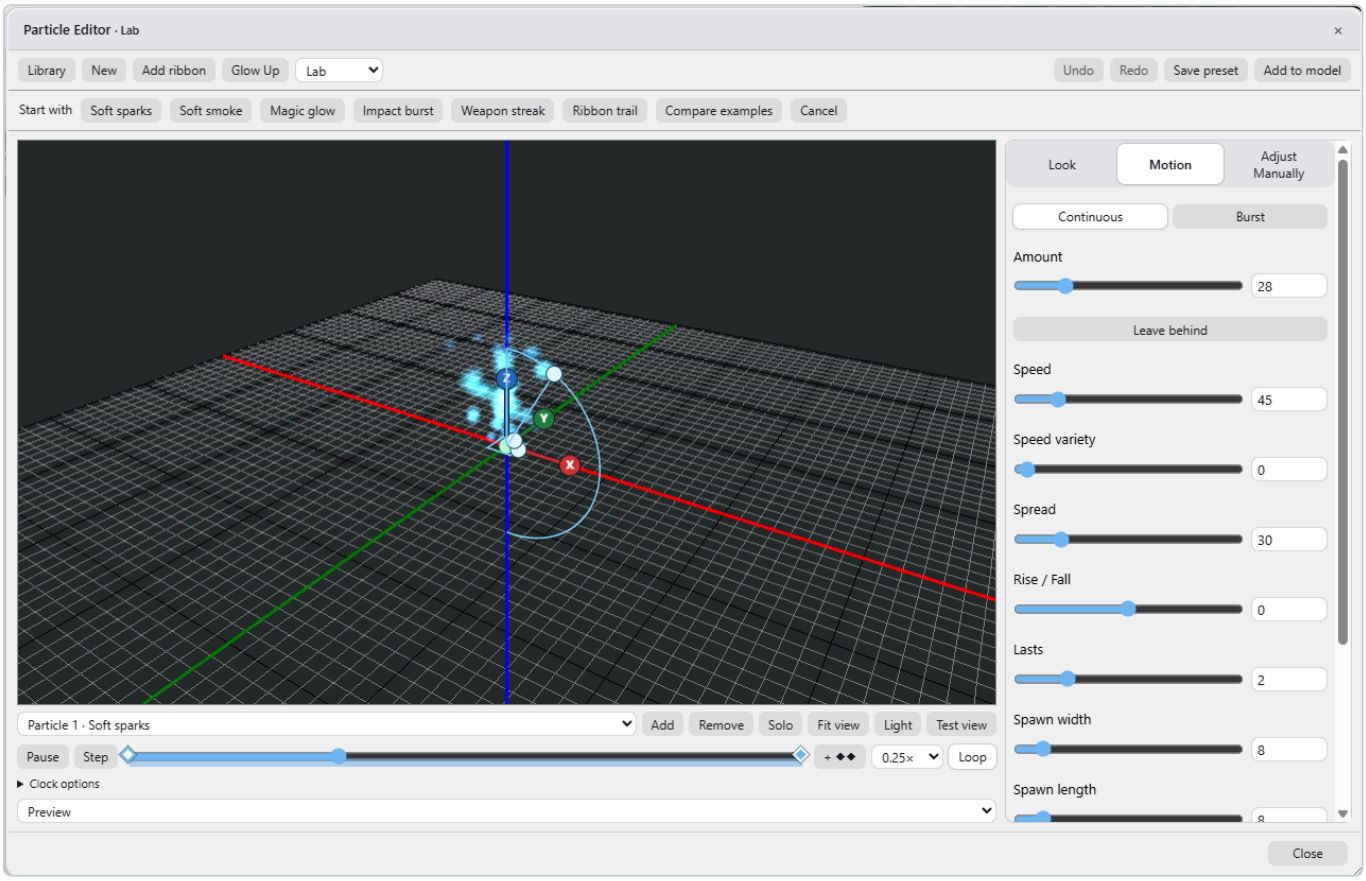


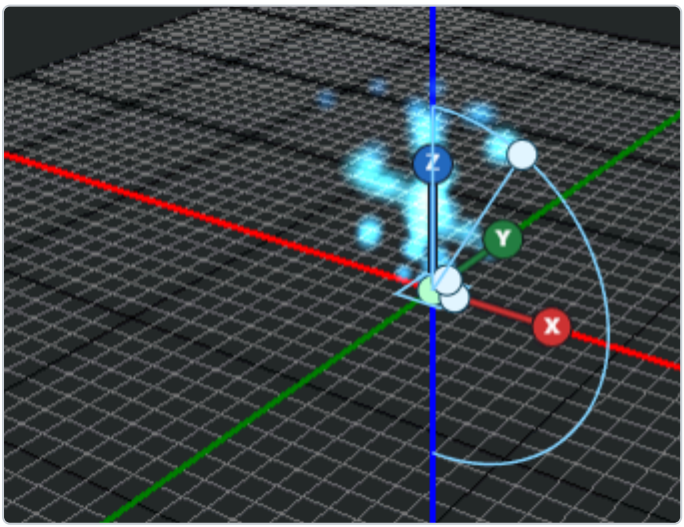



FX - Add emitter


1. With a part selected, click **Surface Effects** (FX) and choose a look. With two or more geosets checked, the effect is fitted to them as one surface, drawn as one overlay.
2. In **Particles**, pick an emitter. It appears only in the preview. Pick another to swap it, or the empty **Add emitter** choice to remove it.
3. Click **Add** to keep the emitter as a layer. **Apply effect** also includes an emitter you are still previewing.

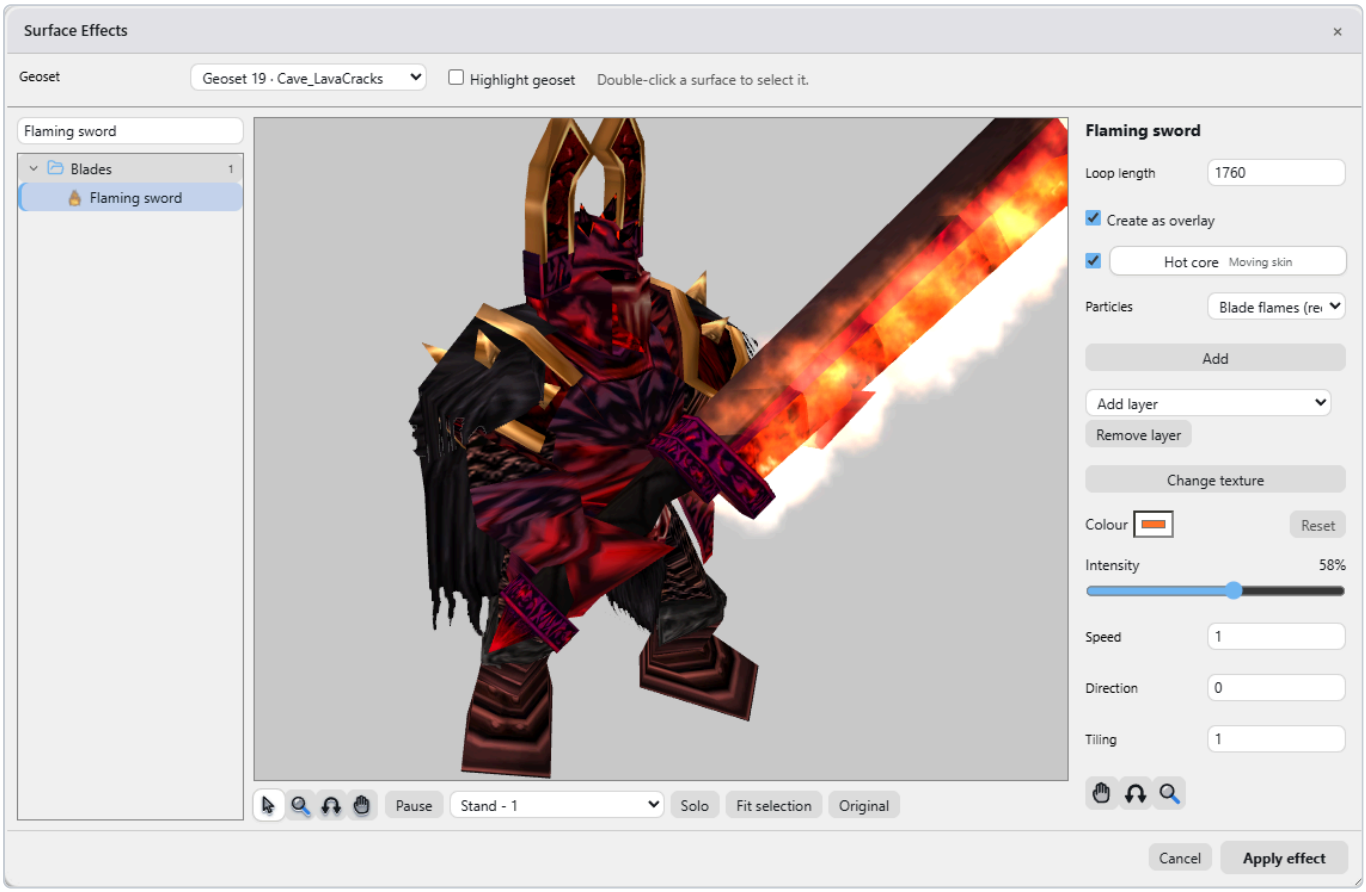




Calculate extents

1. Press F12 for **Save as** and tick **Calculate extents**. The choice is remembered.
2. The same **Calculate extents** is in the model inspector and in OptimizeXL's **Insanity FIxer**.
3. It rebuilds the model, animation and geoset boxes. Portrait backgrounds, hero and team glows and additive effect meshes are left out, so the health bar sits at the right height.

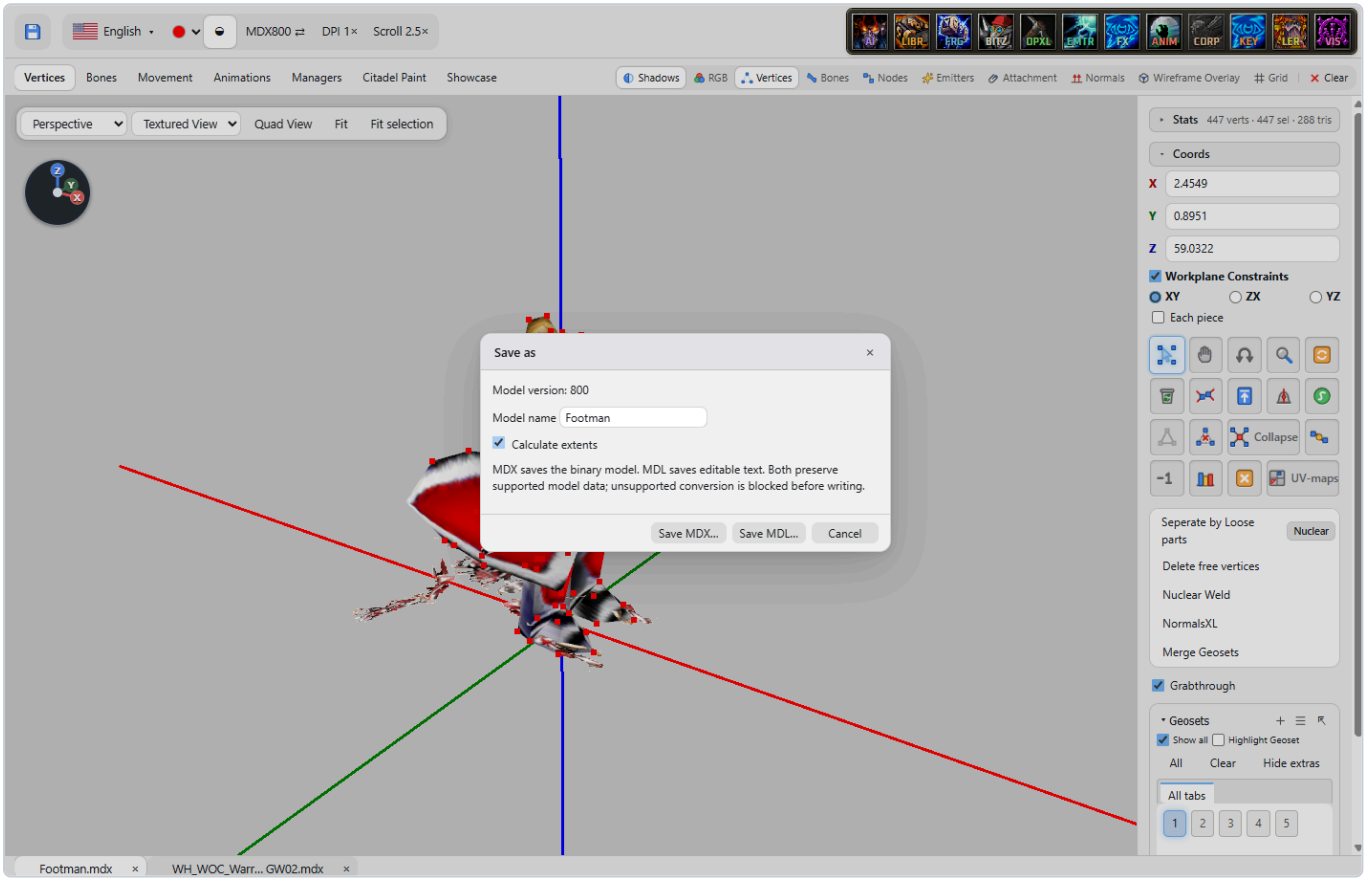

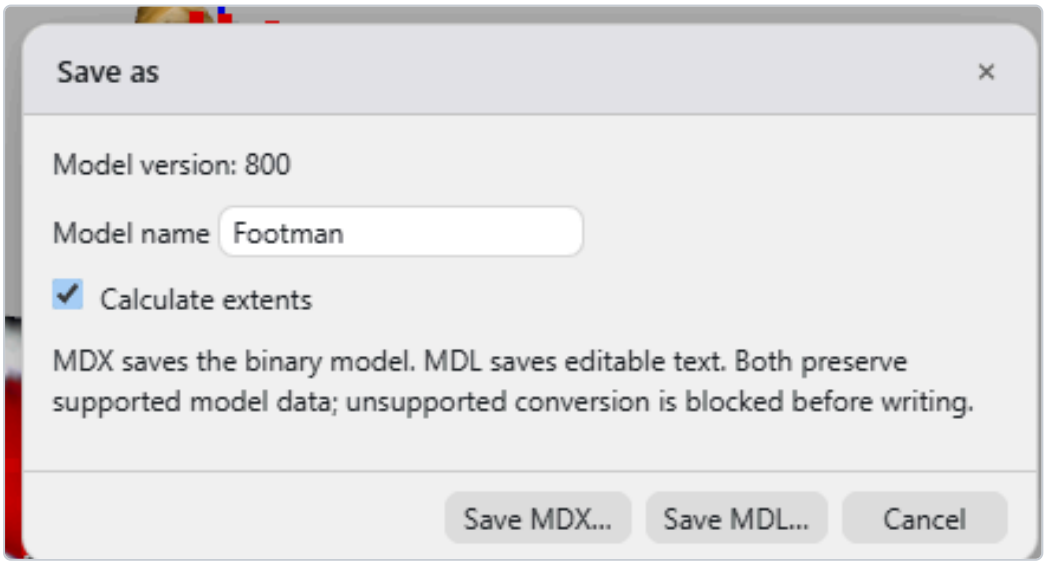

OptimizeXL - Remove exact redundancy

1. Click **OptimizeXL**. In **Insanity FIxer**, open **Proposed fixes** and choose **Remove exact redundancy**.
2. It removes repeated end keys, constant tracks and collapsed triangles. The text lists what will go, and the box shows the bytes saved. Check Before and After.
3. Click **Approve** to keep it, then **Save**.

