



Voyager[®] 7.0
WebVoyage Basic User's Guide

September 2008
Revised

CONFIDENTIAL INFORMATION

The information herein is the property of Ex Libris Ltd. or its affiliates and any misuse or abuse will result in economic loss. DO NOT COPY UNLESS YOU HAVE BEEN GIVEN SPECIFIC WRITTEN AUTHORIZATION FROM EX LIBRIS LTD.

This document is provided for limited and restricted purposes in accordance with a binding contract with Ex Libris Ltd. or an affiliate. The information herein includes trade secrets and is confidential.

DISCLAIMER

The information in this document will be subject to periodic change and updating. Please confirm that you have the most current documentation. There are no warranties of any kind, express or implied, provided in this documentation, other than those expressly agreed upon in the applicable Ex Libris contract. This information is provided AS IS. Unless otherwise agreed, Ex Libris shall not be liable for any damages for use of this document, including, without limitation, consequential, punitive, indirect or direct damages.

Any references in this document to third-party material (including third-party Web sites) are provided for convenience only and do not in any manner serve as an endorsement of that third-party material or those Web sites. The third-party materials are not part of the materials for this Ex Libris product and Ex Libris has no liability for such materials.

TRADEMARKS

"Ex Libris," the Ex Libris bridge, Primo, Aleph, Alephino, Voyager, SFX, MetaLib, Verde, DigiTool, Preservation, URM, Voyager, ENCompass, Endeavor eZConnect, WebVoyage, Citation Server, LinkFinder and LinkFinder Plus, and other marks are trademarks or registered trademarks of Ex Libris Ltd. or its affiliates.

The absence of a name or logo in this list does not constitute a waiver of any and all intellectual property rights that Ex Libris Ltd. or its affiliates have established in any of its products, features, or service names or logos.

Trademarks of various third-party products, which may include the following, are referenced in this documentation. Ex Libris does not claim any rights in these trademarks. Use of these marks does not imply endorsement by Ex Libris of these third-party products, or endorsement by these third parties of Ex Libris products.

Oracle is a registered trademark of Oracle Corporation.

UNIX is a registered trademark in the United States and other countries, licensed exclusively through X/Open Company Ltd.

Microsoft, the Microsoft logo, MS, MS-DOS, Microsoft PowerPoint, Visual Basic, Visual C++, Win32, Microsoft Windows, the Windows logo, Microsoft Notepad, Microsoft Windows Explorer, Microsoft Internet Explorer, and Windows NT are registered trademarks and ActiveX is a trademark of the Microsoft Corporation in the United States and/or other countries.

Unicode and the Unicode logo are registered trademarks of Unicode, Inc.

Google is a registered trademark of Google, Inc.

Copyright Ex Libris Limited, 2008. All rights reserved.

Document released: September 2008

Web address: <http://www.exlibrisgroup.com>

Contents

About This Document

• Purpose of This User's Guide	xiii
• Intended Audience	xiii
• Reason for Reissue	xiii
• Document Summary	xiv
• Conventions Used in This Document	xiv
• Accessibility	xv
Accessibility Statement	xvi
Accessibility Disclaimer	xvi
Comments and Suggestions	xvii
• Document Reproduction/Photocopying	xvii
• Comment on This Document	xvii
To Submit Comments by E-mail	xvii

1 Getting Started

• Purpose of this Chapter	1-1
• Prerequisites - Skills and Knowledge	1-1
• Before You Begin	1-1
Web Server	1-2
Unicode	1-2
• Login	1-3
Session Start Login	1-3
Login As Needed	1-5

2 User Interface

• Purpose of This Chapter	2-1
• Navigation	2-1
URL Access	2-1
My Account Example	2-2

Contents

Bibliographic Record ID Number Example	2-2
Menu List	2-3
Labeled Tabs	2-4
• Search	2-5
Quick Search	2-6
Basic Search	2-7
Advanced Search	2-8
Subject Search	2-9
Author Search	2-10
Course Reserve Search	2-11
Geospatial Search	2-14
Search History	2-15
• Patron Options	2-16
My Searches	2-16
Automated Saved Search Queries	2-17
My List	2-17
My Account	2-18
Personal Information	2-19
Edit Preferences	2-20
• Actions	2-22
Print	2-24
Export	2-25
E-mail	2-25
Add to List/Add to My List	2-25
Make A Request	2-25

3 Basic Customization

• Purpose	3-1
• Before You Begin (Best Practices)	3-1
• Where To Find Things	3-2
File Conventions	3-2
Directory Structure/Files Description	3-3
.../vwebv/	3-3
.../ui/en_US/	3-5
• What Is A Skin?	3-10
• Customization Example - Text	3-10
Footer - "Your Library Name Here"	3-10

Contents

	index.html Text Change	3-12
•	Customization Example - Search	3-15
	Quick Search	3-15
	Search Pages	3-17
	Canned Search - URL	3-21
	What Is Required?	3-22
•	Customization Example - Logo	3-23
	Logo Example	3-23
•	Customization Example - Color (Basic)	3-25

A	webvoyage.properties File	A-1
	• webvoyage.properties File	A-1

B	Default index.html File	B-1
	• Default index.html File	B-1

IN	Index	IN-1
-----------	--------------	------

Contents

Figures

1 Getting Started

1-1.	Login from default window	1-4
1-2.	Login dialog box	1-4
1-3.	Basic Search dialog box	1-5
1-4.	Login as needed	1-6

2 User Interface

2-1.	Holdings for bibliographic record ID number 53699 example	2-3
2-2.	Example of URL with bibliographic record ID number	2-3
2-3.	Default page (index.html)	2-4
2-4.	Labeled tabs	2-5
2-5.	Search bar	2-7
2-6.	New Search bar	2-7
2-7.	Basic Search	2-8
2-8.	Advanced Search	2-9
2-9.	Subject Search	2-10
2-10.	Author Search	2-10
2-11.	Course Reserve dropdown page format	2-11
2-12.	Course Reserve Search	2-12
2-13.	Course Reserve Browse	2-12
2-14.	Course reserve list	2-13
2-15.	Titles displayed	2-14
2-16.	Geospatial Search	2-15
2-17.	Search History	2-15
2-18.	My Searches	2-16
2-19.	Automated My Searches example	2-17
2-20.	My List example	2-18
2-21.	My Account example	2-19
2-22.	Personal Information page	2-20
2-23.	Edit Preferences page	2-21
2-24.	Database Change option	2-21
2-25.	Actions bar	2-22
2-26.	Titles results page example	2-23

Figures

2-27. Actions list	2-24
2-28. Full record display with Actions list example	2-24

3 Basic Customization

3-1. .../vwebv/ directory	3-4
3-2. .../ui/en_US/ directory structure	3-6
3-3. Your Library Name Here example	3-11
3-4. Customized footer name	3-11
3-5. Default window	3-12
3-6. Example of textual changes to index.html	3-13
3-7. Default index.html file	3-14
3-8. Default index.html file modified	3-14
3-9. Quick search bar	3-15
3-10. Quick search customization example	3-16
3-11. Basic Search section of the webvoyage.properties file	3-18
3-12. Canned search URL example	3-22
3-13. Logo example	3-23
3-14. Header section of webvoyage.properties file	3-24
3-15. Menu list example	3-26

A webvoyage.properties File

A-1. webvoyage.properties file example	A-1
--	-----

B Default index.html File

B-1. Default index.html file example	B-1
--------------------------------------	-----

Tables

2	User Interface	
	2-1. Special Search Characters	2-6
3	Basic Customization	
	3-1. .../vwebv/ Description of Contents	3-4
	3-2. .../ui/en_US/ Description of Contents	3-7
	3-3. .../ui/en_US/css/ Description of Contents	3-8
	3-4. .../ui/en_US/htdocs/ Description of Contents	3-8
	3-5. .../ui/en_US/images/ Description of Contents	3-8
	3-6. .../ui/en_US/xsl/ Description of Contents	3-8
	3-7. .../ui/en_US/xsl/contentLayout/ Description of Contents	3-9
	3-8. Search Code Modifiers	3-16
	3-9. Search Types	3-22

Tables

Procedures

1 Getting Started

- | | |
|---|-----|
| 1-1. Setting Web Browser to Unicode Compatibility | 1-2 |
| 1-2. Session Start Login | 1-3 |

2 User Interface

- | | |
|-----------------------------------|------|
| 2-1. Course Reserve Search/Browse | 2-11 |
|-----------------------------------|------|

3 Basic Customization

- | | |
|--|------|
| 3-1. Customize Footer Text | 3-11 |
| 3-2. Change Quick Search Bar Search Index Default | 3-16 |
| 3-3. Changing the Dropdown List of Search Types for Basic Search | 3-17 |
| 3-4. Customizing the Logo Display | 3-23 |

Procedures

About This Document

Purpose of This User's Guide

The purpose of the *WebVoyage® Basic User's Guide* is to familiarize you with the Voyager 7.0 WebVoyage user interface (the Voyager Online Public Access Catalog) and describe some basic customization options.

Intended Audience

This document is intended for Voyager customers interested in a basic overview of the out-of-the-box Voyager 7.0 WebVoyage user interface.

In addition, this guide provides basic customization instruction for the staff system administrator needing to make some simple changes to reflect site-specific preferences.

Reason for Reissue

This guide incorporates and is being reissued for the following reasons:

- Reorganization of the following tables: [Table 3-2](#) through [Table 3-7](#).
- Corrections to cross references for *Voyager 7.0 WebVoyage Architecture Overview and Configuration Models*.

Document Summary

Chapter 1	“Getting Started” Chapter 1 This chapter describes the prerequisite knowledge, skills, and software necessary for beginning work in Voyager 7.0 WebVoyáge. Plus, preliminary setup and logging in instructions are provided.
Chapter 2	“User Interface” Chapter 2 This chapter describes the new WebVoyáge user interface.
Chapter 3	“Basic Customization” Chapter 3 This chapter describes basic customization options to make simple changes to reflect site-specific preferences.
Appendix A	“webvoyage.properties File” Appendix A. This appendix provides a sample of the <code>webvoyage.properties</code> file.
Appendix B	“Default index.html File” Appendix A. This appendix provides a sample of the default <code>index.html</code> file.
Index	The Index is an alphabetical, detailed cross-reference of topics.

Conventions Used in This Document

The following conventions are used throughout this document:

- Names of commands, variables, stanzas, files, and paths (such as `/dev/tmp`), as well as selectors and typed user input, are displayed in `constant width` type.
- Commands or other keyboard input that must be typed exactly as presented are displayed in **`constant width bold`** type.
- Commands or other keyboard input that must be supplied by the user are displayed in ***constant width bold italic*** type.
- System-generated responses such as error messages are displayed in `constant width` type.
- Variable *portions* of system-generated responses are displayed in *constant width italic* type.
- Keyboard commands (such as **Ctrl** and **Enter**) are displayed in **bold**.
- Required keyboard input such as “Enter **vi**” is displayed in **`constant width bold`** type.

- Place holders for variable portions of user-defined input such as `ls -l filename` are displayed in *italicized constant width bold* type.
- The names of menus or status display pages and required selections from menus or status display pages such as “From the **Applications** drop-down menu, select **System-wide**,” are displayed in **bold** type.
- Object names on a window's interface, such as the **Description** field, the **OK** button, and the **Metadata** tab, are displayed in **bold** type.
- The titles of documents such as *Acquisitions User's Guide* are displayed in *italic* type.
- Caution, and important notices are displayed with a distinctive label such as the following:

NOTE:

Extra information pertinent to the topic.

**IMPORTANT:**

Information you should consider before making a decision or configuration.

**CAUTION:**

Information you must consider before making a decision, due to potential loss of data or system malfunction involved.

**TIP:**

Helpful hints you might want to consider before making a decision.

RECOMMENDED:

Preferred course of action.

OPTIONAL:

Indicates course of action which is not required, but may be taken to suit your library's preferences or requirements.

Accessibility

Ex Libris™ development has focused on accessibility compliance for WebVoyage.

The tactics and techniques used for accessibility compliance in WebVoyage were derived from discussion documents and use of tools including the FAE (Functional Accessibility Evaluator) tool. The FAE tool analyzes web content based on the use of CITES/DRES Html Best Practices (see <http://html.cita.uiuc.edu/>) for web development.

For example, one of the practices used is to declare a headings level 2 tag, `<h2>`, within ordered, ``, and unordered, ``, lists, ``. The `<h2>` tag describes a descriptive label for a collection of links.

Since JAWS (see http://www.freedomscientific.com/fs_products/software_jaws.asp) allows users to navigate web content via headers, `<h1>...<h6>`, this is a good way to break up the web interface into logical components.

WebVoyage implements the use of `<h2>` headings within lists purely for accessibility navigation. The header is positioned off-screen using css so that a non-screen-reading user does not see the header.

As you work with WebVoyage, you will observe other characteristics of accessibility compliance.

Accessibility Statement

Ex Libris is committed to making its Web-based applications accessible to as many users as possible regardless of the challenges that they face. As new technologies emerge, Ex Libris makes every effort to improve the accessibility of its products.

The Voyager 7.0 WebVoyage user interface was developed to comply with leading international accessibility and industry standards.

- The W3C Web Content Accessibility Guidelines 1.0, level A. See <http://www.w3.org/TR/WCAG10/>.
- Section 508 of the Rehabilitation Act (29 U.S.C. 794d). See <http://www.section508.gov/>.

Accessibility Disclaimer

Institutions can customize the interface of WebVoyage. Ex Libris cannot guarantee that the resulting user interface will be compliant with accessibility standards after a third party has altered the interface.

WebVoyáge connects to other Web sites maintained by third parties over which Ex Libris has no control. Ex Libris makes no representations as to Web accessibility compliance standards maintained by other Web sites.

Comments and Suggestions

If you have any comments or questions on Web accessibility issues relating to Voyager 7.0 WebVoyáge, please contact accessibility@exlibrisgroup.com.

Document Reproduction/Photocopying

Photocopying the documentation is allowed under your contract with Ex Libris (USA) Inc. It is stated below:

All documentation is subject to U.S. copyright protection. CUSTOMER may copy the printed documentation only in reasonable quantities to aid the employees in their use of the SOFTWARE. Limited portions of documentation, relating only to the public access catalog, may be copied for use in patron instruction.

Comment on This Document

Please contact Customer Support to provide us with your feedback. For Customer Support contact information, see SupportWeb at:

http://www.exlibrisgroup.com/support_center.htm.

To Submit Comments by E-mail

To submit comments by e-mail, please send your message to:

docmanager@exlibrisgroup.com

Getting Started

Purpose of this Chapter	1-1
Prerequisites - Skills and Knowledge	1-1
Before You Begin	1-1
• Unicode	1-2
Login	1-3
• Session Start Login	1-3
• Login As Needed	1-5

Purpose of this Chapter

The purpose of this chapter is to provide the following:

- Prerequisites for getting started and skills required.
- Preliminary setup information. See [Before You Begin](#) on [page 1-1](#).
- Instructions for logging on to WebVoyage. See [Login](#) on [page 1-3](#).

Prerequisites - Skills and Knowledge

To use this document effectively, you should be familiar with the following:

- Microsoft Windows operating environment.
- UNIX operating system commands and file system.
- A text editor such as `vi` or equivalent.
- Local procedures.

Before You Begin

Before you can begin, you need to do the following:

- Have the Voyager WebVoyage 7.0 and corresponding Voyager 7.0 integrated library system software installed.

- Have access to an internet browser on your PC.
- Obtain the URL and/or the IP and port address for accessing your instance of Voyager WebVoyage 7.0.
- Obtain your user ID and password for logging in to Voyager WebVoyage 7.0.
- Set up your PC to display Unicode-specific data as needed. See [Unicode](#) on [page 1-2](#) for more information.

Web Server

You can specify the port on which you want your Apache Web Server to run by editing the port entry in the following file:

```
/ml/shared/apache2/conf/httpd.conf
```

The default port to connect to WebVoyage is 7008 and/or 80.

Unicode

In order to be sure that data displays properly in your browser when you view records or other information in foreign languages, you must set up your Web browser to use Unicode fonts.

For example, see [Procedure 1-1, Setting Web Browser to Unicode Compatibility](#), on page [1-2](#) that describes the Unicode set up for Internet Explorer.



Procedure 1-1. Setting Web Browser to Unicode Compatibility

As an example for setting up your web browser, the following steps highlight the Unicode setup procedure when using Internet Explorer. These steps enable Unicode and UTF-8 encoding.

1. Open Internet Explorer.
2. From the **View** menu, set character coding/encoding to **Unicode (UTF-8)**.
3. Set your browser to read a Unicode-compliant font.
 - a. From the **Tools** menu, click **Internet Options...**
 - b. From the **General** tab, click the **Fonts...** button.

- c. In the left-column list box of the **Fonts** dialog box, select a font with Unicode included. (There may be only one selection, **Arial Unicode MS**.)
- d. Click **OK** to save your changes.

Result: Internet Explorer now renders any text requiring a Unicode font or UTF-8 encoding accurately.

Login

For the convenience of patrons, there are two options for logging in to WebVoyáge as follows:

- At the beginning of the WebVoyáge session. See [Procedure 1-2, Session Start Login](#).
- When required to access secured features of WebVoyáge. See [Login As Needed](#) on [page 1-5](#).

Session Start Login

For patrons wanting to immediately access patron-specific options such as saved searches, view a list of items on hold, or use other secured access features, they need to log in at the beginning of their WebVoyáge session. See [Procedure 1-2, Session Start Login](#) for login steps using this method.



Procedure 1-2. Session Start Login

Use the following procedure to log in at the beginning of your WebVoyáge session.

1. Enter the URL (Universal Resource Locator) in your web browser for your library's OPAC (Online Public Access Catalog) default WebVoyáge web page.

Result: The default WebVoyáge web page displays. See [Figure 1-1](#).

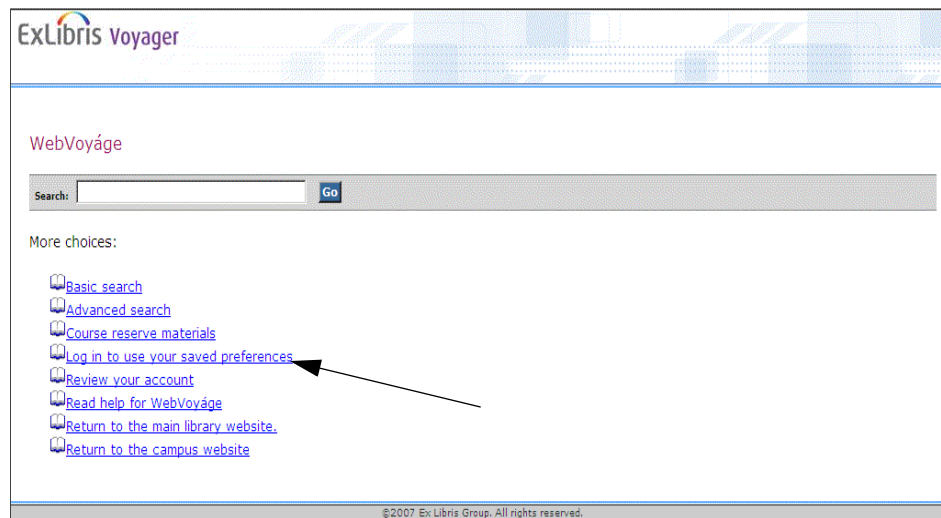


Figure 1-1. Login from default window

2. Click **Log in to use your saved preferences**.

Result: The **Log In** dialog box displays. See [Figure 1-2](#).

Figure 1-2. Login dialog box

3. Select and enter your security information using one of the following options:
 - Barcode and Last Name
 - Institution ID
 - Social Security Number

Use the dropdown list to select which method you prefer.

4. Click **Log in** to process your security information.

Result: The **Basic Search** dialog box and a confirmation that **username** is **logged in** displays when you successfully log in. See [Figure 1-3](#).

ExLibris Voyager

Search My Searches My List My Account Help

Ann Lorish is logged in Logout

Basic Search

Database: My Library Catalog

Basic Advanced Subject Author Course Reserve Search History

Search: within All Fields

Limit To: All Material

Records per page: 10 records per page Search

Search Tips: enter words relating to your topic, use quotes to search phrases: "world wide web", use + to mark essential terms: +explorer, use * to mark important terms: *internet, use ? to truncate: browser?

Search My Searches My List My Account Help

Figure 1-3. Basic Search dialog box

Login As Needed

For the convenience of patrons wanting to do a quick search, logging in only becomes necessary if they decide to use a patron-specific, secured feature of WebVoyage. When a secured feature is accessed, the system automatically displays the **Log In** dialog box (see [Figure 1-2](#)) for the patron to complete.

Optionally at any time, a user may also choose to log in by clicking **Log in**. See [Figure 1-4](#).

Once the **Log in** dialog box displays, the steps are the same as in [Procedure 1-2, Session Start Login](#), on page [1-3](#).



Figure 1-4. Login as needed

Purpose of This Chapter	2-1
Navigation	2-1
• URL Access	2-1
My Account Example	2-2
Bibliographic Record ID Number Example	2-2
• Menu List	2-3
• Labeled Tabs	2-4
Search	2-5
• Quick Search	2-6
• Basic Search	2-7
• Advanced Search	2-8
• Subject Search	2-9
• Author Search	2-10
• Course Reserve Search	2-11
• Geospatial Search	2-14
• Search History	2-15
Patron Options	2-16
• My Searches	2-16
Automated Saved Search Queries	2-17
• My List	2-17
• My Account	2-18
Personal Information	2-19
Edit Preferences	2-20

Actions	2-22
• Print	2-24
• Export	2-25
• E-mail	2-25
• Add to List/Add to My List	2-25
• Make A Request	2-25

Purpose of This Chapter

The purpose of this chapter is to describe the out-of-the-box Voyager 7.0 WebVoyage user interface to include the following information:

- Navigation.
- Search.
- Patron options.
- Actions.

Navigation

WebVoyage offers multiple options for you to easily access the function you need to invoke. Those options include the following:

- URL.
- Menu lists.
- Labeled tabs.

URL Access

For your ease in quickly accessing a particular function in WebVoyage, you may enter the URL for a specific WebVoyage function and access it dynamically.

NOTE:

URL access to some functions is limited by your point of entry within the WebVoyáge software.

Given that WebVoyáge is a web-based software application, you have extensive navigation flexibility to include using URL bookmarks.

My Account Example

To access My Account information, for example, you may enter a URL similar to *http://111.111.111.111:7008/vwebv/myAccount* substituting your server access information for *111.111.111.111:7008*.

If you attempt to access a secured page such as My Account and have not logged in, the system prompts you with the **Log In** page. (See [Figure 1-2](#) on [page 1-4](#) for an illustration of the **Log In** display and [Procedure 1-2, Session Start Login](#), on [page 1-3](#) for more information about the **Log In** procedure.)

Bibliographic Record ID Number Example

When you display specific holdings from your search results such as in [Figure 2-1](#), a component of the URL that displays is the bibliographic record ID number.

To display the holdings for a different bibliographic record, simply edit the `bibId=` number in the URL for the record you want to view. See [Figure 2-2](#) for an example URL format for displaying holdings using `bibId=`.

NOTE:

Substitute your server access information for *111.111.111.111:7008* in these examples.



Figure 2-1. Holdings for bibliographic record ID number 53699 example

`http://111.111.111.111:7008/vwebv/holdingsInfo?bibId=53699`

Figure 2-2. Example of URL with bibliographic record ID number

Menu List

The default WebVoyage page provides a menu list from which to select the function you need to perform. Options provided are as follows:

- Basic Search
- Advanced Search
- Course reserve materials
- Log in to use your saved preferences

- Review your account
- Read help for WebVoyáge
- Return to the main library website
- Return to the campus website

See [Figure 2-3](#) and the Appendix [Default index.html File](#) on [page B-1](#).

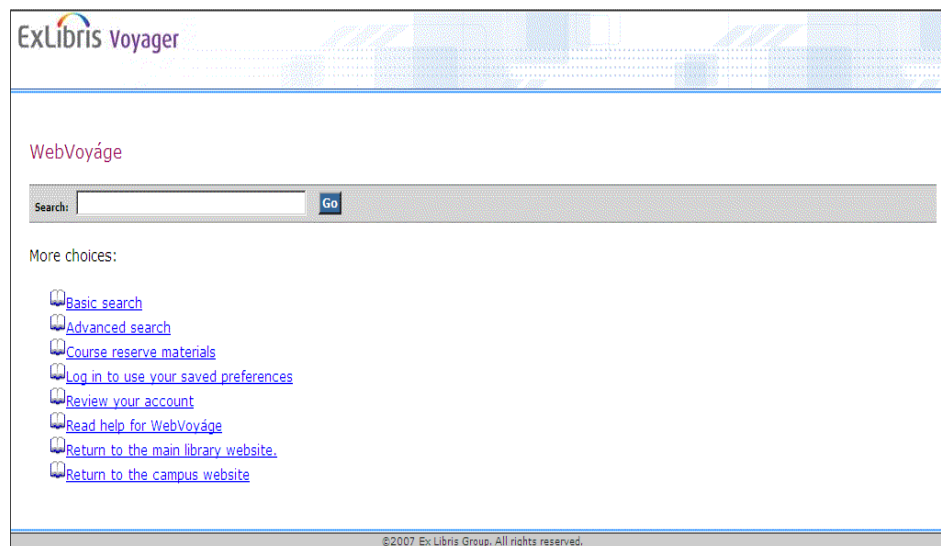


Figure 2-3. Default page (index.html)

Labeled Tabs

Search and patron functions are easily accessed from labeled tabs on a single page. Functions provided are as follows:

- Search (Basic, Advanced, Subject, Author, Course Reserve)
- My Searches
- My List
- My Account

See [Figure 2-4](#).

ExLibris Voyager

[Log in to your account](#)

[Search](#) [My Searches](#) [My List](#) [My Account](#) [Help](#)

Basic Search

Database: My Library Catalog

[Basic](#) [Advanced](#) [Subject](#) [Author](#) [Course Reserve](#) [Search History](#)

Search: within

Limit To:

Records per page:

Search Tips: enter words relating to your topic, use quotes to search phrases: "world wide web", use + to mark essential terms: +explorer, use * to mark important terms: *internet, use ? to truncate: browser?

[Search](#) [My Searches](#) [My List](#) [My Account](#) [Help](#)

[Your Library Name Here](#)

©2007 Ex Libris Group. All rights reserved.

Figure 2-4. Labeled tabs

Other easy access functions are available such as Search History, Account Log in, and Help.

Search

WebVoyage provides the following search functions:

- Quick Search (see [Quick Search](#) on [page 2-6](#)).
- Basic (see [Basic Search](#) on [page 2-7](#)).
- Advanced (see [Advanced Search](#) on [page 2-8](#)).
- Subject (see [Subject Search](#) on [page 2-9](#)).
- Author (see [Author Search](#) on [page 2-10](#)).
- Course Reserve (see [Course Reserve Search](#) on [page 2-11](#)).
- Geospatial Search (see [Geospatial Search](#) on [page 2-14](#)).

Special characters may be used to enhance your searches. See [Table 2-1](#).

Table 2-1. Special Search Characters

Character	Description
?	<p>Use the question mark to truncate a search or for multiple-character, wild card searches at the beginning, middle, or end of your search term.</p> <p>Example: <i>col?r</i> finds color and colour.</p> <p><i>cod?</i> finds code, codes, coding and so on.</p> <p>NOTE: The question mark does not work with z39.50 searches.</p>
%	<p>Use the percent sign for single-character wild card searches.</p> <p>Example: <i>g%%se</i> finds goose and geese.</p> <p>NOTE: The percent sign does not work with z39.50 searches.</p>
+	<p>Use the plus sign to indicate that the search term is essential.</p>
!	<p>Use the exclamation point before a search term to indicate that records with that term are to be excluded.</p>
*	<p>Use the asterisk to indicate that the search term entered is important.</p>
" "	<p>Use quotes to search phrases.</p>
()	<p>Use open/close parentheses to group search terms.</p>

For some search types, you may also use Boolean operators (AND, OR, or NOT) with your search criteria.

NOTE:

The boolean operators may be typed in either upper- or lower-case.

Quick Search

In several places throughout WebVoyage, you can access the quick search function from the quick search bar. See [Figure 2-5](#) and [Figure 2-6](#).

A search bar interface with the label "Search:" followed by a text input field and a blue "Go" button.

Figure 2-5. Search bar

A "New Search" bar interface with the label "New Search :" followed by a text input field and a blue "Go" button.

Figure 2-6. New Search bar

The default index for the quick search function is GKEY (keyword anywhere) that matches search terms to terms located anywhere within a title's record and results are displayed on a Titles page.

NOTE:

The default may be set to a different index. See [Quick Search](#) on [page 3-15](#) for instructions.

Basic Search

Basic Search finds records using keywords located anywhere in a record or only in specific fields.

You have the options to specify the following:

- Search term(s).
- Field to search from a drop-down list.
- Limit from a drop-down list.
- Number of records to display in the results list.

See [Figure 2-7](#).

The screenshot shows the ExLibris Voyager web interface. At the top, the logo 'ExLibris Voyager' is on the left, and 'Ann Lorish is logged in Logout' is on the right. Below the logo is a navigation bar with buttons: 'Search' (highlighted), 'My Searches', 'My List', and 'My Account'. A 'Help' link is also present. The main section is titled 'Basic Search'. Below this, it says 'Database: My Library Catalog'. There are tabs for 'Basic' (selected), 'Advanced', 'Subject', 'Author', and 'Course Reserve'. A 'Search History' link is on the right. The search form includes a 'Search:' text box, a 'within' dropdown menu set to 'All Fields', a 'Limit To:' dropdown menu set to 'All Material', and a 'Records per page:' dropdown menu set to '10 records per page'. A 'Search' button is on the right. Below the form, there is a 'Search Tips' section with instructions on using quotes, plus signs, and truncation. At the bottom, there is a navigation bar with links: 'Search', 'My Searches', 'My List', 'My Account', and 'Help'.

Figure 2-7. Basic Search

Advanced Search

Advanced Search finds records using keywords located anywhere in a record or only in specific fields. This search option is more advanced than the Basic Search alternative due to the number of additional fields with which you may narrow your search such as the following:

- Treatment of search terms such as:
 - As a phrase
 - All of these
 - Any of these
- Field to search such as:
 - Title
 - Subject
 - Author
 - Journal Title
 - ISSN
- Multiple search term(s) fields that can be combined with the following conditions:
 - And
 - Or

- Not
- Year
- Location
- Place
- Type such as serial, musical score, or map
- Status
- Format
- Language

See [Figure 2-8](#).

Advanced Search

Database: My Library Catalog

Basic Advanced Subject Author Course Reserve Search History

Search: as a phrase within Keyword Anywhere

AND as a phrase within Keyword Anywhere

AND as a phrase within Keyword Anywhere

Year: ☐ Current Material ☐ From To

Location: All Locations

Place: All Places

Type: All Types

Status: All Status

Format: All Formats

Language: All Languages

Records per page: 10 records per page

Figure 2-8. Advanced Search

Subject Search

Subject Search finds materials that match the search terms entered in library-defined categories for subject headings. See [Figure 2-9](#) for an example of the Subject Search page.

Subject Search

Database: My Library Catalog

Basic Advanced **Subject** Author Course Reserve

Search History

Subject:

Records per page: 10 records per page

Search

Figure 2-9. Subject Search

The default index used for Subject Search is SUBJ. This may be changed in the webvoyage.properties file. See Appendix A, [webvoyage.properties File](#) on [page A-1](#).

Author Search

Use the Author Search option to use the author's name to locate the item for which you are searching. See [Figure 2-10](#).



TIP:

When searching using a company or association name such as American Cancer Society, use the Last Name field to enter this search criteria.

Author Search

Database: My Library Catalog

Basic Advanced Subject **Author** Course Reserve

Search History

Last Name Initials or First Name

Author:

Records per page: 10 records per page

Search

Figure 2-10. Author Search

Course Reserve Search

Use the Course Reserve Search to locate items placed on reserve. There are two options available in webvoyage.properties (see Appendix A, [webvoyage.properties File](#) on [page A-1](#) starting at line 740).

- Browse format (see [Procedure 2-1, Course Reserve Search/Browse](#)).
- Dropdown list page format (see [Figure 2-11](#)).

The screenshot displays the ExLibris Voyager interface. At the top, the logo "ExLibris Voyager" is on the left, and a "Log in to your account" link is on the right. Below the logo are navigation buttons: "Search", "My Searches", "My List", and "My Account". A "Help" link with a question mark icon is also present.

The main section is titled "Course Reserve Data Page" in purple. Below this, it says "Database: My Library Catalog". There are four tabs: "Basic", "Advanced", "Subject", and "Author". The "Course Reserve" tab is selected and highlighted in blue. To the right of the tabs is a "Search History" link with a magnifying glass icon.

Inside the "Course Reserve" tab, there is a form titled "Select Locations: Voyager Library Training Database". The form contains several dropdown menus: "Instructor" (set to "Arms, Dr. Michele"), "Department" (set to "Any"), "Course" (set to "BIO:700: Human Biology"), and "Section" (set to "Any"). Below these is a "Records per page" dropdown set to "10 records per page". To the right of the form are "Reset" and "Search" buttons.

Below the form, a "Search Tips" message reads: "To find material on reserve for your course, select the instructor, department, course, and/or section." At the bottom of the page, there is a footer with navigation links "Search", "My Searches", "My List", "My Account", and "Help", followed by a link "Your Library Name Here" and the copyright notice "©2007 Ex Libris Group. All rights reserved."

Figure 2-11. Course Reserve dropdown page format



Procedure 2-1. Course Reserve Search/Browse

1. Select the location associated with the materials placed on reserve. See [Figure 2-12](#).

Select Locations

Select Locations:

- ☐ Biology
- ☐ All Locations
- ☐ Government Documents
- ☐ Cataloging desk
- ☐ Electronic Collections
- ☐ Reserve Desk
- ☐ Main
- ☐ Circulation Desk

Figure 2-12. Course Reserve Search

Result: The Course Reserve Browse page displays. See [Figure 2-13](#).

WebVoyáge Course Reserve Browse

Database: My Library Catalog

[Search History](#)

Select Locations: QA701DB [Change Location](#)

Please select the first letter of the Instructor, Department or Course whose reserve list you'd like to browse.

Instructor: [A](#) B C D E F G H I J K L M N O P Q R S T U V W X Y Z

Department: A B C D E F G H I J K [L](#) M N O P Q R S T U V W X Y Z

Course: A B C D E F G H [I](#) J K L M N O P Q R S T U V W X Y Z

Please select the first letter of the Instructor, Department or Course whose reserve list you'd like to browse.

Figure 2-13. Course Reserve Browse

2. Select the first letter of the Instructor, Department, or Course whose reserve list you would like to browse. Letters with active reserve materials are highlighted and underlined.

OPTIONAL:

3. Click *Change Location* to return to the *Select Locations* page to display *Course Reserve Browse* for a different location.

Result: The course reserve list displays. See [Figure 2-14](#).

Course Reserve Course Page

Database: My Library Catalog

Basic	Advanced	Subject	Author	Course Reserve	Geospatial Search
<div>Select Locations: QA701DB Change Location</div> <div>Please select the instructor name from the list below.</div> <div>Introduction to Economics Finklestein, Dr. George</div> <div>Introduction to Cataloging Arms, Dr. Michele</div>					

Please select the instructor name from the list below.

Figure 2-14. Course reserve list

4. Make a selection from the course reserve list.

Result: The titles display. See [Figure 2-15](#).

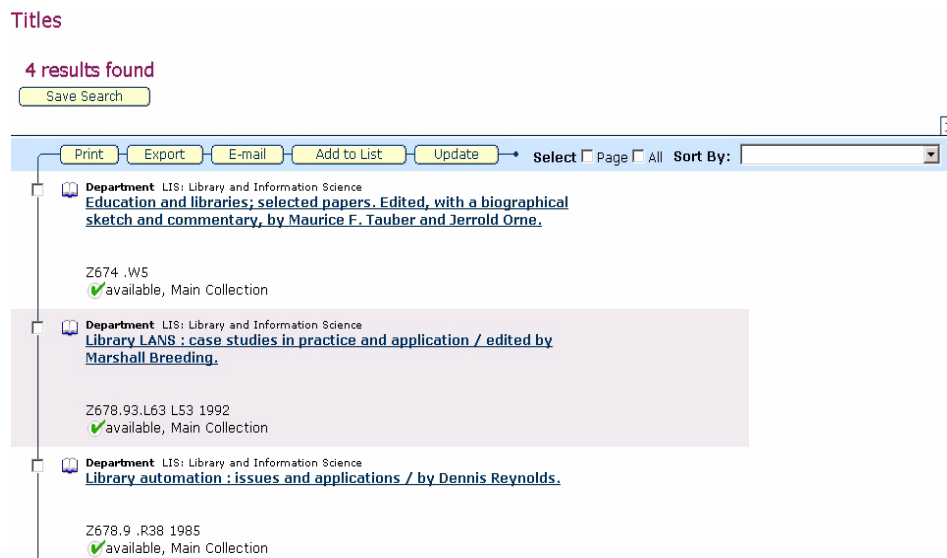


Figure 2-15. Titles displayed

Geospatial Search

The Geospatial Search feature is only available if your institution has purchased the Geospatial Searching tools.

Geospatial Search is a search feature that you optionally set when you install WebVoyáge. See *WebVoyáge Architecture Overview and Configuration Models* for more information regarding setup.

Geospatial Search provides you with a variety of options when searching for map-related items in your database. See [Figure 2-16](#) for an example of Rectangle Search using Geospatial Search.

Rectangle Search

Database: My Library Catalog

Basic

Advanced

Subject

Author

Course Reserve

Geospatial Search

Search History

Rectangle Search

Polygon Search

Point + Radius Search

Corridor/Route Search

Range Search

LOWER LEFT

UPPER RIGHT

Latitude:

Longitude:

Latitude:

Longitude:

Toggle Limits

Footprint:
MBR

Format Type:
Degrees/Min/Sec

Records per page:
10 records per page

Search Map

Figure 2-16. Geospatial Search

Search History

Search History displays a list of searches that you have completed during your current session in WebVoy ge until you logout. See [Figure 2-17](#).

For searches that you want to keep on a more permanent basis, save them in My Searches; see [My Searches](#) on [page 2-16](#).

Search History

Displays your last 20 searches in this session.

Combine	Search	Search Type	Results	Action
	All Fields(tiger)	Quick	30	Re-run Edit Save
	All Fields(potter)	Quick	122	Re-run Edit Save
	All Fields(biology)	Quick	545	Re-run Edit Save
	All Fields(animal science)	Quick	23	Re-run Edit Save

Figure 2-17. Search History

With Search History, you have the ability to do the following:

- Re-run the search.
- Edit the search and run it again.
- Save the search to My Searches.
- Combined Advanced Searches.

Patron Options

WebVoyáge provides patron-specific options that enhance system usability for each individual patron. The following functions are available:

- My Searches (page [2-16](#)).
- My List (page [2-17](#)).
- My Account (page [2-18](#)).

My Searches

My Searches enables patrons to permanently maintain a list of previously executed search queries. See [Figure 2-18](#).

My Searches

*To change a saved search into an email alert, change the option under **Alert Frequency** from "None" to another value and save the changes. To cancel an alert, either set the option under **Alert Frequency** to "None" or delete the associated saved search.*

Combine	Search	Search Type	Alert Frequency	Results	Actions
	All Fields(biology)	Basic	Daily	N	Re-Run Edit Delete
	All Fields(potter)	Quick	Daily	Y	Re-Run Edit Delete
	All Fields(horseback)	Quick	None	N	Re-Run Edit Delete
Save Changes					

Figure 2-18. My Searches

Optionally, search queries are saved to the My Searches list from the Search History page, the Titles list, or the Subjects list. See [Figure 2-17](#).

From My Searches, patrons can do the following:

- Re-run a specific search.
- Edit a specific search and run it.

- Delete individual searches from the My Searches list.
- Combine Advanced Searches.
- Configure Alert.

Automated Saved Search Queries

Saved search queries may be run automatically and trigger email notifications when certain optional features are set in WebVoy ge to include alerts. See [Figure 2-19](#).

My Searches

*To change a saved search into an email alert, change the option under **Alert Frequency** from "None" to another value and save the changes. To cancel an alert, either set the option under **Alert Frequency** to "None" or delete the associated saved search.*

Combine	Search	Search Type	Alert Frequency	Results	Actions
	All Fields(biology)	Basic	Daily	N	Re-Run Edit Delete
	All Fields(potter)	Quick	Daily	N	Re-Run Edit Delete
	All Fields(horseback)	Quick	None	N	Re-Run Edit Delete
Save Changes					

Figure 2-19. Automated My Searches example

See Chapter 3, "[Basic Customization](#)," for more information regarding customizing WebVoy ge.

My List

Optionally, My List provides a place for patrons to save titles for later review and processing. See [Figure 2-20](#).

Processing options include the following:

- Print
- Export
- E-mail
- Delete

My List

The screenshot shows a web interface for a 'My List'. At the top, there is a light blue bar containing four yellow buttons: 'Print', 'Export', 'E-mail', and 'Delete', followed by the text 'Select ☐ All'. Below this bar, there is a list of three items, each preceded by a checkbox. The first item is 'Sirks, Marius Jacob, 1889-' with details 'Evolution of biology [by] M. J. Sirks [and] Conway Zirkle.', 'Publisher date: [1964]', and 'Saved on: 2008-02-13 16:34:07'. The second item is 'Morison, Samuel Eliot, 1887-1976.' with details 'Two ocean war, a short history of the United States Navy in the Second World War.', 'Publisher date: [1963]', and 'Saved on: 2008-02-19 18:47:45'. The third item is 'Mahy, Margaret.' with details '17 kings and 42 elephants / Margaret Mahy ; pictures by Patricia MacCarthy.', 'Publisher date: 1987.', and 'Saved on: 2008-02-20 14:57:23'. At the bottom, there is another light blue bar with the same four yellow buttons and 'Select ☐ All' text.

	Print	Export	E-mail	Delete	Select <input type="checkbox"/> All
<input type="checkbox"/> Sirks, Marius Jacob, 1889- Evolution of biology [by] M. J. Sirks [and] Conway Zirkle. Publisher date: [1964] Saved on: 2008-02-13 16:34:07					
<input type="checkbox"/> Morison, Samuel Eliot, 1887-1976. Two ocean war, a short history of the United States Navy in the Second World War. Publisher date: [1963] Saved on: 2008-02-19 18:47:45					
<input type="checkbox"/> Mahy, Margaret. 17 kings and 42 elephants / Margaret Mahy ; pictures by Patricia MacCarthy. Publisher date: 1987. Saved on: 2008-02-20 14:57:23					
	Print	Export	E-mail	Delete	Select <input type="checkbox"/> All

Figure 2-20. My List example

Search results can be added to My List using the Add to My List action from the Actions bar ([Figure 2-25](#)) or Actions list ([Figure 2-27](#)).

My Account

The My Account page displays the following information and provides options to View Personal Information and Edit Preferences.

- Pending Requests
- Available Items
- Charged Items
- Borrowing Blocks
- Fines and Fees
- Demerits

See [Figure 2-21](#) for an example of My Account information.

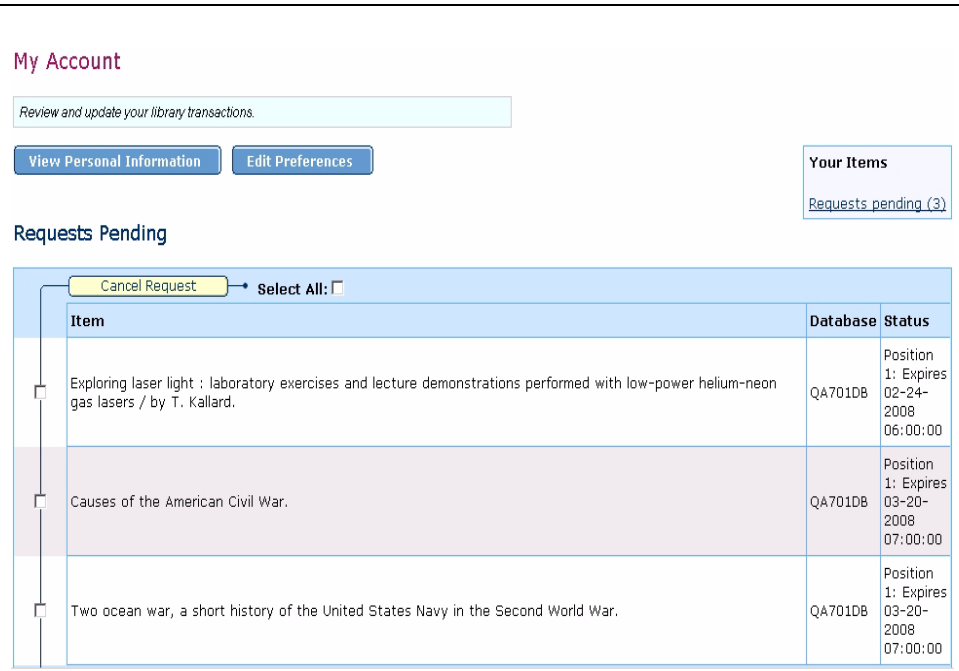


Figure 2-21. My Account example

Personal Information

The Personal Information page displays individual patron information such as name, email address, and so on. See [Figure 2-22](#).

Personal Information

[My Account](#)

[Edit Preferences](#)

Name: Ann Lorish

Email: ann.lorish@abclibrary.com

Permanent Address: 2200 East Devon
Suite 382

Des Plaines IL 60018

Phone: 847 296 2200

Figure 2-22. Personal Information page

Edit Preferences

The Edit Preferences page provides options for the patron to tailor search preferences and select the number of records to display on the results page. See [Figure 2-23](#).

Edit Preferences

Set the following preference to be restored each time you log in.

[My Account](#)[View Personal Information](#)

Search options

- ☒ Basic
- ☐ Advanced
- ☐ Subject
- ☐ Author
- ☐ Course Reserve

Display options

Records per page:

[Save](#)

Figure 2-23. Edit Preferences page

If the patron has access to multiple OPAC databases such as a local database and a Z39.50 database, this page displays those options. The patron can then select a database preference from the Edit Preferences page.

When multiple databases are configured, an additional Search page option displays allowing the patron to dynamically select a database. See [Figure 2-24](#).

Database: My Library Catalog [Change](#)

Figure 2-24. Database Change option

Actions

WebVoyage provides the following Actions for working with search results:

- Actions Bar (see [Figure 2-25](#))
 - Print
 - Export
 - E-mail
 - Add to List
 - Update (displays when JavaScript is disabled in the browser)
- Actions List (see [Figure 2-27](#))
 - Make a Request
 - Print
 - Export
 - E-mail
 - Add to My List




Figure 2-25. Actions bar

The Actions bar ([Figure 2-25](#)) displays on the Titles results page. See [Figure 2-26](#).

The Update action is used in combination with the Select and Sort by display options.

The Select Page check box places checks against all the titles on the page to identify them for one of the following Actions:

- Print.
- Export.
- E-mail.
- Add to List.

The Select All check box places all results in an action buffer for processing with one of the Actions (Print, Export, E-mail, or Add to List). Check marks against the titles are not displayed with this selection.

NOTE:
The Select Page and Select All check box options only display when JavaScript is enabled in the browser. If JavaScript is disabled, select Update after checking Select Page or Select All or when using Sort By.

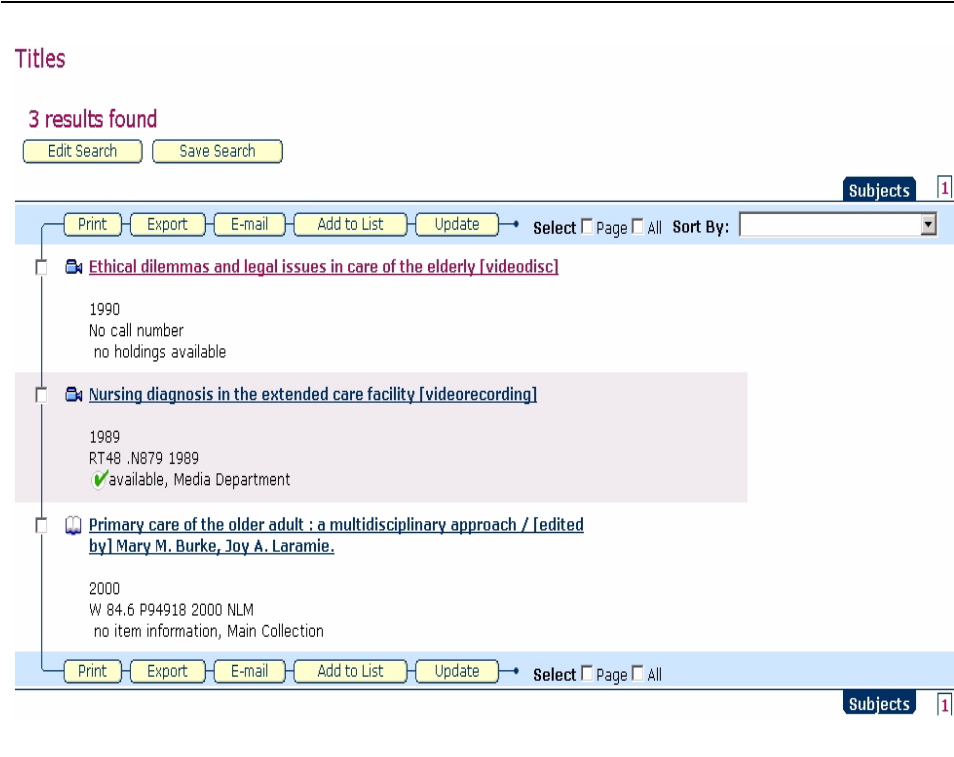


Figure 2-26. Titles results page example

Actions

- [Make a Request](#)
(e.g. Hold, Recall, Photocopy)
- [Print](#)
- [Export](#)
- [E-mail](#)
- [Add to My List](#)

Figure 2-27. Actions list

The Actions list ([Figure 2-27](#)) displays when the title link is clicked to display the full record. See [Figure 2-28](#).

Harry Potter and the deathly hallows /

Title: Harry **Potter** and the deathly hallows / J. K. Rowling ; illustrations by Mary GrandPré.

Author: [Rowling, J. K.](#)

Publisher: New York : Arthur A. Levine Books (Scholastic) 2007.

ISBN: 9780545010221
0545010225
9780545029360
0545029368

Format: Book

Subjects: [Potter, Harry \(Fictitious character\)--Fiction.](#)
[Wizards--Fiction.](#)
[Magic--Fiction.](#)
[Schools--Fiction.](#)
[Hogwarts School of Witchcraft and Wizardry \(Imaginary place\)--Fiction.](#)
[England--Fiction.](#)

Links: [cover art](#)

Held at: [Gaboos QA701DB](#)

This item

[Record View](#)

• [Staff View](#)

Actions

- [Make a Request](#)
(e.g. Hold, Recall, Photocopy)
- [Print](#)
- [Export](#)
- [E-mail](#)
- [Add to My List](#)

More About This Item From

[SFX](#)

[Click to Request](#)

Holdings Information

Location:	Main Collection
Call Number:	823.92 22
Number of Items:	1
Status:	Not Charged
Linked Resources:	cover art

Figure 2-28. Full record display with Actions list example

Print

The Print option displays the Print Titles page with one or more titles to print per the patron's selection.

A dropdown list provides Print Format options from which to select.

Export

The Export option displays the Export Results page with one or more titles to export per the patron's selection.

A dropdown list provides Export Format options such as Raw MARC, UTF-8 MARC and so forth from which to select.

E-mail

The E-mail option displays the E-mail page. Fields are provided for entering the following:

- To (address)
- Subject
- Body Text

Add to List/Add to My List

The Add to List or Add to My List options add selected titles to the My List page. Once stored on the My List page, these selections are available to view and process at a later session after logging in.

Make A Request

The Make A Request option displays the Patron Requests page that provides several patron request alternatives such as hold, recall, call slip, and so on for the holdings record selected.

Purpose	3-1
Before You Begin (Best Practices)	3-1
Where To Find Things	3-2
• File Conventions	3-2
• Directory Structure/Files Description	3-3
.../vwebv/	3-3
.../ui/en_US/	3-5
What Is A Skin?	3-10
Customization Example - Text	3-10
• Footer - "Your Library Name Here"	3-10
• index.html Text Change	3-12
Customization Example - Search	3-15
• Quick Search	3-15
• Search Pages	3-17
• Canned Search - URL	3-21
What Is Required?	3-22
Customization Example - Logo	3-23
• Logo Example	3-23
Customization Example - Color (Basic)	3-25

Purpose

The purpose of this chapter is to do the following:

- Provide some best practices considerations when planning and implementing changes to WebVoyage.
- Provide an overview of the directory structure and files needed to customize WebVoyage.
- Provide some basic examples of changes you can make to WebVoyage such as configuration changes in `webvoyage.properties`.

Before You Begin (Best Practices)

This chapter's focus is about customization. Customization implies change; and with change, planning is an important part of the process.

As a result, the intent of this section is to share a few reminders or things to consider before opening a file and making that first change. Consider the following as you prepare:

- Make a backup copy of all the original files you plan to change. Use a naming convention that makes it obvious that the file is in the original format and that it is a backup copy.

- Use Begin and End comments before and after the places where you make customization changes within a file. You may want to consider using something consistent in each comment like author's initials, institution name, or some other unique naming convention that makes it easy to search out the locations of customization changes at a later time.
- Use comments to describe the purpose of the customization change.
- Plan ahead for software upgrades. Consider the upgrade implications with the customization changes that you make and develop a plan for identifying changed files.
- Keep a record of all the files that you change.
- Make backup copies of the files in which you've made customization changes. Consider using a version control system to maintain customized files starting with the original source file.

Where To Find Things

This section is intended to provide information that enables you to do the following:

- Identify code/options within the files that you want to change.
- Identify the files you need to customize within the WebVoyáge directory structure.

File Conventions

A common convention that is used in the WebVoyáge files is lines of comments to identify segments of code or provide a brief description of options.

As an example, the `webvoyage.properties` file is organized in sections such as Options, Connections, Header, Footer, Search Quick, Login page, and so on. These comments are located near the lines of code (options) that you can customize to match your preferences.

See Appendix A, [webvoyage.properties File](#) on [page A-1](#), for an example of the `webvoyage.properties` file and how it is organized.

The `webvoyage.properties` file located in `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/` where `xxxdb` is your database name is one of the key files used to make customization changes (somewhat analogous to the `opac.ini` file in classic WebVoyáge).

As you review the `webvoyage.properties` file in Appendix A, notice that additional comments have been included near the options to describe parameter choices.

**TIP:**

As part of your planning process for making customizations, you may want to print a copy of the `webvoyage.properties` file, read the comments/instructions provided within the file regarding the options, make notes on the hard copy regarding customization changes you want to implement, and use your hard copy notes to make those changes.

As you become familiar with the `webvoyage.properties` file, using the Search/Find features of your editor makes an easy method for locating lines of code (options) you want to change.

Directory Structure/Files Description

As part of the basic user's guide, the purpose of this section is to provide an overview of some key WebVoyage directories/files relative to customizing the product for your institution. See [Table 3-1](#) and [Table 3-2](#).

NOTE:

Also refer to *Voyager 7.0 WebVoyage Architecture Overview and Configuration Models* for more customization information.

.../vwebv/

The primary path to the files that you most commonly modify is `/ml/voyager/xxxxdb/tomcat/vwebv/context/vwebv/` where `xxxxdb` is your database name. See [Figure 3-1](#).

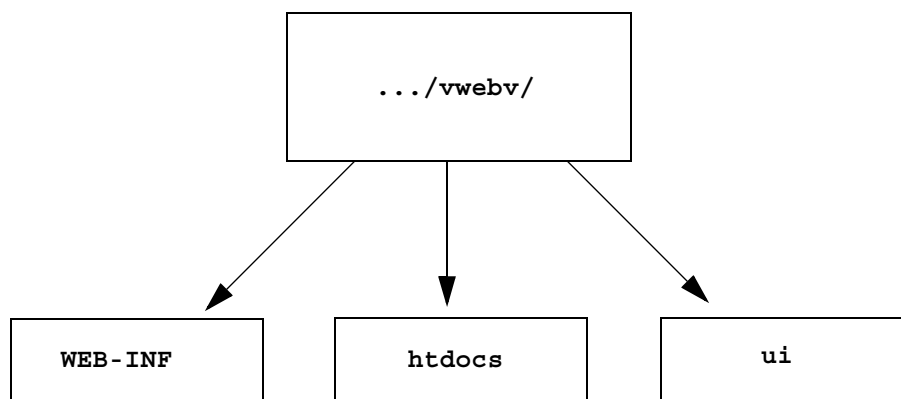


Figure 3-1. .../vwebv/ directory


See [Table 3-1](#) for a description of .../vwebv/ contents.

Regarding the directory structure highlighted in [Table 3-1](#), all the directories/files identified are preceded by /ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ where xxxdb is your database name.

Table 3-1. .../vwebv/ Description of Contents

Directory/Files	Description
WEB-INF/	<p>Contains the web.xml file where the help links and default skin are located.</p> <p>See What Is A Skin? on page 3-10 for more information regarding skins.</p> <p>Regarding Help, search for:</p> <pre><param-name>HelpURL</param-name> <param-value>ui/%SKIN%/htdocs/help/</param-value></pre> <p>Regarding skins, search for:</p> <pre><param-name>DefaultSkin</param-name> <param-value>en_US</param-value></pre> <p>Example skin URL format for Basic Search:</p> <pre>http://111.111.111.111:7008/vwebv/ searchBasic?sk=en_US</pre>

Table 3-1. .../vwebv/ Description of Contents

Directory/Files	Description
htdocs/	<p>Contains the default <code>index.html</code> file for accessing WebVoyage.</p> <p>See Appendix B for an example of the <code>index.html</code> file.</p> <p>The <code>index.html</code>, when accessed by the URL you define, opens a window that displays like the one seen in Figure 3-5 on page 3-12.</p>
ui/	<p>Identifies the root directory containing files and subdirectories that are key to customizing WebVoyage.</p> <p>See Table 3-2 on page 3-7 for more details.</p> <p>Copy the base <code>en_US</code> directory (and subdirectories) located in <code>/ui/</code> as many times as needed to the <code>/ui/</code> directory to create alternative skins to do the following:</p> <ul style="list-style-type: none"> • Make alternate language interfaces. • Make alternate configurations for different devices. • Make alternate configurations for consortium libraries (all pointing to the same database). • Make test configurations. <p> CAUTION: <i>Do not modify the <code>exl_default</code> skin located in the <code>/ui/</code> directory. This is intended for use by Ex Libris Support.</i></p>

.../ui/en_US/

The path to `.css`, `.xsl`, and other files that you most commonly modify/customize is `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/` where `xxxdb` is your database name. See [Figure 3-2](#) for an illustration of the directory structure.

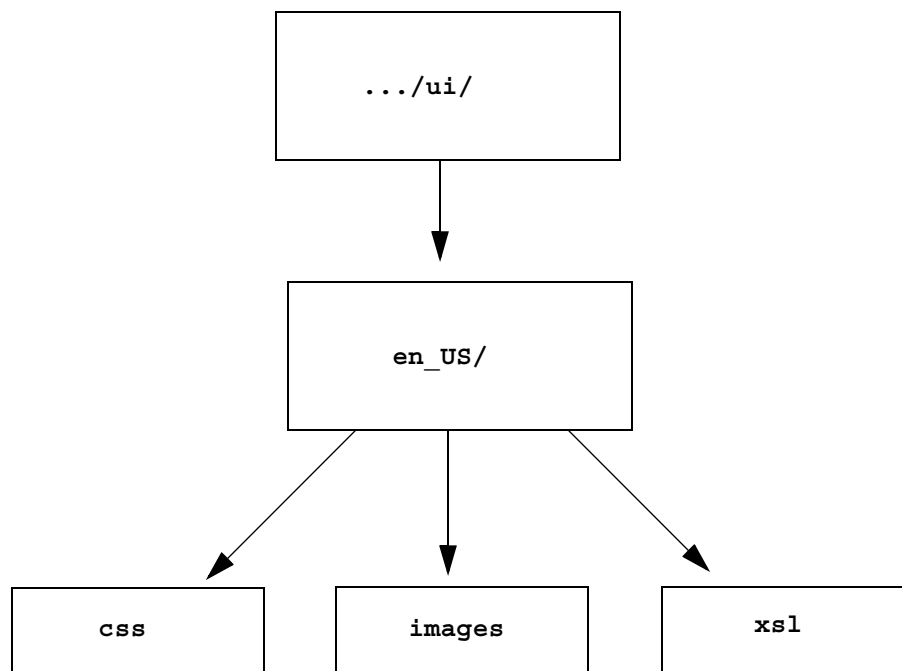


Figure 3-2. `../ui/en_US/` directory structure

The `../ui/en_US/` directory provides the default files and subdirectories used to localize skins. Each subdirectory provides skin settings for functional, language, and appearance changes.

The default skin, `../en_US/`, is identified in the `web.xml` file. Substitute your skin (directory name) to establish a new default.

You can create your own customized skin by copying `../en_US/` and all its subdirectories/files and giving it a unique name such as `../en_USxxx/` where `xxx` is the name that you append for skins in U.S. English. For example, `../en_US_ABCUniv/`. This name becomes a part of the URL for accessing the skin as in `http://xxx.xxx.xxx.xxx:7008/vwebv/searchBasic?sk=en_US_ABCUniv`. Use the following syntax to copy the files:

```
cp -r en_US [target]
```

You may access your modified skin settings by entering the skin name as part of a URL using the pattern of the following examples where `en_US_ABCUniv` is your customized skin directory name:

```
http://111.111.111.111:7008/vwebv/
searchBasic?sk=en_US_ABCUniv
(Basic search tab)
```

```
http://111.111.111.111:7008/vwebv/
searchAdvanced?sk=en_US_ABCUniv
(Advanced search tab)
```

```
http://111.111.111.111:7008/vwebv/
searchAuthorBasic?sk=en_US_ABCUniv
(Author search tab)
```

When entered from the URL in your browser, the customized skin remains active until you end your WebVoyage session.

See [Table 3-2](#) through [Table 3-7](#) for a description of commonly accessed directories and files like `webvoyage.properties` and `pageProperties.xml` found in `.../ui/en_US/` and its subdirectories.

For [Table 3-2](#) through [Table 3-7](#), all the directories/files identified are preceded by `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/` where `xxxdb` is your database name.

The directories/files described in [Table 3-2](#) are all a subset of any skin directory.

Table 3-2. `.../ui/en_US/` Description of Contents



Directory/Files	Description
<code>internal.properties</code>	Used by Ex Libris development and support staff only.
<code>webvoyage.properties</code>	<p>Provides configuration options for several display characteristics and system behaviors such as which page to return to when one logs out.</p> <p> TIP: Refer to file comments for configuration assistance.</p>
<code>mapsearch.properties</code>	<p>Provides configuration options for setting up Geospatial map search.</p> <p> TIP: Refer to file comments for configuration assistance.</p>

Table 3-2. .../ui/en_US/ Description of Contents

Directory/Files	Description
css	Contains cascading style sheets that control the appearance of elements on each page in vwebv to include color settings.
images	Contains logos, icons, and other image files such as the ones used on tabs and buttons.
jscripts	Contain JavaScript files used by WebVoyáge.
xsl	Contains XSL stylesheets for transforming XML data from the server into specific page layout with headers, footers, and so on.

Table 3-3. .../ui/en_US/css/ Description of Contents

Directory/Files	Description
css/print	Contains style sheets used for printing records.
css/frameWork.css	Sets basic fonts and colors.

Table 3-4. .../ui/en_US/htdocs/ Description of Contents

Directory/Files	Description
help	Contains the .html help files.

Table 3-5. .../ui/en_US/images/ Description of Contents

Directory/Files	Description
bibFormat	Contain images used as record format icons.

Table 3-6. .../ui/en_US/xsl/ Description of Contents

Directory/Files	Description
common	Contains XSL stylesheets for managing constants used in the interface.
contentLayout	Contains working XSL for page displays.

Table 3-6. .../ui/en_US/xsl/ Description of Contents

Directory/Files	Description
exportFormats	Contains XSL files that drive the actual export format output.
pageFacets	Contains XSL files with templates for common page elements such as headers, footers, and so on.
PageTools	Contains XSL files with templates used on pages to help create a button, create an image URL, and so forth.
printFormats	Contains XSL files that drive actual print format output.
userTextConfigs	Contains XML files that contain assisting message text for page displays and that contain options for limits configuration.
emailBody.xsl	Provides settings for email footer information.
printFormats/printCommon.xsl	Provides formatting for footer data on printouts.
userTextConfigs/pageProperties.xml	Provides XML options for search tips, instructions, Geospatial setup, and other messages.
userTextConfigs/limits.xml	Provides limits settings (in order) for advanced search.

Table 3-7. .../ui/en_US/xsl/contentLayout/ Description of Contents

Directory/Files	Description
configs	Contains XML files for configuring MARC, bibliographic, holdings, and item displays.
configs/export	Contains XML files for configuring MARC, bibliographic, holdings, and item export formats.
configs/print	Contains XML files for configuring MARC, bibliographic, holdings, and item printing.
display	Contains XSL templates for MARC display, export, and print functionality
configs/104X_config.xml	Provides 104X “NISO” or “Standard” display settings.
configs/displayHoldings.xml	Provides record display holdings/items MARC tag configuration settings.
configs/displaycfg.xml	Provides record display bibliographic MARC tags configuration settings.

Table 3-7. .../ui/en_US/xsl/contentLayout/ Description of Contents

Directory/Files	Description
configs/emailcfg.xml	Provides record email bibliographic MARC tags configuration settings.
configs/export	Contains export format files.
configs/export/ endNoteCitationConfig.xml	Provides record export bibliographic MARC tags configuration format.
configs/print	Contains XML files containing print formats.
configs/print/ briefRecordConfig.xml	Provides XML formatting for printing bibliographic MARC record tags in the brief record configuration.
configs/print/ fullRecordConfig.xml	Provides XML formatting for printing bibliographic MARC record tags in the full record configuration.

What Is A Skin?

A concept that is key to understanding how to approach the customization of WebVoyáge is the concept of skins.

A skin is a method for identifying presentation style (display) characteristics separate from the logic of the software application.

In WebVoyáge, there are several files that control the presentation style within the skin. The root directory for the WebVoyáge default skin is `.../en_US/`. You may copy `.../en_US/` and all its subdirectories to create a new presentation style and make that skin your new default. The default skin is identified in `web.xml`.

For more details regarding the WebVoyáge architecture and customizing the skin, see *Voyager 7.0 WebVoyáge Architecture Overview and Configuration Models*.

Customization Example - Text

This section is designed to illustrate examples where you can customize text in the WebVoyáge user interface.

Footer - “Your Library Name Here”

The out-of-the-box version of WebVoyáge provides a place in the footer of the user interface where you can tailor it to display your institution's name. See [Figure 3-3](#).




Figure 3-3. Your Library Name Here example

Use [Procedure 3-1, Customize Footer Text](#) to customize the footer text in WebVoyáge for your institution.



Procedure 3-1. Customize Footer Text

Use the following steps to customize the footer text.

1. Locate the `webvoyage.properties` file stored in `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/` where `xxxdb` is your database name.
2. Open `webvoyage.properties` in your editor of choice and search for *Your Library Name Here*.

NOTE:

Remember to make copies of original files before making changes. See [Before You Begin \(Best Practices\)](#) on [page 3-1](#) for additional information.

3. Replace *Your Library Name Here* with your university's name or other footer text you prefer. See [Figure 3-4](#).

NOTE:

You may optionally comment out the code to prevent any footer name from displaying.



Figure 3-4. Customized footer name

4. Save your updated `webvoyage.properties` file in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/`.
-

index.html Text Change

This section describes how you can make some textual changes to customize the default `index.html` file for your institution. It is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/htdocs/` where `xxxdb` is your database name.

In its original form, the default `index.html` opens as seen in [Figure 3-5](#).

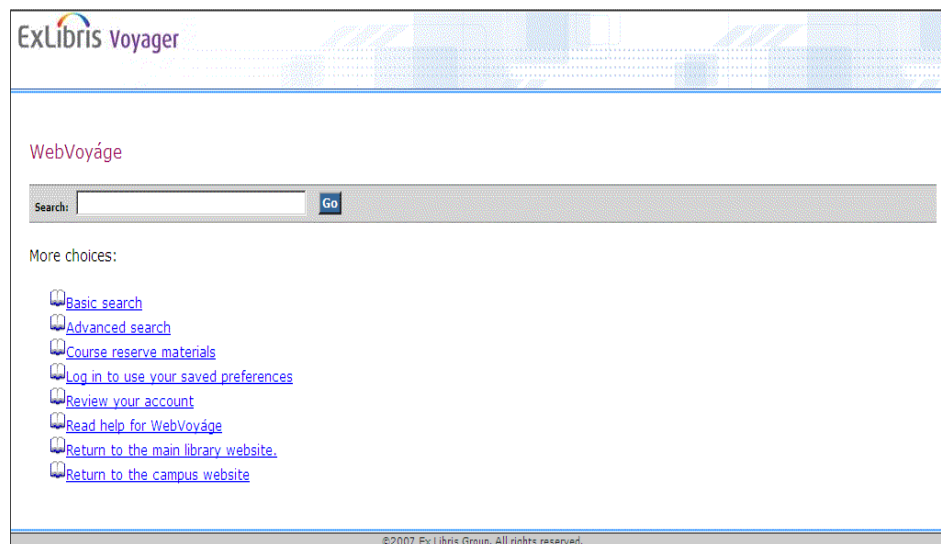


Figure 3-5. Default window

As an example, this section highlights code changes to produce the result as seen in [Figure 3-6](#).

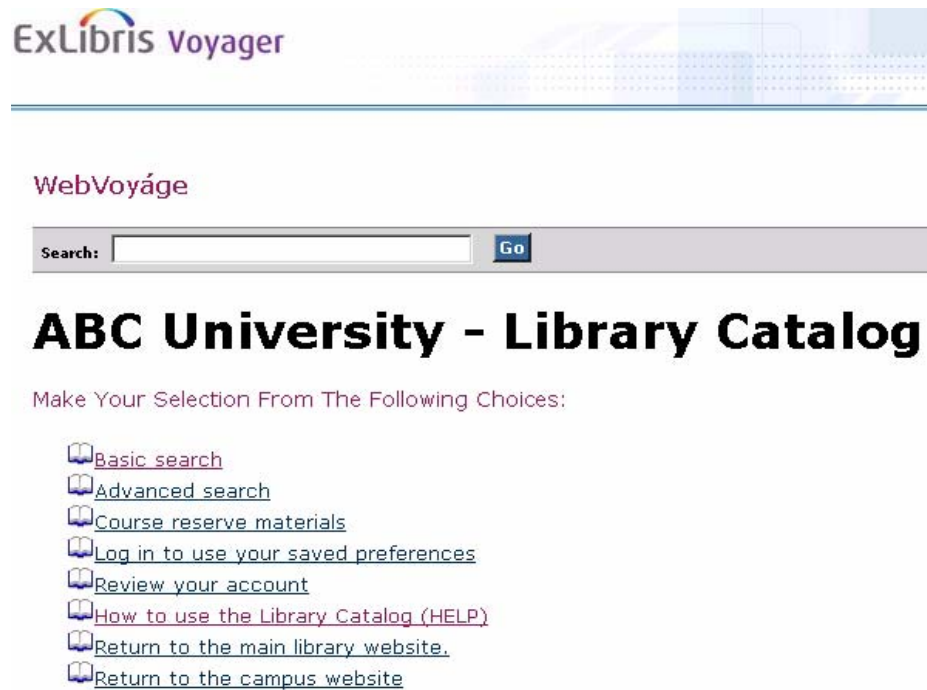


Figure 3-6. Example of textual changes to index.html

For comparison purposes, refer to the lines of code in [Figure 3-7](#) that illustrates the original `index.html` and [Figure 3-8](#) that illustrates the changes.

Specifically, the following lines changed:

- Line 1 was removed from the original file and replaced with lines 1 and 2 as seen in [Figure 3-8](#).

To achieve different font characteristics, heading 1 (h1) and heading 2 (h2) styles were used in place of the default paragraph (p) style.

- Line 8 text was changed from “Read help for WebVoyage” to “How to use the Library Catalog (HELP).”

Notice that in line 8 there is also a reference to the help file such as `/vwebv/ui/en_US/htdocs/help/index.html`.



TIP:

Update the file referenced in line 8 to provide your library-specific help information like library policies, hours of operation and so forth or create a separate file that you point to (enter) in line 8.

Line#	
1	<p>More choices:</p>
2	
3	Basic search
4	Advanced search
5	Course reserve materials
6	Log in to use your saved preferences
7	Review your account
8	Read help for WebVoyÁge
9	<!-- the following links must be customized locally -->
10	Return to the main library website.
11	Return to the campus website
12	

Figure 3-7. Default index.html file

Line#	
1	<h1>ABC University - Library Catalog</h1>
2	<h2>Make Your Selection From The Following Choices:</h2>
3	
4	Basic search
5	Advanced search
6	Course reserve materials
7	Log in to use your saved preferences
8	Review your account

Figure 3-8. Default index.html file modified

Line#	
9	<code>How to use the Library Catalog (HELP)</code>
10	<code><!-- the following links must be customized locally --></code>
11	<code>Return to the main library website.</code>
12	<code>Return to the campus website</code>
13	<code></code>

Figure 3-8. Default index.html file modified (Continued)

Customization Example - Search

There are several options for customizing search within WebVoyage. This section is intended to highlight some of those options.

As you build your skills with customizing WebVoyage, learn to take full advantage of the commenting done within the files of code that describe the options.

Quick Search

You may customize the quick search bar (see [Figure 3-9](#)) to default to the search index of your choice.



Figure 3-9. Quick search bar

By default, the quick search bar uses the GKEY index. You may change this default in the `webvoyage.properties` file to another search index. Any search index code in the system may be specified.

There are other modifiers you can add after the index search code (see line 7 of [Figure 3-10](#)). Refer to [Table 3-8](#) for a description of these modifiers.

NOTE:

These modifiers are not compatible with non-keyword indexes such as 008D (Publication Date) or 020A (ISBN), for example.

Table 3-8. Search Code Modifiers

Modifier	Description
+	Indicates browse search type.
*	Indicates relevance search type.
^	Indicates to insert an AND operator between the strings in a search.
	Indicates to insert an OR operator between the strings in a search.

See [Procedure 3-2, Change Quick Search Bar Search Index Default](#) for the steps to change the default.



Procedure 3-2. Change Quick Search Bar Search Index Default

Use the following steps to change the default search index for the quick search bar.

1. Open the `webvoyage.properties` file in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/` and locate `page.search.quick.search.code=GKEY` (see [Figure 3-10](#), line 7).

```
Line#
1      #####
2      #
3      #   Quick Search
4      #
5      #####
6      page.searchQuick.argument.label=New Search :
7      page.search.quick.search.code=GKEY^*
8      page.searchQuick.go.button=Go
```

Figure 3-10. Quick search customization example

Line#	
9	page.searchQuick.go.button.message=Submit search the library
10	page.searchQuick.searchHistory.linkText=Search History
11	page.searchQuick.searchHistory.link.pretext=
12	page.searchQuick.searchHistory.link.posttext=
13	#####

Figure 3-10. Quick search customization example (Continued)

2. Replace GKEY with the index you prefer.

NOTE:

The search code must be one of the codes listed in the Search Indexes definitions in the Voyager System Administration module.

3. Save your changes.

Search Pages

There are several search pages such as Basic, Advanced, Subject, and so on and there are many options for customizing these searches. The comments within the `webvoyage.properties` file helps guide you through many customization alternatives.

Some changes can be as simple as adding or removing comment indicators to the line(s) of code. See [Procedure 3-3, Changing the Dropdown List of Search Types for Basic Search](#).



Procedure 3-3. Changing the Dropdown List of Search Types for Basic Search

Use the following steps to change the dropdown list of search types for Basic search.

1. Open the `webvoyage.properties` file in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/` and locate the Basic Search section. See [Figure 3-11](#).

Line#	
1	#####
2	#
3	# Search Basic
4	#
5	#####
6	page.search.basic.title=WebVoyáge Basic Search
7	page.search.basic.heading=Basic Search
8	#
9	# The Search Code must be one of the codes listed on either the Search
10	# Definitions, Composite Definitions, or Keyword Searches dialogs (in the
11	# System Administration module). In addition to the search codes on those
12	# dialogs,
13	# you may use the codes FT (Full-Text Keyword Search) and CMD or BT (Command
14	# Search.)
15	#
16	# To modify search codes, you may use the following:
17	#
18	# ? Enter a plus (+) sign after the Search Code. This will turn that particular
19	# search into a Browse search. For example, entering AUTH+ would specify
20	# an Author Browse search type.
21	#
22	# ? Enter an asterisk (*) after the Search Code. This will cause that search to
23	# be performed with Relevance. For example, entering CMD* will indicate a
24	# Command Search with Relevance search type.
25	#
26	# ? Enter a caret (^) after an index code (such as GKEY, SKEY, TKEY, JKEY,
27	# etc.) to insert an AND operator between the strings in a search. An asterisk
28	# may be placed after this symbol to add relevance to the search.
29	#
30	# ? Enter a pipe () after an index code (such as GKEY, SKEY, TKEY, JKEY,
	# etc.) to insert an OR operator between the strings in a search. An asterisk
	# may be placed after this symbol to add relevance to the search.

Figure 3-11. Basic Search section of the webvoyage.properties file

Line#	
31	
32	#=====
33	# Basic search codes
34	#=====
35	page.search.basic.search.code.selected=GKEY *
36	page.search.basic.search.code.keyAnyAndWith=
37	page.search.basic.search.code.keyAnyAndWith.code=GKEY^*
38	page.search.basic.search.code.keyAnyAndWith.order=1
39	page.search.basic.search.code.keyAnyAndWith.display=All Fields
40	#page.search.basic.search.code.keyAnyOrWith=
41	#page.search.basic.search.code.keyAnyOrWith.code=GKEY *
42	#page.search.basic.search.code.keyAnyOrWith.order=2
43	#page.search.basic.search.code.keyAnyOrWith.display=Keyword Anywhere OR with Relevance
44	page.search.basic.search.code.titleKeyAnd=
45	page.search.basic.search.code.titleKeyAnd.code=TKEY^
46	page.search.basic.search.code.titleKeyAnd.order=3
47	page.search.basic.search.code.titleKeyAnd.display=Title
48	page.search.basic.search.code.subjectKeyAnd=
49	page.search.basic.search.code.subjectKeyAnd.code=SKEY^
50	page.search.basic.search.code.subjectKeyAnd.order=4
51	page.search.basic.search.code.subjectKeyAnd.display=Subject
52	page.search.basic.search.code.journalTitleKeyAnd=
53	page.search.basic.search.code.journalTitleKeyAnd.code=JKEY^
54	page.search.basic.search.code.journalTitleKeyAnd.order=5
55	page.search.basic.search.code.journalTitleKeyAnd.display=Journal Title
56	#page.search.basic.search.code.keyRelSearch=
57	#page.search.basic.search.code.keyRelSearch.code=FT*
58	#page.search.basic.search.code.keyRelSearch.order=6
59	#page.search.basic.search.code.keyRelSearch.display=Keyword Relevance Search
60	page.search.basic.search.code.authorKey=
61	page.search.basic.search.code.authorKey.code=NKEY*

Figure 3-11. Basic Search section of the webvoyage.properties file (Continued)

Line#	
62	page.search.basic.search.code.authorKey.order=7
63	page.search.basic.search.code.authorKey.display=Author
64	#page.search.basic.search.code.leftAnchorTitle=
65	#page.search.basic.search.code.leftAnchorTitle.code=TALL
66	#page.search.basic.search.code.leftAnchorTitle.order=8
67	#page.search.basic.search.code.leftAnchorTitle.display=Left Anchored Title
68	page.search.basic.search.code.callNumberBrowse=
69	page.search.basic.search.code.callNumberBrowse.code=CALL+
70	page.search.basic.search.code.callNumberBrowse.order=9
71	page.search.basic.search.code.callNumberBrowse.display=Call Number
72	#page.search.basic.search.code.subjectBrowse=
73	#page.search.basic.search.code.subjectBrowse.code=SUBJ+
74	#page.search.basic.search.code.subjectBrowse.order=10
75	#page.search.basic.search.code.subjectBrowse.display=Subject Browse
76	#page.search.basic.search.code.commSearchWithRel=
77	#page.search.basic.search.code.commSearchWithRel.code=CMD*
78	#page.search.basic.search.code.commSearchWithRel.order=11
79	#page.search.basic.search.code.commSearchWithRel.display=Command Search with Relevance
80	#page.search.basic.search.code.dateSearch=
81	#page.search.basic.search.code.dateSearch.code=008D
82	#page.search.basic.search.code.dateSearch.order=12
83	#page.search.basic.search.code.dateSearch.display=Date Search (Left Anchored)
84	#page.search.basic.search.code.nameTitleBrowse=
85	#page.search.basic.search.code.nameTitleBrowse.code=AUTH+
86	#page.search.basic.search.code.nameTitleBrowse.order=13
87	#page.search.basic.search.code.nameTitleBrowse.display=Name Title Browse
88	#page.search.basic.search.code.fullTextKeySearch=
89	#page.search.basic.search.code.fullTextKeySearch.code=FT
90	#page.search.basic.search.code.fullTextKeySearch.order=14
91	#page.search.basic.search.code.fullTextKeySearch.display=Full Text Keyword Search
92	#page.search.basic.search.code.commandSearch=

Figure 3-11. Basic Search section of the webvoyage.properties file (Continued)

Line#

```

93 #page.search.basic.search.code.commandSearch.code=CMD
94 #page.search.basic.search.code.commandSearch.order=14
95 #page.search.basic.search.code.commandSearch.display=Command Search
96 #page.search.basic.search.code.subjectHeadingsKeyword=
97 #page.search.basic.search.code.subjectHeadingsKeyword.code=SUBJ@
98 #page.search.basic.search.code.subjectHeadingsKeyword.order=15
99 #page.search.basic.search.code.subjectHeadingsKeyword.display=Subject Headings
    Keyword

```

Figure 3-11. Basic Search section of the webvoyage.properties file (Continued)

2. Identify the lines of code associated with the dropdown list items you want to add or remove from the list (see lines 35 through 99 in [Figure 3-11](#)).
 - a. To add options to the Basic search dropdown list, remove the # symbol (comment indicator) such as in lines 72 through 75 of the code shown in [Figure 3-11](#) to add the Subject Browse option.
 - b. To remove options from the Basic search dropdown list, place the #symbol in the first position of the lines of code such as lines 68 through 71 of the code shown in [Figure 3-11](#) to remove the Call Number option.

NOTE:

For each search option there are four lines of code that identify the following:

- Definition.
 - Index code.
 - Order in which to display in the dropdown list.
 - Name to display in the dropdown list.
3. Repeat this process of adding or removing the # symbol to the lines of code you want to affect.
 4. Save your changes.

Canned Search - URL

With the flexibility of the web architecture, you may create and store URLs with criteria that is used for canned, repeatable searches.

What Is Required?

The following components are required in the URL statement:

- Address and search target.

```
http://111.111.111.111:7008/vwebv/search?
```

- Search argument.

```
searchArg=[search term(s)]
```

- Search code.

```
searchCode=[index code number]
```

Specify an index available in your system such as GKEY, TKEY, and so on.

- Search type.

```
searchType=[type number]
```

See [Figure 3-9](#).

Table 3-9. Search Types

Search Type	Number
Quick	0
Basic	1
Advanced	2
Subject	3
Author	4
Course Reserve	5

See [Figure 3-12](#) for an example of a search URL statement.

```
http://111.111.111.111:7008/vwebv/  
search?searchArg=harry+potter&searchCode=GKEY&searchType=1
```

Figure 3-12. Canned search URL example

When using WebVoyage to search the database, you may notice that the URL statements contain additional (optional) information.

For example, `recCount=` may be added to a stored URL to control the number of records per page. If this is not specified, the default of 10 records per page is used.

The `limitTo=` option may also be used. It is not required. When used in the URL statement, it must match a value from the quick limits dropdown list from the Basic search page.

Expand your number of canned searches by saving (and optionally editing) the URL statements generated by WebVoy  ge when you process searches in the system.

Customization Example - Logo

This section describes basic logo customization information for WebVoy  ge.

Logo Example

See [Procedure 3-4, Customizing the Logo Display](#) for steps regarding how to customize the logo that displays in the header section of the page as in [Figure 3-13](#).

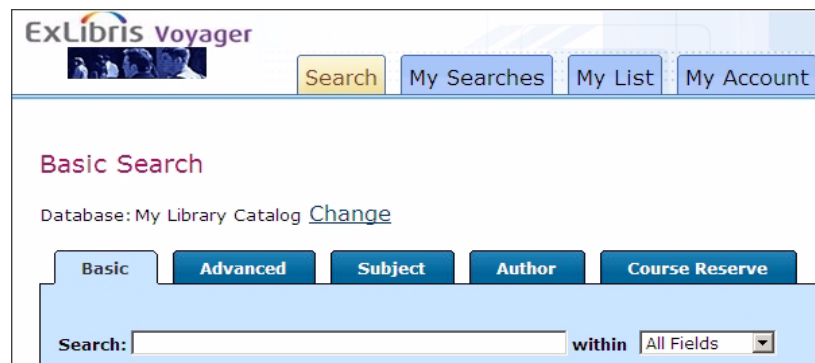


Figure 3-13. Logo example



Procedure 3-4. Customizing the Logo Display

Use the following steps to customize the logo display.

1. Open the `webvoyage.properties` file in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/` and locate the Header section. See [Figure 3-14](#) for an example.

Line#	
1	
2	#####
3	#
4	# Header
5	#
6	#####
7	page.header.login.linkText=Log in
8	page.header.login.link.pretext=
9	page.header.login.link.posttext= to your account
10	page.header.logout.linkText=Logout
11	# the username from the patron record will be inserted as the first pretext element
12	page.header.logout.link.pretext= is logged in
13	page.header.logout.link.posttext=
14	page.header.logo.image=ui/en_US/images/webVoyageLogo.jpg
15	page.header.logo.link=exit.do
16	page.header.logo.linkText=WebVoyáge

Figure 3-14. Header section of `webvoyage.properties` file

2. Locate the line of code that specifies the name of the logo image. See line 14 in [Figure 3-14](#).
3. Edit this line of code to specify the name of your logo image file.

NOTE:

Your custom logo needs to be stored in the `/images/` subdirectory of the skin path. The full path is `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/images/`.

OPTIONAL:

4. Edit the skin name if you are using a custom skin. For example, line 14 of [Figure 3-14](#) may be edited as follows:


```
page.header.logo.image=ui/en_US_ABCUniv/images/ABCUnivLogo.jpg
```

5. Save your changes.
-

Customization Example - Color (Basic)

In designing the updated (7.0) WebVoyage user interface (UI), considerable thought and research was given to the color choices relative to how color works as a single design component of the overall appearance and display of the WebVoyage UI.

There are a large number of display components that have color associated with them. Many cascading style sheets control these settings. Refer to the `.css` files located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/css/` where `xxxdb` is your database name.

As part of a basic user's guide, the intent of this section is to provide some general information regarding color.

For example when you change text, using heading styles change the appearance. See [Figure 3-6](#) on [page 3-13](#).

As you customize menu lists such as the one in [Figure 3-15](#), keeping a consistent appearance is a consideration. When you make your changes, you can follow the existing pattern for these lines of code. The [Figure 3-15](#) menu list is coded in `index.html`. Refer to this file for example lines of code. See `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/htdocs/` where `xxxdb` is your database name.

Notice also in [Figure 3-15](#), that separate color settings have been standardized for used and unused links.









-
-  [Basic search](#)
 -  [Advanced search](#)
 -  [Course reserve materials](#)
 -  [Log in to use your saved preferences](#)
 -  [Review your account](#)
 -  [Read help for WebVoyáge](#)
 -  [Return to the main library website.](#)
 -  [Return to the campus website](#)

Figure 3-15. Menu list example

For more information regarding WebVoyáge architecture and cascading style sheets, see *Voyager 7.0 WebVoyáge Architecture Overview and Configuration Models*.

webvoyage.properties File



webvoyage.properties File

See [Figure A-1](#) for a sample of the webvoyage.properties file. It is located in /ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/ where xxxdb is your database name.

Line#	
1	
2	#(c)#=====
3	#(c)#
4	#(c)# Copyright 2007-2007 Ex Libris Group
5	#(c)# All Rights Reserved
6	#(c)#
7	#(c)#=====
8	
9	#####
10	#
11	# Custom Property File

Figure A-1. webvoyage.properties file example

Line#	
12	# =====
13	# This file contains customizable properties, which will control displayed
14	# text and behavior.
15	#
16	# The properties are name/value pairs.
17	#
18	# The name is unique and it is all characters delimited by dot (".").
19	# Each section is a part of the property hierarchy similar to the ini
20	# file, but the ini file describes the hierarchy in many text blocks instead of
21	# combining them on a single line.
22	#
23	# This file is organized in sections.
24	# Options
25	# These properties will control system behavior.
26	# Connections
27	# These properties customize database connections
28	# Page Customizations
29	# These properties will customize individual pages.
30	# Page Header
31	# Page Footer
32	# Quick Search Bar
33	# Log In
34	# Searching attributes
35	# Search Pages
36	# Basic
37	# Advanced
38	# Subject
39	# Author
40	# Course Reserve
41	# Geospatial
42	# Search Results pages

Figure A-1. webvoyage.properties file example (Continued)

```

Line#
43 # common results elements
44 #   jump bar
45 #   save selected messages
46 # Search Status
47 # Search History
48 # Select Database
49 # My Account Pages
50 # My Account
51 # Edit preferences
52 # Personal info
53 # Change Pin
54 # My Searches pages
55 # My List Pages
56
57
58 #####
59
60
61 #####
62 #
63 # Options
64 # =====
65 # This section contains options that may be set to configure the behavior
66 # of the WebVoyage system.
67 #####
68
69 #=====
70 # Which page should the system return to on logout?
71 #=====
72 option.startPage=searchBasic
73

```

Figure A-1. webvoyage.properties file example (Continued)

Line#	
74	#####
75	# What page or URL should the system go to in response to the exit.do action?
76	# This can be a WebVoyage page, such as searchBasic, or an external URL
77	#####
78	option.exitURL=index.html
79	
80	#####
81	# Should WebVoyage display a quick search page element?
82	# If Y, WebVoyage displays a quick search page element
83	# If N, WebVoyage doesn't display a quick search page element
84	#####
85	option.useQuickSearch=Y
86	
87	#####
88	# Should WebVoyage display a geospatial search tab,
89	# and are geospatial indexes permitted in advanced search?
90	# If Y, WebVoyage permits geospatial searches
91	# If N, WebVoyage doesn't permit geospatial searches
92	# NOTE: Geospatial Searching is an add-on product that must be enabled in the database.
93	#####
94	option.geospatialSearch=N
95	
96	#####
97	# Should WebVoyage users enter a PIN when logging in?
98	# If Y, supply a default PIN for patrons that do not yet have PINs in their records.
99	#####
100	option.usePIN=N
101	option.defaultPIN=
102	
103	#####
104	# Should WebVoyage users be presented with the "brief" logon form when logging in?

Figure A-1. webvoyage.properties file example (Continued)

Line#	
105	# If Y, WebVoyage displays the brief logon form
106	# If N, WebVoyage displays the standard logon form
107	=====
108	option.useBriefLogon=N
109	
110	=====
111	# Should WebVoyage users use an external authentication system when logging in?
112	# If Y, WebVoyage uses the external authentication system as configured below
113	# If N, WebVoyage displays the native logon form
114	=====
115	option.extAuthSystemEnabled=Y
116	
117	=====
118	# URL to the external authentication system
119	=====
120	option.extAuthSystemURL=http://10.100.2.36:19008/cgi-bin/Pextauth.cgi
121	
122	=====
123	# Should WebVoyage bypass the logon form if using an external authentication system?
124	=====
125	option.extAuthBypassLoginScreen=N
126	
127	=====
128	# Option to display the "Save Search" link
129	=====
130	option.saveSearch=Y
131	
132	=====
133	# Option to display the "Save Search as Alert" link
134	#NOTE: "Save Search" functionality must be enabled for "Save Search as Alert" to work.
135	=====

Figure A-1. webvoyage.properties file example (Continued)

Line#	
136	option.SDI=N
137	
138	#####
139	# Option to enable "MyList" functionality
140	#####
141	option.saveRecords=Y
142	
143	#####
144	# Option to enable loading related records for a bib id on holdings page
145	# when the related record is available for the bib ID
146	#####
147	option.loadRelatedRecords=Y
148	
149	#####
150	# Option to display paired bib records (880 tags) on holdings page
151	#####
152	option.link880s=N
153	
154	#####
155	# Option to display request groups on hold and recall request forms
156	#####
157	option.displayRequestGroups=Y
158	
159	#####
160	# Date time conversion format -- the format must be Java program recognizable
161	# The month is MM, the minute is mm
162	#####
163	date.format.short=MM-dd-yyyy
164	date.format.long=MM-dd-yyyy hh:mm:ss
165	time.format=HH:mm:ss
166	#####

Figure A-1. webvoyage.properties file example (Continued)

Line#	
167	# Money conversion format -- the scale is the number of digits after the decimal point
168	=====
169	money.format.scale=2
170	
171	=====
172	# Timeout configuration.
173	=====
174	# How many minutes before an idle WebVoyage session times out?
175	# Must be less than Tomcat's session timeout, defined in web.xml.
176	timeout.time=4
177	# How many minutes before timeout should the user be warned? Should be less than the timeout.time value.
178	timeout.grace=2
179	# Where do we go when a session times out?
180	timeout.page=exit.do
181	
182	#####
183	#
184	# Connections
185	# =====
186	# This section contains customizations for remote database connections.
187	#####
188	#####
189	#
190	#To create one or more groups of remote database connections, do the following:
191	#1. Create an empty numbered group variable.
192	#2. Provide a name for the group.
193	#3. Add the database code (from Sysadmin) of a database to be included in the group.
194	#NOTE: the database code must be included in the variable name, on the left side of the equals sign, as well as the right.
195	#4. Add the database name that will display in WebVoyage.
196	#5. Add the config properties file name that will control how record details from this database are displayed.

Figure A-1. webvoyage.properties file example (Continued)

Line#	
197	# Voyager bibliographic databases (vbib)
198	# Voyager citation databases (vcit)
199	# Z39.50 bibliographic databases (zbib)
200	# Z39.50 citation databases j(zcit)
201	#6. Specify the order in which the database appears within the group.
202	#7. Repeat steps 3 - 6 for each database that belongs to the group.
203	#
204	#Example:
205	#connect.db.group1=
206	#connect.db.group1.name=Academic Libraries
207	#connect.db.group1.VOY.dbCode=VOY
208	#connect.db.group1.VOY.name=Voyager University
209	#connect.db.group1.VOY.config=holdingsInfo.vbib.properties
210	#connect.db.group1.VOY.order=1
211	#connect.db.group1.APH.dbCode=APH
212	#connect.db.group1.APH.name=Aleph University
213	#connect.db.group1.APH.config=holdingsInfo.zbib.properties
214	#connect.db.group1.APH.order=2
215	#
216	=====
217	# The following lines are required to give the local database a name
218	# before any other database may be selected.
219	# Note that LOCAL database code "LOCAL" must be in capital letters.
220	=====
221	connect.db.LOCAL.dbCode=LOCAL
222	connect.db.LOCAL.name=My Library Catalog
223	connect.db.LOCAL.config=holdingsInfo.vbib.properties
224	=====
225	# This option controls whether users may set preferred
226	# database connections on their preferences page.
227	=====

Figure A-1. webvoyage.properties file example (Continued)

Line#	
228	connect.db.preference=N
229	
230	#connect.db.group1=
231	#connect.db.group1.name=Local Libraries
232	#connect.db.group1.order=1
233	#connect.db.group1.XXX.dbCode=
234	#connect.db.group1.XXX.name=
235	#connect.db.group1.XXX.config=holdingsInfo.vbib.properties
236	#connect.db.group1.XXX.order=1
237	#connect.db.group1.YYY.dbCode=YYY
238	#connect.db.group1.YYY.name=
239	#connect.db.group1.YYY.config=holdingsInfo.vbib.properties
240	#connect.db.group1.YYY.order=3
241	#connect.db.group1.ZZZ.dbCode=ZZZ
242	#connect.db.group1.ZZZ.name=
243	#connect.db.group1.ZZZ.config=holdingsInfo.vbib.properties
244	#connect.db.group1.KZZZ.order=4
245	#connect.db.group1.LOCAL.dbCode=LOCAL
246	#connect.db.group1.LOCAL.name=My Library Catalog
247	#connect.db.group1.LOCAL.config=holdingsInfo.vbib.properties
248	#connect.db.group1.LOCAL.order=1
249	#
250	#connect.db.group2=
251	#connect.db.group2.name=Academic Libraries
252	#connect.db.group2.order=2
253	#connect.db.group2.XYZ.dbCodeXYZ
254	#connect.db.group2.XYZ.name
255	#connect.db.group2.XYZ.config=holdingsInfo.vbib.properties
256	#connect.db.group2.XYZ.order=1
257	#
258	#connect.db.group3=

Figure A-1. webvoyage.properties file example (Continued)

Line#	
259	#connect.db.group3.name=Economics Libraries
260	#connect.db.group3.order=3
261	#connect.db.group3.ECON.dbCode=ECON
262	#connect.db.group3.ECON.name=
263	#connect.db.group3.ECON.config=holdingsInfo.vbib.properties
264	#connect.db.group3.ECON.order=1
265	#connect.db.group3.LOCAL.dbCode=LOCAL
266	#connect.db.group3.LOCAL.name=My Library Catalog
267	#connect.db.group3.LOCAL.config=holdingsInfo.vbib.properties
268	#connect.db.group3.LOCAL.order=2
269	#####
270	#
271	# Header
272	#
273	#####
274	page.header.login.linkText=Log in
275	page.header.login.link.pretext=
276	page.header.login.link.posttext= to your account
277	page.header.logout.linkText=Logout
278	# the username from the patron record will be inserted as the first pretext element
279	page.header.logout.link.pretext= is logged in
280	page.header.logout.link.posttext=
281	page.header.logo.image=ui/en_US/images/webVoyageLogo.jpg
282	page.header.logo.link=exit.do
283	page.header.logo.linkText=WebVoyáge
284	page.header.buttons.search.button=Search
285	page.header.buttons.search.message=Search the library
286	page.header.buttons.myList.button=My List
287	page.header.buttons.myList.message=My book list
288	page.header.buttons.mySearches.button=My Searches
289	page.header.buttons.mySearches.message=My search list

Figure A-1. webvoyage.properties file example (Continued)

Line#	
290	page.header.buttons.myAccount.button=My Account
291	page.header.buttons.myAccount.message=My account information
292	page.header.help.linktext=Help
293	page.header.help.link.pretext=
294	page.header.help.link.posttext=
295	#####
296	#
297	# Footer
298	#
299	#####
300	page.footer.buttons.help.message=Help on searching the library catalog
301	page.footer.buttons.search.button=Search
302	page.footer.buttons.search.message=Search the library
303	page.footer.buttons.myList.button=My List
304	page.footer.buttons.myList.message=My book list
305	page.footer.buttons.mySearches.button=My Searches
306	page.footer.buttons.mySearches.message=My search list
307	page.footer.buttons.myAccount.button=My Account
308	page.footer.buttons.myAccount.message=My account information
309	page.footer.buttons.help.button=Help
310	page.footer.library.linktext=Your Library Name Here
311	page.footer.library.link=http://your.librarylink.here
312	page.footer.copyright.message=©2007 Ex Libris Group. All rights reserved.
313	#####
314	#
315	# Quick Search
316	#
317	#####
318	page.searchQuick.argument.label=New Search :
319	page.search.quick.search.code=GKEY^*
320	page.searchQuick.go.button=Go

Figure A-1. webvoyage.properties file example (Continued)

```
Line#
321 page.searchQuick.go.button.message=Submit search the library
322 page.searchQuick.searchHistory.linkText=Search History
323 page.searchQuick.searchHistory.link.pretext=
324 page.searchQuick.searchHistory.link.posttext=
325 #####
326 #
327 # Login Page
328 #
329 #####
330 page.logIn.title=WebVoyáge Log In
331 page.logIn.heading=Log In
332 page.logIn.message="You must log in to access this feature"
333 page.logIn.logIn.button=Log in
334 page.logIn.logIn.button.message=Log in to access library feature
335 page.logIn.cancel.button=Cancel
336 page.logIn.cancel.button.message=Cancel log in
337 #=====
338 # At least one loginType must be defined, the others are optional and
339 # may be commented out.
340 #=====
341 page.logIn.loginType.barcode=Barcode
342 page.logIn.loginType.instId=Institution Id
343 page.logIn.loginType.ssn=Social Security Number
344 page.logIn.lastName=Last Name:
345 page.logIn.logIn.label=Log in
346 page.logIn.homeLibrary.label=Home Library
347 page.logIn.defaultCluster=
348 page.logIn.briefId.label=ID Number
349 #=====
350 # use of the PIN is optional, this line will have no effect if option.usePIN=N
351 #=====
```

Figure A-1. webvoyage.properties file example (Continued)

Line#	
352	page.logIn.pin=Personal Identification Number
353	=====
354	# use of the external authentication link is optional,
355	# this line will have no effect if option.extAuthSystemEnabled=N
356	=====
357	page.logIn.extAuth.linkText=Go to External Patron Login System
358	
359	##### #####
360	#
361	# Number of record display per page
362	#
363	##### #####
364	page.record.display.label=Records per page:
365	page.record.display.record.10=10 records per page
366	page.record.display.record.20=20 records per page
367	page.record.display.record.25=25 records per page
368	page.record.display.record.50=50 records per page
369	page.record.display.record.10=
370	page.record.display.record.10.name=10 records per page
371	page.record.display.record.10.order=1
372	page.record.display.record.20=
373	page.record.display.record.20.name=20 records per page
374	page.record.display.record.20.order=2
375	page.record.display.record.25=
376	page.record.display.record.25.name=25 records per page
377	page.record.display.record.25.order=3
378	page.record.display.record.50=
379	page.record.display.record.50.name=50 records per page
380	page.record.display.record.50.order=4
381	# default value
382	page.record.display.record=10

Figure A-1. webvoyage.properties file example (Continued)

```
Line#
383
384
385 #=====
386 # The following properties configure the "No Hits Redirect" feature when
387 # redirectEnabled=Y. The specified database code (dbCode) must be unique and
388 # defined in System Administration for this feature to work.  If enabled, this
389 #   feature
390 # will create an extra search button, whose text is defined below, when a search
391 #   returns no hits.
392 # When a user clicks this button, it will connect to the desired database
393 # and search that database.  The original connection to the current database will
394 #   be dropped.
395 #=====
396 page.search.redirectEnabled=N
397 page.search.reSearch.button=Search Another Database
398 page.search.reSearch.message=Search Another Database
399 page.search.reSearch.database.dbCode=CODE
400
401 #####
402 #
403 # Search Index Definitions
404 #   Search Index definitions are used on the Advanced search page. This section
405 #   allows the name of the index to be changed from what is defined in Sysadmin.
406 #   The order of these entries is controlled by the database.
407 #
408 #####
409 search.index.GKEY=
410 search.index.GKEY.display=Keyword Anywhere
411 search.index.TKEY=
412 search.index.TKEY.display=Title
413 search.index.SKEY=
414 search.index.SKEY.display=Subject
415 search.index.NKEY=
```

Figure A-1. webvoyage.properties file example (Continued)

Line#	
413	search.index.NKEY.display=Author Name
414	search.index.100A=
415	search.index.100A.display=Personal Name
416	search.index.260B=
417	search.index.260B.display=Publisher: Name
418	search.index.NAUT=
419	search.index.NAUT.display=Name/Uniform Title
420	search.index.260C=
421	search.index.260C.display=Publisher: Date
422	search.index.ISSN=
423	search.index.ISSN.display=ISSN
424	search.index.DEWD=
425	search.index.DEWD.display=Dewey Call Number
426	search.index.ISBN=
427	search.index.ISBN.display=ISBN
428	search.index.SERI=
429	search.index.SERI.display=Series
430	search.index.AUTI=
431	search.index.AUTI.display=Author/Title
432	
433	
434	#####
435	# Heading for holding records on item location, call number, and status
436	#####
437	search.item.location=Location
438	search.item.callNumber=Call Number
439	search.item.status=Status
440	#####
441	#
442	# Limit To
443	#

Figure A-1. webvoyage.properties file example (Continued)

```
Line#
444 #####
445 #=====
446 # To specify a default quick limit on the Basic Search page, list its name in the
    page.search.limitTo option.
447 # If there is no default quick limit on the Basic Search page, type "none"
448 # NOTE these limits are used in the post search Filter functionality as well.
449 #=====
450 page.search.limitTo.selected=none
451
452 page.search.limitTo.none=
453 page.search.limitTo.none.limit=none
454 page.search.limitTo.none.text=All Material
455 page.search.limitTo.2006AndAfter=
456 page.search.limitTo.2006AndAfter.limit=Date=2006-
457 page.search.limitTo.2006AndAfter.text=2006 And After
458 page.search.limitTo.English=
459 page.search.limitTo.English.limit=LANG=ENG
460 page.search.limitTo.English.text=English language materials
461 page.search.limitTo.Videos=
462 page.search.limitTo.Videos.limit=MEDI=v
463 page.search.limitTo.Videos.text=Videos
464 #####
465 #
466 # Select location
467 #These variables are used for course reserve searches in multi-cluster
    databases.
468 #
469 #####
470 page.search.selectLocation.page.title=WebVoyáge Select Locations
471 page.search.selectLocation.page.heading=Select Locations
472 page.search.selectLocation.page.label=Select Locations:
473 page.search.selectLocation.submit.button=Submit
474 page.search.selectLocation.submit.button.message=Submit location
```

Figure A-1. webvoyage.properties file example (Continued)

Line#	
475	page.search.selectLocation.cancel.button=Cancel
476	page.search.selectLocation.cancel.button.message=Cancel selection of locations
477	page.search.selectLocation.label=Select Locations:
478	page.search.selectLocation.linkText=Change Location
479	page.search.selectLocation.link.pretext=
480	page.search.selectLocation.link.posttext=
481	page.search.selectLocation.allClusters=All Clusters
482	page.search.selectLocation.allLocations=All Locations
483	page.search.selectLocation.defaultCluster=Default Cluster
484	page.search.selectLocation.defaultLocation=Default Location
485	
486	
487	
488	#####
489	#
490	# Search Pages
491	#
492	#####
493	page.search.argument.label=Search:
494	page.search.database.label=Database:
495	page.search.buttons.quick.button=Quick
496	page.search.buttons.basic.button=Basic
497	page.search.buttons.basic.message=Basic search
498	page.search.buttons.advanced.button=Advanced
499	page.search.buttons.advanced.message=Advanced search
500	page.search.buttons.subjectHeading.button=Subject
501	page.search.buttons.subjectHeading.message=Search by subject
502	page.search.buttons.author.button=Author
503	page.search.buttons.author.message=Search by author
504	page.search.buttons.courseReserve.button=Course Reserve
505	page.search.buttons.courseReserve.message=Search by course reserve

Figure A-1. webvoyage.properties file example (Continued)

```
Line#
506 page.search.search.label=Search:
507 page.search.change.linkText=Change
508 page.search.change.link.pretext=
509 page.search.change.link.posttext=
510 page.search.within.label=within
511 page.search.limitTo.label=Limit To:
512 page.search.searchHistory.linkText=Search History
513 page.search.searchHistory.link.pretext=
514 page.search.searchHistory.link.posttext=
515 page.search.search.button=Search
516 page.search.search.button.message=Search the library
517 page.search.clear.button=Reset
518 page.search.clear.button.message=Reset dropdown menus
519
520 #####
521 #
522 #   Search Basic
523 #
524 #####
525 page.search.basic.title=WebVoyáge Basic Search
526 page.search.basic.heading=Basic Search
527 #
528 # The Search Code must be one of the codes listed on either the Search
529 # Definitions, Composite Definitions, or Keyword Searches dialogs (in the
530 # System Administration module). In addition to the search codes on those
531 # dialogs,
532 # you may use the codes FT (Full-Text Keyword Search) and CMD or BT (Command
533 # Search.)
534 #
535 # To modify search codes, you may use the following:
536 #
537 # ? Enter a plus (+) sign after the Search Code. This will turn that particular
538 # search into a Browse search. For example, entering AUTH+ would specify
```

Figure A-1. webvoyage.properties file example (Continued)

Line#	
537	# an Author Browse search type.
538	#
539	# ? Enter an asterisk (*) after the Search Code. This will cause that search to
540	# be performed with Relevance. For example, entering CMD* will indicate a
541	# Command Search with Relevance search type.
542	#
543	# ? Enter a caret (^) after an index code (such as GKEY, SKEY, TKEY, JKEY,
544	# etc.) to insert an AND operator between the strings in a search. An asterisk
545	# may be placed after this symbol to add relevance to the search.
546	#
547	# ? Enter a pipe () after an index code (such as GKEY, SKEY, TKEY, JKEY,
548	# etc.) to insert an OR operator between the strings in a search. An asterisk
549	# may be placed after this symbol to add relevance to the search.
550	
551	=====
552	# Basic search codes
553	=====
554	page.search.basic.search.code.selected=GKEY *
555	page.search.basic.search.code.keyAnyAndWith=
556	page.search.basic.search.code.keyAnyAndWith.code=GKEY^*
557	page.search.basic.search.code.keyAnyAndWith.order=1
558	page.search.basic.search.code.keyAnyAndWith.display=All Fields
559	#page.search.basic.search.code.keyAnyOrWith=
560	#page.search.basic.search.code.keyAnyOrWith.code=GKEY *
561	#page.search.basic.search.code.keyAnyOrWith.order=2
562	#page.search.basic.search.code.keyAnyOrWith.display=Keyword Anywhere OR with Relevance
563	page.search.basic.search.code.titleKeyAnd=
564	page.search.basic.search.code.titleKeyAnd.code=TKEY^
565	page.search.basic.search.code.titleKeyAnd.order=3
566	page.search.basic.search.code.titleKeyAnd.display=Title
567	page.search.basic.search.code.subjectKeyAnd=

Figure A-1. webvoyage.properties file example (Continued)

Line#	
568	page.search.basic.search.code.subjectKeyAnd.code=SKEY^
569	page.search.basic.search.code.subjectKeyAnd.order=4
570	page.search.basic.search.code.subjectKeyAnd.display=Subject
571	page.search.basic.search.code.journalTitleKeyAnd=
572	page.search.basic.search.code.journalTitleKeyAnd.code=JKEY^
573	page.search.basic.search.code.journalTitleKeyAnd.order=5
574	page.search.basic.search.code.journalTitleKeyAnd.display=Journal Title
575	#page.search.basic.search.code.keyRelSearch=
576	#page.search.basic.search.code.keyRelSearch.code=FT*
577	#page.search.basic.search.code.keyRelSearch.order=6
578	#page.search.basic.search.code.keyRelSearch.display=Keyword Relevance Search
579	page.search.basic.search.code.authorKey=
580	page.search.basic.search.code.authorKey.code=NKEY*
581	page.search.basic.search.code.authorKey.order=7
582	page.search.basic.search.code.authorKey.display=Author
583	#page.search.basic.search.code.leftAnchorTitle=
584	#page.search.basic.search.code.leftAnchorTitle.code=TALL
585	#page.search.basic.search.code.leftAnchorTitle.order=8
586	#page.search.basic.search.code.leftAnchorTitle.display=Left Anchored Title
587	page.search.basic.search.code.callNumberBrowse=
588	page.search.basic.search.code.callNumberBrowse.code=CALL+
589	page.search.basic.search.code.callNumberBrowse.order=9
590	page.search.basic.search.code.callNumberBrowse.display=Call Number
591	#page.search.basic.search.code.subjectBrowse=
592	#page.search.basic.search.code.subjectBrowse.code=SUBJ+
593	#page.search.basic.search.code.subjectBrowse.order=10
594	#page.search.basic.search.code.subjectBrowse.display=Subject Browse
595	#page.search.basic.search.code.commSearchWithRel=
596	#page.search.basic.search.code.commSearchWithRel.code=CMD*
597	#page.search.basic.search.code.commSearchWithRel.order=11
598	#page.search.basic.search.code.commSearchWithRel.display=Command Search with Relevance

Figure A-1. webvoyage.properties file example (Continued)

Line#	
599	#page.search.basic.search.code.dateSearch=
600	#page.search.basic.search.code.dateSearch.code=008D
601	#page.search.basic.search.code.dateSearch.order=12
602	#page.search.basic.search.code.dateSearch.display=Date Search (Left Anchored)
603	#page.search.basic.search.code.nameTitleBrowse=
604	#page.search.basic.search.code.nameTitleBrowse.code=AUTH+
605	#page.search.basic.search.code.nameTitleBrowse.order=13
606	#page.search.basic.search.code.nameTitleBrowse.display=Name Title Browse
607	#page.search.basic.search.code.fullTextKeySearch=
608	#page.search.basic.search.code.fullTextKeySearch.code=FT
609	#page.search.basic.search.code.fullTextKeySearch.order=14
610	#page.search.basic.search.code.fullTextKeySearch.display=Full Text Keyword Search
611	#page.search.basic.search.code.commandSearch=
612	#page.search.basic.search.code.commandSearch.code=CMD
613	#page.search.basic.search.code.commandSearch.order=14
614	#page.search.basic.search.code.commandSearch.display=Command Search
615	#page.search.basic.search.code.subjectHeadingsKeyword=
616	#page.search.basic.search.code.subjectHeadingsKeyword.code=SUBJ@
617	#page.search.basic.search.code.subjectHeadingsKeyword.order=15
618	#page.search.basic.search.code.subjectHeadingsKeyword.display=Subject Headings Keyword
619	
620	
621	#####
622	#
623	# Search Advanced
624	#
625	#####
626	page.search.advanced.title=WebVoyage Advanced Search
627	page.search.advanced.heading=Advanced Search
628	page.search.advanced.label=Advanced Search
629	

Figure A-1. webvoyage.properties file example (Continued)

Line#	
630	#=====
631	# The number of search arguments and it must be a positive value.
632	# The default is 3
633	#=====
634	page.search.advanced.numsets=3
635	
636	page.search.advanced.arg.label=Search Argument
637	page.search.advanced.selection.argType.label=Search Argument Type
638	page.search.advanced.argType.any=any of these
639	page.search.advanced.argType.all=all of these
640	page.search.advanced.argType.phrase=as a phrase
641	page.search.advanced.selection.combine.label=Combine With
642	page.search.advanced.combine.and=AND
643	page.search.advanced.combine.or=OR
644	page.search.advanced.combine.not=NOT
645	page.search.advanced.search.label=Search:
646	page.search.advanced.year.selection.label=Year:
647	page.search.advanced.location.label=Location:
648	#=====
649	# The name of the default location, if any.
650	# This option may be left blank or commented out.
651	#=====
652	page.search.advanced.location.default=
653	# the text used to indicate all locations should be included
654	page.search.advanced.location.all=All Locations
655	page.search.advanced.materialType.label=Material Type:
656	page.search.advanced.format.label=Format:
657	page.search.advanced.language.label=Language:
658	page.search.advanced.yearOption.defined=select
659	page.search.advanced.yearOption.range=range
660	page.search.advanced.fromYear.label=From

Figure A-1. webvoyage.properties file example (Continued)

Line#	
661	page.search.advanced.toYear.label=To
662	#####
663	# YYYY in the lines below is a token meaning the current year.
664	# It is used to enable relative ranges to be defined. For example,
665	# YYYY-1
666	# will be interpreted as a range beginning at the year before the
667	# current year.
668	#####
669	page.search.advanced.year.limit.current=
670	page.search.advanced.year.limit.current.name=Current Material
671	page.search.advanced.year.limit.current.def=YYYY-1
672	page.search.advanced.year.limit.current.order=1
673	page.search.advanced.year.limit.prev5=
674	page.search.advanced.year.limit.prev5.name=Last 5 Years
675	page.search.advanced.year.limit.prev5.def=YYYY-5
676	page.search.advanced.year.limit.prev5.order=2
677	page.search.advanced.year.limit.prev10=
678	page.search.advanced.year.limit.prev10.name=Last 10 Years
679	page.search.advanced.year.limit.prev10.def=YYYY-10
680	page.search.advanced.year.limit.prev10.order=3
681	
682	page.search.advanced.place.label=Place
683	page.search.advanced.status.selection.label=Status:
684	page.search.advanced.within.label=within
685	
686	#####
687	#
688	# Search Subject
689	#
690	#####
691	page.search.subject.title=WebVoyage Subject Search

Figure A-1. webvoyage.properties file example (Continued)

```
Line#
692 page.search.subject.heading=Subject Search
693 page.search.subjectPage.label=Subject Search
694 page.search.subject.message=Enter a subject to search the Subject Headings Index
695 page.search.subject.argument.label=Subject:
696 #=====
697 # page.search.subject.search.code defines the index to be used
698 # for searches initiated from the subject search page.
699 #=====
700 page.search.subject.search.code=SUBJ@
701 page.search.subject.search.display=Subject
702 #####
703 #
704 # Search Author
705 #
706 #####
707 page.search.author.title=WebVoyáge Author Search
708 page.search.author.heading=Author Search
709 page.search.authorPage.label=Author Search
710 page.search.author.label=Author:
711 page.search.author.message=Enter an author's name to search the Author Index
712 page.search.author.lastName.argument.label=Last Name
713 page.search.author.firstName.argument.label=Initials or First Name
714 #=====
715 # page.search.author.search.code defines the index to be used
716 # for searches initiated from the author search page.
717 #=====
718 page.search.author.search.code=NAME@
719 page.search.author.search.display=Author
720 #####
721 #
722 # Search Course Reserve
```

Figure A-1. webvoyage.properties file example (Continued)

Line#	
723	#
724	#####
725	page.search.courseReserve.data.page.title=WebVoyage Course Reserve Data Page
726	page.search.courseReserve.data.page.heading=Course Reserve Data Page
727	page.search.courseReserve.alpha.page.title=WebVoyage Course Reserve Browse
728	page.search.courseReserve.alpha.page.heading=Course Reserve Browse Page
729	page.search.courseReserve.instructor.page.label=Instructor
730	page.search.courseReserve.instructor.page.title=WebVoyage Course Reserve Instructor Page
731	page.search.courseReserve.instructor.page.heading=Course Reserve Instructor Page
732	page.search.courseReserve.department.page.label=Department
733	page.search.courseReserve.department.page.title=WebVoyage Course Reserve Department Page
734	page.search.courseReserve.department.page.heading=Course Reserve Department Page
735	page.search.courseReserve.course.page.title=WebVoyage Course Reserve Course Page
736	page.search.courseReserve.course.page.heading=Course Reserve Course Page
737	page.search.courseReserve.course.page.label=Course
738	page.search.courseReserve.page.label=Course Reserve Search
739	page.search.courseReserve.label=Course Reserve Search:
740	#####
741	# Browse option -
742	# "Y" for course reserve alpha list for instructor, department, and course
743	# "N" (default) for course reserve dropdown instructor, department, course, and section
744	# Check htdocs/help/index.html for link to different version of help for alpha list
745	#####
746	page.search.courseReserve.browse=N
747	page.search.courseReserve.instructor=Instructor:
748	page.search.courseReserve.department=Department:
749	page.search.courseReserve.course=Course:
750	page.search.courseReserve.section=Section:
751	
752	#####

Figure A-1. webvoyage.properties file example (Continued)

Line#	
753	# the name Any from the course reserve drop down link on search course reserve page
754	#=====
755	page.search.courseReserve.term.any=Any
756	
757	#####
758	#
759	# Holdings Information Section
760	#
761	#####
762	holdingsInfo.page.title=WebVoyáge Holdings Information
763	holdingsInfo.page.heading=Holdings Information
764	holdingsInfo.page.label=Bibliographic Details
765	
766	#=====
767	# Action box on the holding information page
768	#=====
769	actionBox.thisItem=This item
770	actionBox.recordView.linkText=Record View
771	actionBox.staffView.linkText=Staff View
772	actionBox.actions=Actions
773	actionBox.actions.makeRequest.linkText=Make a Request
774	actionBox.actions.makeRequest.link.posttext=(e.g. Hold, Recall, Photocopy)
775	actionBox.actions.print.linkText=Print
776	actionBox.actions.export.linkText=Export
777	actionBox.actions.email.linkText=E-mail
778	#NOTE the option.email variable must be Y in order for the email link to appear.
779	
780	actionBox.actions.addToList.linkText=Add to My List
781	actionBox.moreAboutThisItem=More About This Item From
782	# actionBox.openURL properties in holdingsInfo.X.properties
783	# actionBox.requestURI properties in holdingsInfo.X.properties

Figure A-1. webvoyage.properties file example (Continued)

```

Line#
784
785 #=====
786 # Holdings info text to display when related records feature is turned on.
787 # NOTE option.loadRelatedRecords must be Y
788 # NOTE the pretext, linktext, and posttext are used to display the text
789 # for the related items link. Therefore, this approach would provide more
790 # flexible how to construct the text for the link.
791 # The default is "Click (pretext) here (linktext has underlining URL to the
792 # related items link) for related items" (posttext).
793 #=====
794 holdingsInfo.relatedRecords=Related Records
795 holdingsInfo.relatedRecords.maxPerPage=10
796 holdingsInfo.relatedRecords.profile.ISSNPREC=
797 holdingsInfo.relatedRecords.profile.ISSNPREC.link.pretext=Click
798 holdingsInfo.relatedRecords.profile.ISSNPREC.link.text=here
799 holdingsInfo.relatedRecords.profile.ISSNPREC.link.posttext=for related items
800 holdingsInfo.relatedRecords.profile.ISSNSUCC=
801 holdingsInfo.relatedRecords.profile.ISSNSUCC.link.pretext=Click
802 holdingsInfo.relatedRecords.profile.ISSNSUCC.link.text=here
803 holdingsInfo.relatedRecords.profile.ISSNSUCC.link.posttext=for related items
804 holdingsInfo.relatedRecords.profile.ISSNCOMP=
805 holdingsInfo.relatedRecords.profile.ISSNCOMP.link.pretext=Click
806 holdingsInfo.relatedRecords.profile.ISSNCOMP.link.text=here
807 holdingsInfo.relatedRecords.profile.ISSNCOMP.link.posttext=for related items
808 #=====
809 # Label for displaying source record link in the holdings record page
810 ## NOTE option.loadRelatedRecords must be Y
811 #=====
812 holdingsInfo.sourceRecord=Source Record
813 #=====
814 # Order status for the holdings record. The status is from the line

```

Figure A-1. webvoyage.properties file example (Continued)

```
Line#
815 # item status defined in the database.
816 # The "+" indicates status for multiple holdings records.
817 # Substitution characters:
818 # c -- number of copies
819 # d -- date
820 #=====
821 holdingsInfo.orderStatus.Pending=In the Pre-Order Process
822 holdingsInfo.orderStatus.Pending+=In the Pre-Order Process
823 holdingsInfo.orderStatus.Approved=\\c Copy Ordered as of \\d
824 holdingsInfo.orderStatus.Approved+=\\c Copies Ordered as of \\d
825 holdingsInfo.orderStatus.Claimed=\\c Copy Claimed as of \\d
826 holdingsInfo.orderStatus.Claimed+=\\c Copies Claimed as of \\d
827 holdingsInfo.orderStatus.ReceivedComplete=\\c Copy Received as of \\d
828 holdingsInfo.orderStatus.ReceivedComplete+=\\c Copies Received as of \\d
829 #=====
830 # Holdings item status. Note that the status code is exactly the same as the
      request status
831 #=====
832 holdings.item.status.1=Not Charged
833 holdings.item.status.2=\\i Charged - Due on \\d \\u
834 holdings.item.status.3=\\i Renewed - Due on \\d \\u
835 holdings.item.status.4=\\i Overdue - Due on \\d \\u
836 holdings.item.status.5=\\i Requests: \\c
837 holdings.item.status.6=\\i Requests: \\c
838 holdings.item.status.7=\\i On hold at \\l
839 holdings.item.status.8=\\i In transit \\d
840 holdings.item.status.9=\\i In transit to \\l \\d
841 holdings.item.status.10=\\i In transit to \\l \\d
842 holdings.item.status.11=\\i Discharged - \\d \\u
843 holdings.item.status.12=\\i Missing - \\d
844 holdings.item.status.14=\\i Lost - \\d
845 holdings.item.status.18=\\i At Bindery - \\d
```

Figure A-1. webvoyage.properties file example (Continued)

```

Line#
846 holdings.item.status.21=\\i Scheduled
847 holdings.item.status.22=\\i In Process \\d
848 holdings.item.status.23=\\i Requested
849 holdings.item.status.24=\\i Requested
850 holdings.item.status.25=\\i Requested
851
852 #=====
853 # Holdings item request status code and display text. Note that the status code
854 # is exactly as the status code for item status
855 #=====
856 holdings.item.request.status.1=\\i has \\c requests
857 holdings.item.request.status.2=\\i Charged (Requests: \\c) - Due on \\d \\u
858 holdings.item.request.status.3=\\i Renewed (Requests: \\c) - Due on \\d \\u
859 holdings.item.request.status.4=\\i Overdue (Requests: \\c) - Due on \\d \\u
860 holdings.item.request.status.7=\\i On hold at \\l (Requests: \\c)
861 holdings.item.request.status.8=\\i In transit \\d (Requests: \\c)
862 holdings.item.request.status.9=\\i In transit to \\l \\d (Requests: \\c)
863 holdings.item.request.status.10=\\i In transit to \\l \\d (Requests: \\c)
864 holdings.item.request.status.11=\\i Discharged - \\d \\u (Requests: \\c)
865 holdings.item.request.status.12=\\i Missing - \\d (Requests: \\c)
866 holdings.item.request.status.14=\\i Lost - \\d (Requests: \\c)
867 holdings.item.request.status.18=\\i At Bindery - \\d (Requests: \\c)
868 holdings.item.request.status.22=\\i In Process \\d (Requests: \\c)
869 holdings.item.request.status.21=\\i Scheduled (Requests: \\c)
870 holdings.item.request.status.22=\\i In Process \\d
871 holdings.item.request.status.24=\\i Requests: \\c
872 holdings.item.request.status.25=\\i Requests: \\c
873
874 #=====
875 # DB Holdings jump bar to allow traverse to the desire section
876 # of database holdings in a holdings record. This feature only

```

Figure A-1. webvoyage.properties file example (Continued)

```
Line#
877 # activates in a multiple database environment and
878 # when the holding jump bar = Y
879 #=====
880 db.holdings.jumpBar=Y
881 db.holdings.jumpBar.text=Held at:
882 db.holdings.jumpBar.back=Back to library list
883
884 #####
885 #
886 # Search Results Section
887 #
888 #####
889
890 #####
891 #
892 # "Jump Bar" configuration (prev/next)
893 #
894 #####
895 jumpBar.next=Next
896 jumpBar.prev=Prev
897 # separator between first/last page and the rest of the short list
898 jumpBar.discontinuity=...
899 # how many pages to show left and right of the current page
900 jumpBar.viewWindow=2
901 # text separating page X_of_Y in record view results
902 jumpBar.recsOf.separator=of
903 #####
904 #
905 # "Add to list" messages
906 #
907 #####
```

Figure A-1. webvoyage.properties file example (Continued)

Line#	
908	searchResults.saveSelected.errMsg=Selection not saved.
909	searchResults.saveSelected.successMsg=Selection saved.
910	#####
911	#
912	# Call number search results page
913	#
914	#####
915	page.searchResults.callNumbers.page.title=WebVoyage Call Number
916	page.searchResults.callNumbers.page.heading=Call Number
917	page.searchResults.callNumbers.page.label=Call Number
918	#####
919	#
920	# Headings search results page
921	#
922	#####
923	page.searchResults.headings.page.title=WebVoyage Subjects
924	page.searchResults.headings.page.heading=Subjects
925	#=====
926	# The following headings are also used in jump bar and titles for headings page
927	#=====
928	headings.authors=Authors
929	headings.subjects=Subjects
930	headings.titles=Titles
931	headings.namesTitles=Name/Titles
932	headings.callNumbers=Call Numbers
933	#=====
	==
934	# Reference code for display label for related topic from the heading search
935	#=====
	==
936	headings.reference.code.Authorized=Authorized:
937	headings.reference.code.Non-authorized=Non-authorized:
938	headings.reference.code.SeeReference=See:

Figure A-1. webvoyage.properties file example (Continued)

```
Line#
939 headings.reference.code.SeeAlsoReference=See Also:
940 headings.reference.code.EarlierHeading=Earlier Heading:
941 headings.reference.code.LaterHeading=Later Heading:
942 headings.reference.code.Acronym=Acronym:
943 headings.reference.code.MusicalComposition=Musical Composition:
944 headings.reference.code.BroaderTerm=Broader Term:
945 headings.reference.code.NarrowerTerm=Narrower Term:
946 headings.reference.code.UntracedReference=Untraced Reference:
947 headings.reference.code.TracedReference=Traced Reference:
948 #=====
949 # Scope notes code for displaying the label text for the topic from search
    result headings page
950 #=====
951 headings.scopeNote.code.260=Search Under:
952 headings.scopeNote.code.360=Search Also Under:
953 headings.scopeNote.code.663=Search Also Under:
954 headings.scopeNote.code.664=Search Under:
955 headings.scopeNote.code.665=History:
956 headings.scopeNote.code.666=Note:
957 headings.scopeNote.code.680=Note:
958 #####
959 #
960 # Search titles
961 #
962 #####
963 page.searchResults.titles.page.title=WebVoyáge Titles
964 page.searchResults.titles.page.heading=Titles
965 page.searchResults.titles.page.label=Titles
966 #####
967 #
968 # Simultaneous search status
969 #
```

Figure A-1. webvoyage.properties file example (Continued)

Line#	
970	#####
971	page.searchStatus.page.title=WebVoyage Search Status
972	page.searchStatus.page.heading=Search Status
973	page.searchStatus.page.label=Search Status
974	search.status.id=VWEBV en_US
975	#=====
976	# search status page refresh time in sec
977	#=====
978	page.searchStatus.refresh=5
979	
980	page.search.stop.button=Stop
981	page.search.stop.button.message=Stop the search
982	page.searchStatus.show.button=Show
983	page.searchStatus.show.button.message=Show search status
984	page.searchStatus.status=Search Status
985	page.searchStatus.database=Database Name
986	#=====
987	# search status code
988	#=====
989	page.searchStatus.Status_Searching=Searching...
990	page.searchStatus.Status_Receiving=Receiving: %s of %s
991	page.searchStatus.Status_DBFail=Database Failure
992	page.searchStatus.Status_SearchFail=Search Failed
993	page.searchStatus.Status_SearchIncompatible=Search Incompatible
994	page.searchStatus.Status_SearchDone=Done %s Records
995	page.searchStatus.Status_DBReset=Database Resetting
996	page.searchStatus.Status_DBVersion=Database Version Incompatible
997	page.searchStatus.Status_DBLicense=Database License Block
998	
999	#=====
1000	# New search results item status

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1001	#=====
1002	page.searchResults.item.status.noHoldingsAvailable=no holdings available
1003	page.searchResults.item.status.noItemInfo=no item information
1004	page.searchResults.item.status.available=available
1005	page.searchResults.item.status.unavailable=not available
1006	page.searchResults.item.status.multipleItemsAvailable=multiple items available
1007	page.searchResults.item.status.multipleHoldingsAvailable= multiple holdings available
1008	page.searchResults.item.status.noCallNumber=No call number
1009	#####
1010	#
1011	# Search results, titles page header label, link configuration
1012	#
1013	#####
1014	page.searchResults.recordsFound.label=results found
1015	page.searchResults.saveSearch.linkText=Save Search
1016	page.searchResults.saveSearch.link.pretext=
1017	page.searchResults.saveSearch.link.posttext=
1018	page.searchResults.editSearch.linkText=Edit Search
1019	page.searchResults.editSearch.link.pretext=
1020	page.searchResults.editSearch.link.posttext=
1021	page.searchResults.saveSearchAsAlert.linkText=Save Search as Alert
1022	page.searchResults.saveSearchAsAlert.link.pretext=
1023	page.searchResults.saveSearchAsAlert.link.posttext=
1024	
1025	#####
1026	#
1027	# Search results, browse bar (print, export buttons, selection of all or page
1028	# record per page, post sort menu
1029	#
1030	#####
1031	page.searchResults.browseBar.print.button=Print

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1032	page.searchResults.browseBar.print.button.message=Print the search results
1033	page.searchResults.browseBar.export.button=Export
1034	page.searchResults.browseBar.export.button.message=Export the search results
1035	page.searchResults.browseBar.email.button=E-mail
1036	page.searchResults.browseBar.email.button.message=E-mail the search results
1037	page.searchResults.browseBar.addToList.button=Add to List
1038	page.searchResults.browseBar.addToList.button.message=Add to the list of my search results
1039	page.searchResults.browseBar.update.button=Update
1040	page.searchResults.browseBar.update.button.message=Update current page
1041	page.searchResults.browseBar.delete.button=Delete
1042	page.searchResults.browseBar.delete.button.message=Delete selected or all items
1043	=====
1044	# Select display of the results -- all or page
1045	=====
1046	page.searchResults.selectPage.label=Select
1047	page.searchResults.selectPage.type.all=All
1048	page.searchResults.selectPage.type.page=Page
1049	
1050	=====
1051	# Post sort menu to provide additional filtering on the search results
1052	=====
1053	page.searchResults.postSortDisplay=Y
1054	page.searchResults.sort.label=Sort By:
1055	page.searchResults.sort.AUTHOR=
1056	page.searchResults.sort.AUTHOR.text=Author
1057	page.searchResults.sort.AUTHOR.order=1
1058	page.searchResults.sort.TITLE=
1059	page.searchResults.sort.TITLE.text=Title
1060	page.searchResults.sort.TITLE.order=2
1061	page.searchResults.sort.PUB_DATE=
1062	page.searchResults.sort.PUB_DATE.text=Publication Date

Figure A-1. webvoyage.properties file example (Continued)

```
Line#
1063 page.searchResults.sort.PUB_DATE.order=3
1064 page.searchResults.sort.PUB_DATE_DESC=
1065 page.searchResults.sort.PUB_DATE_DESC.text=Publication Date Descending
1066 page.searchResults.sort.PUB_DATE_DESC.order=4
1067 page.searchResults.sort.RELEVANCE=
1068 page.searchResults.sort.RELEVANCE.text=Relevance
1069 page.searchResults.sort.RELEVANCE.order=5
1070
1071
1072 page.searchResults.filtersBlock.label=Filter Your Search:
1073 page.searchResults.filtersBlock.remove.linkText=remove filter
1074 # this property controls the text used to indicate a search has been filtered
1075 page.searchResults.filtered=Filtered
1076
1077 page.searchResults.saveSearchAddSuccess=Successfully saved your search.
1078 page.searchResults.saveSearchAddFailure=Failed to save your search.
1079 #####
1080 #
1081 # Export search results labels, buttons. Export uses the same format as print.
1082 #
1083 #####
1084 page.exportDialog.page.title=WebVoyáge Export Results
1085 page.exportDialog.page.heading=Export Results
1086 page.exportDialog.page.label=Export
1087 page.exportDialog.export.button=Click to Export
1088 page.exportDialog.export.moreRecords= more bibliographic records...
1089 page.exportDialog.export.button.action=
1090 page.exportDialog.export.button.message=Export search results
1091 page.exportDialog.export.instructions=To export this result, choose the desired
    format and click Export
1092 #####
1093 #
```

Figure A-1. webvoyage.properties file example (Continued)

```

Line#
1094 # Print search results labels, buttons, and format selections
1095 #
1096 #####
1097 page.printDialog.page.title=WebVoyage Print Titles
1098 page.printDialog.page.heading=Print Titles
1099 page.printDialog.page.label=Print Titles
1100 page.printDialog.format.label=Format:
1101 page.return.button=Return
1102 page.return.button.message=Return to previous page
1103 page.printDialog.print.moreRecords= more bibliographic records...
1104 page.printDialog.print.button=Click to Print
1105 page.printDialog.print.button.message=Print the selected page(s)
1106 #=====
1107 # Print and Export format selection. The default format is marked "selected".
1108 # Each format has display name for the drop down # The xsl stylesheet used for
      each format is defined in the record display # configuration file,
      holdingsInfo.X.properties by default. The format # names (X in
      page.printDialog.format.X) must match exactly the names # of the
      print formats in the record display configuration file.
1109 # Also, each format defined here must have a stylesheet associated with it # in
      each of the record display configuration files, including any that #
      are customer defined.
1110 #=====
1111 page.printDialog.format.selected=brief
1112 page.printDialog.format.full=
1113 page.printDialog.format.full.label=Full Record (All Fields)
1114 page.printDialog.format.full.order=1
1115 page.printDialog.format.brief=
1116 page.printDialog.format.brief.label=Brief Record (Title, Author, Location & Call
      Number)
1117 page.printDialog.format.brief.order=2
1118 page.printDialog.format.label=Print Format:
1119 page.printDialog.error.noSelectedRecords=No records were selected.
1120
1121 #####
1122 #

```

Figure A-1. webvoyage.properties file example (Continued)

```
Line#
1123 # Print results results labels, buttons, and format selections
1124 #
1125 #####
1126 page.printResults.page.title=WebVoyáge Printable Record Page
1127 page.printResults.page.heading=Printable View
1128
1129 #=====
1130 # Note for the export formats Latin1, Raw and UTF-8 there is no xsl file
1131 #=====
1132 page.exportDialog.format.selected=endNote
1133 page.exportDialog.format.endNote=
1134 page.exportDialog.format.endNote.label=EndNote Citation
1135 page.exportDialog.format.endNote.order=1
1136 page.exportDialog.format.latin1=
1137 page.exportDialog.format.latin1.label=Latin1 MARC
1138 page.exportDialog.format.latin1.order=2
1139 page.exportDialog.format.raw=
1140 page.exportDialog.format.raw.label=Raw MARC
1141 page.exportDialog.format.raw.order=3
1142 page.exportDialog.format.utf-8=
1143 page.exportDialog.format.utf-8.label=UTF-8 MARC
1144 page.exportDialog.format.utf-8.order=4
1145 page.exportDialog.format.label=Export Format:
1146 page.exportDialog.error.noSelectedRecords=No records were selected.
1147
1148 #=====
1149 # Print property DOI and URN URL to convert the DOI and URN to the physical
      location
1150 # of the digital item
1151 #=====
1152 property.DOI=http://hdl.handle.net/
1153 property.URN=http://hdl.handle.net/
```

Figure A-1. webvoyage.properties file example (Continued)


```

Line#
1154 #####
1155 #
1156 # Search History
1157 #
1158 #####
1159 page.searchHistory.page.title=WebVoyage Search History
1160 page.searchHistory.page.heading=Search History
1161 page.searchHistory.page.label=Search History
1162 page.searchHistory.heading.combine=Combine
1163 page.searchHistory.heading.search=Search
1164 page.searchHistory.heading.searchType=Search Type
1165 page.searchHistory.heading.results=Results
1166 page.searchHistory.heading.action=Action
1167 page.searchHistory.data.action.rerun.linkText=Re-run
1168 page.searchHistory.data.action.edit.linkText=Edit
1169 page.searchHistory.data.action.save.linkText=Save
1170 page.searchHistory.button.combine=Search
1171 #=====
1172 # Display this string in the "Hits" column if the search is browse or
    simultaneous search
1173 # or the number of hits is unknown
1174 #=====
1175 page.searchHistory.browse_simul=BROWSE/Simul
1176 #####
1177 #
1178 # My Searches
1179 #
1180 #####
1181 page.searchMySearches.page.title=WebVoyage My Searches
1182 page.searchMySearches.page.heading=My Searches
1183 page.searchMySearches.heading.combine=Combine
1184 page.searchMySearches.heading.search=Search

```

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1185	page.searchMySearches.heading.newhits=Results
1186	page.searchMySearches.heading.searchType=Search Type
1187	page.searchMySearches.heading.date=Date
1188	page.searchMySearches.heading.alertfrequency=Alert Frequency
1189	page.searchMySearches.heading.action=Actions
1190	page.searchMySearches.heading.summary=This table displays the search history.
1191	page.searchMySearches.data.action.rerun.linkText=Re-Run
1192	page.searchMySearches.data.action.edit.linkText=Edit
1193	page.searchMySearches.data.action.delete.linkText=Delete
1194	page.searchMySearches.data.newhits.yes=Y
1195	page.searchMySearches.data.newhits.no=N
1196	page.searchMySearches.data.alertfrequency.default=1
1197	page.searchMySearches.data.alertfrequency.1=None
1198	page.searchMySearches.data.alertfrequency.2=Daily
1199	page.searchMySearches.data.alertfrequency.3=Weekly
1200	page.searchMySearches.data.alertfrequency.4=Bi-Monthly
1201	page.searchMySearches.data.alertfrequency.5=Monthly
1202	page.searchMySearches.save.button=Save Changes
1203	page.searchMySearches.combineSearches.button=Search
1204	#####
1205	#
1206	# Select Database
1207	#
1208	#####
1209	page.selectDatabase.title=WebVoyáge Select Database
1210	page.selectDatabase.heading=Select Database
1211	page.selectDatabase.selectDatabase.label=Select Databases:
1212	page.selectDatabase.selectDatabase.message=Select database(s) to search:
1213	page.selectDatabase.select.button=Select
1214	page.selectDatabase.select.button.message=Select libraries to search
1215	page.selectDatabase.cancel.button=Reset

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1216	page.selectDatabase.cancel.button.message=Reset selection
1217	
1218	
1219	
1220	#####
1221	#
1222	# My Account
1223	#
1224	#####
1225	page.myAccount.myAccount.title=WebVoyage My Account
1226	page.myAccount.myAccount.heading=My Account
1227	page.myAccount.myAccount.linkText=My Account
1228	page.myAccount.myAccount.link.pretext=
1229	page.myAccount.myAccount.link.posttext=
1230	page.myAccount.changePin.linkText=Change PIN
1231	page.myAccount.changePin.link.pretext=
1232	page.myAccount.changePin.link.posttext=
1233	page.myAccount.editPreferences.linkText=Edit Preferences
1234	page.myAccount.editPreferences.link.pretext=
1235	page.myAccount.editPreferences.link.posttext=
1236	page.myAccount.viewPersonalInfo.linkText=View Personal Information
1237	page.myAccount.viewPersonalInfo.link.pretext=
1238	page.myAccount.viewPersonalInfo.link.posttext=
1239	page.myAccount.page.label=My Account
1240	page.myAccount.yourItems.label=Your Items
1241	page.myAccount.yourItems.itemAvail.linkText=Items available
1242	page.myAccount.yourItems.reqPending.linkText=Requests Pending
1243	page.myAccount.yourItems.chargedItem.linkText=Charged Items
1244	page.myAccount.yourItems.borrowingBlocks.linkText=Borrowing Blocks
1245	page.myAccount.yourItems.finesAndFees.linkText=Fines and Fees
1246	page.myAccount.yourItems.demerits.linkText=Demerits

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1247	page.myAccount.borrowingBlocks.label=Borrowing Blocks
1248	page.myAccount.borrowingBlocks.item.heading.reason=Reason
1249	page.myAccount.borrowingBlocks.total.label=Total
1250	page.myAccount.finesAndFees.label=Fines and Fees
1251	page.myAccount.finesAndFees.item.heading.date=Date
1252	page.myAccount.finesAndFees.item.heading.item=Item
1253	page.myAccount.finesAndFees.item.heading.fee=Fee
1254	page.myAccount.finesAndFees.item.heading.payment=Payment
1255	page.myAccount.finesAndFees.item.heading.balance=Balance
1256	page.myAccount.finesAndFees.item.heading.type=Fee/PostingType
1257	page.myAccount.finesAndFees.item.heading.total=Fee Amount
1258	page.myAccount.finesAndFees.total.label=Fee Amount
1259	page.myAccount.finesAndFees.amountDue.label=Total Amount Due:
1260	page.myAccount.demerits.label=Demerits
1261	page.myAccount.demerits.item.heading.date=Date
1262	page.myAccount.demerits.item.heading.location=Location
1263	page.myAccount.demerits.item.heading.item=Item
1264	page.myAccount.demerits.item.heading.demerits=Demerits
1265	page.myAccount.demerits.item.heading.posting=Posting
1266	page.myAccount.demerits.item.heading.balance=Balance
1267	page.myAccount.demerits.item.heading.type=Demerit/PostingType
1268	page.myAccount.demerits.total.label=Total
1269	page.myAccount.itemAvailable.label=Items Available
1270	page.myAccount.itemAvailable.cancel.preference=Y
1271	page.myAccount.itemAvailable.cancel.button.name=Cancel Request
1272	page.myAccount.itemAvailable.cancel.button.message=Cancel request to the selection of item available
1273	page.myAccount.itemAvailable.select.label=Select All:
1274	page.myAccount.itemAvailable.select.option.all=All
1275	page.myAccount.itemAvailable.item.heading.item=Item
1276	page.myAccount.itemAvailable.item.heading.database=Database
1277	page.myAccount.itemAvailable.item.heading.status=Status

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1278	#page.myAccount.itemAvailable.item.heading.holdExpires=Hold Expires
1279	page.myAccount.itemAvailable.item.heading.pickupLocation=Pickup Location
1280	page.myAccount.reqPending.label=Requests Pending
1281	page.myAccount.reqPending.cancel.preference=Y
1282	page.myAccount.reqPending.cancel.button.name=Cancel Request
1283	page.myAccount.reqPending.cancel.button.message=Cancel request to the selection of requests pending
1284	page.myAccount.reqPending.select.label=Select All:
1285	page.myAccount.reqPending.select.option.all=All
1286	page.myAccount.reqPending.item.heading.item=Item
1287	page.myAccount.reqPending.item.heading.database=Database
1288	page.myAccount.reqPending.item.heading.status=Status
1289	#page.myAccount.reqPending.item.heading.holdExpires=Hold Expires
1290	page.myAccount.reqPending.item.heading.pickupLocation=Pickup Location
1291	page.myAccount.chargedItem.label=Charged Items
1292	page.myAccount.chargedItem.cancel.preference=Y
1293	page.myAccount.chargedItem.cancel.button.name=Cancel Request
1294	page.myAccount.chargedItem.cancel.button.message=Cancel request to the selection of charged item
1295	page.myAccount.chargedItem.renew.single=Y
1296	page.myAccount.chargedItem.renew.all=Y
1297	page.myAccount.chargedItem.renew.button.name=Request Renewal
1298	page.myAccount.chargedItem.renew.button.message=Renew single item
1299	page.myAccount.chargedItem.select.label=Select All:
1300	page.myAccount.chargedItem.select.option.all=All
1301	page.myAccount.chargedItem.item.heading.item=Item
1302	page.myAccount.chargedItem.item.heading.type=Item Type
1303	page.myAccount.chargedItem.item.heading.status=Status
1304	page.myAccount.chargedItem.item.heading.dueDate=Due Date
1305	page.myAccount.update.button=Update
1306	page.myAccount.update.button.message=Refresh the data
1307	#####
1308	#

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1309	# Block reason code
1310	#####
1311	page.myAccount.borrowingBlocks.item.reason.Expired_patron=Your patron record expired on \\\d.
1312	page.myAccount.borrowingBlocks.item.reason.Address_expired_patron=The address in your patron record expired on \d.
1313	page.myAccount.borrowingBlocks.item.reason.Address_invalid_patron=The address in your patron record is invalid.
1314	page.myAccount.borrowingBlocks.item.reason.charge_limit_patron=You have \p items charged. The limit for your patron group is \b.
1315	page.myAccount.borrowingBlocks.item.reason.fine_limit_patron=You have \p in fines and fees. The limit for your patron group is \b.
1316	page.myAccount.borrowingBlocks.item.reason.odue_limit_patron=You have \p overdue items. The limit for your patron group is \b.
1317	page.myAccount.borrowingBlocks.item.reason.odue_recall_limit_patron=You have \p overdue recalled items. The limit for your patron group is \b.
1318	page.myAccount.borrowingBlocks.item.reason.recall_limit_patron=You have recalled \p items. The limit for your patron group is \b.
1319	page.myAccount.borrowingBlocks.item.reason.claims_ret_limit_patron=You have claimed to have returned \p items. The limit for your patron group is \b.
1320	page.myAccount.borrowingBlocks.item.reason.lost_limit_patron=You have lost \p items. The limit for your patron group is \b.
1321	page.myAccount.borrowingBlocks.item.reason.sshelved_limit_patron=You have \p self-shelved items. The limit for your patron group is \b.
1322	page.myAccount.borrowingBlocks.item.reason.short_loan_limit_patron=You have \p pending Short Loan requests. The limit for your patron group is \b.
1323	page.myAccount.borrowingBlocks.item.reason.call_slip_limit_patron=You have \p pending Call Slip requests. The limit for your patron group is \b.
1324	page.myAccount.borrowingBlocks.item.reason.suspension_patron=Your borrowing privileges are suspended until \d.
1325	page.myAccount.borrowingBlocks.item.reason.demerits_limit_patron=You have \p demerits. The limit for your patron group is \b.
1326	page.myAccount.borrowingBlocks.item.reason.ub_ineligible_patron=You are not eligible to use Universal Borrowing.
1327	page.myAccount.borrowingBlocks.item.reason.charge_limit_ub_patron=You have \p Universal Borrowing items charged. The limit for your patron group is \b.
1328	page.myAccount.borrowingBlocks.item.reason.fine_limit_ub_patron=You have \p in Universal Borrowing fines. The limit for your patron group is \b.
1329	page.myAccount.borrowingBlocks.item.reason.odue_limit_ub_patron= You have \p Universal Borrowing overdue items. The limit for your patron group is \b.
1330	page.myAccount.borrowingBlocks.item.reason.odrecall_limit_ub_patron=You have \p Universal Borrowing recalled items. The limit for your patron group is \b.
1331	page.myAccount.borrowingBlocks.item.reason.claims_ret_limit_ub_patron=You have \p Universal Borrowing claims returned items. The limit for your patron group is \b.

Figure A-1. webvoyage.properties file example (Continued)

```

Line#
1332 page.myAccount.borrowingBlocks.item.reason.lost_limit_ub_patron=You have \\p
      Universal Borrowing lost items. The limit for your patron group is
      \\b.
1333 page.myAccount.borrowingBlocks.item.reason.sshelved_limit_ub_patron= You have
      \\p Universal Borrowing self-shelved items. The limit for your
      patron group is \\b.
1334 page.myAccount.borrowingBlocks.item.reason.charge_limit_item_policy=You have
      \\p items charged. The limit for your patron group in this item's
      policy is \\b.
1335 page.myAccount.borrowingBlocks.item.reason.charge_limit_item_type=You have \\p
      items charged that have the item type \\i. The limit for your patron
      group is \\b.
1336 page.myAccount.borrowingBlocks.item.reason.charge_limit_item_policy_type=You
      have \\p items charged that have the item type \\i. The limit for
      your patron group is \\b.
1337 page.myAccount.borrowingBlocks.item.reason.demerits_limit_ub_patron=You have
      \\p ub demerits. The limit for your ub demerits is \\b.
1338 #####
1339 #
1340 # Charged Item Status Code -- from OPAC.INI
1341 #      NOTCHARGED      1
1342 #      CHARGED          2
1343 #      RENEWED          3
1344 #      OVERDUE          4
1345 #      RECALLREQUEST    5
1346 #      HOLDREQUEST      6
1347 #      ONHOLD           7
1348 #      INTRANSIT        8
1349 #      INTRANSIT_DISCHARGED 9 (No longer in use - please do not remove)
1350 #      INTRANSIT_ONHOLD  10 (No longer in use - please do not remove)
1351 #      DISCHARGED       11
1352 #      MISSING          12
1353 #      LOSTLIBRARYAPPLIED 13
1354 #      LOSTSYSTEMAPPLIED 14
1355 #      CLAIMSRETURNED    15
1356 #      DAMAGED           16
1357 #      WITHDRAWN         17
1358 #      ATBINDERY         18
1359 #      CATALOGINGREVIEW  19

```

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1360	# CIRCULATIONREVIEW 20
1361	# SCHEDULED 21
1362	# INPROCESS 22
1363	# CALLSLIPREQUEST 23
1364	# SHORTLOANREQUEST 24
1365	# REMOTESTORAGEREQUEST 25
1366	#
1367	#####
1368	page.myAccount.chargedItem.item.status.1=Not Charged
1369	page.myAccount.chargedItem.item.status.2=Charged
1370	page.myAccount.chargedItem.item.status.3=Renewed
1371	page.myAccount.chargedItem.item.status.4=Overdue
1372	page.myAccount.chargedItem.item.status.5=Recall Request
1373	page.myAccount.chargedItem.item.status.6=Hold Request
1374	page.myAccount.chargedItem.item.status.7=On Hold
1375	page.myAccount.chargedItem.item.status.8=Routed from \\rsloc in \\rslib to \\rtloc in \\rtlib on \\rd
1376	page.myAccount.chargedItem.item.status.9=In Transit Discharged
1377	page.myAccount.chargedItem.item.status.10=In Transit On Hold
1378	page.myAccount.chargedItem.item.status.11=Discharged
1379	page.myAccount.chargedItem.item.status.12=Missing
1380	page.myAccount.chargedItem.item.status.13=Lost--Library Applied
1381	page.myAccount.chargedItem.item.status.14=Lost--System Applied
1382	page.myAccount.chargedItem.item.status.15=Claims Returned
1383	page.myAccount.chargedItem.item.status.16=Damaged
1384	page.myAccount.chargedItem.item.status.17=Withdrawn
1385	page.myAccount.chargedItem.item.status.18=At Bindery
1386	page.myAccount.chargedItem.item.status.19=Cataloging Review
1387	page.myAccount.chargedItem.item.status.20=Circulation Review
1388	page.myAccount.chargedItem.item.status.21=Scheduled
1389	page.myAccount.chargedItem.item.status.22=In Process
1390	page.myAccount.chargedItem.item.status.23=Call Slip Request

Figure A-1. webvoyage.properties file example (Continued)


```

Line#
1391 page.myAccount.chargedItem.item.status.24=Short Loan Request
1392 page.myAccount.chargedItem.item.status.25=Remote Storage Request
1393 #####
1394 #
1395 # Variables used to substitute for the in transit status rsloc, rslib, rtloc,
      rtlib, rd
1396 # rsloc: RoutingSourceLocationUnknown=unknown location
1397 # rslib: RoutingSourceLibraryUnknown=unknown location
1398 # rtloc: RoutingTargetLocationUnknown=unknown location
1399 # rtlib: RoutingTargetLibraryUnknown=unknown location
1400 # rd: RoutingDateUnknown=unknown date
1401 #
1402 #####
1403 page.myAccount.chargedItem.item.status.variable.rsloc=unknown location
1404 page.myAccount.chargedItem.item.status.variable.rslib=unknown location
1405 page.myAccount.chargedItem.item.status.variable.rtloc=unknown location
1406 page.myAccount.chargedItem.item.status.variable.rtlb=unknown location
1407 page.myAccount.chargedItem.item.status.variable.rd=unknown date
1408 #####
1409 #
1410 # My Account - Requests/Callslip Status
1411 # 1=Accepted
1412 # 2=Printed
1413 # 3=Reassigned
1414 # 4=Filled
1415 # 5=Not Filled
1416 # 6=Expired
1417 # 7=Canceled
1418 # 8=Error
1419 # 9=Promoted
1420 #####
1421 page.myAccount.reqPending.item.status.1=Accepted

```

Figure A-1. webvoyage.properties file example (Continued)

```
Line#
1422 page.myAccount.reqPending.item.status.2=Printed
1423 page.myAccount.reqPending.item.status.3=Reassigned
1424 page.myAccount.reqPending.item.status.4=Filled
1425 page.myAccount.reqPending.item.status.5=Not Filled
1426 page.myAccount.reqPending.item.status.6=Expired
1427 page.myAccount.reqPending.item.status.7=Canceled
1428 page.myAccount.reqPending.item.status.8=Error
1429 page.myAccount.reqPending.item.status.9=Promoted
1430
1431 #=====
1432 # Following is the label for concatenating with the above request status code
1433 # to produce the display status
1434 #=====
1435 page.myAccount.reqPending.position=Position
1436 page.myAccount.reqPending.expires=Expires
1437 page.myAccount.reqPending.pickup=Pick up at
1438 page.myAccount.reqPending.inTransit=In transit to
1439 item.status.unknown.location=Unknown Location
1440 item.status.unknown.date=Unknown Date
1441
1442 #####
1443 #
1444 # My Account Preferences used for Edit Preferences Page
1445 #
1446 #####
1447 page.myAccount.editPreferences.title=WebVoyáge My Account Edit Preferences
1448 page.myAccount.editPreferences.heading=Edit Preferences
1449 page.myAccount.editPreferences.label=Edit Preferences
1450 page.myAccount.editPreferences.searchOptions.label=Search options
1451 page.myAccount.editPreferences.database.label=Databases
1452 page.myAccount.editPreferences.displayOptions.label=Display options
```

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1453	page.myAccount.editPreferences.defaultSearchForm.label=Default Search Form:
1454	page.myAccount.editPreferences.displaySearchResults.label=Display Search Results:
1455	page.myAccount.editPreferences.save.button=Save
1456	page.myAccount.editPreferences.save.button.message=Save user search preferences
1457	page.myAccount.editPreferences.cancel.button=Cancel
1458	page.myAccount.editPreferences.cancel.button.message=Cancel editing user search preferences
1459	page.myAccount.editPreferences.clear.button=Clear
1460	page.myAccount.editPreferences.clear.button.message=Clear user selected preferences
1461	
1462	#####
1463	#
1464	# My Account Preferences - page e.g. basic, advanced, author, subject, course reserve
1465	# set preference to Y to display the preference choice
1466	#####
1467	page.myAccount.editPreferences.preferences.page.preference=Y
1468	page.myAccount.editPreferences.preferences.page.name=Default Search Form:
1469	page.myAccount.editPreferences.preferences.page.type.basic=Basic
1470	page.myAccount.editPreferences.preferences.page.type.advanced=Advanced
1471	page.myAccount.editPreferences.preferences.page.type.subject=Subject
1472	page.myAccount.editPreferences.preferences.page.type.author=Author
1473	page.myAccount.editPreferences.preferences.page.type.courseReserve=CourseReserve
1474	#####
1475	#
1476	# My account edit preferences -- search basic page available indices
1477	#####
1478	page.myAccount.editPreferences.preferences.page.basic.label=Basic
1479	page.myAccount.editPreferences.preferences.page.basic.code=1
1480	page.myAccount.editPreferences.preferences.page.basic.codeName=basic
1481	page.myAccount.editPreferences.preferences.page.basic.name.GKEY=All Fields
1482	page.myAccount.editPreferences.preferences.page.basic.name.TKEY=Title

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1483	page.myAccount.editPreferences.preferences.page.basic.name.SKEY=Subject
1484	page.myAccount.editPreferences.preferences.page.basic.name.NKEY=Author
1485	page.myAccount.editPreferences.preferences.page.basic.name.JKEY=Journal Title
1486	#####
1487	#
1488	# My account edit preferences -- search advanced page available indices <-- for developing the page
1489	# the indices are actually from the database
1490	#####
1491	page.myAccount.editPreferences.preferences.page.advanced.label=Advanced
1492	page.myAccount.editPreferences.preferences.page.advanced.code=2
1493	page.myAccount.editPreferences.preferences.page.advanced.codeName=advanced
1494	page.myAccount.editPreferences.preferences.page.advanced.name.TKEY=Title Keyword
1495	page.myAccount.editPreferences.preferences.page.advanced.name.SKEY=Subject Keyword
1496	page.myAccount.editPreferences.preferences.page.advanced.name.JKEY=Journal Title Keyword
1497	#####
1498	#
1499	# My account edit preferences -- search subject page available indices (NEW)
1500	#####
1501	page.myAccount.editPreferences.preferences.page.subject.label=Subject
1502	page.myAccount.editPreferences.preferences.page.subject.code=3
1503	page.myAccount.editPreferences.preferences.page.subject.codeName=subject
1504	page.myAccount.editPreferences.preferences.page.subject.name.SKEY=Subject Keyword
1505	#####
1506	#
1507	# My account edit preferences -- search author page available indices
1508	#####
1509	page.myAccount.editPreferences.preferences.page.author.label=Author
1510	page.myAccount.editPreferences.preferences.page.author.code=4
1511	page.myAccount.editPreferences.preferences.page.author.codeName=author
1512	page.myAccount.editPreferences.preferences.page.author.name.AUTH=Name Title Browse

Figure A-1. webvoyage.properties file example (Continued)

```

Line#
1513 #####
1514 #
1515 # My account edit preferences -- search course reserve page available indices
1516 #####
1517 page.myAccount.editPreferences.preferences.page.courseReserve.label=Course
1518         Reserve
1519 page.myAccount.editPreferences.preferences.page.courseReserve.code=5
1520 page.myAccount.editPreferences.preferences.page.courseReserve.codeName=courseRe
1521         serve
1522 page.myAccount.editPreferences.preferences.page.courseReserve.instructor.label=
1523         Instructor
1524 page.myAccount.editPreferences.preferences.page.courseReserve.department.label=
1525         Department
1526 page.myAccount.editPreferences.preferences.page.courseReserve.course.label=Cour
1527         se
1528 page.myAccount.editPreferences.preferences.page.courseReserve.section.label=Sec
1529         tion
1530 #####
1531 #
1532 # My Account Preferences - display e.g. number of records on a page
1533 # set preference to Y to display the preference choice
1534 #####
1535 page.myAccount.editPreferences.preferences.display.preference=Y
1536 #####
1537 #
1538 # My Account - personal information
1539 #
1540 #####
1541 page.myAccount.viewPersonalInfo.title=WebVoyáge My Account Personal Information
1542 page.myAccount.viewPersonalInfo.heading=Personal Information
1543 page.myAccount.viewPersonalInfo.label=Personal Information
1544 page.myAccount.viewPersonalInfo.fullname.label=Name:
1545 page.myAccount.viewPersonalInfo.firstName.label=First Name:
1546 page.myAccount.viewPersonalInfo.lastName.label=Last Name:

```

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1543	page.myAccount.viewPersonalInfo.permanentAddress=Permanent Address:
1544	page.myAccount.viewPersonalInfo.activeAddress=Active Address:
1545	page.myAccount.viewPersonalInfo.addressLine1.label=Address Line1:
1546	page.myAccount.viewPersonalInfo.addressLine2.label=Address Line2:
1547	page.myAccount.viewPersonalInfo.addressLine3.label=Address Line3:
1548	page.myAccount.viewPersonalInfo.addressLine4.label=Address Line4:
1549	page.myAccount.viewPersonalInfo.addressLine5.label=Address Line5:
1550	page.myAccount.viewPersonalInfo.city.label=City:
1551	page.myAccount.viewPersonalInfo.state.label=State:
1552	page.myAccount.viewPersonalInfo.zipCode.label=Zip Code
1553	page.myAccount.viewPersonalInfo.country.label=Country:
1554	page.myAccount.viewPersonalInfo.activeAddress.label=Active Address:
1555	page.myAccount.viewPersonalInfo.permanentAddress.label=Permanent Address:
1556	page.myAccount.viewPersonalInfo.permanentAddress.preference=Y
1557	page.myAccount.viewPersonalInfo.phone.label=Phone:
1558	page.myAccount.viewPersonalInfo.mobile.label=Cell Phone:
1559	page.myAccount.viewPersonalInfo.fax.label=Fax:
1560	page.myAccount.viewPersonalInfo.otherPhone.label=Other:
1561	page.myAccount.viewPersonalInfo.email.label=Email:
1562	page.myAccount.viewPersonalInfo.expirationDate.label=Expiration Date:
1563	
1564	#####
1565	#
1566	# My Account - change PIN
1567	#
1568	#####
1569	page.myAccount.changePin.title=WebVoyáge My Account Change PIN
1570	page.myAccount.changePin.heading=Change PIN
1571	page.myAccount.changePin.changePin.label=Change PIN
1572	page.myAccount.changePin.save.button=Save
1573	page.myAccount.changePin.save.button.message=Save new PIN

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1574	page.myAccount.changePin.cancel.button=Cancel
1575	page.myAccount.changePin.cancel.button.message=Cancel change PIN
1576	page.myAccount.changePin.currentPin.label=Current PIN:
1577	page.myAccount.changePin.newPin.label=New PIN:
1578	page.myAccount.changePin.ConfirmNewPin.label=Confirm New PIN:
1579	#####
1580	#
1581	# My Account - change PIN error code
1582	#
1583	# Customizable Change PIN message from OPAC.ini and add success message code
1584	#
1585	#####
1586	page.myAccount.changePin.errorCode.PINMessage1=You have not entered your current PIN correctly.
1587	page.myAccount.changePin.errorCode.PINMessage2=Not all fields have been entered. Please try again.
1588	page.myAccount.changePin.errorCode.PINMessage3=New PIN does not contain 5-12 characters. Please enter again.
1589	page.myAccount.changePin.errorCode.PINMessage4=New PIN and Confirm PIN do not mach. Please enter again.
1590	page.myAccount.changePin.errorCode.PINMessage5=New PIN matches existing PIN. Please enter again.
1591	page.myAccount.changePin.errorCode.PINMessage6=Unable to change PIN. Please ask for help at the Circulation or Reference Desk.
1592	page.myAccount.changePin.errorCode.PINMessage7=Change PIN success
1593	#####
1594	#
1595	# Patron Requests page properties
1596	#
1597	#####
1598	option.patronRequests=Y
1599	page.patronRequests.title=WebVoyáge Patron Requests
1600	page.patronRequests.heading=Patron Requests
1601	page.patronRequests.label=Patron Requests
1602	page.patronRequests.select.message=Select the type of request below:
1603	page.patronRequests.available.pretext=(

Figure A-1. webvoyage.properties file example (Continued)

```
Line#
1604 page.patronRequests.available.posttext= available)
1605 page.patronRequests.returnToHoldings.linkText=Return to holdings
1606 page.patronRequests.returnToHoldings.pretext=
1607 page.patronRequests.returnToHoldings.posttext=
1608 #####
1609 #
1610 # Patron Request page properties
1611 #
1612 #####
1613 page.patronRequest.submit.button=Submit
1614 page.patronRequest.submit.button.message=Submit the request
1615 page.patronRequest.cancel.button=Cancel
1616 page.patronRequest.cancel.button.message=Cancel request
1617 page.patronRequest.returnToRequests.linkText=Return to requests
1618 page.patronRequest.returnToRequests.pretext=
1619 page.patronRequest.returnToRequests.posttext=
1620 page.patronRequest.requiredFields.message=Please enter data for the required
      field
1621 #####
1622 #
1623 # Patron Requests - request form label text
1624 #   These define the text labels on patron request forms.
1625 #   Please be aware that some patron request form field labels are defined
1626 #   in SysAdmin and cannot be changed here.
1627 #
1628 #####
1629 # These labels are used on many request forms:
1630 page.patronRequest.label.anyCopy=Any Copy
1631 page.patronRequest.label.anyCopyAt=Any Copy At:
1632 page.patronRequest.label.comment=Comment:
1633 page.patronRequest.label.instructions=Instructions:
1634 page.patronRequest.label.pickUpAt=Pick Up At:
```

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1635	page.patronRequest.label.notNeededAfter=Not Needed After:
1636	page.patronRequest.label.selectItem=Select an item:
1637	page.patronRequest.label.thisCopy=This Copy:
1638	page.patronRequest.label.thisIssue=Specify an issue:
1639	page.patronRequest.label.title=Title:
1640	# These are the labels for the option buttons on the Call Slip request form
1641	page.patronRequest.label.callSlipPick=Select an item:
1642	page.patronRequest.label.callSlipSpecify=Specify an issue:
1643	# These are the labels on the "No Bib" Form (OPAC Purchase Request)
1644	page.patronRequest.label.field1=Author:
1645	page.patronRequest.label.field2=Title:
1646	page.patronRequest.label.field3=Number:
1647	page.patronRequest.label.field4=Publisher:
1648	page.patronRequest.label.field5=Date:
1649	page.patronRequest.label.field6=Edition:
1650	page.patronRequest.label.field7=Email:
1651	# This is the label for the Bib Info section on the Bib Level requests
1652	page.patronRequest.label.bibInfo=Bib Info:
1653	# These labels are used on the Short Loan request form
1654	page.patronRequest.label.reservationDate=Select Reservation Date:
1655	page.patronRequest.label.startTime=Start Time:
1656	page.patronRequest.label.endTime=End Time:
1657	# This is for the NLNZ BibU and Index ILL Forms.
1658	page.patronRequest.label.note=Note:
1659	# These are labels for the UB Request form
1660	page.patronRequest.label.holdingsLib=Library:
1661	page.patronRequest.label.pickupLib=Pick Up Library:
1662	page.patronRequest.label.SelectPickupLocsMsg=You must provide a Pick Up Library and Desk before your request is complete!
1663	# These are labels for the Media Bookings forms
1664	page.patronRequest.label.callNumber=Call Number:
1665	page.patronRequest.label.deliverTo=Deliver To:

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1666	page.patronRequest.label.equipmentInRoom=Equipment In Room:
1667	page.patronRequest.label.itemNotAvailable=This item is not available during the following times:
1668	page.patronRequest.label.itemLoanPeriod=This item may be booked for up to \\n \\i(s).
1669	page.patronRequest.label.mediaStartDate=Select Start Date and Time:
1670	page.patronRequest.label.mediaEndDate=Select End Date and Time:
1671	page.patronRequest.label.otherEquipment=Other Equipment Available For Your Booking:
1672	page.patronRequest.label.selectEquipment=Select Equipment:
1673	#####
1674	#
1675	# Patron Requests - request messages
1676	#
1677	#####
1678	page.patronRequests.message.request.success=Your request was successful.
1679	page.patronRequests.message.request.fail=Your request failed.
1680	page.patronRequests.message.request.validation=The barcode you entered does not match that of the currently logged in patron. You may retry your request or log out and start over.
1681	#####
1682	#
1683	# Patron Requests - no requests message. This is displayed if:
1684	# 1: the patron has no requests available in the current database
1685	# OR
1686	# 2: the patron is blocked from making requests
1687	#
1688	#####
1689	page.patronRequests.message.noRequests=You have no requests available in this database.
1690	#####
1691	#
1692	# Patron Requests - generic request blocked messages
1693	#
1694	#####

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1695	page.patronRequests.message.requestblocked-4=There are no circulating items available to satisfy your UB Borrowing Request.
1696	page.patronRequests.message.requestblocked-2=No items are available for CallSlip requests.
1697	page.patronRequests.message.requestblocked-1=No items are available for Hold requests.
1698	page.patronRequests.message.requestblocked1=No holdings are available.
1699	page.patronRequests.message.requestblocked2=The item is on order.
1700	page.patronRequests.message.requestblocked3=The item is not charged.
1701	page.patronRequests.message.requestblocked4=The item is missing.
1702	page.patronRequests.message.requestblocked5=The item is lost.
1703	page.patronRequests.message.requestblocked6=The item is at the bindery.
1704	page.patronRequests.message.requestblocked7=No items are available for recall.
1705	page.patronRequests.message.requestblocked8=You have already placed a request for this item.
1706	page.patronRequests.message.requestblocked9=No recall policy is defined for this item.
1707	page.patronRequests.message.requestblocked10=No hold policy is defined for this item.
1708	page.patronRequests.message.requestblocked11=This item has been scheduled through media booking.
1709	page.patronRequests.message.requestblocked12=This item is not available for hold.
1710	#####
1711	#
1712	# Patron Requests - automated retrieval system request blocked messages
1713	#
1714	#####
1715	page.patronRequests.message.arsblocked1=Your Automated Retrieval System Request failed. This item is not a Remote Storage item.
1716	page.patronRequests.message.arsblocked2=Your Automated Retrieval System Request failed. This item has already been requested from Remote Storage.
1717	page.patronRequests.message.arsblocked3=Your Automated Retrieval System Request failed. This item is not available for Remote Storage request.
1718	page.patronRequests.message.arsblocked-3=No items are available for Remote Storage requests.
1719	#####
1720	#
1721	# Patron Requests - short loan request blocked messages
1722	#

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1723	#####
1724	page.patronRequests.message.shortloanblocked1=This item is not authorized for Short Loans.
1725	page.patronRequests.message.shortloanblocked2=This item is not available for Short Loan at the selected time.
1726	page.patronRequests.message.shortloanblocked3=This item cannot be requested on this date since the Library will be closed.
1727	page.patronRequests.message.shortloanblocked4=The Short Loan configuration is not valid. Please inform the nearest librarian.
1728	page.patronRequests.message.shortloanblocked5=Patron has accrued blocks.
1729	page.patronRequests.message.shortloanblocked6=Patron has reached the maximum number of short loans allowed.
1730	page.patronRequests.message.shortloanblocked7=Patron has reached the maximum number of short loans allowed for this title.
1731	page.patronRequests.message.shortloanblocked8=Patron has reached the maximum number of short loans allowed for this day.
1732	page.patronRequests.message.shortloanblocked99=No items are available for Short Loan.
1733	#####
1734	#
1735	# Patron Requests - media booking block messages
1736	#
1737	#####
1738	page.patronRequests.message.medbaddelloc=The selected media item cannot be delivered to the specified location. Please select another delivery location from the list.
1739	page.patronRequests.message.medbadend=Your selected ending date and/or time does not fall within the media calendar. Please enter a different end time.
1740	page.patronRequests.message.medbadequiptimes=The selected equipment cannot be booked at the specified time. Please select a different piece of equipment from the list, or adjust your booking times.
1741	page.patronRequests.message.medbadpickuploc=The selected media item cannot be picked up at the specified location. Please select a different pickup location from the list.
1742	page.patronRequests.message.medbadroomtimes=The selected room cannot be booked at the specified time. Please select a different room from the list, or change the time of your booking.
1743	page.patronRequests.message.medbadstart=Your selected starting date and/or time does not fall within the media calendar. Please enter a different start time.
1744	page.patronRequests.message.medbooklimit=You have reached the maximum number of bookings. Please see staff at the Media Desk.
1745	page.patronRequests.message.medcancellimit=You have too many cancelled media bookings. Please see staff at the Media Desk.
1746	page.patronRequests.message.medendclosed=The library is closed on the specified end date or time. Please enter a different end time.

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1747	page.patronRequests.message.medequipintervalmax=The specified booking schedule exceeds the maximum booking interval for the selected equipment. Please select a different piece of equipment from the list, or change the booking times.
1748	page.patronRequests.message.medequipnousage=The selected equipment cannot be picked up or delivered. Please select a different piece of equipment from the list.
1749	page.patronRequests.message.medequippiecesmax=You have reached the maximum number of pieces of equipment allowed in a media booking. Please remove one or more pieces from the list.
1750	page.patronRequests.message.medfeelimit=You have reached the maximum balance in media booking fees. Please see staff at the Media Desk.
1751	page.patronRequests.message.meditemintervalmax=The specified booking schedule exceeds the maximum loan period for the selected item. Please consult the displayed loan period and modify the booking times.
1752	page.patronRequests.message.meditemnousage=The selected item cannot be picked up or delivered. Please select a different item.
1753	page.patronRequests.message.meditemunavail=The selected item is not available for booking at the specified times. Please consult the displayed schedule and modify the booking times.
1754	page.patronRequests.message.medlatelimit=You have too many "late return" media bookings. Please see staff at the Media Desk.
1755	page.patronRequests.message.mednoitems=No items are available for use in your booking.
1756	page.patronRequests.message.medroomintervalmax=The specified booking schedule exceeds the maximum booking interval for the selected room. Please select a different room from the list, or change the booking times.
1757	page.patronRequests.message.medroomnousage=The selected location cannot be used for delivery. Please select a different delivery location.
1758	page.patronRequests.message.medroomunavail=The selected room is not available for booking at the specified times. Please select a different room from the list, or change the booking times.
1759	page.patronRequests.message.medstartclosed=The library is closed on the specified start date or time. Please enter a different start time.
1760	page.patronRequests.message.medunclaimlimit=You have too many unclaimed media bookings. Please see staff at the Media Desk.
1761	#####
1762	#
1763	# Patron Requests - call slip request messages:
1764	# The final segment of the message codes must match those defined in SysAdmin.
1765	#
1766	#####
1767	page.patronRequests.message.callslipmsg.SM1_NxtDay=Call Slip requests should be fulfilled by the next day.
1768	#####
1769	#
1770	# Patron Requests - media booking confirmation form

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1771	#
1772	#####
1773	page.mediaBookingConf.title=WebVoyáge Media Booking Request
1774	page.mediaBookingConf.heading=Media Booking Confirmation
1775	page.mediaBookingConf.label=Media Booking Confirmation
1776	#####
1777	#
1778	# Send Email
1779	#
1780	#####
1781	page.searchResults.emailResults.page.title=WebVoyáge E-mail
1782	page.searchResults.emailResults.page.heading=E-mail
1783	page.searchResults.emailResults.page.label=E-mail
1784	page.searchResults.emailResults.page.email.label1=To e-mail the selected results, enter the information below and click E-mail.
1785	page.searchResults.emailResults.page.email.label2=(
1786	page.searchResults.emailResults.page.email.label2.value=*
1787	page.searchResults.emailResults.page.email.label2.posttext= = required field)
1788	page.searchResults.emailResults.page.email.label3=The information entered on this page will not be used to send unsolicited e-mail, and will not be sold to a 3rd party.
1789	page.searchResults.emailResults.page.email.to.argument.label=To:
1790	toString.asterisk=*
1791	page.searchResults.emailResults.page.email.subject.argument.label=Subject:
1792	page.searchResults.emailResults.page.email.bodytext.argument.label=Body Text:
1793	page.searchResults.emailResults.page.email.email.button=E-mail
1794	page.searchResults.emailResults.page.email.email.button.message=Send Email Message
1795	page.searchResults.emailResults.page.email.cancel.button=Cancel
1796	page.searchResults.emailResults.page.email.cancel.button.message=Cancel Email Message
1797	page.searchResults.emailResults.page.errorCode.EMAILMessage1=No email address has been entered. Please enter an email address.
1798	page.searchResults.emailResults.page.errorCode.EMAILMessage2=Email address is not valid.
1799	page.searchResults.emailResults.page.errorCode.EMAILMessage3=No records were selected.

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1800	page.searchResults.emailResults.page.errorCode.EMAILMessage4=The maximum number of characters on subject line is 100.
1801	page.searchResults.emailResults.page.errorCode.EMAILMessage5=The maximum number of characters of boy text is 2000.
1802	page.searchResults.emailResults.page.errorCode.EMAILMessage6=Your Email Request failed!
1803	page.searchResults.emailResults.page.email.success=Your Email was sent correctly
1804	page.searchResults.emailComplete.page.title=WebVoyage E-mail Confirmation
1805	page.searchResults.emailComplete.page.heading=E-Mail Sent
1806	page.searchResults.emailComplete.page.label=E-mail Sent
1807	page.searchResults.emailComplete.page.success.label=Your e-mail has been sent successfully to
1808	page.searchResults.emailComplete.page.return.button=Return
1809	page.searchResults.emailComplete.page.return.button.message=Return Email Message
1810	
1811	#####
1812	# Option to enable email functionality
1813	#####
1814	option.email=N
1815	mail.host=
1816	mail.transport.protocol=smtp
1817	mail.user=voyager
1818	mail.subject=Search Results
1819	
1820	##### #####
1821	#
1822	# My list page used configurable labels, buttons
1823	#
1824	##### #####
1825	page.myList.page.title=WebVoyage My List
1826	page.myList.page.heading=My List
1827	page.myList.pubDate.label=Publisher date:
1828	page.myList.saveOn.label=Saved on:
1829	page.myList.delete.button=delete

Figure A-1. webvoyage.properties file example (Continued)

Line#	
1830	page.myList.delete.message=delete the list
1831	page.myList.noOfHits.label=
1832	page.myList.noOfHits.posttext= items in your list
1833	page.myList.message.empty.display=Your list is empty.
1834	
1835	#=====
1836	# My list book bag error message
1837	#=====
1838	page.myList.bookbagMessage1=Record not found, or it has been deleted.
1839	page.myList.bookbagMessage2=Database is no longer available.
1840	page.myList.bookbagMessage3=No email address has been entered. Please enter an email address.
1841	page.myList.bookbagMessage4=No records have been selected to save to your list.
1842	page.myList.bookbagMessage5=To save to your list, you must log into your account.
1843	page.myList.bookbagMessage6=The selected records have been added to your list.
1844	page.myList.bookbagMessage7=You may not save more than 1000 records to your list.
1845	page.myList.bookbagMessage8=Your list is empty.
1846	page.myList.bookbagMessage9=Save record operation may have been failed.

Figure A-1. webvoyage.properties file example (Continued)

Default index.html File

B

Default index.html File

See [Figure B-1](#) for a sample of the default `index.html` file. It is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/htdocs/` where `xxxdb` is your database name.

Line#	
1	
2	<head>
3	<META http-equiv="Content-Type" content="text/html; charset=UTF-8">
4	<style type="text/css">@import "/vwebv/ui/en_US/css/frameWork.css";</style>
5	<style type="text/css">@import "/vwebv/ui/en_US/css/header.css";</style>
6	<style media="screen" type="text/css">@import "/vwebv/ui/en_US/css/quickSearchBar.css";</style>
7	<link href="/vwebv/ui/en_US/css/help.css" rel="stylesheet" type="text/css">
8	
9	<title>Welcome to WebVoyage</title>
10	</head>
11	<body class="frameWorkUI">

Figure B-1. Default `index.html` file example

```

Line#
12  <div id="pageContainer">
13      <div id="pageHeader">
14          <div id="headerRow">
15              <div id="logo">
16                  
17              </div>
18          </div>
19      </div>
20      <div id="mainContent" class="help">
21          <h1 id="pageHeadingTitle">WebVoyage</h1>
22
23          <div id="quickSearchBar">
24              <form method="get" action="/vwebv/search">
25                  <span id="quickSearchArg"><label for="searchArg">Search: </label><input
26                      id="searchArg" name="searchArg" class="inputStyle" size="36"
27                      type="text"></span><span id="searchButton">
28                      <input id="quickSearchButton" value="Go" type="submit"
29                          alt="Go get search results" src="/vwebv/ui/en_US/images/
30                          btn_go.gif"></span><input value="GKEY*" name="searchCode"
31                          type="hidden">
32                      <input value="0" name="searchType" type="hidden">
33                  </form>
34              </div>
35              <p>More choices:</p>
36              <ul>
37                  <li><a href="/vwebv/searchBasic?sk=en_US">Basic search</a></li>
38                  <li><a href="/vwebv/searchAdvanced?sk=en_US">Advanced search</
39                      a></li>
40                  <li><a href="/vwebv/enterCourseReserve.do?sk=en_US">Course
41                      reserve materials</a></li>
42                  <li><a href="/vwebv/login?sk=en_US">Log in to use your saved
43                      preferences</a></li>
44                  <li><a href="/vwebv/myAccount?sk=en_US">Review your account</
45                      a></li>
46                  <li><a href="/vwebv/ui/en_US/htdocs/help/index.html">Read help
47                      for WebVoyage</a></li>
48                  <!-- the following links must be customized locally -->
49                  <li><a href="#">Return to the main library website.</a></li>
50                  <li><a href="#">Return to the campus website</a></li>

```

Figure B-1. Default index.html file example (Continued)

Line#	
41	
42	
43	</div> <!-- end mainContent -->
44	
45	<div id="pageFooter">
46	<div id="copyright">
47	©2007 Ex Libris Group. All rights reserved.
48	</div>
49	</div> <!-- end of pageFooter -->
50	</div> <!-- end page container -->
51	</body>
52	</html>

Figure B-1. Default index.html file example (Continued)

Index

Symbols

!, [2-6](#)
?, [2-6](#)
"" (quotes), [2-6](#)
() (parentheses), [2-6](#)
*, [2-6](#)
%, [2-6](#)
+, [2-6](#)

A

about this document, [xiii](#)
accessibility, [-xv](#)
actions, [2-22](#)
 add to list, [2-25](#)
 add to my list, [2-25](#)
 e-mail, [2-25](#)
 export, [2-25](#)
 make a request, [2-25](#)
 print, [2-24](#)
add to list, [2-25](#)
add to my list, [2-25](#)
advanced search, [2-8](#)
audience
 of this document, [xiii](#)
author search, [2-10](#)

B

basic search, [2-7](#)

C

canned search, [3-21](#)
comments
 about this document, [xvii](#)
conventions used
 in this document, [xiv](#)
course reserve search, [2-11](#)

D

document summary, [xiv](#)

E

edit preferences, [2-20](#)
e-mail, [2-25](#)
export, [2-25](#)

F

feedback, customer, [xvii](#)

G

geospatial search, [2-14](#)
Getting Started, [1-1](#)
 prerequisite skills and knowledge, [1-1](#)

I

intended audience
 of this document, [xiii](#)

L

labeled tabs, [2-4](#)
logging in, [1-3](#)
logo example, [3-23](#)

M

make a request, [2-25](#)
menu list, [2-3](#)
My Account, [2-18](#)
My List, [2-17](#)
My Searches, [2-16](#)

N

navigation, [2-1](#)
 labeled tabs, [2-4](#)
 menu list, [2-3](#)
 quick search, [2-6](#)
 URL access, [2-1](#), [3-21](#)

P

patron options, [2-16](#)
 My Account, [2-18](#)
 My List, [2-17](#)
 My Searches, [2-16](#)
personal information, [2-19](#)
photocopying
 documentation, [xvii](#)
port 7008, [1-2](#)
port 80, [1-2](#)
preferences
 database change, [2-21](#)
 edit, [2-20](#)
prerequisites, [1-1](#)
print, [2-24](#)
purpose
 of this document, [xiii](#)

Q

quick search, [2-6](#)

R

reissue
 reason for, [xiii](#)
reproduction, of documentation, [xvii](#)

S

search
 advanced, [2-8](#)
 author, [2-10](#)
 basic, [2-7](#)
 course reserve, [2-11](#)
 geospatial, [2-14](#)
 search history, [2-15](#)
 special characters (wild card), [2-6](#)
 subject, [2-9](#)
search history, [2-15](#)
special search character
 !, [2-6](#)
 ?, [2-6](#)
 " (quotes), [2-6](#)
 () (parentheses), [2-6](#)
 *, [2-6](#)
 %, [2-6](#)
 +, [2-6](#)
subject search, [2-9](#)

U

URL access, [2-1](#), [3-21](#)

W

web server port, [1-2](#)
wild card character, [2-6](#)

