



**Voyager® 8.2**  
**WebVoyage Architecture Overview**  
**and Configuration Models**

November 2012

# CONFIDENTIAL INFORMATION

The information herein is the property of Ex Libris Ltd. or its affiliates and any misuse or abuse will result in economic loss. DO NOT COPY UNLESS YOU HAVE BEEN GIVEN SPECIFIC WRITTEN AUTHORIZATION FROM EX LIBRIS LTD.

This document is provided for limited and restricted purposes in accordance with a binding contract with Ex Libris Ltd. or an affiliate. The information herein includes trade secrets and is confidential.

## DISCLAIMER

The information in this document will be subject to periodic change and updating. Please confirm that you have the most current documentation. There are no warranties of any kind, express or implied, provided in this documentation, other than those expressly agreed upon in the applicable Ex Libris contract. This information is provided AS IS. Unless otherwise agreed, Ex Libris shall not be liable for any damages for use of this document, including, without limitation, consequential, punitive, indirect or direct damages.

Any references in this document to third-party material (including third-party Web sites) are provided for convenience only and do not in any manner serve as an endorsement of that third-party material or those Web sites. The third-party materials are not part of the materials for this Ex Libris product and Ex Libris has no liability for such materials.

## TRADEMARKS

"Ex Libris," the Ex Libris Bridge to Knowledge , Primo, Aleph, Voyager, SFX, MetaLib, Verde, DigiTool, Rosetta, bX, URM, Alma , and other marks are trademarks or registered trademarks of Ex Libris Ltd. or its affiliates.

The absence of a name or logo in this list does not constitute a waiver of any and all intellectual property rights that Ex Libris Ltd. or its affiliates have established in any of its products, features, or service names or logos.

Trademarks of various third-party products, which may include the following, are referenced in this documentation. Ex Libris does not claim any rights in these trademarks. Use of these marks does not imply endorsement by Ex Libris of these third-party products, or endorsement by these third parties of Ex Libris products.

Oracle is a registered trademark of Oracle Corporation.

UNIX is a registered trademark in the United States and other countries, licensed exclusively through X/Open Company Ltd.

Microsoft, the Microsoft logo, MS, MS-DOS, Microsoft PowerPoint, Visual Basic, Visual C++, Win32, Microsoft Windows, the Windows logo, Microsoft Notepad, Microsoft Windows Explorer, Microsoft Internet Explorer, and Windows NT are registered trademarks and ActiveX is a trademark of the Microsoft Corporation in the United States and/or other countries.

Unicode and the Unicode logo are registered trademarks of Unicode, Inc.

Google is a registered trademark of Google, Inc.

Copyright Ex Libris Limited, 2012. All rights reserved.

Document released: November 2012

Web address: <http://www.exlibrisgroup.com>

---

# Contents

---

## About This Document

• Purpose	xiii
• Intended Audience	xiv
• Reasons for Reissue	xiv
• Document Summary	xiv
• Conventions Used in This Document	xvii
• Document Reproduction/Photocopying	xviii
• Comment on This Document	xviii

---

## 1 Getting Started

• Purpose of this Chapter	1-1
• Prerequisite Skills and Knowledge	1-1
• Before You Begin	1-2

---

## 2 Architecture

• WebVoyage Architecture Overview	2-1
• Flowchart Example - myAccount Page	2-2
Flowchart Example Description	2-2
.css Processing	2-4
• Page Components Example - Basic Search	2-5
• Page Components Example - Advanced Search	2-7
• Page Components Example - Subject Search	2-9
• Page Components Example - Author Search	2-10
• Page Components Example - Course Reserves	2-12
• Page Components Example - Geospatial Search	2-14

## Contents

---

<b>3</b>	<b>PDS</b>	
	• Introduction	3-1
	• PDS Implementation	3-1
	• Login	3-3
	• PDS Integration	3-6
	• PDS Considerations	3-7
	PDS/SSO Characteristics	3-7
	Clustered/Universal Borrowing Environments	3-7
<b>4</b>	<b>Search</b>	
	• Search Overview	4-1
	• Search Types	4-1
	Configuration	4-2
	Keyword	4-6
	Left-Anchored/Headings-Browse	4-7
	• Limits	4-8
	• LOCAL/Remote Database Search	4-11
	• Display Records	4-15
	• eLink Data	4-16
<b>5</b>	<b>Linking/OpenURL</b>	
	• Overview	5-1
	• OpenURL Standard	5-1
	• OpenURL Requests	5-2
	• OpenURL/LinkResolver Configuration	5-3
<b>6</b>	<b>Bibliographic Record Linking</b>	
	• Overview	6-1
	• Defining Record Relationships	6-2
	Displaying Related Records	6-2
	Maintaining Related Records	6-2

## Contents

- Configuring Voyager for Bibliographic Record Linking 6-3
  - System Administration 6-3
  - Cataloging 6-3
  - WebVoyage 6-4

---

### 7

#### Display Codes

- displaycfg.xml 7-1
- displayHoldings.xml 7-2
  - Serials Display 7-3
- Enable Redirect 7-4
- display.xsl 7-4

---

### 8

#### How Do I Build A Separate Display For Serials?

- Description For “How Do I Build A Separate Display For Serials?” Example 8-1
- Files 8-1
- Instructions 8-1

---

### 9

#### How Do I Add Static Links To The Header Or Footer?

- Description For “How Do I Add Static Links To The Header Or Footer?” Example 9-1
- Files 9-1
- Instructions 9-2

---

### 10

#### How Do I Remove Information From A Page?

- Description For “How Do I Remove Information From A Page?” Example 10-1
- Files 10-1
- Instructions 10-1

## Contents

---

### **11            How Do I Add A Map Or Other Information To A Location?**

- Description For “How Do I Add A Map Or Other Information To A Location?” Example 11-1
- Files 11-1
- Instructions 11-1

---

### **12            How Do I Create An External Search From A Bibliographic Record Display?**

- Description For “How Do I Create An External Search From A Bibliographic Record Display?” Example 12-1
- Files 12-1
- Instructions 12-2

---

### **13            How Do I Dynamically Disable Limits And Change Search Tips Based On The Selected Search Index?**

- Description For “How Do I Dynamically Disable Limits And Change Search Tips Based On The Selected Search Index?” Example 13-1
- Files 13-1
- Instructions 13-2

---

### **14            How Do I Disable AutoComplete?**

- Description For “How Do I Disable AutoComplete?” Example 14-1
- Files 14-1
- Instructions 14-1

## Contents

---

<b>15</b>	<b>How Do I Display A Favicon?</b>	
	• Description For “How Do I Display A Favicon?” Example	15-1
	• Files	15-1
	• Instructions	15-2
<b>16</b>	<b>How Do I Hide Limits On The Advanced Search Page?</b>	
	• Description For “How Do I Hide Limits On The Advanced Search Page?” Example	16-1
	• Files	16-1
	• Instructions	16-1
<b>17</b>	<b>How Do I Build And Display A Persistent Link To A Bibliographic Record?</b>	
	• Description For “How Do I Build And Display A Persistent Link To A Bibliographic Record?” Example	17-1
	• Files	17-1
	• Instructions	17-1
<b>18</b>	<b>How Do I Change The Format Of The Record Display Page?</b>	
	• Description For “How Do I Change The Format Of The Record Display Page?” Example	18-1
	• Files	18-1
	• Instructions	18-2
<b>19</b>	<b>How Do I Add Tracking Codes?</b>	
	• Description For “How Do I Add Tracking Codes?” Example	19-1
	• Files	19-1

## Contents

- Instructions 19-2

---

### 20 How Do I Implement Google Book Search?

- Description For “How Do I Implement Google Book Search?” 20-1
- Files 20-1
- Google Book Search Implementation 20-2
  - googleBooksAvail.js 20-2
  - local\_googleBooksAvail.xsl 20-2
  - displayFacets.xsl 20-3
  - displayGoogleBooks.css 20-3
- Disable Google Book Search 20-3

---

### 21 How Do I Display Cover Images From Services Like Amazon.com and Syndetics Solutions?

- Description For “How Do I Display Cover Images From Services Like Amazon.com and Syndetics Solutions?” 21-1
- Files 21-1
- Syndetic Solutions Implementation 21-2
  - pageProperties.xml 21-2
  - resultsFacets.xsl 21-3
  - resultsTitles.xsl 21-4
  - imageUtils.js 21-5
  - displaycfg.xml 21-6
  - display.xsl 21-6
  - displayRecord.xsl 21-7
- Syndetic Solutions Information 21-7
  - What is a Query String? 21-7
  - Sample URLs 21-8



## Contents

---

### **22            How Do I Implement Geospatial Search?**

- Description For “How Do I Implement Geospatial Search?” 22-1
- Files 22-1
- Instructions 22-2

---

### **23            How Do I Enable External Authentication?**

- Description For “How Do I Enable External Authentication?” 23-1
- Files 23-1
- Instructions 23-1

---

### **24            How Do I Modify Page Messages?**

- Description For “How Do I Modify Page Messages?” 24-1
- Files 24-2
- Instructions 24-2

---

### **25            How Do I Remove the Course Reserve Tab?**

- Description For “How Do I Remove the Course Reserve Tab?” Example 25-1
- Files 25-1
- Instructions 25-1

---

### **26            How Do I Add A New Search Tab?**

- Description For “How Do I Add A New Search Tab?” Example 26-1
- Files 26-1
- Instructions 26-1

## Contents

---

<b>27</b>	<b>How Do I Add A New Header Tab?</b>	
	• Description For “How Do I Add A New Header Tab?” Example	27-1
	• Files	27-1
	• Instructions	27-1

---

<b>28</b>	<b>How Do I Create Additional Record Views?</b>	
	• Description For “How Do I Create Additional Record Views?” Example	28-1
	• Files	28-1
	• Instructions	28-2

---

<b>29</b>	<b>How Do I Implement DOI and URN Handling?</b>	
	• DOI/URN Overview	29-1
	• Files	29-1
	• DOI/URN Implementation	29-1
	webvoyage.properties	29-2

---

<b>30</b>	<b>How Do I Implement Hook to Holdings (Citation Server)?</b>	
	• Hook to Holdings Implementation	30-1

---

<b>31</b>	<b>How Do I Implement HTTP Post to Link Resolver?</b>	
	• HTTP POST to Link Resolver Overview	31-1
	• Files	31-1
	• HTTP POST to Link Resolver Implementation	31-1
	voyager.ini	31-2
	linkresolver.properties	31-4
	OpenURL Standard	31-6

## Contents

---

### **32            How Do I Display Media Bookings in MyAccount?**

- Media Bookings Overview 32-1
- Files 32-1
- Media Bookings Implementation 32-2

---

### **33            How Do I Implement ImageServer in WebVoyage?**

- WebVoyage ImageServer Overview 33-1
- Files 33-1
- ImageServer Implementation 33-2
  - display.xsl 33-3
  - resultsFacets.xsl 33-3

---

### **34            How Do I Implement Messages for Status Patron Groups?**

- Overview of Messages for Status Patron Groups 34-1
- Files 34-2
- Instructions 34-2

---

### **35            How Do I Add/Modify Search Results Page Icons?**

- Add/Modify Search Results Page Icons Overview 35-1
- Files 35-1
- Instructions 35-1

---

### **36            How Do I Modify the Renewal Status Messages?**

- Modify the Renewal Status Messages Overview 36-1
- Files 36-1
- Instructions 36-3

## Contents

---

<b>37</b>	<b>How Do I Add CGI Script Support?</b>	
	• Description For “How Do I Add CGI Script Support?”	37-1
	• Files	37-1
	• Instructions	37-1
<b>38</b>	<b>How Do I Suppress Patron Barcode/ID Prompts on Request Forms?</b>	
	• Description For “How Do I Suppress Patron Barcode/ID Prompts on Request Forms?”	38-1
	• Files	38-2
	• Instructions	38-2
<b>IN</b>	<b>Index</b>	IN-1

---

## About This Document

---

### Purpose

---

The purpose of WebVoyáge Architecture Overview and Configuration Models is to describe WebVoyáge files, their relationship, and configuration options by example.

Given the programming design used for the new user interface, there is considerable flexibility in customizing the online public access catalog (OPAC) to your preferences. Key to this customization is experience with coding cascading style sheets (CSS), XSL, XML, and/or JavaScript.

This guide implements a learn-by-example format. As a result, WebVoyáge Architecture Overview and Configuration Models incorporates several chapters of specific examples and “how to” instructions. Optionally, you may copy/paste examples as you choose.



**CAUTION:**

*Examples provided in this guide may require additional editing to meet your site-specific requirements. If you copy/paste code from this guide, be aware that long lines of code that wrap within the left/right edges of the illustration may contain line breaks resulting from the PDF build that you need to remove for successful processing.*

## Intended Audience

---

This document is intended for programmers who are customizing WebVoyáge in CSS, XSL, XML, and/or JavaScript.

## Reasons for Reissue

---

This guide incorporates and is being reissued for the following reasons:

- Updated PIN information in [Figure 3-2](#) on [page 3-2](#).
- Updated [Table 4-1](#) on [page 4-10](#) with the new limit types
- Added [eLink Data](#) on [page 4-16](#)
- Updated [Figure 11-2](#) on [page 11-4](#)
- Updated [Table 7-2](#) on [page 7-2](#)

## Document Summary

---

Chapter 1	<a href="#">“Getting Started”</a> Chapter 1 describes the prerequisites for working with and customizing Voyager WebVoyáge 7.x and later.
Chapter 2	<a href="#">“Architecture”</a> Chapter 2 provides an overview of the WebVoyáge architecture.
Chapter 3	<a href="#">“PDS”</a> Chapter 3 describes the full implementation of PDS with Voyager WebVoyáge.
Chapter 4	<a href="#">“Search”</a> Chapter 4 describes search capabilities in Voyager WebVoyáge 7.x and later.
Chapter 5	<a href="#">“Linking/OpenURL”</a> Chapter 5 describes the OpenURL capability available in Voyager WebVoyáge 7.x and later.
Chapter 6	<a href="#">“Bibliographic Record Linking”</a> Chapter 6 describes bibliographic record linking available in Voyager WebVoyáge 7.x and later.
Chapter 7	<a href="#">“Display Codes”</a> Chapter 7 describes display codes used in Voyager WebVoyáge 7.x and later.

- Chapter 8      ["How Do I Build A Separate Display For Serials?"](#)  
Chapter 8 describes how to build a separate display for serials.
- Chapter 9      ["How Do I Add Static Links To The Header Or Footer?"](#)  
Chapter 9 describes how to add static links to the header/footer area.
- Chapter 10     ["How Do I Remove Information From A Page?"](#)  
Chapter 10 describes how to remove information from a page.
- Chapter 11     ["How Do I Add A Map Or Other Information To A Location?"](#)  
Chapter 11 describes how to add a map or other information to a location.
- Chapter 12     ["How Do I Create An External Search From A Bibliographic Record Display?"](#)  
Chapter 12 describes how to create an external search.
- Chapter 13     ["How Do I Dynamically Disable Limits And Change Search Tips Based On The Selected Search Index?"](#)  
Chapter 13 describes how to dynamically disable limits and change search tips based on the selected search index.
- Chapter 14     ["How Do I Disable AutoComplete?"](#)  
Chapter 14 describes how to disable AutoComplete.
- Chapter 15     ["How Do I Display A Favicon?"](#)  
Chapter 15 describes how to create an icon for a browser tab or title bar display.
- Chapter 16     ["How Do I Hide Limits On The Advanced Search Page?"](#)  
Chapter 16 describes how to hide the limit options on an advanced search while, optionally, a user may click to see them.
- Chapter 17     ["How Do I Build And Display A Persistent Link To A Bibliographic Record?"](#)  
Chapter 17 describes how to dynamically build and display a persistent link to a bibliographic record.
- Chapter 18     ["How Do I Change The Format Of The Record Display Page?"](#)  
Chapter 18 describes how to add class attributes to the Detailed Display Page for improved formatting control.
- Chapter 19     ["How Do I Add Tracking Codes?"](#)  
Chapter 19 describes how to add tracking codes.
- Chapter 20     ["How Do I Implement Google Book Search?"](#)  
Chapter 20 provides instructions regarding the implementation of Google Book Search.
- Chapter 21     ["How Do I Display Cover Images From Services Like Amazon.com and Syndetics Solutions?"](#)  
Chapter 21 provides instructions for implementing Syndetics enhancements.

- Chapter 22     [“How Do I Implement Geospatial Search?”](#)  
Chapter 22 provides instructions for implementing geospatial search.
- Chapter 23     [“How Do I Enable External Authentication?”](#)  
Chapter 23 provides instructions for enabling external authentication.
- Chapter 24     [“How Do I Modify Page Messages?”](#)  
Chapter 24 provides instructions for modifying page messages.
- Chapter 25     [“How Do I Remove the Course Reserve Tab?”](#)  
Chapter 25 provides instructions for removing the Course Reserves tab.
- Chapter 26     [“How Do I Add A New Search Tab?”](#)  
Chapter 26 provides instructions for adding a new search tab.
- Chapter 27     [“How Do I Add A New Header Tab?”](#)  
Chapter 27 provides instructions for creating a new header tab.
- Chapter 28     [“How Do I Create Additional Record Views?”](#)  
Chapter 28 provides instructions for creating additional record views such as brief and full.
- Chapter 29     [“How Do I Implement DOI and URN Handling?”](#)  
Chapter 29 provides instructions for DOI/URN handling.
- Chapter 30     [“How Do I Implement Hook to Holdings \(Citation Server\)?”](#)  
Chapter 30 provides instructions for implementing hook to holdings.
- Chapter 31     [“How Do I Implement HTTP Post to Link Resolver?”](#)  
Chapter 31 provides instructions for implementing HTTP POST to link resolver.
- Chapter 32     [“How Do I Display Media Bookings in MyAccount?”](#)  
Chapter 32 provides instructions for implementing media bookings.
- Chapter 33     [“How Do I Implement ImageServer in WebVoyage?”](#)  
Chapter 33 provides instructions for implementing ImageServer.
- Chapter 34     [“How Do I Implement Messages for Status Patron Groups?”](#)  
Chapter 34 provides instructions for implementing messages for Status Patron Groups.
- Chapter 35     [“How Do I Add/Modify Search Results Page Icons?”](#)  
Chapter 35 provides instructions for implementing icons on the search results page.
- Chapter 36     [“How Do I Modify the Renewal Status Messages?”](#)  
Chapter 36 provides instructions for how to modify renewal status messages.



Chapter 37	<a href="#">“How Do I Add CGI Script Support?”</a> Chapter 37 provides instructions for how to add CGI script support to Voyager 7.x and later versions of WebVoyage.
Chapter 38	<a href="#">“How Do I Suppress Patron Barcode/ID Prompts on Request Forms?”</a> Chapter 38 provides instructions for how to suppress the barcode/ID prompt on the patron request page.
Index	The Index is an alphabetical, detailed cross-reference of topics.

## **Conventions Used in This Document**

---

The following conventions are used throughout this document:

- Names of commands, variables, stanzas, files, and paths (such as `/dev/tmp`), as well as selectors and typed user input, are displayed in `constant width` type.
- Commands or other keyboard input that must be typed exactly as presented are displayed in `constant width bold` type.
- Commands or other keyboard input that must be supplied by the user are displayed in `constant width bold italic` type.
- System-generated responses such as error messages are displayed in `constant width` type.
- Variable *portions* of system-generated responses are displayed in `constant width italic` type.
- Keyboard commands (such as **Ctrl** and **Enter**) are displayed in **bold**.
- Required keyboard input such as “Enter **vi**” is displayed in `constant width bold` type.
- Place holders for variable portions of user-defined input such as `ls -l filename` are displayed in *italicized constant width bold* type.
- The names of menus or status display pages and required selections from menus or status display pages such as “From the **Applications** drop-down menu, select **System-wide**,” are displayed in **bold** type.
- Object names on a window's interface, such as the **Description** field, the **OK** button, and the **Metadata** tab, are displayed in **bold** type.
- The titles of documents such as *Acquisitions User's Guide* are displayed in *italic* type.
- Caution, and important notices are displayed with a distinctive label such as the following:

**NOTE:**

Extra information pertinent to the topic.



**IMPORTANT:**

*Information you should consider before making a decision or configuration.*



**CAUTION:**

*Information you must consider before making a decision, due to potential loss of data or system malfunction involved.*



**TIP:**

*Helpful hints you might want to consider before making a decision.*

**RECOMMENDED:**

*Preferred course of action.*

**OPTIONAL:**

*Indicates course of action which is not required, but may be taken to suit your library's preferences or requirements.*

## **Document Reproduction/Photocopying**

---

Photocopying the documentation is allowed under your contract with Ex Libris (USA) Inc. It is stated below:

All documentation is subject to U.S. copyright protection. CUSTOMER may copy the printed documentation only in reasonable quantities to aid the employees in their use of the SOFTWARE. Limited portions of documentation, relating only to the public access catalog, may be copied for use in patron instruction.

## **Comment on This Document**

---

To provide feedback regarding this document, use the Ex Libris eService or send your comments in an e-mail message to [docmanager@exlibrisgroup.com](mailto:docmanager@exlibrisgroup.com).

---

## Getting Started

# 1

---

<b>Purpose of this Chapter</b>	<b>1-1</b>
<b>Prerequisite Skills and Knowledge</b>	<b>1-1</b>
<b>Before You Begin</b>	<b>1-2</b>



---

**Purpose of this Chapter**

The purpose of this chapter is to describe what you need to get started to effectively work with/customize WebVoy ge and use this guide.

---

**Prerequisite Skills and Knowledge**

To use this document effectively, you should have a working knowledge of the following:

- Microsoft Windows operating environment.
- CSS.
- XML.
- XSL.
- JavaScript.
- Text editor(s) for working with CSS, XML, XSL, and so on.
- UNIX operating system commands and file system (depending on your environment).
- Basic MARC records formats.
- Local procedures.

## Before You Begin

---

Before you can begin, you need to do the following:

- Have the Voyager WebVoyage 7 (or higher) and corresponding Voyager integrated library system software installed.
- Have access to an internet browser on your PC.  
Refer to the Ex Libris Documentation Center for Microsoft® and Mozilla browser support information.
- Obtain the URL and/or the IP and port address for accessing your instance of Voyager WebVoyage 7(or higher).
- Obtain your user ID and password for logging in to Voyager WebVoyage 7 (or higher). For logon steps, refer to the *WebVoyage Basic User's Guide*.
- Set up your PC to display Unicode-specific data as needed. See the *WebVoyage Basic User's Guide* for instructions.

---

<b>WebVoyage Architecture Overview</b>	<b>2-1</b>
<b>Flowchart Example - myAccount Page</b>	<b>2-2</b>
• Flowchart Example Description	2-2
• .css Processing	2-4
<b>Page Components Example - Basic Search</b>	<b>2-5</b>
<b>Page Components Example - Advanced Search</b>	<b>2-7</b>
<b>Page Components Example - Subject Search</b>	<b>2-9</b>
<b>Page Components Example - Author Search</b>	<b>2-10</b>
<b>Page Components Example - Course Reserves</b>	<b>2-12</b>
<b>Page Components Example - Geospatial Search</b>	<b>2-14</b>





---

### WebVoyáge Architecture Overview

---


The purpose of this section is to provide an overview description of the architecture of WebVoyáge for displaying information.

WebVoyáge has a modular design to control formatting for the broadest number of page displays.

To display search results, patron information, and other dynamically generated information, WebVoyáge combines information from the Voyager database (or from an outside resource like Google<sup>TM</sup> Book Search) with formatting properties from the WebVoyáge .css, .xsl, and .xml files to render a display page in HTML. See [Figure 2-1](#) on [page 2-2](#).

For a flowchart example of how these files work together, see [Flowchart Example - myAccount Page](#) on [page 2-2](#).

For an example and description of the HTML page components, see [Page Components Example - Basic Search](#) on [page 2-5](#).

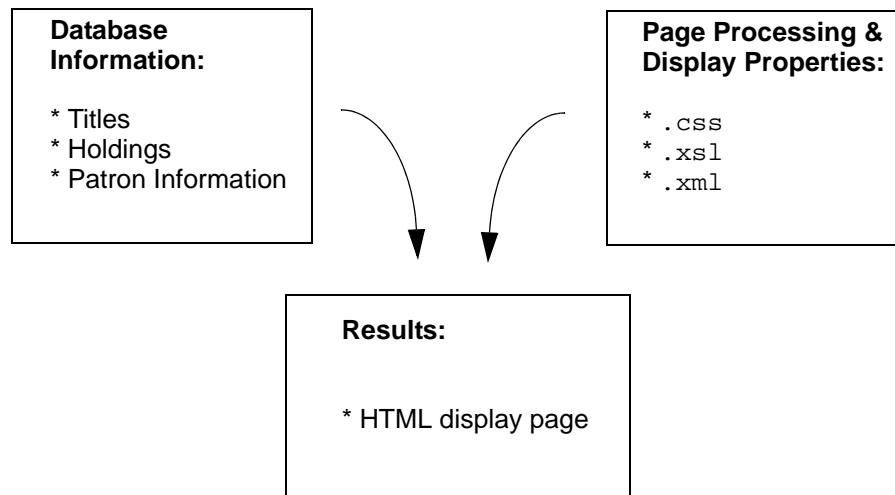

---

**Figure 2-1. Display page build overview**

## Flowchart Example - myAccount Page

---

The purpose of this section is to describe and illustrate the relationship of the WebVoyáge files used for building and displaying content using the myAccount page as an example.

### Flowchart Example Description

---

The content of this section describes the the flowchart example highlighted in [Figure 2-2](#) on [page 2-4](#).

To build the display page for myAccount page, the primary .xsl file is used. For this example, it is the myAccount.xsl file that is used. The name of the .xsl file used for this process generally represents the page being built such as displayRecord.xsl. See the .xsl files located in /ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/.

#### **NOTE:**

Directory path references to xxxdb implies that you need to substitute your database path name; and where [skin] is referenced, substitute the path name

that is used at your site. The default skin path provided is `en_US` as in the following:

```
/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

The `myAccount.xml` imports the following:

- `stdImports.xml`.  
This is an important part of the page processing. Every page uses it. It imports `framework.xml`.
- `cl_myAccount.xml`.  
This is a key component. The `cl` stands for content layout.
- `myAccountLinks.xml`.
- `myAccount.css`.

**NOTE:**

The file naming convention used is intentional to show relationships between files used to build the HTML page as with `myAccount.xml`, `myAccountLinks.xml`, `cl_myAccount.xml`, and `myAccount.css`.

The `myAccount.xml` calls the following templates which are used to construct every page:

- `buildHtmlPage`.
- `buildContent`.

The `framework.xml` takes input from the following components:

- `.xml` files.
- `.js` files.
- `.css` files.
- `buildHtmlPage` template.
- Timeout mechanism.

And subsequently, the `framework.xml` generates HTML output with the following page components:

- Header.
- Main content based on the `buildContent` template.
- Footer.

For more information regarding page components, see [Page Components Example - Basic Search](#) on [page 2-5](#).

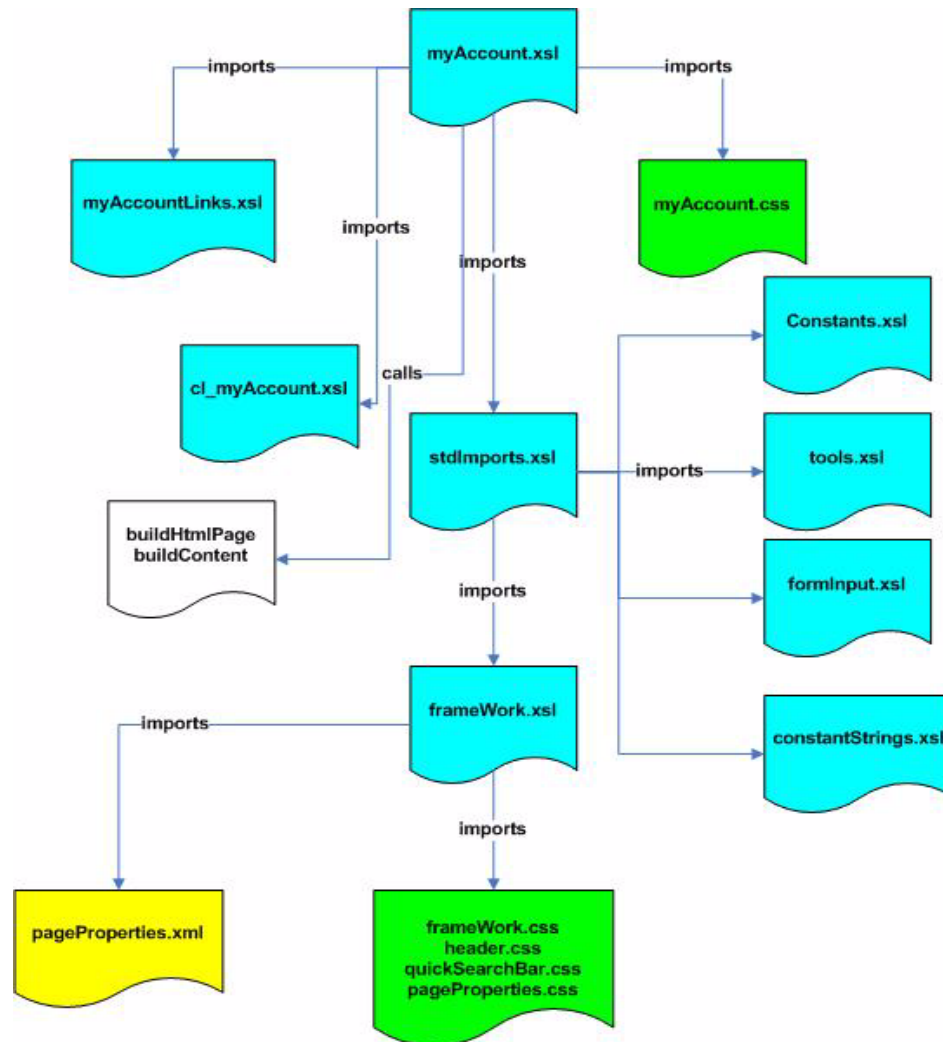


Figure 2-2. Flowchart example for myAccount page

## .css Processing

Cascading Style Sheets (CSS) is a stylesheet language used to describe the presentation of a document. CSS is commonly used to apply style to web pages or more specifically colors, fonts, layout, and other aspects of document presentation. These are processed in a specified priority scheme or hierarchy that determines which style rules apply. As a result, pieces of one stylesheet may be overridden by another stylesheet.

In WebVoyage, the baseline defaults are provided by the following `.css` files that are used by almost every page that is generated:

1. `pageProperties.css`.
2. `quickSearchBar.css`.
3. `header.css`.
4. `frameWork.css`.

This list illustrates the order of precedence for each of these `.css` files. In this hierarchy, `pageProperties.css` provides overriding characteristics to #2 through #4. Specific page `.css` files like `myAccount.css` always override the baseline defaults.

Variations in a specific page `.css` file only apply to that page. For more global changes like a font change for all pages, the files controlling the baseline defaults need to be modified.

**TIP:**

*A tool like Mozilla® Firebug enables you to view these variations/interactions and edit/debug CSS, JavaScript, and so on live in any web page.*


## Page Components Example - Basic Search

---

As described, each page includes the following major components:

- Header
- Footer
- Main content

See [Figure 2-3](#).

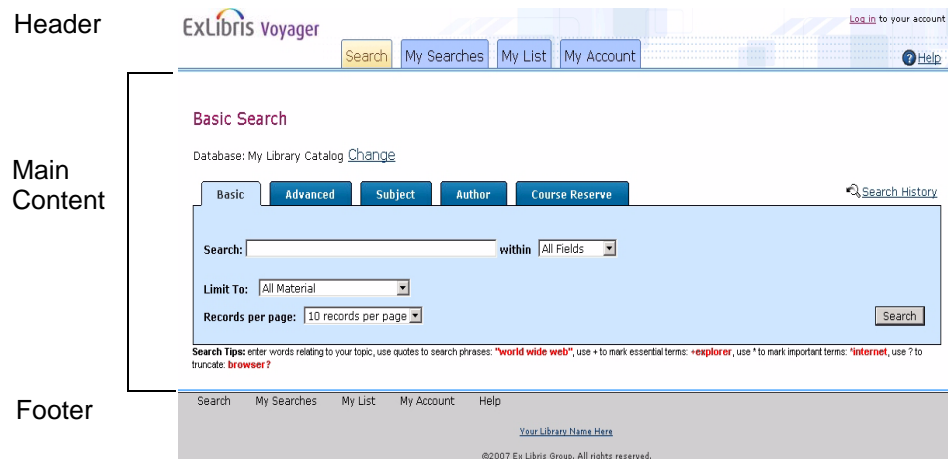

**Figure 2-3. Page components**

Any element of WebVoyáge that is used by multiple pages such as the footer component, the search navigation bar, or the login link is defined independent of the pages on which it appears. An independent definition allows the element to be called by any and every page. This provides greater flexibility; but as a result, there isn't a single `.xsl` stylesheet for each page that WebVoyáge renders.

The page shown in [Figure 2-3](#) is built with the following files that are used by all pages.

- `frameWork.xsl`.
- `constants.xsl`.
- `tools.xsl`.
- `formInput.xsl`.
- `constantStrings.xsl`.
- `frameWork.css`.
- `header.css`.
- `quickSearchBar.css`.
- `pageProperties.css`.

In addition, the Basic Search page uses the following:

- `cl_searchBasic.xsl`.

- `searchFacets.xsl`.
- `searchPages.css`.
- `searchBasic.css`.
- `pageInputFocus.js`.

Specific to the Basic tab, it uses the following:

- The font family is from `frameWork.css`.
- The font size, color, weight, and alignment of the tab label are from the `searchPages.css`.
- The font size, color, weight, and alignment of the tab contents such as Limit To are from `frameWork.css`.
- The font family, size, color, weight, and alignment of the search tips are from `pageProperties.css`.
- The text values are from `webvoyage.properties`.
- The images that make up the Basic tab are from the `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/images/` directory.
- The cursor placement is determined by `pageInputFocus.js`.

In summary, this example illustrates the hierarchy described in [Flowchart Example - myAccount Page](#) on [page 2-2](#) where baseline defaults are used in combination with page-specific, overriding controls for formatting that includes the following:

- Fonts
- Color
- Images
- Content placement on the page
- And so on

## **Page Components Example - Advanced Search**

---

As described, each page includes the following major components:

- Header
- Footer
- Main content

Any element of WebVoyáge that is used by multiple pages such as the footer component, the search navigation bar, or the login link is defined independent of the pages on which it appears. An independent definition allows the element to be called by any and every page. This provides greater flexibility; but as a result, there isn't a single `.xsl` stylesheet for each page that WebVoyáge renders.

The Advanced Search page is built with the following files that are used by all pages.

- `frameWork.xsl`.
- `constants.xsl`.
- `tools.xsl`.
- `formInput.xsl`.
- `constantStrings.xsl`.
- `frameWork.css`.
- `header.css`.
- `quickSearchBar.css`.
- `pageProperties.css`.

In addition, the Advanced Search page uses the following:

- `cl_searchAdvanced.xsl`.
- `searchFacets.xsl`.
- `searchPages.css`.
- `searchAdvanced.css`.
- `pageInputFocus.js`.

Specific to the Advanced tab, it uses the following:

- The font family is from `frameWork.css`.
- The font size, color, weight, and alignment of the tab label are from the `searchPages.css`.
- The font size, color, weight, and alignment of the tab contents such as Limit To are from `frameWork.css`.
- The font family, size, color, weight, and alignment of the search tips are from `pageProperties.css`.
- The text values are from `webvoyage.properties`.
- The images that make up the Advanced tab are from the `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/images/` directory.



- The cursor placement is determined by `pageInputFocus.js`.

In summary, this example illustrates the hierarchy described in [Flowchart Example - myAccount Page](#) on [page 2-2](#) where baseline defaults are used in combination with page-specific, overriding controls for formatting that includes the following:

- Fonts
- Color
- Images
- Content placement on the page
- And so on

## Page Components Example - Subject Search

---

As described, each page includes the following major components:

- Header
- Footer
- Main content

Any element of WebVoyáge that is used by multiple pages such as the footer component, the search navigation bar, or the login link is defined independent of the pages on which it appears. An independent definition allows the element to be called by any and every page. This provides greater flexibility; but as a result, there isn't a single `.xsl` stylesheet for each page that WebVoyáge renders.

The Subject Search page is built with the following files that are used by all pages.

- `frameWork.xsl`.
- `constants.xsl`.
- `tools.xsl`.
- `formInput.xsl`.
- `constantStrings.xsl`.
- `frameWork.css`.
- `header.css`.
- `quickSearchBar.css`.
- `pageProperties.css`.

In addition, the Subject Search page uses the following:

- `cl_searchSubject.xml`.
- `searchFacets.xml`.
- `searchPages.css`.
- `searchSubject.css`.
- `pageInputFocus.js`.

Specific to the Subject tab, it uses the following:

- The font family is from `framework.css`.
- The font size, color, weight, and alignment of the tab label are from the `searchPages.css`.
- The font size, color, weight, and alignment of the tab contents such as Limit To are from `framework.css`.
- The font family, size, color, weight, and alignment of the search tips are from `pageProperties.css`.
- The text values are from `webvoyage.properties`.
- The images that make up the Subject tab are from the `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/images/` directory.
- The cursor placement is determined by `pageInputFocus.js`.

In summary, this example illustrates the hierarchy described in [Flowchart Example - myAccount Page](#) on [page 2-2](#) where baseline defaults are used in combination with page-specific, overriding controls for formatting that includes the following:

- Fonts
- Color
- Images
- Content placement on the page
- And so on

## Page Components Example - Author Search

---

As described, each page includes the following major components:

- Header

- Footer
- Main content

Any element of WebVoyáge that is used by multiple pages such as the footer component, the search navigation bar, or the login link is defined independent of the pages on which it appears. An independent definition allows the element to be called by any and every page. This provides greater flexibility; but as a result, there isn't a single `.xsl` stylesheet for each page that WebVoyáge renders.

The Author Search page is built with the following files that are used by all pages.

- `frameWork.xsl`.
- `constants.xsl`.
- `tools.xsl`.
- `formInput.xsl`.
- `constantStrings.xsl`.
- `frameWork.css`.
- `header.css`.
- `quickSearchBar.css`.
- `pageProperties.css`.

In addition, the Author Search page uses the following:

- `cl_searchAuthor.xsl`.
- `searchFacets.xsl`.
- `searchPages.css`.
- `searchAuthor.css`.
- `pageInputFocus.js`.

Specific to the Author tab, it uses the following:

- The font family is from `frameWork.css`.
- The font size, color, weight, and alignment of the tab label are from the `searchPages.css`.
- The font size, color, weight, and alignment of the tab contents such as Limit To are from `frameWork.css`.
- The font family, size, color, weight, and alignment of the search tips are from `pageProperties.css`.
- The text values are from `webvoyage.properties`.

- The images that make up the Author tab are from the `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/images/` directory.
- The cursor placement is determined by `pageInputFocus.js`.

In summary, this example illustrates the hierarchy described in [Flowchart Example - myAccount Page](#) on [page 2-2](#) where baseline defaults are used in combination with page-specific, overriding controls for formatting that includes the following:

- Fonts
- Color
- Images
- Content placement on the page
- And so on

## Page Components Example - Course Reserves

---

As described, each page includes the following major components:

- Header
- Footer
- Main content

Any element of WebVoyage that is used by multiple pages such as the footer component, the search navigation bar, or the login link is defined independent of the pages on which it appears. An independent definition allows the element to be called by any and every page. This provides greater flexibility; but as a result, there isn't a single `.xsl` stylesheet for each page that WebVoyage renders.

The Course Reserves page is built with the following files that are used by all pages.

- `frameWork.xsl`.
- `constants.xsl`.
- `tools.xsl`.
- `formInput.xsl`.
- `constantStrings.xsl`.
- `frameWork.css`.

- `header.css`.
- `quickSearchBar.css`.
- `pageProperties.css`.

In addition, the Course Reserves page uses the following:

- `cl_searchCourseReserves.xsl`.
- `searchFacets.xsl`.
- `searchPages.css`.
- `searchCourseReserve.css`.
- `pageInputFocus.js`.

Specific to the Course Reserve tab, it uses the following:

- The font family is from `frameWork.css`.
- The font size, color, weight, and alignment of the tab label are from the `searchPages.css`.
- The font size, color, weight, and alignment of the tab contents such as Limit To are from `frameWork.css`.
- The font family, size, color, weight, and alignment of the search tips are from `pageProperties.css`.
- The text values are from `webvoyage.properties`.
- The images that make up the Course Reserve tab are from the `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/images/` directory.
- The cursor placement is determined by `pageInputFocus.js`.

In summary, this example illustrates the hierarchy described in [Flowchart Example - myAccount Page](#) on [page 2-2](#) where baseline defaults are used in combination with page-specific, overriding controls for formatting that includes the following:

- Fonts
- Color
- Images
- Content placement on the page
- And so on

## Page Components Example - Geospatial Search

---

The Geospatial Search feature is only available if your institution has purchased the Geospatial searching tools.

As described, each page includes the following major components:

- Header
- Footer
- Main content

Any element of WebVoyáge that is used by multiple pages such as the footer component, the search navigation bar, or the login link is defined independent of the pages on which it appears. An independent definition allows the element to be called by any and every page. This provides greater flexibility; but as a result, there isn't a single `.xsl` stylesheet for each page that WebVoyáge renders.

The Geospatial Search page is built with the following files that are used by all pages.

- `frameWork.xsl`.
- `constants.xsl`.
- `tools.xsl`.
- `formInput.xsl`.
- `constantStrings.xsl`.
- `frameWork.css`.
- `header.css`.
- `quickSearchBar.css`.
- `pageProperties.css`.

In addition, the Geospatial Search page uses the following:

- `cl_searchGeoCorridor.xsl`.
- `cl_searchGeoPolygon.xsl`.
- `cl_searchGeoRadius.xsl`.
- `cl_searchGeoRange.xsl`.
- `cl_searchGeoRectangle`.
- `searchFacets.xsl`.
- `searchPages.css`.

- `searchGeospatial.css`.
- `pageInputFocus.js`.

Specific to the Geospatial Search tab, it uses the following:

- The font family is from `frameWork.css`.
- The font size, color, weight, and alignment of the tab label are from the `searchPages.css`.
- The font size, color, weight, and alignment of the tab contents such as Limit To are from `frameWork.css`.
- The font family, size, color, weight, and alignment of the search tips are from `pageProperties.css`.
- The text values are from `webvoyage.properties`.
- The images that make up the Geospatial Search tab are from the `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/images/ directory`.
- The cursor placement is determined by `pageInputFocus.js`.

In summary, this example illustrates the hierarchy described in [Flowchart Example - myAccount Page](#) on [page 2-2](#) where baseline defaults are used in combination with page-specific, overriding controls for formatting that includes the following:

- Fonts
- Color
- Images
- Content placement on the page
- And so on





<b>Introduction</b>	<b>3-1</b>
<b>PDS Implementation</b>	<b>3-1</b>
<b>Login</b>	<b>3-4</b>
<b>PDS Integration</b>	<b>3-7</b>
<b>PDS Considerations</b>	<b>3-7</b>
• PDS/SSO Characteristics	3-8
• Clustered/Universal Borrowing Environments	3-8



---

## Introduction

Full PDS (Patron Directory Services) support has been integrated into WebVoyage. PDS is provided as a standard component of the Voyager installation that is usually set up during the installation or upgrade process.

With PDS you have the option to enable Single Sign-On (SSO) capabilities across all Ex Libris products.

PDS is a flexible application that enables the interchange of patron authentication and patron attribute information between a variety of sources across a mix of topologies. For a complete description of PDS implementation options, refer to the *Patron Directory Services Guide* located in the Cross Products folder of the Ex Libris Documentation Center.

---

## PDS Implementation

To activate PDS, you need to configure the `web.xml` file that is located in `/ml/voyager/xxxxdb/tomcat/vwebv/context/vwebv/WEB-INF/` (see [Figure 3-1](#)) and, if you use PINs, the `web.xml` file that is located in `/ml/voyager/xxxxdb/tomcat/vpds/context/vpds/WEB-INF/` (see [Figure 3-2](#)).

**NOTE:**

Directory path references to `xxxxdb` implies that you need to substitute your database path name.

```

<context-param>
  <param-name>PDSEnabled</param-name>
  <param-value>True</param-value>
  <description>
    Flag to enable or disable PDS Support. (True / False)
  </description>
</context-param>
<context-param>
  <param-name>PDShost</param-name>
  <param-value>[server IP]</param-value>
  <description>The host of the Patron Data Services.</description>
</context-param>
<context-param>
  <param-name>PDSport</param-name>
  <param-value>[server port number]</param-value>
  <description>
    The port at which Patron Data Services can be found
  </description>
</context-param>
<context-param>
  <param-name>Institution</param-name>
  <param-value>[institution name]</param-value>
  <description>
    The Institution "tab_service" which to operate under in PDS
  </description>
</context-param>

```

---

**Figure 3-1. web.xml PDS Parameters (vwebv path)**

```

<!--
  <context-param>
    <param-name>DefaultPIN</param-name>
    <param-value>1234</param-value>
    <description>
      Supply a default PIN for patrons that do not yet have PINs in their records.
      PINs can be 4 - 12 characters.
      By not setting a default pin here , patron must have a patron PIN set, if not they
      must contact the circ desk.
      This needs to match the value set in webvoyage.properties in vwebv in
      option.defaultPIN=
    </description>
  </context-param>
-->

```

---

**Figure 3-2. web.xml PDS PIN Parameters (vpds path)**

The following `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/WEB-INF/web.xml` parameters need to be configured:

- **PDSEnabled**

To activate/enable the PDS software, enter True (or Yes is acceptable) for the value. You must enter the entire word for this value. T is not a recognized value. This value is not case sensitive.

- **PDSHost**

Enter the PDS URL location for this value.

- **PDSPort**

Enter the port number for the location of PDS for this value.

- **Institution**

Identify the institution under which PDS should operate.

For PDS, institution is an administrative concept that denotes the organization to which patrons and/or resources belong. For Voyager, each institution within a consortium generally has its own Voyager database which is the equivalent of a PDS institution.

If you are implementing PIN security, the following `/m1/voyager/xxxdb/tomcat/vpds/context/vpds/WEB-INF/web.xml` changes need to be made:

- Remove the commenting for the `DefaultPIN` parameter
- Set a default PIN for patrons that do not already have a PIN



### **IMPORTANT:**

*The default PIN value that you specify needs to match the value set for `option.defaultPIN=` in `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/webvoyage.properties` (where the default `[skin]` is `en_US`). Do not make any changes to the PIN parameters in the `/m1/voyager/xxxdb/tomcat/vpds/context/vpds/WEB-INF/web.xml` file unless you have also made changes to the `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/webvoyage.properties` file.*

## **Login**

---

When PDS is activated for WebVoyage, the PDS login display replaces the traditional (native) WebVoyage login display. See [Figure 3-3](#).



---

**Figure 3-3. PDS Login Display**

PDS provides the flexibility to customize the login display. If you need to make changes to the login display, the PDS files to modify are:

- `\location\to\pds\html_form\calling_system-voyager`  
This is the location of the templates for the html forms.
- `\location\to\pds\html_form\icon\loginvoyager.jpg`  
This is the file for the background (gradient purple).
- `\location\to\pds\apache\htdocs\PDSVoyager.css`  
This is the stylesheet for text fonts, colors, sizes, and so forth.

Refer to the *Patron Directory Services Guide* located in the Cross Products section of the Ex Libris Documentation Center for more information.

Using the PDS login display, the patron enters information for the following fields:

- Id (required)  
For this field, the patron can enter either a barcode or institution ID.  
This equates to the `bor_verification=` component that is referenced in the PDS guide.
- Last Name (required)

This equates to the `bor_id=` component that is referenced in the PDS guide.

- Home Library

Optionally, the login display may be customized to include a PIN field (see [Figure 3-4](#)) that is used as part of the authentication process. To display the PIN option on the login form, you need to remove commenting for the sections displayed in [Figure 3-5](#) and [Figure 3-6](#) that are located in `/<location>/<to>/pds/html_form/calling_system-voyager/login`.

**Figure 3-4.** PDS Login Display with PIN

```
<!--
<TR>
<TD class="LoginLabel">Personal ID Number:&nbsp;&nbsp;&nbsp;</TD>
<TD><INPUT TYPE="password" NAME=bor_pin class="form" style="width:180px"></
      TD>
</TR>
-->
```

**Figure 3-5.** PDS Form PIN Label

```
<!--  
<input type="hidden" name="check_pin" value="Y">  
-->
```

Figure 3-6. PDS Form PIN Field Type

## PDS Integration

PDS provides a single point of integration for external authentication and authorization (attribute) systems for Ex Libris products. With PDS, Voyager VPDS acts as an external authentication and authorization system (see [Figure 3-7](#)).

Refer to the *Patron Directory Services Guide* for a description of the way that you can combine a variety of external authentication and authorization systems.

### NOTE:

PDS has the flexibility to accommodate authentication checks against one server and retrieve user attributes from a different server.

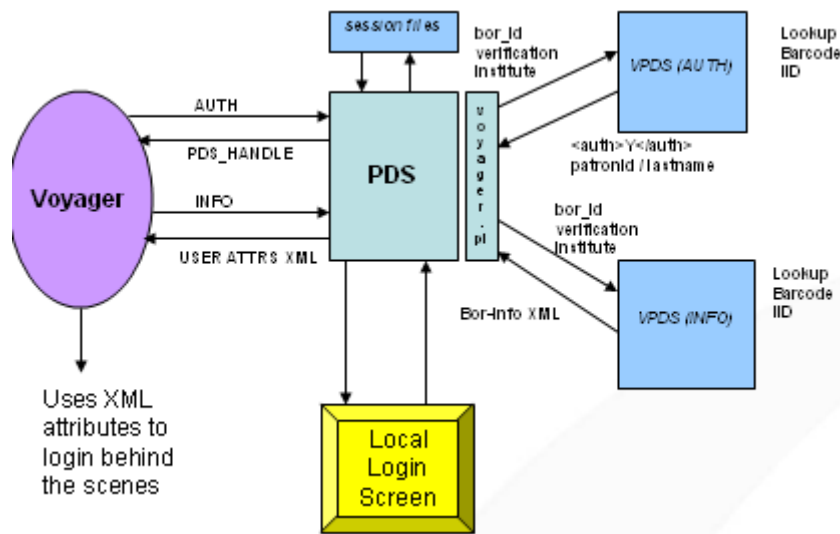


Figure 3-7. VPDS Example



## PDS Considerations

---

This section describes the following PDS considerations:

- [PDS/SSO Characteristics](#)
- [Clustered/Universal Borrowing Environments](#)

### PDS/SSO Characteristics

---

With PDS and SSO, the login and logout characteristics differ from the traditional (native) WebVoyage process. For example, the behavior of clicking the Ex Libris Voyager logo (see [Figure 3-8](#)) to exit WebVoyage differs from the traditional (native) WebVoyage process when PDS/SSO is enabled.



**Figure 3-8. Ex Libris Voyager Logo**

If a patron clicks the Ex Libris Voyager logo to exit WebVoyage and is logged in to another Ex Libris PDS SSO-enabled application, the SSO session files (see [Figure 3-7](#)) that contain the authentication/authorization session information remain active. When the user returns to WebVoyage (while still logged in to the other SSO-enabled application), the user immediately enters the WebVoyage application.

### Clustered/Universal Borrowing Environments

---

In clustered and Universal Borrowing (UB) environments, it is necessary to have a `<ubid>` parameter. As a result, external authentication systems need to store and return a `<ubid>` which is the concatenation of `cluster_id` and `db_key`.



---

<b>Search Overview</b>	<b>4-1</b>
<b>Search Types</b>	<b>4-1</b>
• Configuration	4-2
• Keyword	4-6
• Left-Anchored/Headings-Browse	4-7
<b>Limits</b>	<b>4-8</b>
<b>LOCAL/Remote Database Search</b>	<b>4-11</b>
<b>Display Records</b>	<b>4-15</b>
<b>eLink Data</b>	<b>4-16</b>



---

### Search Overview

With WebVoyáge 7.0 and later, it is important to note that the foundation underlying WebVoyáge in the Voyager system has not changed. The database structure, indexes, integrated system administration configuration, and so on remain the same.

This chapter is intended to describe Voyager search characteristics. You may find that some of this information is familiar to you if you've had experience with WebVoyáge Classic. However, for user's just starting with WebVoyáge 7.0 and later, these may be completely new concepts.



#### **IMPORTANT:**

*Also, remember to use the WebVoyáge Basic User's Guide for key basic concepts regarding the WebVoyáge search interface.*

---

### Search Types

Different search types enable you to access the various indexes provided with your Voyager system. The search types are:

- Keyword (see [Keyword](#) on [page 4-6](#))
- Left-anchored (see [Left-Anchored/Headings-Browse](#) on [page 4-7](#))
- Headings browse (see [Left-Anchored/Headings-Browse](#) on [page 4-7](#))

The Basic Search page uses all search types, the Advanced Search page uses keyword, and the Subject and Author Search pages use one of the types based on what is configured.

To increase your understanding of the relationship between the search types and the available indexes, you may find it helpful to refer to the “Search Definition Tables” Appendix in the *Voyager System Administration User’s Guide* that contains the following sections:

- Headings Indexes
- Keyword Indexes
- Left-Anchored Indexes

### Configuration

---

The WebVoyáge search function utilizes the index definitions set through the Search component of the Voyager System Administration module. See [Figure 4-1](#).



---

**Figure 4-1. Voyager System Administration Search - Index Settings**

The search codes for the WebVoyage search pages are set in the `webvoyage.properties` file that is located in `/ml/voyager/xxxxdb/tomcat/vwebv/context/vwebv/ui/en_US/` following a similar pattern as shown in [Figure 4-2](#).

```
Basic Search:
page.search.basic.search.code=

Subject Search:
page.search.subject.search.code=

Author Search:
page.search.author.search.code=
```

**Figure 4-2.** Example line of code for specifying search code

**NOTE:**

Since the Advanced Search page only uses keyword searches, it pulls the necessary search code information from the 1) Indexes - Keyword Definitions and 2) Indexes - Holdings Keyword Definitions configured in the Voyager System Administration module. As a result, there is no `page.search.<xxx>.search.code=` line in the `webvoyage.properties` file for Advanced Search. The Advanced Search configuration options provided in the `webvoyage.properties` file allow you to override the display label (name) for the search codes as defined in the Voyager System Administration module.

Review the comment sections of the `webvoyage.properties` file for additional setup information. See [Figure 4-3](#), [Figure 4-4](#), [Figure 4-5](#), and [Figure 4-6](#) for examples of search code configurations (in the `webvoyage.properties` file) for the Search pages.

```
#=====#
# Basic search codes
#=====#
# The default index in the drop down
page.search.basic.search.code.selected=GKEY|*
page.search.basic.search.code.keyAnyAndWith=
page.search.basic.search.code.keyAnyAndWith.code=GKEY^*
page.search.basic.search.code.keyAnyAndWith.order=1
page.search.basic.search.code.keyAnyAndWith.display=All Fields
# page.search.basic.search.code.keyAnyOrWith=
# page.search.basic.search.code.keyAnyOrWith.code=GKEY|*
# page.search.basic.search.code.keyAnyOrWith.order=2
# page.search.basic.search.code.keyAnyOrWith.display=Keyword Anywhere OR with
  Relevance
page.search.basic.search.code.titleKeyAnd=
page.search.basic.search.code.titleKeyAnd.code=TKEY^
page.search.basic.search.code.titleKeyAnd.order=3
page.search.basic.search.code.titleKeyAnd.display=Title
page.search.basic.search.code.subjectKeyAnd=
page.search.basic.search.code.subjectKeyAnd.code=SKEY^
page.search.basic.search.code.subjectKeyAnd.order=4
page.search.basic.search.code.subjectKeyAnd.display=Subject
page.search.basic.search.code.journalTitleKeyAnd=
page.search.basic.search.code.journalTitleKeyAnd.code=JKEY^
page.search.basic.search.code.journalTitleKeyAnd.order=5
page.search.basic.search.code.journalTitleKeyAnd.display=Journal Title
```

---

**Figure 4-3. Example configuration for Basic Search page**



```

#####
#
# Search Index Definitions
# =====
# Search Index definitions are used on the Advanced search page. This section
# allows the name of the index to be changed from what is defined in Sysadmin.
# The order of these entries is controlled by the database.
#####
search.index.GKEY=
search.index.GKEY.display=Keyword Anywhere
search.index.TKEY=
search.index.TKEY.display=Title
search.index.SKEY=
search.index.SKEY.display=Subject
search.index.NKEY=
search.index.NKEY.display=Author Name
search.index.100A=
search.index.100A.display=Personal Name
search.index.260B=
search.index.260B.display=Publisher: Name
search.index.NAUT=
search.index.NAUT.display=Name/Uniform Title
search.index.260C=
search.index.260C.display=Publisher: Date
search.index.ISSN=
search.index.ISSN.display=ISSN
search.index.DEWD=
search.index.DEWD.display=Dewey Call Number
search.index.ISBN=
search.index.ISBN.display=ISBN
search.index.SERI=
search.index.SERI.display=Series
search.index.AUTI=
search.index.AUTI.display=Author/Title

```

**Figure 4-4.** Example configuration for Advanced Search page (overrides)

```
#=====#
# page.search.subject.search.code defines the index to be used
# for searches initiated from the subject search page.
#=====#
page.search.subject.search.code=SUBJ@
page.search.subject.search.display=Subject
```

**Figure 4-5. Example configuration for Subject Search page**

```
#=====#
# page.search.author.search.code defines the index to be used
# for searches initiated from the author search page.
# Only one search index may be specified for use by this the author search page
#=====#
page.search.author.search.code=NAME+
page.search.author.search.display=Author
```

**Figure 4-6. Example configuration for Author Search page**

### Keyword

---

A keyword search does a search for specified words anywhere within a record. This search type is based on the keyword indexes. For example, Table A-12 in the appendix of the *Voyager System Administration User's Guide* defines the keyword search (GKEY) as searching all 010 through 9xx fields and subfields.

The results of a keyword search display on a Titles list page. WebVoyáge works in combination with the Voyager System Administration configuration specified by the system administrator to identify what fields such as title, author, and date display and in which order they display for a specific record. The Voyager System Administration configuration also identifies the sort order of the records when there is more than one.

Other characteristics of a keyword search include the following:

- Enter multiple search terms separated by a space.
- AND is the default boolean operator between search terms.

- Enclose terms in parentheses to group them together.
- Surround terms in quotation marks to search for them as a phrase.
- Use the question mark (?) as a wild card or truncation character.

Examples:

col?r finds color and colour

medi? finds medicine, medical, and so on

**NOTE:**

Wild card characters do not work with Z39.50 searches.

- Use the percent sign (%) as a wild card for a specific character.

Examples:

g%lf finds golf and gulf

g%%se finds geese and goose

- Use an exclamation point (!) before a term to indicate that records containing the term are not to be displayed.
- Use a plus sign (+) before a term to indicate that it is an essential term.
- Use the asterisk (\*) before a term to indicate that it is important but less important than a term marked with a plus sign.


### **Left-Anchored/Headings-Browse**

---

Left-anchored/headings browse searches look for the search terms only at the beginning of the appropriate field (as configured).

A left-anchored search scans an index and returns every subject, author, title, call number, or publication date that begins with what you typed. For example, a headings search on the subject “medi” would return the topics medicaid, medical, medicare, medici, medicine, medieval, and mediterranean.

The search results are displayed in a browseable Headings List for Subject (see [Figure 4-7](#)) and Author searches. Journal Title and Call Number searches display in a Title List.

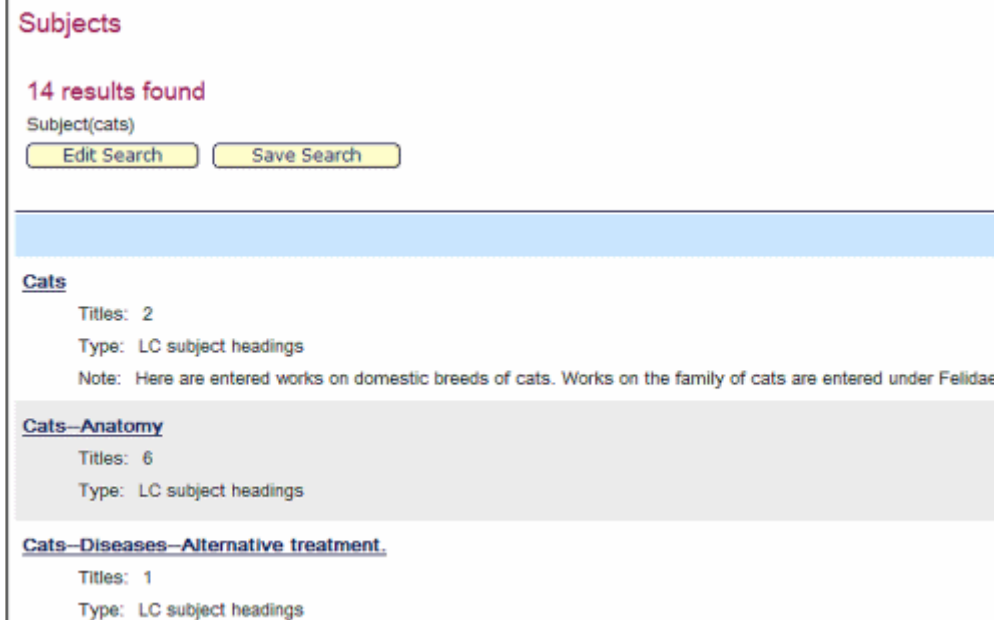

---

**Figure 4-7. Subject Headings display example**

## Limits

---

WebVoyáge provides the options to configure search result limits for patrons to use when doing a search. The following broad categories of limits can be configured:

- Quick limits (Basic Search page)
- Advanced limits

You can configure multiple limits to be associated with one quick-limit, drop-down option by using a vertical bar between the valid limit types. For example, `page.search.limitTo.text.limit=LANG=ENG|MEDI=v`.

Limits are configured in the `webvoyage.properties` file that is located in `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/` (see the section that begins as shown in [Figure 4-8](#)) and in the `limits.xml` file that is located in `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/xsl/userTextConfigs/` (see [Figure 4-9](#) for an example section).

Review the comments provided with these files for setup information.

```

#####
#
# Limit To
# =====
#####
# To specify a default quick limit on the Basic Search page, list its name in \
# the page.search.limitTo option.
# If there is no default quick limit on the Basic Search page, type "none."

```

**Figure 4-8. Limits section in webvoyage.properties example**

```

<limitGroup type="medium" label="Format:">
    <limit code="all" default="Y">All Formats</limit>
    <limit code="a">Map</limit>
    <limit code="c">Computer File</limit>
    <limit code="d">Globe</limit>
    <limit code="g">Projected Graphic</limit>
    <limit code="h">Microform</limit>
    <limit code="k">Nonprojected Graphic</limit>
    <limit code="m">Motion Picture</limit>
    <limit code="s">Sound Recording</limit>
    <limit code="t">Text (Eye-Readable)</limit>
    <limit code="v">Videorecording</limit>
</limitGroup>

```

**Figure 4-9. Example from limits.xml**

See [Table 4-1](#) for a description of the limitGroup types (identified in the `webvoyage.properties` file's Limit To comments section). The limit codes identified for each limitGroup is specified in the `limits.xml` file.

**Table 4-1. Limit Types**

Code	Type	Description
LANG	Language	Refer to <code>limits.xml</code> for a list of limit codes such as ENG for English.
MEDI	Medium	This identifies the format such as video.  <b>NOTE:</b> MEDI is labeled "Format:" in the <code>limits.xml</code> file. See <a href="#">Figure 4-9</a> .  Refer to <code>limits.xml</code> for a list of limit codes such as v for video.
PLAC	Place	Refer to <code>limits.xml</code> for a list of limit codes such as hui for Hawaii.
STAT	Status	Refer to <code>limits.xml</code> for a list of limit codes such as d for ceased publication.
TYPE	Item Type	Refer to <code>limits.xml</code> for a list of limit codes such as jm for musical recording.
DATE	Date	Enter dates in the following format:  DATE=1990-2000 (between 1990 and 2000)  DATE=-1990 (before 1990)  DATE=1990- (after 1990)  Dates must use the 4-digit format YYYY.
LOCA	Location	The list of Location limits comes from the System > Location Limit Groups > [group] > Name in the System Administration module.  Any limit groups in the list that do not have the Suppress in OPAC button pressed are available to select as limits.
CONT	Content	Refer to <code>limits.xml</code> for a list of limit codes such as prm for performed music.
MEDA	Media	Refer to <code>limits.xml</code> for a list of limit codes such as s for audio.

**Table 4-1. Limit Types**

Code	Type	Description
CARR	Carrier	Refer to <code>limits.xml</code> for a list of limit codes such as <code>ss</code> for audio cassette.

Using the limit values that you select, WebVoyage performs search limits according to the following rules:

- The relationship between multiple limit values of the same limit types is considered to be OR. This means that selecting English and French returns only records that are in either English or French.
- The relationship between limit values of different limit types is considered to be AND. This means that selecting English (limitGroup type="language") and Book (limitGroup type="type") returns only records that are books in English.

## **LOCAL/Remote Database Search**

Voyager provides the ability to connect to a wide variety of databases and electronic resources. Voyager WebVoyage configuration defines connections to:

- Your LOCAL database
- Remote Voyager databases
- Z39.50-compliant databases
- Citation databases via Voyager or Z39.50

These connections are configured in the `webvoyage.properties` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/`. See the section that starts as shown in [Figure 4-10](#).

Review the comments provided in this file for setup information.

```
#=====#
#
# Connections
# =====
# This section contains customizations for remote database connections.
#=====#
#
# To create one or more groups of remote database connections, do the following:
# 1. Create an empty numbered group variable.
# 2. Provide a name for the group.
```

**Figure 4-10. Example from Connections section of webvoyage.properties**

For each connection, there are multiple lines of code that define:


- The database code (from Voyager System Administration)
- Name to display
- The display configuration file to reference
- The order in which to display the connections

These lines are repeated for each database connection. See [Figure 4-11](#) for an example of the configuration code and [Figure 4-12](#) for the display results. Notice also from these examples that two groups have been defined and how they display.



```
connect.db.group1=
connect.db.group1.name=Local Libraries
connect.db.group1.order=1
connect.db.group1.AIXCURR.dbCode=AIXCURR
connect.db.group1.AIXCURR.name=Current AIX database
connect.db.group1.AIXCURR.config=holdingsInfo.vbib.properties
connect.db.group1.AIXCURR.order=1
connect.db.group1.QAFINNDB.dbCode=QAFINNDB
connect.db.group1.QAFINNDB.name=QAFINNDB
connect.db.group1.QAFINNDB.config=holdingsInfo.vbib.properties
connect.db.group1.QAFINNDB.order=2
connect.db.group1.KC70DB.dbCode=KC70DB
connect.db.group1.KC70DB.name=KC70DB on king-cobra
connect.db.group1.KC70DB.config=holdingsInfo.vbib.properties
connect.db.group1.KC70DB.order=3
connect.db.group1.LOCAL.dbCode=LOCAL
connect.db.group1.LOCAL.name=My Library Catalog
connect.db.group1.LOCAL.config=holdingsInfo.vbib.properties
connect.db.group1.LOCAL.order=4
connect.db.group2=
connect.db.group2.name=Academic Libraries
connect.db.group2.order=2
connect.db.group2.LOCZ.dbCode=LOCZ
connect.db.group2.LOCZ.name=Library of Congress (z3950)
connect.db.group2.LOCZ.config=holdingsInfo.zbib.properties
connect.db.group2.LOCZ.order=1
```

**Figure 4-11. Example configuration code**

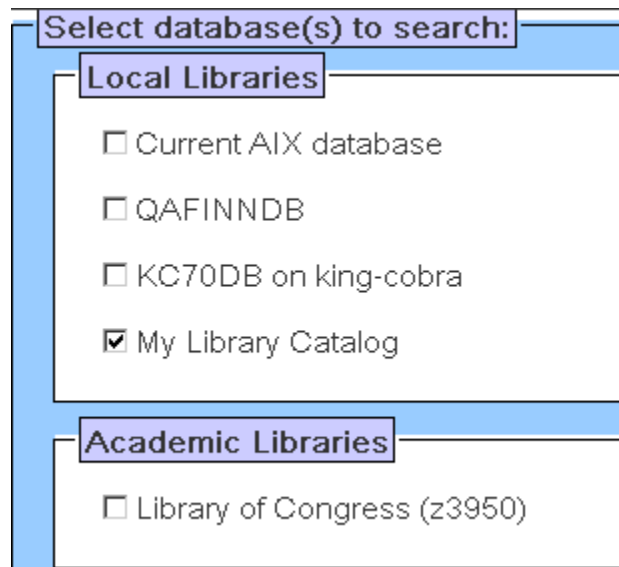

Select database(s) to search:

**Local Libraries**

- ☐ Current AIX database
- ☐ QAFINNDB
- ☐ KC70DB on king-cobra
- ☒ My Library Catalog

**Academic Libraries**

- ☐ Library of Congress (z3950)


**Figure 4-12. Example display of database connections configuration**

The user may select one or more databases to search by clicking the Change link from the search page. See [Figure 4-13](#) for an example of the Change link.

---

## Advanced Search

Database: Current AIX database, KC70DB on king-cobra, My Library Catalog, QAFINNDB [Change](#)



**Figure 4-13. Example of Change link**

Preceding the Change link are the active databases displayed after the Database: label. This label is defined in the Search Pages section of the `webvoyage.properties` file. See [Figure 4-14](#).

```

#=====#
#
# Search Pages
# =====
#=====#
page.search.argument.label=Search:
page.search.database.label=Database:
page.search.buttons.quick.button=Quick
page.search.buttons.basic.button=Basic

```

**Figure 4-14. Database label example in webvoyage.properties**

## Display Records

When a user selects to display a record's detail, the system looks for data in the MARC bibliographic record, the MARC holdings record, the line item in the purchase order, and the item record. Whenever any of these records are present, the system displays data based on a variety of factors including:

- Definitions in the `displaycfg.xml` and `displayHoldings.xml` configuration files (located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/xsl/contentLayout/configs/`)
- Available data in the MARC bibliographic record
- Available data in the linked MARC holdings record(s)
- Available data in the linked line item copy or copies of a purchase order(s)
- Available data in the linked item record(s)

However, before the system constructs a display from this data, it first considers whether or not records have been set for suppression from WebVoyage display. This is accomplished by the manual or automatic setting of the Suppress from OPAC values in either the MARC bibliographic record or the MARC holdings record or both.

Review the comments provided in the `displaycfg.xml` and `displayHoldings.xml` configuration files to use as a template/guidelines to configure these files. See [Display Codes](#) on [page 7-1](#) for more information regarding available codes to use in these configuration files and how to enable redirect.

Also check Chapter 8, [How Do I Build A Separate Display For Serials?](#) on [page 8-1](#) and Chapter 21, [How Do I Display Cover Images From Services Like Amazon.com and Syndetics Solutions?](#) on [page 21-1](#) for other examples of using the configuration files to display records.

## eLink Data

---

For eLink data from the 856 field to display in the Titles list search results, you need to configure the `option.elink.activate` parameter.

The `option.elink.activate` parameter is configured in the `webvoyage.properties` file that is located in `/ml/voyager/xxxxdb/tomcat/vwebv/context/vwebv/ui/en_US/`. See the `webvoyage.properties` file section that is shown in [Figure 4-15](#).


```
#=====
# Option to activate (True) or deactivate (False) elink thumbnails
# Default is deactivate elink thumbnail
#=====
option.elink.activate=False
```

---

**Figure 4-15. eLink Data Parameter**

To enable eLink data identification (with an eLink icon) in the Titles list (see [Figure 4-16](#)), set the `option.elink.activate` parameter to `True`.

---

 [From complexity to creativity \[computer file\] : explorations in evolutionary, autopoietic, and cognitive dynamics / Ben Goertzel.](#)  
Goertzel, Ben.  
Book  
BF311 .G574 1997eb



---

**Figure 4-16. eLink Example**

Similar to the Classic WebVoyáge, the Titles list in the Tomcat WebVoyáge provides an indicator of that eLinks are available. Separately, the eLink URL and text are provided in the XML.

---

<b>Overview</b>	<b>5-1</b>
<b>OpenURL Standard</b>	<b>5-1</b>
<b>OpenURL Requests</b>	<b>5-2</b>
<b>OpenURL/LinkResolver Configuration</b>	<b>5-3</b>



---

**Overview**

WebVoyáge uses the OpenURL standard (see [OpenURL Standard](#) on [page 5-1](#)) to generate links and obtain information from external sources. From the WebVoyáge Record View page, Voyager can generate a URI in OpenURL format from information in the MARC record. When sent to an OpenURL-compliant linking server, the information in the URI is used to locate corresponding full-text records.

---

**OpenURL Standard**

OpenURL is a type of Uniform Resource Locator (URL) that contains resource metadata. It is a defined NISO standard described in the “ANSI/NISO Z39.88 - The OpenURL Framework for Context-Sensitive Services” document that is available at [www.niso.org](http://www.niso.org).


The OpenURL standard is designed to support mediated linking from sources (MARC databases) to library targets like on-line academic journals. A link resolver parses the elements of an OpenURL and provides links to appropriate targets such as full-text repositories and so on.

## OpenURL Requests

---

OpenURL-formatted item requests can be initiated when a patron clicks the OpenURL request button (SFX, for example) from the Action Box of the Record View page. See [Figure 5-1](#).

---

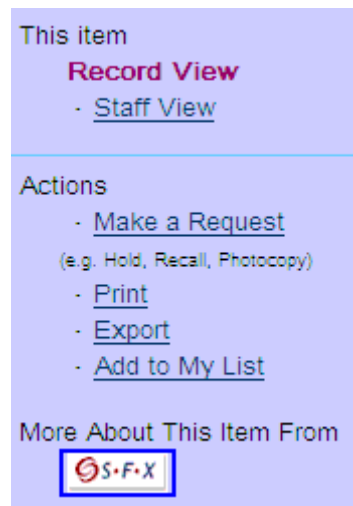


---

**Figure 5-1. Action Box - OpenURL (SFX) request button example**

Or an OpenURL-formatted item request can be initiated when a patron clicks the LinkResolver option as shown in [Figure 5-2](#).

---

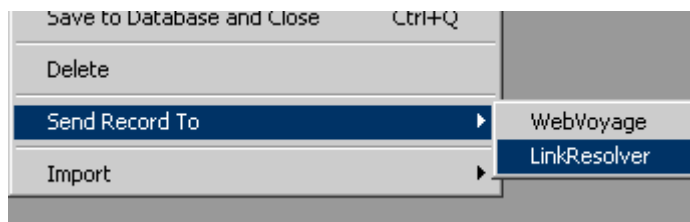

---

**Figure 5-2. LinkResolver option example**



## OpenURL/LinkResolver Configuration

The following WebVoyage files provide configuration options for OpenURL processing:

- `holdingsInfo.vbib.properties` (for Voyager bibliographic databases)
- `holdingsInfo.vcit.properties` (for Voyager citation databases)
- `holdingsInfo.zbib.properties` (for Z39.50 bibliographic databases)
- `holdingsInfo.zcit.properties` (for Z39.50 citation databases)
- `linkresolver.properties` (see [Figure 5-2](#))

Open these files and review the comments provided for additional information regarding setup.

An example of configuring `linkresolver.properties` can be found in [How Do I Implement HTTP Post to Link Resolver?](#) on [page 31-1](#).

In all the configuration files, you see the following variables repeated for each key:

- Field name
- Tag/field number
- Subfield
- Length 1 (number of positions)
- Parse start
- Parse end
- Length 2 (number of positions)

See [Table 5-1](#) for a description of these variables.

**Table 5-1. Variables Description**

Element	Description	Possible Values
key	Meta-tag for the field to parse	Enter meta-tag
tag	MARC field to match	Enter valid MARC field number
subfield	MARC subfield to match	Enter valid MARC subfield letter

Element	Description	Possible Values
len1	Specify a fixed number of characters to extract from a field, or use this element in conjunction with parseStart to identify the starting point for extraction	Enter the number of characters or 0
parseStart	Text of field/subfield after which extraction is to begin.	Enter the text of the field/subfield after which to parse such as Issue: for example (see <a href="#">Figure 5-3</a> )
parseEnd	Text of field/subfield at which extraction is to end	Enter the text of field/subfield at which to end the parse such as Date: (see <a href="#">Figure 5-3</a> )
len2	Specify a fixed number of characters to extract from a field, or use this element in conjunction with parseEnd to identify the end point for extraction.	Enter the number of characters or 0

```
#Issue=773/g/0/Issue:/Date:/0
actionBox.openUrl.cfg.LOCAL.key4.key=Issue
actionBox.openUrl.cfg.LOCAL.key4.tag=773
actionBox.openUrl.cfg.LOCAL.key4.subfield=g
actionBox.openUrl.cfg.LOCAL.key4.len1=0
actionBox.openUrl.cfg.LOCAL.key4.parseStart=Issue:
actionBox.openUrl.cfg.LOCAL.key4.parseEnd=Date:
actionBox.openUrl.cfg.LOCAL.key4.len2=0
```

---

**Figure 5-3. Example of OpenURL variables configuration**  
(holdingsInfo.vbib.properties)

The OpenURL request button such as SFX that displays on the Record View page is defined by the lines of code as shown in [Figure 5-4](#).

```
actionBox.openUrl.image.linkText=SFX
actionBox.openUrl.image.link=ui/en_US/images/sfx.gif
actionBox.openUrl.urlRoot=http://host:port/SFXinstance
```

**Figure 5-4. OpenURL request button configuration example  
(holdingsInfo.vbib.properties)**

For each database that can be accessed, you need to create another set of configuration specifications. Notice that each set begins with a definition of the database being referenced/turned on (Y/N) as shown in [Figure 5-5](#).

```
#LOCAL
actionBox.openUrl.cfg.LOCAL.openUrlDisplay=Y
```

**Figure 5-5. Database identified example**

In [Figure 5-5](#), LOCAL is the database being referenced. Following the same format, simply replace LOCAL with the name of another database to be defined in the next set of configuration specifications. Multiple database configurations can be saved in the properties files concurrently.



**IMPORTANT:**

*The database name you use in the configuration must match the database Code as defined in Search - Database Definitions in Voyager System Administration.*



---

## **Bibliographic Record Linking**

# **6**

---

<b>Overview</b>	<b>6-1</b>
<b>Defining Record Relationships</b>	<b>6-2</b>
• Displaying Related Records	6-2
• Maintaining Related Records	6-2
<b>Configuring Voyager for Bibliographic Record Linking</b>	<b>6-3</b>
• System Administration	6-3
• Cataloging	6-3
• WebVoyage	6-4



---

### Overview

Bibliographic records are related to each other for different reasons. You can use bibliographic record linking to relate a new serial title with its preceding title. Conversely, you can relate an old serial title with its succeeding title. Those are just two types of related records.

Bibliographic Record Linking provides sites with a method for:

- Defining relationships between bibliographic records using profiles created in the Voyager System Administration module
- Displaying those relationships in WebVoyage
- Maintaining those relationships with templates in the Voyager Cataloging module

The bibliographic record linking profiles are created so that related records can be identified using data from a single source, the source record. In each profile, the data from the source record is expressed in MARC format by pairing coordinated tags and subfields with a left-anchored index.

For example, the 773  $\pm$ x tag and subfield might be paired with the left-anchored index for searching ISSN numbers. The tag/subfield/index combination that links the source record to its related records can be any tag/subfield in the source record and any left-anchored index defined in System Administration.

**NOTE:**

The left-anchored indexes available for bibliographic record linking are those defined in the Search component of Voyager System Administration.

Left-anchored indexes which are not available for bibliographic record linking include headings searches as defined in Search Definitions and composite searches as defined in Composite Definitions of Voyager System Administration.

## **Defining Record Relationships**

---

Bibliographic records can be linked in different directions. For example, a vertical relationship can be used to relate the main bibliographic record of a serial title to its article level bibliographic records and then to relate the article level bibliographic records back to the main record. In addition to vertical relationships, the following relationships exist:

- Sibling relationships between children records that share the same host or parent record
- Chronological relationships between records that are predecessors and successors
- Horizontal relationships between records that reflect different versions of the same bibliographic item

Complementary relationships are defined separately. In this type of relationship, the tag/subfield that links a source record to related records does not automatically specify the complementary tag that links the related records back to the source record. Each complementary relationship must be explicitly defined and all tag/subfields must be available in a left-anchored index.

## **Displaying Related Records**

---

When a source record displays in WebVoyáge, the related record information is displayed by clicking a hyperlink. Patrons view related records by clicking the hyperlink that leads directly to the detailed record view of the related record.

Each site can specify the maximum number of related records to display in the detailed record view.

## **Maintaining Related Records**

---

Related records can be maintained using the Voyager Cataloging module. You can view and edit existing related records as well as create new related records quickly and easily using templates that contain derivation fields.



Derivation fields allow you to map data from the source record into the new, target record. Standard template functionality remains in place so you can create new records containing mapped data as well as static text and empty tags and subfields.

## **Configuring Voyager for Bibliographic Record Linking**

---

Bibliographic Record Linking integrates the functionality of several Voyager modules.

- System Administration
- WebVoyage
- Cataloging

### **System Administration**

---

In the Voyager System Administration module, you determine the tag, subfields, and indexes that link a source record to one or more related records. This is accomplished through the Bibliographic Record Linking Profile. This profile allows you to create multiple profiles for multiple record relationships. See the Bibliographic Record Linking section in the Search Configuration chapter of the *Voyager System Administration User's Guide* for more information.

### **Cataloging**

---

In the Cataloging module, staff can search for, review, and edit the related records using current cataloging functions. If the active bibliographic record contains any of the subfields that define a bibliographic record relationship, a new menu option displays on the menu bar.

The Record Relationships menu lists any profiles that include tags/subfields that exist in the current active record. Selecting one of the profiles returns a list of all related records.

#### **NOTE:**

Any bibliographic records that have been suppressed do not display in WebVoyage. However, they do display in the Cataloging module.

Also, if multiple owning libraries exist for records in the database, related records only display per owning library. That is, only the related records belonging to the same owning library as the source record display in WebVoyage.

## WebVoyage

---

The setting to enable bibliographic record linking on the holdings page is in the `webvoyage.properties` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/`. See [Figure 6-1](#).

---

```
#=====#
# Option to enable bibliographic record linking on holdings page
# when the related record is available for the bib ID
#=====#
option.loadRelatedRecords=Y
```

---

**Figure 6-1. Enable bibliographic record linking on holdings page example**

Related records holdings display configuration settings are also located in the `webvoyage.properties` file. See [Figure 6-2](#).

```

#=====#
# Holdings info text to display when bibliographic record linking feature is
#   turned on.
# NOTE option.loadRelatedRecords must be Y
# NOTE the pretext, linktext, and posttext are used to display the text
# for the related items link.
# The default is "Click (pretext) here (linktext has underlining URL to the
# related items link) for related items" (posttext).
# One link may be defined per bibliographic record linking profile, as defined
#   in Sysadmin.
#=====#
holdingsInfo.relatedRecords=Related Records
holdingsInfo.relatedRecords.maxPerPage=10
holdingsInfo.relatedRecords.profile.ISSNPREC=
holdingsInfo.relatedRecords.profile.ISSNPREC.link.pretext=Click
holdingsInfo.relatedRecords.profile.ISSNPREC.link.text=here
holdingsInfo.relatedRecords.profile.ISSNPREC.link.posttext=for related items
holdingsInfo.relatedRecords.profile.ISSNSUCC=
holdingsInfo.relatedRecords.profile.ISSNSUCC.link.pretext=Click
holdingsInfo.relatedRecords.profile.ISSNSUCC.link.text=here
holdingsInfo.relatedRecords.profile.ISSNSUCC.link.posttext=for related items
holdingsInfo.relatedRecords.profile.ISSNCOMP=
holdingsInfo.relatedRecords.profile.ISSNCOMP.link.pretext=Click
holdingsInfo.relatedRecords.profile.ISSNCOMP.link.text=here
holdingsInfo.relatedRecords.profile.ISSNCOMP.link.posttext=for related items

```

**Figure 6-2. Related records settings**

The label setting for the source record is in the `webvoyage.properties` file as shown in [Figure 6-3](#).

```

#=====#
# Label for displaying source record link in the holdings record page
# NOTE option.loadRelatedRecords must be Y
#=====#
holdingsInfo.sourceRecord=Source Record

```

**Figure 6-3. Source record label example**



---

<b>displaycfg.xml</b>	<b>7-1</b>
<b>displayHoldings.xml</b>	<b>7-2</b>
<b>Enable Redirect</b>	<b>7-3</b>
<b>display.xsl</b>	<b>7-3</b>



---

### displaycfg.xml

---

The codes described in [Table 7-1](#) may be used to format the display of information through the `displaycfg.xml` file that is located in `/ml/voyager/xxxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/configs/`.

**Table 7-1. displaycfg.xml display codes**

Code	Description
2000	Table of Contents (505 subfields a, r, t, g).
3000	856 links (linked resources from the 856 field).
4000	MARC record.
5000	Database name of the bibliographic record.
6000, 6010	Electronic resource information.
7000	Format.
7106	Includes.
7107	Physical description.
9000	Holdings information that is defined in <code>displayHoldings.xml</code> .
9500	Display holdings summary information.

Many of these codes are defined in `displaycfg.xml`. Comment out the lines of code that you do not want to use for display formatting.

## **displayHoldings.xml**

---

When the 9000 code is specified in `displaycfg.xml`, the codes described in [Table 7-2](#) may be used to format the display of holdings information through the `displayHoldings.xml` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/configs/`.

**Table 7-2. displayHoldings.xml display codes**

Code	Description
1000	OPAC display name for the location.
1002	Database name for the item.
1005	OPAC display name for the temporary location (only). This is used in combination with the 1000 code.
1010	Number of items linked to the MARC holdings record.
1012	Item status from the item record. If there is only one existing item, its status always displays. If there is more than one item linked to the MARC holdings record, only the items with exceptional statuses (charged, lost, in bindery, and so on) have their statuses displayed. (Exceptional statuses are any status except for Available and Not Charged.)
1020	Recent issues from serials.
1021	Recent issues from serials displayed according to the WebVoyage Serials for XML feature
1022	Supplemental issues from serials.
1023	Supplemental issues from serials displayed according to the WebVoyage Serials for XML feature
1024	Indexes from serials.
1025	Indexes from serials displayed according to the WebVoyage Serials for XML feature
102X_config	Configuration options loaded by <code>102X_display.xsl</code> for the 1012, 1023, and 1025 codes set up in the <code>displaycfg.xml</code> called by the <code>display.xsl</code>
102X_display	Display logic behind displaying the WebVoyage Serials for XML feature
1030	Order status as shown in the line items of purchase orders.



**Table 7-2. displayHoldings.xml display codes**

Code	Description
1040, 1042, 1044	Compressed serials information. This is taken from the MFHD 853/863/866, 854/864/867, and 855/865/868 fields. Refer to "Serial Issues Collapsing" in the <i>Voyager Acquisitions User's Guide</i> for more information.
1041	Compressed serials information displayed according to the WebVoyage Serials for XML feature for 853 / 863 pairs
1043	Compressed serials information displayed according to the WebVoyage Serials for XML feature for 854 / 864 pairs
1045	Compressed serials information displayed according to the WebVoyage Serials for XML feature for 855 / 865 pairs
104X_chron Values	This file is used to convert numeric values defined in MARC for month and season into chronological names
104X_config	Configuration options for displaying compressed serials
104X_display	Display logic behind displaying the WebVoyage Serials for XML feature for compressed serials
1050	E-item information. This includes enumeration, chronology, year information, and caption linked to the e-item.
3000	856 links (linked resources from the 856 field).

Many of these codes are defined in `displayHoldings.xml`. Comment out the lines of code that you do not want to use for display formatting.

**NOTE:**

The XML display for serials functionality is the default functionality.

**Serials Display**

The 1040, 1042, and 1044 codes display serials information in WebVoyage. Information from the holdings records 86X (863, 864, and 865) fields display if the first indicator is a 3, 4 or 5. Refer to the 104X files in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/configs/`.

Information in the chronology subfields displays according to its numeric designator mapping (1-12 for the months, 21-24 for the seasons). If there is no corresponding mapping, the literal contents of the subfield display.

## Enable Redirect

---

In order to enable a redirect on any field in WebVoyage, you must add redirect information such as the following to a `displayTag` in either the `displaycfg.xml` or `displayHoldings.xml` files.

```
redirect="callnumber" redirectOn="hi "
```

See [Figure 7-1](#) for an example from the `displaycfg.xml`.

```
<displayTags label="Title:">
<!--
    <displayTag field="130" indicator1="X" indicator2="X"
      subfield="aplskfmnor" redirect="title" redirectOn="apl"/>
    <displayTag field="240" indicator1="X" indicator2="X"
      subfield="aplskfmnor" preText="[ " postText="]" redirect="title"
      redirectOn="apl"/>
    <displayTag field="730" indicator1="X" indicator2="X"
      subfield="aplskfmnor" redirect="title" redirectOn="apl"/>
-->
    <displayTag field="245" indicator1="X" indicator2="X"
      subfield="abcfknps"/>
</displayTags>
```

---

**Figure 7-1. Example of redirect**

---

## display.xml

---

The `display.xml` template identifies all the display codes that can be processed. Locate the lines of code beginning with the code shown in [Figure 7-2](#) to view this information.

```
<!-- ##### -->

<xsl:template name="processDisplayTags">
<xsl:param name="mfhdID"/>
<xsl:param name="recordType"/>
  <xsl:for-each select="displayTag">

    <xsl:choose>
      <xsl:when test="@field &lt; '1000'">
        <xsl:call-template name="BMDProcessMarcTags">
          <xsl:with-param name="field" select="@field"/>
          <xsl:with-param name="indicator1" select="@indicator1"/>
          <xsl:with-param name="indicator2" select="@indicator2"/>
          <xsl:with-param name="subfield" select="@subfield"/>
          <xsl:with-param name="mfhdID" select="$mfhdID"/>
          <xsl:with-param name="recordType" select="$recordType"/>
        </xsl:call-template>
      </xsl:choose>
    </xsl:for-each>
  </xsl:template>
```

**Figure 7-2. Example display.xml code**

The display.xml file is located in /ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/display/.



---

# How Do I Build A Separate Display For Serials?

# 8

---

Description For “How Do I Build A Separate Display For Serials?” Example	8-1
Files	8-1
Instructions	8-1



---

## How Do I Build A Separate Display For Serials?

# 8

---

### Description For “How Do I Build A Separate Display For Serials?” Example

---

By default, WebVoyage uses a single `displaycfg.xml` file to display all MARC bibliographic records.

The instructions for this example allow you to create and use a separate configuration file for serials based on the MARC leader value.

This model can also be used to create different MARC views for any material type.

### Files

---

The example in this chapter uses the following files:

- `sdisplaycfg.xml` (new for this example).
- `cl_displayRecord.xsl`.

### Instructions

---

This section provides the instructions for creating the example described in this chapter.



### Procedure 8-1. Build Separate Display for Serials

---

Use the following procedure to build a separate display for serials.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Create and save a new file in the `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/configs/` directory named `sdisplaycfg.xml` to be used to specify the display fields for your serials records. Use the sample lines of code shown in [Figure 8-1](#) for this example.



```

<!--
#(c)#####
#(c)#
#(c)#      Copyright 2008 ExLibris Group
#(c)#      All Rights Reserved
#(c)#
#(c)#####
-->
<!--
**      Product : WebOpac : displaycfg
**      Version : 7.0
**      Created : 17-OCT-2007
**      Orig Author :
**      Last Modified : 11-APR-2008
**Last Modified By: ASP
-->
<display>
  <titleTags>
    <displayTag field="245" indicator1="X" indicator2="X" subfield="ab"/>
  </titleTags>

  <displayTags label="Title:">
    <displayTag field="245" indicator1="X" indicator2="X" subfield="abcfknps" />
  </displayTags >

  <displayTags label="Also Called:">
    <displayTag field="246" indicator1="X" indicator2="X" subfield="abfnp" />
  </displayTags >

  <displayTags label="Continues:">
    <displayTag field="780" indicator1="0" indicator2="0" subfield="at" />
    <displayTag field="780" indicator1="0" indicator2="1" subfield="at" />

  </displayTags >
  <displayTags label="Supersedes:">

```

Figure 8-1. Sample line of code for sdisplaycfg.xml

```
<displayTag field="780" indicator1="0" indicator2="2" subfield="at" />
<displayTag field="780" indicator1="0" indicator2="3" subfield="at" />
</displayTags >

<displayTags label="Publisher:">
  <displayTag field="260" indicator1="X" indicator2="X" subfield="abc"/>
</displayTags>

<displayTags label="ISSN:">
  <displayTag field="022" indicator1="X" indicator2="X" subfield="a"/>
</displayTags>

<displayTags label="Format:">
  <displayTag field="000" indicator1="0" indicator2="6" subfield="2"/>
</displayTags>

<displayTags label="Subjects:">
  <displayTag field="600" indicator1="X" indicator2="X"
    subfield="abcdefghijklmnopqrstuvxyz">
    <subfield value="v" preText="--" />
    <subfield value="x" preText="--" />
    <subfield value="y" preText="--" />
    <subfield value="z" preText="--" />
  </displayTag>
</displayTags>

<displayTags label="Online Journal:">
  <displayTag field="3000"/>
</displayTags>

<displayTags label="Holdings Information" notFound="No holdings available -- check at
  the Circulation Desk.">
  <displayTag field="9000"/>
</displayTags>

</display>
```

---

Figure 8-1. Sample line of code for sdisplaycfg.xml (Continued)

2. Make a backup copy of `cl_displayRecord.xsl` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/`.
3. Edit `cl_displayRecord.xsl`.
  - a. Locate the XSL stylesheet element that contains namespace declarations and begins with the following:  

```
<xsl:stylesheet version="1.0"
```
  - b. Add two namespace declarations for `hol` and `slim` as shown in [Figure 8-2](#).

```
<xsl:stylesheet version="1.0"
  xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
  xmlns:page="http://www.exlibrisgroup.com/voyager/webvoyage/page"
  xmlns:fo="http://www.w3.org/1999/XSL/Format"
  xmlns:hol="http://www.endinfosys.com/Voyager/holdings"
  xmlns:slim="http://www.loc.gov/MARC21/slim">
```

---

**Figure 8-2. New namespace declarations example**

- c. Locate `<!-- ## Our Document Holders ## -->`. See [Figure 8-3](#).
  - d. Change the variable name `Config` to `MConfig`. See [Figure 8-3](#).
  - e. Add a document holders declaration for the serial configuration display for `SConfig` and `recType` as shown in [Figure 8-3](#).

```
<!-- ## Our Document Holders ## -->
<!-- Config changed to MConfig below -->
<xsl:variable name="MConfig" select="document('./configs/displaycfg.xml')"/>
<xsl:variable name="holdingsConfig" select="document('./configs/displayHoldings.xml')"/>
<!-- added for serial config display -->
<xsl:variable name="SConfig" select="document('./configs/sdisplaycfg.xml')"/>
<xsl:variable name="recType" select="substring($bibRecord/hol:marcRecord/slim:leader,8,1)"
/>
<!-- end of add for serial config display -->
<!-- ##### -->
<!-- ## buildRecordForm ## -->
<!-- ##### -->
```

---

**Figure 8-3. Our Document Holders example**

- f. Add logic for looking at the record leader by replacing the lines of code seen in [Figure 8-4](#) with the example lines of code in [Figure 8-5](#).

```
<!-- ## Bibliographic Data ## -->
  <xsl:for-each select="$Config">
    <div class="bibliographicData">
      <xsl:call-template name="buildMarcDisplay">
        <xsl:with-param name="recordType" select="'bib'"/>
      </xsl:call-template>
    </div>
  </xsl:for-each>
```

---

**Figure 8-4. Lines to be replaced**

```

<!-- ## Bibliographic Data ## -->
<xsl:choose>
  <xsl:when test="$recType='s'">
    <xsl:for-each select="$SConfig">
      <div class="bibliographicData">
        <xsl:call-template name="buildMarcDisplay">
          <xsl:with-param name="recordType" select="'bib'" />
        </xsl:call-template>

        <br />Record type:&#160;<xsl:value-of select="$recType"/>

      </div>
    </xsl:for-each>
  </xsl:when>

  <xsl:otherwise >
    <xsl:for-each select="$MConfig">
      <div class="bibliographicData">
        <xsl:call-template name="buildMarcDisplay">
          <xsl:with-param name="recordType" select="'bib'" />
        </xsl:call-template>

        <br />Record type:&#160;<xsl:value-of select="$recType"/>

      </div>
    </xsl:for-each>
  </xsl:otherwise>
</xsl:choose>

```

**Figure 8-5. Replacement lines of code**

4. Save and test the changes you made to `cl_displayRecord.xml`.

**OPTIONAL:**

5. *Back out your changes, if necessary, by deploying your backup copy of*  
`cl_displayRecord.xsl`.
-

---

# How Do I Add Static Links To The Header Or Footer?

# 9

---

Description For “How Do I Add Static Links To The Header Or Footer?” Example	9-1
Files	9-1
Instructions	9-2





---

## How Do I Add Static Links To The Header Or Footer?

# 9

---

### Description For “How Do I Add Static Links To The Header Or Footer?” Example

---

Both the header and footer page elements can accommodate links to external web sites, web applications, and so forth.

In this chapter, the header example demonstrates hyperlinks; and the footer example demonstrates adding a new tab.

### Files

---

The examples in this chapter use the following files:

- `header.xml.`
- `footer.xml.`

## Instructions

---

This section provides the instructions for creating the examples described in this chapter.



### Procedure 9-1. Create Header Links

---

Use the following procedure to create header links.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Make a backup copy of the `header.xml` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xml/pageFacets/`.
2. Edit the `header.xml` file to add a new template.
  - a. Add your template (see [Figure 9-1](#)) immediately before the `<xsl:stylesheet>` element at the bottom of the file.

```

<!-- #####
-->
<!-- ## buildHeaderLinks ##
-->
<!-- #####-->
<xsl:template name="localHeaderLinks">
<div id="headerLinks" style="font-family:Arial;font-size:.70em;">
  <span style="color:#9F175E;padding: 0 .20em;margin:0 .2em;">University Library Catalog</span>
  <a href="#" style="padding: 0 .20em;margin:0 .2em;">My library</a>
  <a href="#" style="padding: 0 .20em;margin:0 .2em;">SFX</a>
  <a href="#" style="padding: 0 .20em;margin:0 .2em;">Primo</a>
  <a href="#" style="padding: 0 .20em;margin:0 .2em;">Chat with a librarian</a>
</div>
</xsl:template>
<!-- #####-->
<!-- ##### -->

```

**Figure 9-1. Header links template**

- b. Call the template that you created in Step [a](#) by adding the instruction (see [Figure 9-2](#), line 7) to the buildHeader section located at the top of the header.xsl file.

Line#

1	<!-- ##### -->
2	<!-- ## buildHeader ## -->
3	<!-- ##### -->
4	
5	<xsl:template name="buildHeader">
6	<xsl:for-each select="/page:page/page:pageHeader">
7	<xsl:call-template name="localHeaderLinks" />
8	<div id="headerRow">
9	<div id="logo" title="{ \$headerText/logo }">

**Figure 9-2. Call instruction**

3. Save and test your changes to `header.xml`.

**OPTIONAL:**

4. *Back out your changes, if necessary, by deploying your backup copy of `header.xml`.*



**Procedure 9-2. Create Footer Tabs**

---

Use the following procedure to create a footer tab.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

`/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/`

1. Make a backup copy of the `footer.xml` file that is located in `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/pageFacets/`.

2. Edit the footer.xsl file to add a new tab by adding the new tab code (see [Figure 9-3](#), lines 15 -19) after the <ul class="navbar"> in the buildFooter section in the file.

Line#	
1	<!-- ##### -->
2	<!-- ## buildFooter ## -->
3	<!-- #####-->
4	
5	<xsl:template name="buildFooter">
6	
7	<xsl:for-each select="/page:page/page:pageFooter">
8	<div id="pageFooter">
9	<xsl:for-each select="page:tabs[@nameId='page.footer.buttons']">
10	
11	<div id="footerTabs" title="{ \$footerText/footerTabs }">
12	<a name="navFooter"></a>
13	<h2 class="navFooter"><xsl:value-of select="\$footerText/footerTabs"/></h2>
14	<ul class="navbar">
15	<!-- extra footer tabs -->
16	<li>
17	<a href="http://www.exlibrisgroup.com/" target="_newWin">Ex Libris</a>
18	</li>
19	<!-- end extra footer tabs -->
20	<xsl:for-each select="\$Configs/pageConfigs/footerTabDisplayOrder/tab">

**Figure 9-3. Footer tab code example**

3. Save and test your changes to footer.xsl.

**OPTIONAL:**

4. *Back out your changes, if necessary, by deploying your backup copy of footer.xsl.*



---

**How Do I Remove Information  
From A Page?**

**10**

---

<b>Description For “How Do I Remove Information From A Page?” Example</b>	<b>10-1</b>
<b>Files</b>	<b>10-1</b>
<b>Instructions</b>	<b>10-1</b>





---

## How Do I Remove Information From A Page?

# 10

---

### Description For “How Do I Remove Information From A Page?” Example

---

There may be some page elements you want to disable or prevent from displaying. This example describes how to remove the **Item Type** column from the **Charged Items** table on the **My Account** page.

#### NOTE:

It's important to remove all the relevant pieces of a page element. In this example, the instructions comment out both the heading and table cell pieces of the **Item Type** column. Commenting out only one isn't sufficient.

### Files

---

The example in this chapter uses the `cl_myAccount.xml` file.

### Instructions

---

This section provides the instructions for completing the example described in this chapter.



---

**Procedure 10-1. Remove Information From a Page**

---

Use the following procedure to remove information from a page.

**NOTE:**

Directory path references to `xxxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/ml/voyager/xxxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Make a backup copy of `cl_myAccount.xsl` that is located in `/ml/voyager/xxxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/`.
2. Edit `cl_myAccount.xsl`.
  - a. Find the `displayChargedItems` template section marked by the comment shown in [Figure 10-1](#).

---

```
<!-- ##### -->
<!-- ## displayChargedItems ## -->
<!-- ##### -->
<xsl:template name="displayChargedItems">
```

---

**Figure 10-1. Section comment to locate**

---

- b. Comment out the table heading and table cell lines of code relevant to item type. See [Figure 10-2](#) and [Figure 10-3](#).

---

```
<!-- <th id="cellChargedType"><xsl:value-of select="page:element/
page:heading[@nameId='type']"/></th> -->
```

---

**Figure 10-2. Table heading example**

---

---

```
<!-- <td id="tableCell" headers="cellChargedType"><xsl:value-of select="page:itemType"/>&#160;</td> -->
```

---

**Figure 10-3. Table cell example**

---

3. Save and test your changes.

**OPTIONAL:**

4. *Back out your changes, if necessary, by deploying your backup copy of `cl_myAccount.xsl`.*
-



---

**How Do I Add A Map Or Other  
Information To A Location?**

**11**

---

<b>Description For “How Do I Add A Map Or Other Information To A Location?” Example</b>	<b>11-1</b>
<b>Files</b>	<b>11-1</b>
<b>Instructions</b>	<b>11-1</b>



---

## **How Do I Add A Map Or Other Information To A Location?**

# **11**

---

### **Description For “How Do I Add A Map Or Other Information To A Location?” Example**

This example allows you to direct your patrons to add a map to a location and/or other applicable information like the hours of the reading room. The information offered is based on the MFHD location (852 |b).

### **Files**

The example in this chapter uses the following files:

- `local_locMapLink.xml` (new for this example).
- `display.xml`.

### **Instructions**

This section provides the instructions for creating the example described in this chapter.



### Procedure 11-1. Add a Map to a Location and/or Other Applicable Information

---

Use the following procedure to add a map to a location and/or other applicable information.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Create and save a new file in the `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/` directory named `local_locMapLink.xsl` to define how to build the hyperlink. Use the sample lines of code shown in [Figure 11-1](#) for this example.

**NOTE:**

Notice the template name `locMapLink` in this example.



```

<!--
**          Note: sample link to map based on loc code
**          Version : 1.0
**          Created : 16-Nov-2007
**          Created By :
-->

<xsl:stylesheet version="1.0"
    xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
    xmlns:page="http://www.exlibrisgroup.com/voyager/webvoyage/page"
    xmlns:fo="http://www.w3.org/1999/XSL/Format">

<!-- ##### -->

<xsl:template name="locMapLink">
<xsl:param name="mfhd"/>
    <xsl:variable name="locCode">
        <xsl:call-template name="BMDProcessMarcTags">
            <xsl:with-param name="field" select="'852'"/>
            <xsl:with-param name="indicator1" select="'X'"/>
            <xsl:with-param name="indicator2" select="'X'"/>
            <xsl:with-param name="subfield" select="'b'"/>
            <xsl:with-param name="mfhdID" select="$mfhd"/>
            <xsl:with-param name="recordType" select="'mfhd'"/>
        </xsl:call-template>
    </xsl:variable>

    <!-- you must create your web site to display maps -->
    <xsl:variable name="baseURL">http://www.exlibrisgroup.com/?loc=</
xsl:variable>

    <div class="locationMap">
        Show me a map; <a id="locMap" href="{ $baseURL } { $locCode } "
target="_new">map</a>.
    </div>

```

Figure 11-1. Example code for building hyperlink

```
</xsl:template>

<!-- ##### -->

</xsl:stylesheet>
```

---

**Figure 11-1. Example code for building hyperlink (Continued)**

2. Make a backup copy of `display.xsl` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/display/`.
3. Edit `display.xsl`.
  - a. Add a statement at the top of the `display.xsl` file that contains the path to the `local_locMapLink.xsl` file. See [Figure 11-2](#).

---

```
<xsl:include href="../../display/marc21slim.xsl"/>
<xsl:include href="../../configs/104X_display.xsl"/>
<xsl:include href="../../local_locMapLink.xsl"/>
```

---

**Figure 11-2. Example code for adding path statement**

- b. Call the `locMapLink` template from within the `BMD100` template. See [Figure 11-3](#).

```

<!--##### -->

<xsl:template name="BMD1000">
<xsl:param name="mfhdID"/>

  <xsl:for-each select="$HoldXML/hol:holdingsRecord/hol:mfhdCollection/
mfhd:mfhdRecord[@mfhdID = $mfhdID]/mfhd:mfhdData[@name='locationDisplayName']">
    <xsl:if test="string-length(.)">
      <xsl:value-of select="."/>
      <!-- ## add a map link ## -->
      <xsl:call-template name="locMapLink" >
        <xsl:with-param name="mfhd" select="$mfhdID"/>
      </xsl:call-template>
      <br/>
    </xsl:if>
  </xsl:for-each>
</xsl:template>

<!-- ##### -->

```

**Figure 11-3. Example of call for locMapLink**

4. Save and test your changes.

**OPTIONAL:**

5. *Back out your changes, if necessary, by deploying your backup copy of display.xsl.*



---

**How Do I Create An External Search  
From A Bibliographic Record  
Display?**

**12**

---

<b>Description For “How Do I Create An External Search From A Bibliographic Record Display?” Example</b>	<b>12-1</b>
<b>Files</b>	<b>12-1</b>
<b>Instructions</b>	<b>12-2</b>



---

## How Do I Create An External Search From A Bibliographic Record Display?

# 12

---

### Description For “How Do I Create An External Search From A Bibliographic Record Display?” Example

---

It is common to use the ISBN as a parameter to a new search in a different application such as Amazon.com<sup>®</sup>, WorldCat<sup>®</sup>, and so on.

The instructions in this chapter describe how to parse out the ISBN from a bibliographic record display and insert it into a URL.

The URL is displayed in the Action Box on the item display page.

This model can also be used to extract different pieces of the MARC record and construct different or multiple URLs.

### Files

---

The example in this chapter uses the following files:

- isbnSearch.xsl (new for this example).
- displayFacets.xsl.

## Instructions

---

This section provides the instructions for creating the example described in this chapter.



### Procedure 12-1. Create External Search From Bibliographic Record Display

---

Use the following procedure to create an external search from a bibliographic record display.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Create and save a new file in the `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/pageFacets/` directory named `isbnSearch.xsl` to be used to specify how to extract the ISBN from the bibliographic record. Use the sample lines of code shown in [Figure 12-1](#) for this example.

**NOTE:**

Notice the template name `recordIsbnSearch` in this example.



```

<?xml version="1.0" encoding="UTF-8"?>

<!--
**          Note: Creates a link to WorldCat using the ISBN
**          Version : 1.0
**          Created : 15-APR-08
**          Created By :
-->
<xsl:stylesheet version="1.0"
    xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
    xmlns:page="http://www.exlibrisgroup.com/voyager/webvoyage/page"
    xmlns:fo="http://www.w3.org/1999/XSL/Format">

<!-- ##### -->

<xsl:template name="recordIsbnSearch">
    <xsl:variable name="isbn">
        <xsl:call-template name="BMDProcessMarcTags">
            <xsl:with-param name="field" select="'020'"/>
            <xsl:with-param name="indicator1" select="'X'"/>
            <xsl:with-param name="indicator2" select="'X'"/>
            <xsl:with-param name="subfield" select="'a'"/>
            <xsl:with-param name="mfhdID" select="$bibID"/>
            <xsl:with-param name="recordType" select="'bib'"/>
        </xsl:call-template>
    </xsl:variable>

    <a target="_blank">
        <xsl:attribute name="href">http://worldcatlibraries.org/XXXX/isbn/<xsl:value-of
            select="$isbn"/>&amp;loc=united+states</xsl:attribute>
        Check Other Local Libraries</a>

    </xsl:template>
</xsl:stylesheet>

```

Figure 12-1. Sample code to extract ISBN from bibliographic record

2. Make a backup copy of `displayFacets.xsl` that is located in `/ml/voyager/xxxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/pageFacets/`.
3. Edit `displayFacets.xsl`.
  - a. Define where the `isbnSearch.xsl` can be found with a line of code immediately after the namespace declarations. See [Figure 12-2](#).

```
<xsl:stylesheet version="1.0"
  xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
  xmlns:page="http://www.exlibrisgroup.com/voyager/webvoyage/page"
  xmlns:fo="http://www.w3.org/1999/XSL/Format">

  <xsl:include href="./isbnSearch.xsl"/>
```

---

**Figure 12-2. Define isbnSearch.xsl location example**

- b. Call the template defined in `isbnSearch.xsl`.  
For this example, it is added to the bottom of the Action Box.  
Working from the end of the file, add the call before the final `</div>`. See [Figure 12-3](#).

```
<!--/ul-->
<!-- ## add the other libraries search ## -->
    <xsl:call-template name="recordIsbnSearch" />

</div>
</xsl:for-each>

</xsl:template>

<!-- ##### -->

</xsl:stylesheet>
```

---

**Figure 12-3.** Call for isbnSearch.xsl in displayFacets.xsl

---

4. (Optional) Set up trimData XSL code. See [Figure 21-3](#) on [page 21-4](#).

The trimData template resides in /ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/sandbox/xsl/pageTools/tools.xsl .

This template strips out non-numerical data including punctuation and parenthetical references for Web Services or APIs that require number-only input.

5. Save and test your changes.

**OPTIONAL:**

6. *Back out your changes, if necessary, by deploying your backup copy of displayFacets.xsl.*
-



---

**How Do I Dynamically Disable  
Limits And Change Search Tips  
Based On The Selected Search  
Index?**

**13**

---

<b>Description For “How Do I Dynamically Disable Limits And Change Search Tips Based On The Selected Search Index?” Example</b>	<b>13-1</b>
<b>Files</b>	<b>13-1</b>
<b>Instructions</b>	<b>13-2</b>



---

## How Do I Dynamically Disable Limits And Change Search Tips Based On The Selected Search Index?

# 13

---

### Description For “How Do I Dynamically Disable Limits And Change Search Tips Based On The Selected Search Index?”

#### Example

---

The **Basic Search** page includes a **Limit To** dropdown list that is compatible with keyword searches. The instructions in this chapter explain how to install a JavaScript that disables the **Limit To** dropdown list when you select an index that is incompatible with limits such as headings and call number.

The JavaScript also changes the search tips displayed to the user based on the index selected. This provides you with the option to offer hints on improving search strategies.

#### Files

---

The example in this chapter uses the following files:

- `searchBasic.js` (new for this example).
- `cl_searchBasic.xsl`.
- `pageProperties.xml`.

## Instructions

---

This section provides the instructions for creating the example described in this chapter.



### Procedure 13-1. Disable Limits and Change Search Tips

---

Use the following procedure to disable limits and change search tips dynamically based on the selected search index.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Create and save a new JavaScript file in the `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/jscripts/` directory named `searchBasic.js` to be used to disable the quick limits dropdown list. Use the sample lines of code shown in [Figure 13-1](#) for this example.



```

/*
#(c)#####
#(c)#
#(c)# Copyright 2007 ExLibris Group
#(c)# All Rights Reserved
#(c)#
#(c)#####

** Product : WebVoyage :: disable/enable limits on basic search, adjust search tips
** Version : 7.0
** Created : 23-JAN-2008
** Orig Author :
** Last Modified : 18-APR-2008
** Last Modified By : ASP
*/

////////////////////////////////////
function updateSearchTip ()
{
    // added to searchCode.onChange to customize search tip based on index

    // save the default search tip the first time through
    defaultTip = window.defaultTip ||
document.getElementById('customSearchTip').innerHTML;

    currentSearchCode = document.getElementById('searchCode').value

    switch (currentSearchCode)
    {
    case 'CMD':
    case 'CMD*':
        document.getElementById('customSearchTip').innerHTML = "build a simple
Boolean search: <span class=\"example\">(cats or dogs) and therapy</span>"
        break;

    case 'NAME+':
    case 'AUTH+':

```

Figure 13-1. Example code for searchBasic.js

```
        document.getElementById('customSearchTip').innerHTML = "search by
personal or corporate author: last name first <span class=\"example\">pessl
marisha</span>, or company name <span class=\"example\">jung seed</span>"

        break;

        case 'CALL+':

            document.getElementById('customSearchTip').innerHTML = "enter as much of
the call number that you know: <span class=\"example\">PR 1297</span>"

            break;

        default:

            // use the default tip if not otherwise overridden
            document.getElementById('customSearchTip').innerHTML = defaultTip;
    }

}

function searchCodeChanged ()
{
    /*
    ** Disable the limits drop for searches that do not support it.
    */

    currentSearchCode = document.getElementById('searchCode').value.substring(0,4);

    if (!document.getElementById('limitTo').disabled) {
        currentLimit = document.getElementById('limitTo').value;
    }

    switch(currentSearchCode)
    {
        {
        // OPAC HEADING INDEXES
        case 'SUBJ':
        case 'TITL':
        case 'NAME':
        case 'AUTH':
        // MAIN CALL NUMBER INDEX
```

---

**Figure 13-1. Example code for searchBasic.js (Continued)**

```
case 'CALL':
// JOURNAL INDEX WITH PRELIMITS
case 'JKEY':
case 'JALL':

document.getElementById('limitTo').value="none";
document.getElementById('limitTo').disabled=true;
break;

default:
document.getElementById('limitTo').disabled=false;
document.getElementById('limitTo').value=currentLimit;
}

}

function addSearchCodeChanged ()
{
    document.getElementById('searchCode').onchange = function()
    {searchCodeChanged(); updateSearchTip();}

    // run the script to catch default index doesn't support limits or edit
    search
    searchCodeChanged ();
    updateSearchTip();
}

function addLoadEvent(func) {
    var oldonload = window.onload;
    if (typeof window.onload != 'function') {
        window.onload = func;
    } else {
        window.onload = function() {
            if (oldonload) {
                oldonload();
            }
        }
    }
    func();
}
```

**Figure 13-1. Example code for searchBasic.js (Continued)**

```
}  
}  
}  
  
addLoadEvent (addSearchCodeChanged);
```

---

**Figure 13-1. Example code for searchBasic.js (Continued)**

2. Make a backup copy of `pageProperties.xml` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/userTextConfigs/`.
3. Edit `pageProperties.xml`.

Locate the comment `<!-- ## Start Search Tips ## -->` and identify the `<page name="page.searchBasic" position="belowContent">` element.

Add a `<div>` element as in [Figure 13-2](#).

```
<page name="page.searchBasic" position="belowContent">  
  <div class="searchTip">  
    <span class="label">Search Tips: </span>  
    <!-- special div to enable javascript to swap out help text -->  
    <div id="customSearchTip" style="display:inline">  
      enter words relating to your topic, use quotes to search phrases: <span  
class="example">"world wide web"</span>,  
      use + to mark essential terms: <span class="example">+explorer</span>,  
      use * to mark important terms: <span class="example">*internet</span>,  
      use ? to truncate: <span class="example">browser?</span>  
    </div>  
  </div>  
</page>
```

---

**Figure 13-2. Example `<div>` element**

4. Save your changes.

5. Make a backup copy of `cl_searchBasic.xml` that is located in `/ml/voyager/xxxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xml/contentLayout/`.
6. Edit `cl_searchBasic.xml`.

At the end of the `buildBasicSearch` template (see [Figure 13-3](#)), load the `searchBasic.js` JavaScript file you created.

```
<!-- ##### -->
<!-- ## buildSearchForm ## -->
<!-- ##### -->

<xsl:template name="buildBasicSearch">

  <div id="searchParams">
    <div id="searchInputs">
      <xsl:call-template name="buildFormInput">
        <xsl:with-param name="eleName" select="'searchArg'"/>
        <xsl:with-param name="size" select="'51'"/>
        <xsl:with-param name="accesskey" select="'s'"/>
      </xsl:call-template>
      <xsl:call-template name="buildFormDropDown">
        <xsl:with-param name="eleName" select="'searchCode'"/>
      </xsl:call-template>
    </div>
    <div id="quickLimits">
      <xsl:call-template name="buildFormDropDown">
        <xsl:with-param name="eleName" select="'limitTo'"/>
      </xsl:call-template>
    </div>

    <!-- load javascript file for handling limits enable/disable -->
    <script type="text/javascript" src="{ $jscript-loc }searchBasic.js"/>

  </div>

  <xsl:call-template name="buildSearchButtons"/>

</xsl:template>

<!-- ##### -->
```

---

**Figure 13-3. Locate buildBasicSearch template**

7. Save and test your changes.

**OPTIONAL:**

8. *Back out your changes, if necessary, by deploying your backup copies of `pageProperties.xml` and `cl_searchBasic.xml`.*
-





---

**How Do I Disable AutoComplete?**

**14**

---

<b>Description For “How Do I Disable AutoComplete?”</b>	
<b>Example</b>	<b>14-1</b>
<b>Files</b>	<b>14-1</b>
<b>Instructions</b>	<b>14-1</b>



### Description For “How Do I Disable AutoComplete?” Example

---

AutoComplete is a feature of certain web browsers that stores information on the computer's hard drive that a user types into web page forms. When you begin filling in another form, the browser suggests possible answers from information stored on the hard drive.

Particularly at public workstations, you may want to disable the browser's AutoComplete capability. This is a feature of both Internet Explorer® and Firefox®.

### Files

---

The example in this chapter uses the following files:

- `login.xml`.
- `searchFacets.xml`.

### Instructions

---

This section provides the instructions for creating the example described in this chapter.



---

**Procedure 14-1. Disable AutoComplete**

---

Use the following procedure to disable AutoComplete.

**NOTE:**

Directory path references to `xxxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

`/ml/voyager/xxxxdb/tomcat/vwebv/context/vwebv/ui/en_US/`

1. Make a backup copy of `searchFacets.xml` that is located in `/ml/voyager/xxxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/pageFacets/`.
2. Edit `searchFacets.xml`.
  - a. Locate the `buildTheSearchForm` section near the top of the file.
  - b. Add `autocomplete="off"` to the `<form action>` element. See [Figure 14-1](#).

---

<pre>&lt;form action="{ \$formAction}" method="GET" accept-charset="UTF-8" id="{ \$formName}"       autocomplete="off"&gt;</pre>
----------------------------------------------------------------------------------------------------------------------------------

---

**Figure 14-1. Example of autocomplete="off" code**

---

3. Save your changes.
4. Make a backup copy of `login.xml` that is located in `/ml/voyager/xxxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/`.
5. Edit `login.xml`.
  - a. Locate the `buildContent` section.
  - b. Add `autocomplete="off"` to the `<form action>` element. See [Figure 14-2](#).

---

```
<form action="{/page:page//page:element[@nameId='page.logIn.logIn.button']/  
page:buttonAction}" method="GET" accept-charset="UTF-8" name="selectDatabases"  
autocomplete="off">
```

---

**Figure 14-2.** Additional example of autocomplete="off" code

---

6. Save and test your changes.

**OPTIONAL:**

7. *Back out your changes, if necessary, by deploying your backup copies of `searchFacets.xsl` and/or `login.xsl`.*
-



<b>Description For “How Do I Display A Favicon?” Example</b>	<b>15-1</b>
<b>Files</b>	<b>15-1</b>
<b>Instructions</b>	<b>15-2</b>





### Description For “How Do I Display A Favicon?” Example

---

With Internet Explorer (IE) and Firefox, there is the capability to display favicons (favorite icons). These may display in the address bar, favorites menu, page tabs, and bookmarks and provide you with a way to brand your catalog for your patrons.

For the best results using favicons with WebVoyáge and Internet Explorer, use version 8 or later of Internet Explorer.

**NOTE:**

There are multiple methods for installing a favicon. The method described in this chapter is specific to WebVoyáge and allows you to use any type of image files such as .jpg, .gif, or .png in addition to favicon .ico files.

For further information regarding favicons, see the following sites:

- <http://msdn2.microsoft.com/en-us/library/ms537656.aspx>.
- [http://en.wikipedia.org/wiki/Shortcut\\_icon](http://en.wikipedia.org/wiki/Shortcut_icon).

### Files

---

The example in this chapter uses the `framework.xsl` file.

## Instructions

---

This section provides the instructions for creating the example described in this chapter.



### Procedure 15-1. Display favicon

---

Use the following procedure to display your favicon.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Create a 16x16 pixel icon.
2. Save the icon to the `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/images/` directory.
3. Make a backup copy of `frameWork.xml` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xml/pageTools/`.
4. Edit `frameWork.xml`.
  - a. Locate the `buildHtmlPage` template.
  - b. Insert the example code shown in [Figure 15-1](#), after the `<head>` element.

```
<link type="image/x-icon" rel="shortcut icon" href="{ $image-loc }favicon.ico" />
<link type="image/x-icon" rel="icon" href="{ $image-loc }favicon.ico" />
<link type="image/x-icon" rel="shortcut icon" href="favicon.ico" />
<link type="image/x-icon" rel="icon" href="favicon.ico" />
```

---

**Figure 15-1. Example favicon code for frameWork.xml**

- c. Replace `favicon.ico` with the name of the icon file that you created at the beginning of this procedure and saved in `.../images/`.

- d. Also, add the `favicon.ico` to the `DocumentRoot` for `vwebv`. The `DocumentRoot` is defined as `@VOYAGER_BASE@/@DBNAME@/tomcat/vwebv/context/vwebv/htdocs`.

**NOTE:**

By default, the `{ $image-loc }` notation is a path to the `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/images/` directory. This path is defined in `constants.xml`.

5. Save and test your changes.

**OPTIONAL:**

6. *Back out your changes, if necessary, by deploying your backup copy of `framework.xml`.*
-



---

**How Do I Hide Limits On The  
Advanced Search Page?**

**16**

---

<b>Description For “How Do I Hide Limits On The Advanced Search Page?” Example</b>	<b>16-1</b>
<b>Files</b>	<b>16-1</b>
<b>Instructions</b>	<b>16-1</b>



---

## How Do I Hide Limits On The Advanced Search Page?

# 16

---

### Description For “How Do I Hide Limits On The Advanced Search Page?” Example

---

This chapter describes how to hide the various limits options on the **Advanced Search** page until a user clicks a **More** link to display them.

### Files

---

The example in this chapter uses the following files:

- `searchAdvanced.js` (new for this example).
- `searchAdvanced.css`.
- `cl_searchAdvanced.xml`.

### Instructions

---

This section provides the instructions for creating the example described in this chapter.



### Procedure 16-1. Hide Limits on the Advanced Search Page

---

Use the following procedure to hide limits on the **Advanced Search** page.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Create and save a new JavaScript file in the `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/jscripts/` directory named `searchAdvanced.js` to be used to hide limits on the **Advanced Search** page. Use the sample lines of code shown in [Figure 16-1](#) for this example.



```
/*
#(c)#####
#(c)#
#(c)# Copyright 2007 ExLibris Group
#(c)# All Rights Reserved
#(c)#
#(c)#####

** Product : WebVoyage :: disable/enable limits on advanced search
** not an accessible technique
** Version : 7.0
** Created : 23-JAN-2008
** Orig Author :
** Last Modified : 23-JAN-2008
** Last Modified By :
*/

// hide the limitList div
function hideLimits() {
    document.getElementById('limitList').style.display='none';
}

// display the limitList div
function showLimits() {
    document.getElementById('limitList').style.display='';
}

// toggle the limitList div
// we'll check the class of the toggle switch
function toggleLimits () {
    showLimits();
    document.getElementById('limitToggle').style.display='none';
}

function addLoadEvent(func) {
```

**Figure 16-1.** Example code for searchAdvanced.js

```
var oldonload = window.onload;
if (typeof window.onload != 'function') {
    window.onload = func;
} else {
    window.onload = function() {
        if (oldonload) {
            oldonload();
        }
        func();
    }
}

addLoadEvent(
    function () {
        // hide the the limits on page load and show the toggle switch
        hideLimits();
        document.getElementById('limitToggle').style.display='';
    });
```

**Figure 16-1. Example code for searchAdvanced.js (Continued)**

2. Make a backup copy of `searchAdvanced.css` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/css/`.
3. Edit `searchAdvanced.css`.

Go to the end of the file and add the example code shown in [Figure 16-2](#).

```
/* display link to show limits */
#limitToggle {
    font-size: smaller;
    font-family: Verdana;
    margin: 10px 10px 0.5em;
}
```

**Figure 16-2. Example code for searchAdvanced.css**

4. Save your changes.

5. Make a backup copy of `cl_searchAdvanced.xml` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xml/contentLayout/`.
6. Edit `cl_searchAdvanced.xml`.
  - a. Locate the `buildSearchForm` section.
  - b. Add a call to the `searchAdvanced.js` file immediately before the `<!-- line 6 - year label, radio button & selection box -->` comment. See [Figure 16-3](#).

```
<!-- add java script to hide/show limits on page -->
    <script type="text/javascript" src="{javascript-loc}searchAdvanced.js"/>

    <div id="limitToggle" class="limitsOff" style="display:none"><a
href="javascript:toggleLimits();">more</a></div>

    <div id="limitList">
    <!-- end - other end of limitList div was added below -->
```

**Figure 16-3.** Example coding change for `cl_searchAdvanced.xml`

- c. Add the closing `</div>` element above the `buildSearchButtons` template at the bottom of the file. See [Figure 16-4](#).

```
</xsl:for-each>
</div>

<xsl:call-template name="buildSearchButtons"/>

</div>
<!-- search advanced form - end -->
</xsl:template>

</xsl:stylesheet>
```

**Figure 16-4.** Additional coding change to `cl_searchAdvanced.xml`

7. Save your changes and test.

8. Back out your changes, if necessary, by deploying your backup copies of `searchAdvanced.css` and `cl_searchAdvanced.xml`.

---

**How Do I Build And Display A  
Persistent Link To A Bibliographic  
Record?**

**17**

---

<b>Description For “How Do I Build And Display A Persistent Link To A Bibliographic Record?” Example</b>	<b>17-1</b>
<b>Files</b>	<b>17-1</b>
<b>Instructions</b>	<b>17-1</b>



---

## **How Do I Build And Display A Persistent Link To A Bibliographic Record?**

# 17

---

### **Description For “How Do I Build And Display A Persistent Link To A Bibliographic Record?” Example**

Patrons can use the persistent link to bibliographic records for bookmarking, tagging, emailing, blogging, and so forth.

### **Files**

---

The example in this chapter uses the following files:

- `local_PersistentLink.xml` (new for this example).
- `cl_displayRecord.xml`.
- `displayCommon.css`.

### **Instructions**

---

This section provides the instructions for creating the example described in this chapter.



### Procedure 17-1. Build Persistent Link to Bibliographic Record

---

Use the following procedure to create a persistent link to a bibliographic record.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Create and save a new file in the `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/pageFacets/` directory named `local_PersistentLink.xsl` to store the template that defines how to build the hyperlink. Use the sample lines of code shown in [Figure 17-1](#) for this example.



```

<?xml version="1.0" encoding="UTF-8"?>

<!--
#(c)#=====
#(c)#
#(c)#      Copyright 2007-2009 Ex Libris (USA) Inc.
#(c)#      All Rights Reserved
#(c)#
#(c)#=====
-->

<!--
**                      Note: create persistent link based on bib ID
**      Product : WebVoyage :: local_PersistentLink
**      Version : 7.1.0
**      Created : 16-Nov-2007
**      Orig Author : Eric
**      Last Modified : 04-MAY-2009
** Last Modified By : Mel Pemble
-->

<xsl:stylesheet version="1.0"
    xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
    xmlns:page="http://www.exlibrisgroup.com/voyager/webvoyage/page"
    xmlns:fo="http://www.w3.org/1999/XSL/Format">

<!-- ##### -->

<xsl:template name="persistentLink">
<xsl:param name="bibID"/>

    <!-- :doc: you must set this to match your public URL
    where xxx = the ip
    and pppp = the port
    -->

    <xsl:variable name="baseURL">http://xxx.xxx.xxx.xxx:pppp/vwebv/
    holdingsInfo?bibID=</xsl:variable>

```

Figure 17-1. Sample code for local\_PersistentLink.xsl

```
<div class="persistentLink">
    <a id="persistentLink" href="{ $baseUrl } { $bibID }" target="_new"
    >Persistent Link</a>
</div>
</xsl:template>

<!-- ##### -->

</xsl:stylesheet>
```

---

**Figure 17-1. Sample code for local\_PersistentLink.xsl (Continued)**

2. Make a backup copy of `cl_displayRecord.xsl` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/`.
3. Edit `cl_displayRecord.xsl`.
  - a. Locate the namespace declarations at the top of the file and include a reference to the `local_PersistentLink.xsl` file after the `<xsl:stylesheet>` element. See [Figure 17-2](#).

---

```
<xsl:stylesheet version="1.0"
    xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
    xmlns:page="http://www.exlibrisgroup.com/voyager/webvoyage/page"
    xmlns:fo="http://www.w3.org/1999/XSL/Format">

    <!-- ## Include Persistent Link template ## -->
    <xsl:include href="../../pageFacets/local_PersistentLink.xsl"/>
```

---

**Figure 17-2. Include file reference example**

- b. Call the persistent link template from the Bibliographic Data section. See [Figure 17-3](#).

```
<!-- ## Bibliographic Data ## -->
<xsl:for-each select="$Config">
  <div class="bibliographicData">
    <xsl:call-template name="buildMarcDisplay">
      <xsl:with-param name="recordType" select="'bib'"/>
    </xsl:call-template>
    <!-- ## Use persistentLink template to display the persistent link ## -->
    <xsl:call-template name="persistentLink" >
      <xsl:with-param name="bibID" select="$bibID"/>
    </xsl:call-template>
  </div>
</xsl:for-each>
```

---

**Figure 17-3. Persistent link template call in Bibliographic Data section**

---

4. Make a backup copy of `displayCommon.css` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/css/`.
5. Add the code in [Figure 17-4](#) to `displayCommon.css`.

```
#persistentLink
{
  clear:both;
}
```

---

**Figure 17-4. Sample displayCommon.css code**

---

6. Save and test your changes.

**OPTIONAL:**

7. *Back out your changes, if necessary, by deploying your backup copy of `cl_displayRecord.xml` and `displayCommon.css`.*
-



---

**How Do I Change The Format Of  
The Record Display Page?**

**18**

---

<b>Description For “How Do I Change The Format Of The Record Display Page?” Example</b>	<b>18-1</b>
<b>Files</b>	<b>18-1</b>
<b>Instructions</b>	<b>18-2</b>



---

## How Do I Change The Format Of The Record Display Page?

# 18

---

### Description For “How Do I Change The Format Of The Record Display Page?” Example

---

For greater formatting control of elements on the record display page, class attributes may be added to the XML and subsequently adjusted in the appropriate style sheet. This allows you, for example, to change the font characteristics of the Title and Author lines without affecting other data on the page.

See [Procedure 18-1, Add Class Attributes For Formatting](#), on page [18-2](#) for instructions regarding class attributes.

### Files

---

The example in this chapter uses the following files:

- `displaycfg.xml`.
- `display.xsl`.
- `displayCommon.css`.

## Instructions

---

This section provides the instructions for creating the example described in this chapter.



### Procedure 18-1. Add Class Attributes For Formatting

---

Use the following procedure to implement class attributes for formatting.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

`/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/`

1. Make a backup copy of `displaycfg.xml` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/configs/`.
2. Edit `displaycfg.xml`.
  - a. Locate the `displayTag` to which you want to apply formatting.
  - b. Add a class attribute after the `label=` string. Use a name of your own choosing. See [Figure 18-1](#) for examples.

---

```
<displayTags label="Title:" localcssclass="tagTitle">
<displayTags label="Author:" localcssclass="tagAuthor">
```

---

**Figure 18-1. Class attribute creation example**

---

3. Save your changes to the `displaycfg.xml`.
4. Make a backup copy of `display.xsl` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/display/`.
5. Edit `display.xsl`.



- a. Locate the template for buildMarcDisplay.
- b. Add the lines shown in [Figure 18-2](#) to assign one of two classes to the bibliographic tag data.

```
                                </a><br/>

                                </xsl:for-each>
                            </div>
                        </li>
                    </xsl:if>
                </xsl:if>

<!-- assign class-->
        <li>
            <xsl:attribute name="class">
                <xsl:choose>
                    <xsl:when test="string-length(@localcssclass)">
                        <xsl:value-of select="@localcssclass" />
                    </xsl:when>
                    <xsl:otherwise>bibTag</xsl:otherwise>
                </xsl:choose>
            </xsl:attribute>
            <xsl:copy-of select="$bibTag" />
        </li>
<!-- assign class dinking -->

<!-- comment out these lines if using localcssclass
        <li class="bibTag">
            <xsl:copy-of select="$bibTag" />
        </li>
-->

                </xsl:if>
```

---

**Figure 18-2.** Example code to add to buildMarcDisplay

```
        </xsl:for-each>

        </ul>
    </div>
</xsl:when>
```

---

**Figure 18-2.** Example code to add to buildMarcDisplay (Continued)

6. Save your changes to `display.xml`.
7. Make a backup copy of `displayCommon.css` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/css/`.
8. Add style directives to the `localcssclass` tags that you defined in `displaycfg.xml` and place at the bottom of the `displayCommon.css` file.

See example code in [Figure 18-3](#).

---

```
.tagTitle, .tagAuthor
{
    margin-bottom: .75em;
    font-size: larger;
    color: #ff0000;
}
```

---

**Figure 18-3.** Example code for `displayCommon.css`

9. Save and test your changes.
  10. Back out your changes, if necessary, by deploying your backup copies of `displaycfg.xml`, `displayRecord.xml`, and `displayCommon.css`.
-



---

**How Do I Add Tracking Codes?**

**19**

---

<b>Description For “How Do I Add Tracking Codes?”</b>	
<b>Example</b>	<b>19-1</b>
<b>Files</b>	<b>19-1</b>
<b>Instructions</b>	<b>19-2</b>



### Description For “How Do I Add Tracking Codes?” Example

---

Various companies offer web page tracking/analytic services such as Google Analytics. The general practice is to include tagging on all the pages you want tracked.

The instructions in this chapter may be use to add the relevant code to one of two `.xsl` files that are called by all WebVoyáge pages.

**NOTE:**

You must establish a relationship with the tracking service first and consider use of such a tool in relationship to your institution's privacy policy.

### Files

---

The example in this chapter can apply to either of the following files:

- `frameWork.xsl`.
- `footer.xsl`.

## Instructions

---

This section provides the instructions for creating the example described in this chapter.



### Procedure 19-1. Add tracking codes

---

Use the following procedure to add tracking codes (in coordination with an outside service).

Specifically, this example inserts the Google Analytics tracking code into the `footer.xml`. Coordinate with other services regarding their specific instructions.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Make a backup copy of `footer.xml` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xml/pageFacets/`.
2. Edit `footer.xml`.
  - a. Copy the script snippet the third-party vendor generated for you upon signup. This example uses a Google Analytics script snippet.
  - b. Paste the script snippet into the `buildFooter` template. See [Figure 19-1](#).



```

<!-- ##### -->
<!-- ## buildFooter ## -->
<!-- ##### -->

<xsl:template name="buildFooter">

  <xsl:for-each select="/page:page/page:pageFooter">
    <div id="pageFooter">
      <xsl:for-each select="page:tabs[@nameId='page.footer.buttons']">

        <div id="footerTabs" title="{ $footerText/footerTabs}">
          <a name="navFooter"></a>
          <h2 class="navFooter"><xsl:value-of select="$footerText/footerTabs"/></h2>
          <ul class="navbar">
            <xsl:for-each select="$Configs/pageConfigs/footerTabDisplayOrder/tab">
              <xsl:variable name="tempName" select="@name"/>
              <xsl:variable name="newWin" select="@clickOpensNewWindow"/>
              <xsl:call-template name="buildFooterTab">
                <xsl:with-param name="displayTab" select="$tempName"/>
                <xsl:with-param name="newWin" select="$newWin"/>
              </xsl:call-template>
            </xsl:for-each>
          </ul>
        </div>

      </xsl:for-each>

      <div id="libraryLink">
        <span>
          <xsl:call-template name="buildLinkType">
            <xsl:with-param name="eleName" select="'page.footer.library.link'"/>
          </xsl:call-template>
        </span>
      </div>
    </div>
  </xsl:for-each>

```

**Figure 19-1.** Example of script snippet add to buildFooter template

```
<div id="copyright" title="{ $footerText/copyright }"><span><xsl:value-of
  select="page:element[@nameId='page.footer.copyright.message']/page:messageText"/
></span></div>

</div>
</xsl:for-each>

<!-- Google Analytics snippet -->
<script type="text/javascript">
var gaJsHost = (("https:" == document.location.protocol) ? "https://ssl." : "http://www.");
document.write(unescape("%3Cscript src='" + gaJsHost + "google-analytics.com/ga.js'
  type='text/javascript'%3E%3C/script%3E"));
</script>
<script type="text/javascript">
var pageTracker = _gat._getTracker("UA-xxxxxx-x");
pageTracker._initData();
pageTracker._trackPageview();
</script>

</xsl:template>
```

---

**Figure 19-1.** Example of script snippet add to buildFooter template (Continued)

3. Save and test your changes.

**OPTIONAL:**

4. *Back out your changes, if necessary, by deploying your backup copy of footer.xsl.*
-

---

# How Do I Implement Google Book Search?

# 20

---

<b>Description For “How Do I Implement Google Book Search?”</b>	<b>20-1</b>
<b>Files</b>	<b>20-1</b>
<b>Google Book Search Implementation</b>	<b>20-2</b>
• googleBooksAvail.js	20-2
• local_googleBooksAvail.xsl	20-2
• displayFacets.xsl	20-3
• displayGoogleBooks.css	20-3
<b>Disable Google Book Search</b>	<b>20-3</b>



---

## How Do I Implement Google Book Search?

# 20

---

### Description For “How Do I Implement Google Book Search?”

---

The Voyager 7.x version of WebVoyáge provides code to interface with the Google Book Search API. This enables users of WebVoyáge to display Google Book Search information.

This feature is enabled at installation. To disable it, see [Procedure 20-1, Disable Google Book Search Feature](#), on page [20-3](#).

### Files

---

The Google Book Search feature uses the following files:

- `googleBooksAvail.js`.
- `local_googleBooksAvail.xsl`.
- `displayFacets.xsl`.
- `displayGoogleBooks.css`.

## Google Book Search Implementation

---

This section describes the WebVoyáge implementation for displaying Google Book Search information in Voyager 7.x.

### NOTE:

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/.
```

### googleBooksAvail.js

---

The `googleBooksAvail.js` script in `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/jscripts/` executes the call to the Google Book Search service. (This service is transparent to the user.)

The lines shown in [Figure 20-1](#) define the text that displays in the Action Box.

---

```
function listBookEntries(booksInfo)
{
    var bookPreviewFull = 'Full text available';
    var bookPreviewPartial = 'Limited Preview';
    var bookPreviewNoView = '"About This Book"';
```

---

**Figure 20-1. Action Box text**

---

### local\_googleBooksAvail.xsl

---

The `local_googleBooksAvail.xsl` file in `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/` defines a template named `googleBooksAvail`. This template describes how to identify the ISBN, LCCN, or OCLC numbers which are the standard numbers used to do the lookup executed with `googleBooksAvail.js`.

### **displayFacets.xml**

---

The `displayFacets.xml` file in `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/pageFacets/` calls the `googleBooksAvail` template. See [local googleBooksAvail.xsl](#) on [page 20-2](#).

### **displayGoogleBooks.css**

---

The `displayGoogleBooks.css` file in `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/css/` manages the display of the Google information within the Action Box.

## **Disable Google Book Search**

---

This section provides the instructions for disabling Google Book Search described in this chapter.



### **Procedure 20-1. Disable Google Book Search Feature**

---

Use the following procedure to disable Google Book Search.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

`/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/.`

1. Make a backup copy of `displayFacets.xml` that is located in `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/pageFacets/`.
2. Edit `displayFacets.xml`.
  - a. Locate the line of code near the bottom of the file as shown in [Figure 20-2](#).

---

```
## mdp add the google book template ##
```

---

**Figure 20-2. Line of code to locate**

- b. Comment out the lines of code as shown in [Figure 20-3](#).

---

```
<!-- ## mdp add the google book template ##
      <div id="googleBooksRow">
        <xsl:call-template name="googleBooksAvail"/>
      </div>
-->
```

---

**Figure 20-3. Comment out code to disable Google Book Search**

3. Save and test your changes.

**OPTIONAL:**

4. *Back out your changes, if necessary, by deploying your backup copy of displayFacets.xsl.*
-



---

**How Do I Display Cover Images  
From Services Like Amazon.com  
and Syndetics Solutions?**

**21**

---

<b>Description For “How Do I Display Cover Images From Services Like Amazon.com and Syndetics Solutions?”</b>	<b>21-1</b>
<b>Files</b>	<b>21-1</b>
<b>Syndetic Solutions Implementation</b>	<b>21-2</b>
• pageProperties.xml	21-2
• resultsFacets.xsl	21-3
• resultsTitles.xsl	21-4
• imageUtils.js	21-5
• displaycfg.xml	21-6
• display.xsl	21-6
• displayRecord.xsl	21-7
<b>Syndetic Solutions Information</b>	<b>21-7</b>
• What is a Query String?	21-7
• Sample URLs	21-8



---

## How Do I Display Cover Images From Services Like Amazon.com and Syndetics Solutions?

# 21

---

### Description For “How Do I Display Cover Images From Services Like Amazon.com and Syndetics Solutions?”

---

WebVoyage is preconfigured with the capability to display cover images on the results and holdings pages.

The ISBN or ISSN is generally used to do the lookup at the remote service.

**NOTE:**

You must have a pre-existing relationship or agreement with a service that provides this cover art.

### Files

---

The Syndetics example described in this chapter uses the following files:

- `pageProperties.xml`.
- `resultsFacets.xsl`.
- `resultsTitles.xsl`.
- `imageUtils.js`.
- `displaycfg.xml`.

- `display.xsl`.
- `displayRecord.xsl`.

## Syndetic Solutions Implementation

---

This section describes, as an example, the WebVoyáge implementation of displaying Syndetics Solutions cover images for results and holdings pages in Voyager 7.x.

### NOTE:

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/.
```

### pageProperties.xml

---

The `pageProperties.xml` file located in `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/userTextConfigs/` defines how the URL to the cover image for the titles results page is built to include the pre- and post-link text and the alternate name for the image. See [Figure 21-1](#).

```
<!-- each library is responsible for creating a relationship with a provider of cover images
-->

<!-- these options should not be enabled by default -->

<!-- <resultsCoverTag nameIdMatch="page.searchResults.item.type.isbn" linkPRE_TEXT="http://
/images.sample.com/images/" linkPOST_TEXT=".gif" altText="Cover Image"/> -->

<!--resultsCoverTag nameIdMatch="page.searchResults.item.type.isbn" linkPRE_TEXT="http://
www.syndetics.com/hw7.pl?isbn=" linkPOST_TEXT="/SC.gif" altText="Cover Image"/ -
->
```

---

**Figure 21-1.** Example of `pageProperties.xml`

The `/SC.gif` in [Figure 21-1](#) is the Syndetics Solutions syntax for small cover (SC). If you prefer a medium or large cover image, use MC or LC, respectively.

## resultsFacets.xml

---

The `resultsFacets.xml` file located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/pageFacets/` defines a template named `buildResultsCoverImage`. See [Figure 21-2](#).

This template builds on the URL components defined in `pageProperties.xml`.

```
<!-- ##### -->
<!-- ## buildResultsCoverImage ## -->
<!--
    #####
    ##### -->
<xsl:template name="buildResultsCoverImage">
  <xsl:param name="tag"/>
  <xsl:param name="tagType"/>

  <xsl:for-each select="$Configs/pageConfigs/
resultsCoverTag[@nameIdMatch=$tagType]">
    <div class="resultListCoverImageCell">
      
    </div>
  </xsl:for-each>
</xsl:template>
```

---

**Figure 21-2.** Example of `buildResultsCoverImage` template in `resultsFacets.xml`

The `buildResultsCoverImage` template is used later in the file for constructing the URL with an ISBN or ISSN.

The `trimData` template strips parenthetical references from the standard numbers. See [Figure 21-3](#).

```
<!-- ## cover image ## -->
<xsl:choose>
  <xsl:when test="string-length(page:option/
page:element[@nameId='page.searchResults.item.type.isbn']/page:value)">
    <!-- ## cover image from isbn ## -->
    <xsl:call-template name="buildResultsCoverImage">
      <xsl:with-param name="tag">
        <xsl:call-template name="trimData">
          <xsl:with-param name="sData" select="page:option/
page:element[@nameId='page.searchResults.item.type.isbn']/page:value"/>
        </xsl:call-template>
      </xsl:with-param>
      <xsl:with-param name="tagType"
select="'page.searchResults.item.type.isbn'"/>
    </xsl:call-template>
  </xsl:when>
  <xsl:when test="string-length(page:option/
page:element[@nameId='page.searchResults.item.type.issn']/page:value)">
    <!-- ## cover image from issn ## -->
    <xsl:call-template name="buildResultsCoverImage">
      <xsl:with-param name="tag">
        <xsl:call-template name="trimData">
          <xsl:with-param name="sData" select="page:option/
page:element[@nameId='page.searchResults.item.type.issn']/page:value"/>
        </xsl:call-template>
      </xsl:with-param>
      <xsl:with-param name="tagType"
select="'page.searchResults.item.type.issn'"/>
    </xsl:call-template>
  </xsl:when>
</xsl:choose>
```

---

**Figure 21-3. Example of trimData template call in resultsFacets.xml**

## resultsTitles.xml

---

The resultsTitles.xml file located in /m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/ builds the titles results page. It uses a JavaScript file named imageUtils.js.

### imageUtils.js

---

The `imageUtils.js` file located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/jscripts/` performs the functions shown in [Figure 21-4](#).

```
var setDefaultErrImg=""; // Default image to be displayed on error
var setDefaultErrTxt=""; // Default text to be displayed on error

////////////////////////////////////

function checkImage(obj)
{
    if(obj.complete==true)
    {
        if(obj.width < 2)
        {
            obj.src=setDefaultErrImg;
            obj.setAttribute("alt",setDefaultErrTxt);
            obj.setAttribute("style","display:none");
        }
        else
        {
            obj.setAttribute("style","display:block");
        }
    }
}

////////////////////////////////////
```

---

**Figure 21-4.** Example of `imageUtils.js`

The Syndetics service (and possibly other remote cover services) does not allow you to pre-check whether an image exists before you build the link. Therefore, `imageUtils.js` checks to see if the image has been retrieved and loaded. If not, nothing displays.

## displaycfg.xml

---

The `displaycfg.xml` file located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/configs/` defines how the URL to the cover image for the record display page is built that includes the pre- and post-link text and the bib field used to build the link. See [Figure 21-5](#).

The `infoPRE_TEXT` and `infoPOST_TEXT` syntax build a link to more information about the record. This is used to make the cover image a hyperlink.

```
<!-- Cover Tags for MARC Display

  Uncomment the <coverTags> block below to add cover graphics and title info link to the
  MARC display.

  Be sure to replace "ENTER_YOUR_CLIENT_ID" below with your Syndetics Client ID.
-->
<!--
  <coverTags altText="Cover Image" linkPRE_TEXT="http://www.syndetics.com/hw7.pl?isbn="
    linkPOST_TEXT="/MC.jpg" infoPRE_TEXT="http://syndetics.com/index.aspx?isbn="
    infoPOST_TEXT="/index.html&client=ENTER_YOUR_CLIENT_ID&type=rn12"
    singleInstance="true">

    <displayTag field="020" indicator1="X" indicator2="X" subfield="a"/>

  </coverTags>
-->
```

---

**Figure 21-5.** Example `displaycfg.xml` code

The `singleInstance="true"` syntax indicates that the first ISBN or ISSN found is used for building the link.

**NOTE:**

The `displaycfg.xml` file includes a comment reminder to remove the comment markers surrounding `coverTags` to enable cover graphics.

## display.xsl

---

The `display.xsl` file located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/display/` defines the following templates for retrieving cover images:

- `buildCoverImage`.



- `buildCoverImageLinks`.

These templates provide function similar to the templates described in [resultsFacets.xsl](#) on [page 21-3](#).

### **displayRecord.xsl**

---

The `displayRecord.xsl` file located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/` uses the JavaScript file named `imageUtils.js` while building the record display page.

## **Syndetic Solutions Information**

---

Syndetic Solutions provides the information in this section regarding “What is a Query String?” and sample URLs.



### **CAUTION:**

*This information is current as of its receipt. However, over time Syndetic Solutions may change/update its instructions. Should you have any questions, contact Syndetic Solutions Customer Support. See [www/syndetics.com](http://www.syndetics.com).*



### **TIP:**

*The “What is a Query String?” section from Syndetic Solutions references URLs that include the use of ampersands (&). In configuration files, the ampersands need to be escaped as in the following:*

```
http://www.syndetics.com/  
index.aspx?isbn=xxx&amp;client=code&amp;showCap
```

### **What is a Query String?**

---

Consider a Syndetics URL:

```
http://www.syndetics.com/index.aspx?isbn=0002154129/  
SC.GIF&client=clientcode&showCaptionBelow=t&caption=Click+fo  
r+more+info
```

The part before the “?” is the website address, the part after the “?” is the Query String. In this case there are 4 parameter/value pairs, separated by “&”:

```
isbn=0002154129/SC.GIF  
  
client=clientcode  
  
showCaptionBelow=t  
  
caption=Click+for+more+info (this is a custom caption)
```

The order of the parameters within the Query String does not matter. What matters is that they be separated by ampersands and that they have a Name, Equal Sign "=" and Value. There should be no spaces around the "?", "&" or "=". If there are spaces in the Value, replace them with the plus sign "+".

### Sample URLs

---

These strings have no actual line-breaks or spaces.

#### Default caption:

```
<http://www.syndetics.com/index.aspx?isbn=0002154129/  
SC.GIF&client=clientcode&showCaptionBelow=t>
```

#### Superimposed caption:

```
<http://www.syndetics.com/index.aspx?isbn=0002154129/  
SC.GIF&client=clientcode&showCaptionSuperimposed=t>
```

#### Caption with Medium size Cover:

```
<http://www.syndetics.com/index.aspx?isbn=0002154129/  
MC.GIF&client=clientcode&showCaptionBelow=t>
```

#### Caption with Custom Message, Medium size Cover, and Background color:

```
<http://www.syndetics.com/index.aspx?isbn=0002154129/  
MC.GIF&client=clientcode&showCaptionBelow=t&caption=Custom+m  
essage+goes+here&bgColor=red>
```

#### You can also use the RGB value (must be base 10):

```
<http://www.syndetics.com/index.aspx?isbn=0002154129/  
SC.GIF&client=clientcode&showCaptionBelow=t&bgColor=238,238,  
238>
```

*In order to find more RGB colors, you can search the internet for "web safe RGB colors."*

**With a Small size Cover if your message is longer than 19 characters (20 or more - including spaces), then the default caption is used:**

```
<http://www.syndetics.com/index.aspx?isbn=0002154129/  
SC.GIF&client=clientcode&showCaptionBelow=t&caption=Syndetic  
s+Truly+Rocks&bgColor=pink>
```

**With a Medium size Cover if your message is longer than 49 characters (50 or more - including spaces), then the default caption is used:**

```
<http://www.syndetics.com/index.aspx?isbn=0002154129/  
MC.GIF&client=clientcode&showCaptionBelow=t&caption=Syndetic  
s+Really+and+Truly+Totally+Awesomelly+Rocks&bgColor=pink>
```

**SC.GIF (Small Cover)**

**MC.GIF (Medium Cover)**



---

**How Do I Implement Geospatial Search?**

**22**

---

<b>Description For “How Do I Implement Geospatial Search?”</b>	<b>22-1</b>
<b>Files</b>	<b>22-1</b>
<b>Instructions</b>	<b>22-2</b>



---

## How Do I Implement Geospatial Search?

# 22

---

### Description For “How Do I Implement Geospatial Search?”

---

Geospatial Search is a feature that you optionally set to enable map searching when you install WebVoyage.

**NOTE:**

This feature is only available if your institution has purchased the Geospatial Searching tools.

WebVoyage provides you with a variety of options when searching for map-related items in your database. You can conduct a search for geospatial items by specifying a region which must be covered, in part or in whole, by the item. This region can be a rectangle, a polygon, a point or circle, a corridor or route, or a range. See [Figure 22-1](#) on [page 22-3](#) for an example.

### Files

---

The Geospatial Search feature described in this chapter uses the following files:

- `webvoyage.properties.`
- `pageProperties.xml.`

## Instructions

---

This section provides instructions for implementing Geospatial Search in Voyager 7.x.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/.
```

See [Procedure 22-1, Geospatial Search Implementation](#) for the steps to provide access to Geospatial Search.



### Procedure 22-1. Geospatial Search Implementation

---

Use the following steps to implement Geospatial Search.

1. Make a backup copy of `webvoyage.properties` that is located in `/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/`.
2. Open the `webvoyage.properties` file and locate `option.geospatialSearch=`.
3. Set this option to `x` to have WebVoyage display a **Geospatial Search** tab. See [Figure 22-1](#) for a display example.



**Rectangle Search**

Database: My Library Catalog

Basic Advanced Subject Author Course Reserve **Geospatial Search** [Search History](#)

Rectangle Search Polygon Search Point + Radius Search Corridor/Route Search Range Search

**LOWER LEFT**
Latitude:   
Longitude:

**UPPER RIGHT**
Latitude:   
Longitude:

Toggle Limits

Footprint: MBR

Format Type: Degrees/Min/Sec

Records per page: 10 records per page

Search Map

**Figure 22-1. Geospatial Search tab**

4. Save the updated `webvoyage.properties` file.
5. Open the `pageProperties.xml` file in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/xsl/userTextConfigs/` and locate `<!-- enable these lines if site has geospatial searching.`

See [Figure 22-2](#).

Line#

```
1      <!-- ## Search Tab Display Order ## -->
2      <searchTabDisplayOrder>
3          <tab name="page.search.buttons.basic.button"/>
4          <tab name="page.search.buttons.advanced.button"/>
5          <tab name="page.search.buttons.subjectHeading.button"/>
6          <tab name="page.search.buttons.author.button"/>
7          <tab name="page.search.buttons.courseReserve.button"/>
8          <!-- enable these lines if site has geospatial searching
9          <tab name="page.search.buttons.geospatial.button"/>
10         <tab name="page.search.geospatial.button"/>
11         -->
12     </searchTabDisplayOrder>
13
14     <!-- ## GeoSearch Tab Display Order ## -->
15     <geosearchTabDisplayOrder>
16         <tab name="map.search.buttons.rectangleSearch.button"/>
17         <tab name="map.search.buttons.polygonSearch.button"/>
18         <tab name="map.search.buttons.pointRadiusSearch.button"/>
19         <tab name="map.search.buttons.corridorSearch.button"/>
20         <tab name="map.search.buttons.rangeSearch.button"/>
21     </geosearchTabDisplayOrder>
```

---

**Figure 22-2. Enable Geospatial Search in the pageProperties.xml file**

6. Remove the comment lines to enable Geospatial Search.

In [Figure 22-2](#), the comment lines are lines 8 and 11.

7. Save your changes.
-

---

**How Do I Enable External  
Authentication?**

**23**

---

<b>Description For “How Do I Enable External Authentication?”</b>	<b>23-1</b>
<b>Files</b>	<b>23-1</b>
<b>Instructions</b>	<b>23-1</b>



---

## How Do I Enable External Authentication?

# 23

---

### Description For “How Do I Enable External Authentication?”

---

External authentication is an optional setting in WebVoyage to enable patron authentication from an external system.

### Files

---

The external authentication settings described in this chapter use the `webvoyage.properties` file.

### Instructions

---

This section provides instructions for implementing external authentication in Voyager 7.x.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/.
```

See [Procedure 23-1, External Authentication Implementation](#) for the steps to enable external authentication.



### **Procedure 23-1. External Authentication Implementation**

---

Use the following steps to implement external authentication.

1. Make a backup copy of `webvoyage.properties` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/`.
2. Open the `webvoyage.properties` file and locate `option.extAuthSystemEnabled=N`. See [Figure 23-1](#).

```

#####
# Should WebVoyage users use an external authentication system when logging in?
# If Y, WebVoyage uses the external authentication system as configured below
# If N, WebVoyage displays the native logon form
#####
option.extAuthSystemEnabled=N

#####
# URL to the external authentication system
#####
option.extAuthSystemURL=

#####
# Should WebVoyage bypass the logon form if using an external authentication
# system?
#####
option.extAuthBypassLoginScreen=N

===== truncated =====

#####
# use of the external authentication link is optional,
# this line will have no effect if option.extAuthSystemEnabled=N
#####
page.logIn.extAuth.linkText=Go to External Patron Login System

#####
#
# Number of record display per page
#
#####

```

**Figure 23-1. External authentication settings example**

3. Set this option to **Y** to have WebVoyage enable external authentication.
4. Provide the URL for `option.extAuthSystemURL=`.

5. Change `option.extAuthBypassLoginScreen=N` as needed.
6. Change `page.logIn.extAuthlinkText=Go to External Patron LoginSystem` as needed.
7. Save the updated `webvoyage.properties` file.
8. Update the redirect URL that the adaptor uses to return patrons to WebVoyáge using the following format:

```
http://[host]:[port]/vwebv/externalLogin.do?[redirect  
string]&authenticate=[status]
```

This URL indicates to WebVoyáge whether or not the patron is successfully authenticated.



**TIP:**

*Review the comments provided in the `webvoyage.properties` file for additional information.*

---



---

**How Do I Modify Page Messages?**

**24**

---

<b>Description For “How Do I Modify Page Messages?”</b>	<b>24-1</b>
<b>Files</b>	<b>24-2</b>
<b>Instructions</b>	<b>24-2</b>



### Description For “How Do I Modify Page Messages?”

---

When a `<page:message>` block from the server occurs, a customized message may be displayed.

In the XML, a page message is identified by `blockCode`, `errorCode` and/or `requestCode`. See [Figure 24-3](#) on [page 24-4](#).

When an `errorCode` such as “`searchResults.noHits`” is received, for example, a customized **No Hits** message may be displayed. The `<pageMessages>` code in WebVoyage provides the capability to modify the messages that display. See [Figure 24-1](#) for an example of an `errorCode` identified for a customized message.

---

```
<pageMsg errorCode="searchResults.noHits">
```

---

**Figure 24-1.   errorCode example**

---

See [Figure 24-2](#) for a `blockCode` example used when an SSN login error occurs.

---

```
<pageMsg blockCode="PATRONSOCMSG">
```

---

**Figure 24-2.** blockCode example

---

**NOTE:**

You can view the XML by enabling and clicking the **Show XML** button. The parameters for enabling the **Show XML** button are located in `framework.xml` that can be found in the following path:

```
/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/pageTools/
```

## Files

---

The page messages settings described in this chapter use the `pageProperties.xml` file.

## Instructions

---

This section provides instructions for modifying page messages in Voyager 7.x.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/m1/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/.
```

See [Procedure 24-1, Modify Page Messages](#) for the steps to modify page messages.



### Procedure 24-1. Modify Page Messages

---

Use the following steps to modify page messages.

1. Make a backup copy of `pageProperties.xml` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/userTestConfigs/`.
2. Open the `pageProperties.xml` file and locate `<!-- ## Override [blockCode]`. See [Figure 24-3](#).

```
<!-- ## Override [blockCode] [errorCode] or [requestCode] messages
##
## The following XML is a place to define what text appears in the interface when we
get a <page:message> block
## from the server (enable debug in frameWork.xml to reveal the showXML button in
the interface to view XML data)
## At this point the following are just overrides to the text that comes back in the
XML
##
## For Example given the following XML block
##
## <page:message>
## <page:message blockCode=" " errorCode="searchResults.noHits" requestCode=" ">No
hits.</page:message>
## </page:messages>
##
## we have an errorCode of 'searchResults.noHits'
## so we create a <pageMsg> with an errorCode attribute matching what we want to
override with a block of text or HTML
##
## <pageMsg errorCode="searchResults.noHits">Search resulted in no hits.</pageMsg>
##
## Hopefully this makes life a little easier, in the future I would like all
pageMessages to be defined here
-->
<pageMessages>
  <pageMsg blockCode="PATRONMSG">
    <p class="blockMessage">
      You may not have entered your barcode and name correctly.
      <br/>Retry your request or ask for help at the Circulation or Reference Desk.
    </p>
  </pageMsg>
  <pageMsg blockCode="PATRONSOCMSG">
    <p class="blockMessage">
      You may not have entered your social security number and name correctly.
      <br/>Retry your request or ask for help at the Circulation or Reference Desk.
    </p>
  </pageMsg>
  <pageMsg blockCode="PATRONIIDMSG">
```

---

**Figure 24-3. Modifying page messages example**

```
<p class="blockMessage">
  You may not have entered your institution id and name correctly.
  <br/>Retry your request or ask for help at the Circulation or Reference Desk.
</p>
</pageMsg>
<pageMsg blockCode="PATRONBRIEFMSG">
  <p class="blockMessage">
    The system could not identify you from your ID number alone.
    <br/>Please choose your home library and ID number type on this form and try again,
    <br/>or ask for help at the Circulation or Reference Desk.
  </p>
</pageMsg>
<pageMsg errorCode="searchResults.noHits">Search resulted in no hits.</pageMsg>
</pageMessages>
```

---

**Figure 24-3. Modifying page messages example (Continued)**

3. Define/modify the page message text to match your preference.
4. Save the updated `pageProperties.xml` file.
5. Test your changes.

**OPTIONAL:**

6. *Back out your changes, if necessary, by deploying your backup copy of `pageProperties.xml`.*
-





---

## **How Do I Remove the Course Reserve Tab?**

# 25

---

<b>Description For “How Do I Remove the Course Reserve Tab?” Example</b>	<b>25-1</b>
<b>Files</b>	<b>25-1</b>
<b>Instructions</b>	<b>25-1</b>



---

## How Do I Remove the Course Reserve Tab?

# 25

---

### Description For “How Do I Remove the Course Reserve Tab?” Example

---

Course reserves may be an optional requirement for your site. This example describes how to remove the **Course Reserve** tab from the **Search** page.

### Files

---

The examples in this chapter use the following files:

- `pageProperties.xml`.
- `index.html`.

### Instructions

---

This section provides the instructions for completing the examples described in this chapter.



---

**Procedure 25-1. Remove the Course Reserve Tab From the Search Page**

---

Use the following procedure to remove the **Course Reserve** tab.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Make a backup copy of `pageProperties.xml` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/userTextConfigs/`.
2. Edit `pageProperties.xml`.
  - a. Find the Search Tab Display Order section marked by the comment shown in [Figure 25-1](#).

```
<!-- ## Search Tab Display Order ## -->
<searchTabDisplayOrder>
  <tab name="page.search.buttons.basic.button"/>
  <tab name="page.search.buttons.advanced.button"/>
  <tab name="page.search.buttons.subjectHeading.button"/>
  <tab name="page.search.buttons.author.button"/>
  <tab name="page.search.buttons.courseReserve.button"/>
  <!-- enable these lines if site has geospatial searching
  <tab name="page.search.buttons.geospatial.button"/>
  <tab name="page.search.geospatial.button"/>
  -->
</searchTabDisplayOrder>
```

---

**Figure 25-1. Search Tab Display Order section**

---

- b. Comment out the `courseReserve` line in this section. See [Figure 25-2](#).

```
<!-- ## Search Tab Display Order ## -->
<searchTabDisplayOrder>
  <tab name="page.search.buttons.basic.button"/>
  <tab name="page.search.buttons.advanced.button"/>
  <tab name="page.search.buttons.subjectHeading.button"/>
  <tab name="page.search.buttons.author.button"/>
  <!-- Tturn off Course Reserve tab
  <tab name="page.search.buttons.courseReserve.button"/>
  -->
  <!-- enable these lines if site has geospatial searching
  <tab name="page.search.buttons.geospatial.button"/>
  <tab name="page.search.geospatial.button"/>
  -->
</searchTabDisplayOrder>
```

**Figure 25-2.** Comment out course reserve example

3. Turn off the reference to course reserves on the default (`index.html`) page.
4. Make a backup copy of `index.html` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/htdocs/`.
5. Edit `index.html`.
  - a. Find the `More choices` paragraph. See [Figure 25-3](#).

```
<p>More choices:</p>
<ul>
    <li><a href="/vwebv/searchBasic?sk=en_US">Basic search</a></li>
    <li><a href="/vwebv/searchAdvanced?sk=en_US">Advanced search</a></li>
    <li><a href="/vwebv/enterCourseReserve.do?sk=en_US">Course reserve
materials</a></li>
    <li><a href="/vwebv/login?sk=en_US">Log in to use your saved preferences</
a></li>
    <li><a href="/vwebv/myAccount?sk=en_US">Review your account</a></li>
    <li><a href="/vwebv/ui/en_US/htdocs/help/index.html">Read help for
WebVoyage</a></li>
```

---

**Figure 25-3. More choices paragraph example**

- b. Comment out the `courseReserve` line in this section. See [Figure 25-4](#).

```
<p>More choices:</p>
<ul>
    <li><a href="/vwebv/searchBasic?sk=en_US">Basic search</a></li>
    <li><a href="/vwebv/searchAdvanced?sk=en_US">Advanced search</a></li>
    <!-- Removing course reserve reference
    <li><a href="/vwebv/enterCourseReserve.do?sk=en_US">Course reserve
materials</a></li>
    -->
    <li><a href="/vwebv/login?sk=en_US">Log in to use your saved preferences</
a></li>
    <li><a href="/vwebv/myAccount?sk=en_US">Review your account</a></li>
    <li><a href="/vwebv/ui/en_US/htdocs/help/index.html">Read help for
WebVoyage</a></li>
```

---

**Figure 25-4. Comment out course reserve href example**

6. Save and test your changes.

**OPTIONAL:**

7. *Back out your changes, if necessary, by deploying your backup file copies.*
-

---

**How Do I Add A New Search Tab?**

**26**

---

<b>Description For “How Do I Add A New Search Tab?”</b>	
<b>Example</b>	<b>26-1</b>
<b>Files</b>	<b>26-1</b>
<b>Instructions</b>	<b>26-1</b>





---

## How Do I Add A New Search Tab?

# 26

---

### Description For “How Do I Add A New Search Tab?” Example

---

This chapter describes how to add a new search tab.

The new search tab requires that you make a cgi or static HTML file that it can point to.

### Files

---

The examples in this chapter use the following files:

- `webvoyage.properties.`
- `internal.properties.`
- `pageProperties.xml.`

### Instructions

---

This section provides the instructions for creating the examples described in this chapter.



---

**Procedure 26-1. Create New Search Tab**

---

Use the following procedure to create a new search tab for new books.

This procedure assumes that a `newBooks.cgi` file has been created.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Make a backup copy of the `webvoyage.properties` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/`.
2. Add labels for the new tab in the Search Pages section. See [Figure 26-1](#).

---

<pre>page.search.buttons.newBooks.button=New Books page.search.buttons.newBooks.message=New Books</pre>
---------------------------------------------------------------------------------------------------------

---

**Figure 26-1. Labels for new search tab example**

3. Make a backup copy of the `internal.properties` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/`.
4. Bind the new tab to an action. Add the code shown in [Figure 26-2](#) to the Search section of `internal.properties`.

---

<pre>page.search.buttons.newBooks.action=newBooks.cgi</pre>
-------------------------------------------------------------

---

**Figure 26-2. Bind new tab in Search section example**

5. Make a backup copy of the `pageProperties.xml` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xml/userTextConfigs/`.

6. Add the XML to create the new tab. Find the `searchTabDisplayOrder` element and add the code shown in [Figure 26-3](#) to `pageProperties.xml`.

```
<tab name="page.search.buttons.newBooks.button" />
```

**Figure 26-3.** Example XML for new search tab

Place the code where you would like the new search tab to display. See [Figure 26-4](#) for an example.

```
<searchTabDisplayOrder>
  <tab name="page.search.buttons.basic.button" />
  <tab name="page.search.buttons.advanced.button" />
  <tab name="page.search.buttons.subjectHeading.button" />
  <tab name="page.search.buttons.author.button" />
  <tab name="page.search.buttons.courseReserve.button" />
  <tab name="page.search.buttons.newBooks.button" />
  <!-- enable these lines if site has geospatial searching
  <tab name="page.search.buttons.geospatial.button" />
  <tab name="page.search.geospatial.button" />
  -->
</searchTabDisplayOrder>
```

**Figure 26-4.** Example placement of XML code

**NOTE:**

The `tab` name should correspond with the label code such as `newBooks` established in `webvoyage.properties` added as in [Step 2](#).

7. Save and test your changes.

**OPTIONAL:**

8. *Back out your changes, if necessary, by deploying your backup file copies.*



---

**How Do I Add A New Header Tab?**

**27**

---

<b>Description For “How Do I Add A New Header Tab?”</b>	
<b>Example</b>	<b>27-1</b>
<b>Files</b>	<b>27-1</b>
<b>Instructions</b>	<b>27-1</b>



---

## How Do I Add A New Header Tab?

# 27

---

### Description For “How Do I Add A New Header Tab?” Example

---

This chapter describes how to add a new header tab.

### Files

---

The examples in this chapter use the following files:

- `webvoyage.properties.`
- `internal.properties.`
- `pageProperties.xml.`

### Instructions

---

This section provides the instructions for creating the examples described in this chapter.



---

**Procedure 27-1. Create New Header Tab**

---

Use the following procedure to create a new header tab to exit the session.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Identify a unique variable that you can use to bind properties to the exit session action across all the files you edit. Choose a variable that clearly communicates the tab you're describing. For this example, the variable used is `exitSession`.
2. Make a backup copy of the `pageProperties.xml` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/userTextConfigs/`.
3. Locate the `<!-- ## Header Tab Display Order ## -->` comment in `pageProperties.xml`, and add new header tab element between the `<headerTabDisplayOrder>` and `</headerTabDisplayOrder>` tags. Where you place it depends on the order in which you want it to display.

To add it to the right of the existing tabs, place the new element immediately before the `</headerTabDisplayOrder>` tag. See [Figure 27-1](#).

---

```
<!-- The following element will create a new tab in the header -->
<tab name="page.header.buttons.exitSession.button" />
```

---

**Figure 27-1. pageProperties example for new header tab**

---

**NOTE:**

The value of the name attribute needs to match the `.button` variable set in `webvoyage.properties` (see [Step 5](#)).

4. Make a backup copy of the `webvoyage.properties` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/`.



5. Set the new header tab label in the Header section of `webvoyage.properties` as in [Figure 27-2](#).

---

```
#Custom "Exit Session" tab labels
page.header.buttons.exitSession.button=Exit Session
page.header.buttons.exitSession.message=Exit the catalog
```

---

**Figure 27-2.** Header tab label example in `webvoyage.properties`

The `.button` value is the text that displays on the header tab, and the `.message` value is the alternative text that displays for mouse hovering and screen readers.

6. Make a backup copy of the `internal.properties` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/`.
7. Set the header tab's action in the Header section of the `internal.properties` file as in [Figure 27-3](#).

---

```
#Custom "Exit Session" tab action
page.header.buttons.exitSession.action=exit.do
```

---

**Figure 27-3.** `internal.properties` file example changes

The `.action` value is a URL. This can be an existing WebVoyage action or a complete URL such as `http://catalog.loc.gov/`.

8. Save and test your changes.

**OPTIONAL:**

9. *Back out your changes, if necessary, by deploying your backup file copies.*
-



---

**How Do I Create Additional Record Views?**

**28**

---

<b>Description For “How Do I Create Additional Record Views?” Example</b>	<b>28-1</b>
<b>Files</b>	<b>28-1</b>
<b>Instructions</b>	<b>28-2</b>



---

## How Do I Create Additional Record Views?

# 28

---

### Description For “How Do I Create Additional Record Views?” Example

---

This chapter describes how to create additional record views such as brief and full views.

### Files

---

The examples in this chapter use the following files:

- `displayRecord.xml`.
- `cl_displayRecord.xml`.
- `cl_displayStaff.xml`.
- `displaycfg.xml`.
- `displayFacets.xml`.
- `web.xml`.

## Instructions

---

This section provides the instructions for creating the examples described in this chapter.



### Procedure 28-1. Create Additional Record Views

---

Use the following procedure to create additional record views.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Copy `displayRecord.xml` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xml/` to `displayBriefRecord.xml`.
2. Change the template call from `buildRecordForm` to `buildBriefRecordForm` as shown in [Figure 28-1](#).

---

```
<xsl:template name="buildContent">
  <xsl:call-template name="buildBriefRecordForm"/>
</xsl:template>
```

---

**Figure 28-1. Change template call**

3. Modify existing code (see [Figure 28-2](#)) in `displayBriefRecord.xml` with the code shown in [Figure 28-3](#).

---

```
<xsl:include href="../contentLayout/cl_displayRecord.xml"/>
```

---

**Figure 28-2. Existing displayRecord code**

---

```
<xsl:include href="../contentLayout/cl_displayBriefRecord.xsl"/>
```

---

**Figure 28-3. Example modification for displayBriefRecord code**

---

4. Copy `cl_displayRecord.xsl` that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/` to `cl_displayBriefRecord.xsl`.
  5. Change the template call from `buildRecordForm` to `buildBriefRecordForm` as shown in [Figure 28-4](#).
- 

```
<!-- ##### -->
<!-- ## buildBriefRecordForm ## -->
<!-- ##### -->

<xsl:template name="buildBriefRecordForm">
```

---

**Figure 28-4. Change template call**

---

6. Modify existing code (see [Figure 28-5](#)) in `cl_displayBriefRecord.xsl` with the code shown in [Figure 28-6](#).
- 

```
<xsl:variable name="Config" select="document('../configs/displaycfg.xml')"/>
```

---

**Figure 28-5. Existing cl\_displayRecord code**

---

```
<xsl:variable name="Config" select="document('../configs/
displaybriefcfg.xml')"/>
```

---

**Figure 28-6. Example modification for cl\_displayBriefRecord code**

---

7. Modify the existing Action Box code (see [Figure 28-7](#)) in `cl_displayBriefRecord.xsl` with the code shown in [Figure 28-8](#).

```
<!-- ## Action Box ## -->

    <xsl:call-template name="buildActionBox">

        <xsl:with-param name="pageRecordType"
select="'actionBox.recordView.link'"/>

    </xsl:call-template>
```

---

**Figure 28-7. Existing Action Box code**

---

```
<!-- ## Action Box ## -->

    <xsl:variable name="moreActions">

        <li><span class="recordPointer">&#160;</span><label>Brief
Record</label></li>

    </xsl:variable>

    <xsl:call-template name="buildActionBox">

        <xsl:with-param name="pageRecordType"
select="'actionBox.briefRecordView.link'"/>

        <xsl:with-param name="moreActions" select="$moreActions"/>

    </xsl:call-template>
```

---

**Figure 28-8. Example modification of Action Box code**

---

8. Make a backup copy of the `cl_displayRecord.xsl` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/`.
9. Modify the existing Action Box code (see [Figure 28-9](#)) in `cl_displayRecord.xsl` with the code shown in [Figure 28-10](#).



```

<!-- ## Action Box ## -->

    <xsl:call-template name="buildActionBox">

        <xsl:with-param name="pageRecordType"
select="'actionBox.recordView.link'"/>

    </xsl:call-template>

```

**Figure 28-9.** Existing Action Box code in `cl_displayRecord`

```

<!-- ## Action Box ## -->

    <xsl:variable name="briefRecordURL">briefHoldingsInfo?<xsl:value-of
select="substring-after(//
page:element[@nameId='actionBox.recordView.link']/
page:URL, 'holdingsInfo?')"/></xsl:variable>

    <xsl:variable name="moreActions">

        <li><span class="recordLinkBullet">•</span><a
href="{ $briefRecordURL }"><span>Brief Record</span></a></li>

    </xsl:variable>

    <xsl:call-template name="buildActionBox">

        <xsl:with-param name="pageRecordType"
select="'actionBox.recordView.link'"/>

        <xsl:with-param name="moreActions" select="$moreActions"/>

    </xsl:call-template>

```

**Figure 28-10.** Example modification to Action Box code in `cl_displayRecord`

10. Modify the existing Action Box code (see [Figure 28-11](#)) in `cl_displayStaff.xml` with the code shown in [Figure 28-12](#).

```
<!-- ## Action Box ## -->

    <xsl:call-template name="buildActionBox">

        <xsl:with-param name="pageRecordType"
select="'actionBox.staffView.link'"/>

    </xsl:call-template>
```

---

**Figure 28-11. Existing Action Box code in cl\_displayStaff**

---

```
<!-- ## Action Box ## -->

    <xsl:variable name="briefRecordURL">briefHoldingsInfo?<xsl:value-of
select="substring-after(//
page:element[@nameId='actionBox.recordView.link']/
page:URL, 'holdingsInfo?')"/></xsl:variable>

    <xsl:variable name="moreActions">

        <li><span class="recordLinkBullet">•</span><a
href="{ $briefRecordURL }"><span>Brief Record</span></a></li>

    </xsl:variable>

    <xsl:call-template name="buildActionBox">

        <xsl:with-param name="pageRecordType"
select="'actionBox.staffView.link'"/>

        <xsl:with-param name="moreActions" select="$moreActions"/>

    </xsl:call-template>
```

---

**Figure 28-12. Example modification to Action Box code in cl\_displayStaff**

---

11. Copy displaycfg.xml that is located in /ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/contentLayout/configs/ to displaybriefcfg.xml

12. Modify `displaybriefcfg.xml` with your preferences.
13. Make a backup copy of the `displayFacets.xml` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/pageFacets/`.
14. Modify existing code (see [Figure 28-13](#)) in `displayFacets.xml` with the code shown in [Figure 28-14](#).

---

```
<xsl:template name="buildActionBox">

  <xsl:param name="pageRecordType"/>
```

---

**Figure 28-13.** Existing `displayFacets` code

---

---

```
<xsl:template name="buildActionBox">

  <xsl:param name="pageRecordType"/>

  <xsl:param name="moreActions"/>
```

---

**Figure 28-14.** Modification example for `displayFacets` code

---

15. Add the code shown in [Figure 28-15](#) after the code shown in [Figure 28-16](#) in the `displayFacets.xml` file.

---

```
<xsl:copy-of select="$moreActions"/>
```

---

**Figure 28-15.** Example code to add to `displayFacets.xml`

---

```
<xsl:for-each select="page:element">

    <xsl:choose>

        <xsl:when test="@nameId=$pageRecordType">

            <li><span class="recordPointer">&#160;</span><label><xsl:value-of select="page:linkText"/></label></li>

        </xsl:when>

        <xsl:otherwise>

            <li><span class="recordLinkBullet">•</span><a href="{page:URL}"><span><xsl:value-of select="page:linkText"/></span></a></li>

        </xsl:otherwise>

    </xsl:choose>

</xsl:for-each>
```

---

**Figure 28-16.** Existing code in `displayFacets.xml`

16. Make a backup copy of the `web.xml` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/WEB-INF/`.
17. Add the code shown in [Figure 28-17](#) to `web.xml` after the last `<filter-mapping>` stanza that references `SelectSkin Filter` but before any other type of stanza.

```
<filter-mapping>

    <filter-name>SelectSkin Filter</filter-name>

    <url-pattern>/briefHoldingsView/*</url-pattern>

</filter-mapping>
```

**Figure 28-17. filter-mapping code example**

18. Add the code shown in [Figure 28-18](#) to `web.xml` after the last `<servlet-mapping>` stanza but before any other type of stanza.

```
<servlet-mapping>

    <servlet-name>BriefHoldingsInfoServlet</servlet-name>

    <url-pattern>/briefHoldingsInfo/*</url-pattern>

</servlet-mapping>
```

**Figure 28-18. servlet-mapping code example**

19. Add the code shown in [Figure 28-19](#) to `web.xml` after the last `<servlet>` stanza but before any other type of stanza.

```
<servlet>

    <servlet-name>BriefHoldingsInfoServlet</servlet-name>

    <display-name>BriefHoldingsInfoServlet</display-name>
```

**Figure 28-19. Example modification code for web.xml**

```
<servlet-class>

    com.endinfosys.voyager.webvoyage.servlet.PageServlet

</servlet-class>

<init-param>

    <param-name>PageCode</param-name>

    <param-value>briefHoldingsInfo</param-value>

</init-param>

<init-param>

    <param-name>PageClass</param-name>

    <param-
value>com.endinfosys.voyager.webvoyage.pages.HoldingsInfoPage</
param-value>

</init-param>

<init-param>

    <param-name>XSLTemplateName</param-name>

    <param-value>displayBriefRecord.xml</param-value>

</init-param>

<init-param>

    <param-name>Properties-Custom</param-name>

    <param-value>webvoyage</param-value>
```

---

**Figure 28-19. Example modification code for web.xml (Continued)**

```

</init-param>

<init-param>

    <param-name>Properties-Internal</param-name>

    <param-value>internal</param-value>

</init-param>

<init-param>

    <param-name>HelpPage</param-name>

    <param-value>holdingsInfo.html</param-value>

</init-param>

</servlet>

```

**Figure 28-19.** Example modification code for web.xml (Continued)

20. Add the code shown in [Figure 28-20](#) at the end of the following file:

```

/m1/shared/apache2/conf/ConfiguredVirtualHosts/
XXXdb.jkmounts.conf

```

```

JkMount /vwebv/bri* ajpl3_lb_XXXdb_vwebv

```

**Figure 28-20.** Example code to add to displayFacets.xsl

The `bri` in [Figure 28-20](#) matches the beginning of the name of the new brief holdings view (`briefHoldingsInfo`).

**NOTE:**

This change requires that Apache be restarted.

21. Save and test your changes.

**OPTIONAL:**

22. *Back out your changes, if necessary, by deploying your backup file copies.*
-



---

## **How Do I Implement DOI and URN Handling?**

# **29**

---

<b>DOI/URN Overview</b>	<b>29-1</b>
<b>Files</b>	<b>29-1</b>
<b>DOI/URN Implementation</b>	<b>29-1</b>
• webvoyage.properties	29-2



---

## How Do I Implement DOI and URN Handling?

# 29

---

### DOI/URN Overview

WebVoyáge can display links to URN and DOI resources in MARC records. URN stands for Uniform Resource Name, and DOI stands for Digital Object Identifier.

Unlike the URL (Uniform Resource Locator) address, the URN or DOI in the 856 field of the MARC record does not point directly to a digital item. Instead, they are routed through a handler server that maps them to the physical location of the digital item.

For information about entering URN or DOI links in the 856 field of a MARC record, see the *Voyager Cataloging User's Guide*.

---

### Files

WebVoyáge uses the `webvoyage.properties` file to implement the DOI/URN handling feature.

---

### DOI/URN Implementation

This section describes the WebVoyáge implementation for DOI/URN handling.

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/.
```

**webvoyage.properties**

---

To implement DOI and/or URN handling, you need to replace the `http://hdl.handle.net/` variable with the specific URL you want to replace DOI and/or URN when the MARC 856 field is processed. This variable is located in the `webvoyage.properties` file located in the following path:

```
/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/.
```

See [Table 29-1](#) for the default code/configuration provided at installation.

**Table 29-1. DOI/URN Implementation**

# Print property DOI and URN URL to convert the DOI and URN to the physical location
# of the digital item
#=====#
property.DOI=http://hdl.handle.net/
property.URN=http://hdl.handle.net/

**NOTE:**

If the DOI or URN variable is not configured, the DOI and/or URN is replaced by the default URL `http://<host>:<port>/vwebv`.

If there is an occurrence where both the DOI and URN exist, the URN takes priority over the DOI.

---

**How Do I Implement Hook to  
Holdings (Citation Server)?**

**30**

---

**Hook to Holdings Implementation**

**30-1**



---

## How Do I Implement Hook to Holdings (Citation Server)?

# 30

---

### Hook to Holdings Implementation

---

The Hook to Holdings functionality enables WebVoy  ge to display holdings data from the local database when a remote (zcit or vcit) database is searched. See [Figure 30-1](#) for a holdings display example. In [Figure 30-1](#), the portion of the display above the line is from a citation database; and the portion below the line is from the local database.

This is accomplished by comparing specified fields, typically the 022  a and 773  x, to determine if the value in the remote bibliographic record's field matches a value in the local bibliographic record's field. When a match exists the holdings data from the local bibliographic record is displayed with the remote citation database bibliographic data.

To implement this feature, the following needs to occur:

- A Hook to Holdings profile in Voyager System Administration needs to be created and linked to the citation database.
- The citation database needs to be defined as a remote database.

For additional information, see *Voyager Systems Administration User's Guide* and *Citation Server User's Guide*.

**Title:** The Kremlin power struggle.  
**Source:** World Press Review  
v. 43 (Dec. '96) p. 4  
**Page(s):** p. 4.  
**Digital Resources:** [FULL TEXT, HTML VERSION.](#)  
[FULL TEXT, PDF VERSION.](#)

---

**Location:** Main Collection  
**Call Number:** AP2 .A833  
**Status:** Not Charged  
**Recent Issues:** v. 47, no. 4 (2000 Apr.)  
v. 47, no. 3 (2000 Mar.)  
v. 47, no. 2 (2000 Feb.)  
v. 47, no. 1 (2000 Jan.)  
v. 46, no. 12 (1999 Dec.)  
v. 46, no. 11 (1999 Nov.)  
v. 46, no. 10 (1999 Oct.)  
v. 46, no. 9 (1999 Sept.)  
v. 46, no. 8 (1999 Aug.)  
v. 46, no. 7 (1999 July)  
v. 46, no. 6 (1999 June)  
v. 46, no. 5 (1999 May)  
v. 46, no. 4 (1999 Apr.)

---

**Figure 30-1. Hook to Holdings display example**



---

## **How Do I Implement HTTP Post to Link Resolver?**

# **31**

---

<b>HTTP POST to Link Resolver Overview</b>	<b>31-1</b>
<b>Files</b>	<b>31-1</b>
<b>HTTP POST to Link Resolver Implementation</b>	<b>31-1</b>
• voyager.ini	31-2
• linkresolver.properties	31-4
OpenURL Standard	31-6



---

## How Do I Implement HTTP Post to Link Resolver?

# 31

---

### HTTP POST to Link Resolver Overview

The HTTP POST to link resolver functionality sends a MARC bibliographic record to a designated link resolver.

The workflow for this function can be initiated in any Voyager client that allows MARC viewing. For example, the Voyager cataloging client can invoke link resolving with the **Record > Send Record To > Linkresolver** menu options when a MARC record is displayed.

### Files

---

The implementation of this feature uses the following configuration files:

- `linkresolver.properties`.
- `voyager.ini`.

### HTTP POST to Link Resolver Implementation

---

To implement the link resolver function, you need to configure the `linkresolver.properties` file that resides on the WebVoyage server and the `voyager.ini` file that resides on the client PC.

## **voyager.ini**

---

To configure the `voyager.ini` file, edit the `[MARC POSTing]` stanza. See [Figure 31-1](#) for an example.

```
[MARC POSTing]
WebVoyage="http://<host>:<port>/vwebv/holdingsInfo"
Redirect to link resolver="http://<host>:<port>/vwebv/linkResolver"
```

---

**Figure 31-1. voyager.ini configuration example**

The `[MARC POSTing]` stanza is designed to display the MARC record in WebVoyage when **Record > Send Record To > WebVoyage** is clicked or pass the record to a link resolver when **Record > Send Record To > Linkresolver** is clicked. See [Figure 31-2](#).

**NOTE:**

The link resolver function assumes that when a user accesses **Record > Send Record To > Linkresolver** from the staff client that the user is connected to the LOCAL database as defined in Voyager System Administration Database Definitions.

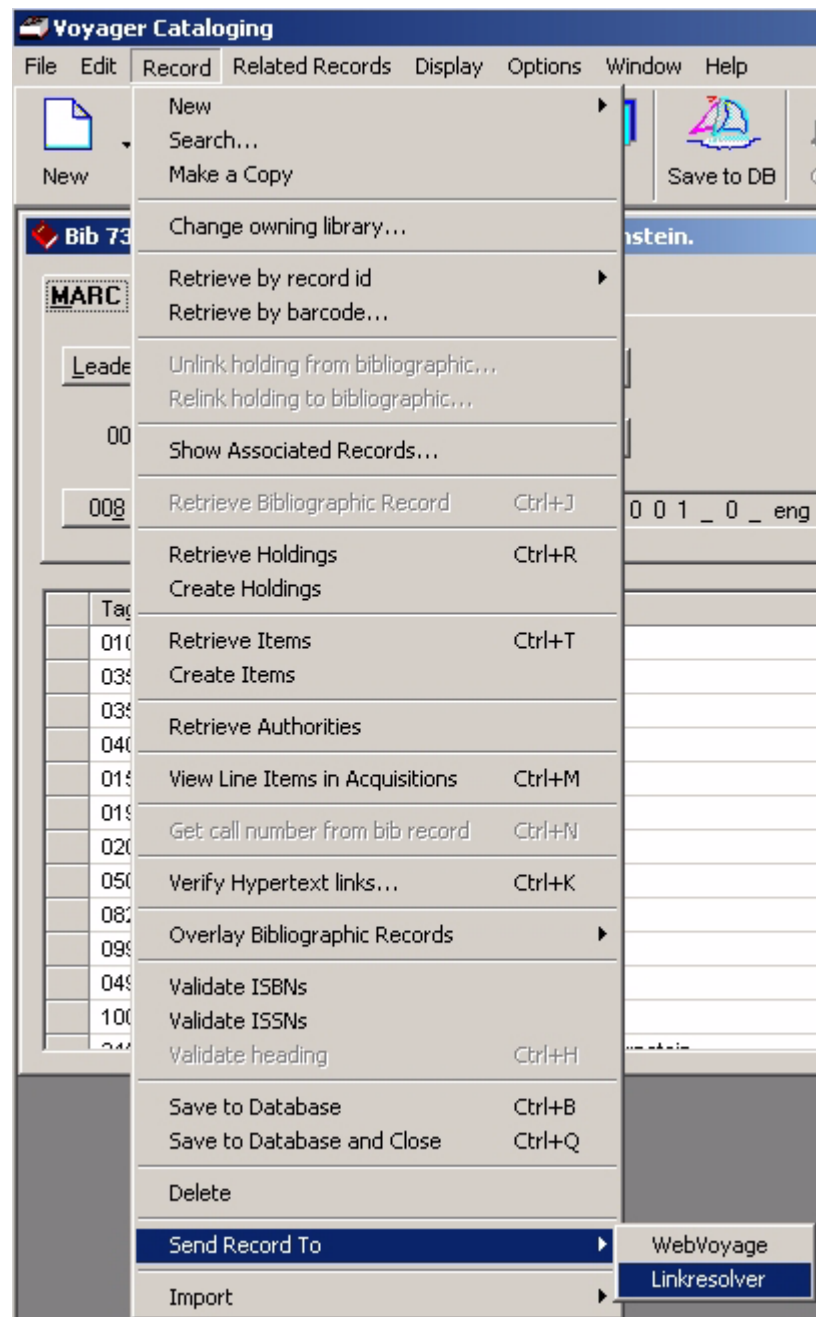


Figure 31-2. Linkresolver option example

## **linkresolver.properties**

---

The `linkresolver.properties` file is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/` where `xxxdb` is your database name. In the `linkresolver.properties` file, you need to do the following:

- Specify the root URL of your link resolver such as your SFX instance, for example. See [Figure 31-3](#).
- Identify the fields to be used for the OpenURL construction and how to parse them. See [Figure 31-4](#) for a citation database example.

```
openUrl.cfg.LOCAL.urlRoot=http://<host>:<port>/<SFX instance>
```

---

**Figure 31-3. Link Resolver URL example**

For each field identified (as in [Figure 31-4](#)), the following keys need to be specified:

- Field name.
- Tag/field number.
- Subfield.
- Length 1 (number of positions).
- Parse start.
- Parse end.
- Length 2 (number of positions).

In the [Figure 31-4](#) example, the following fields are defined:

- Title.
- Author's last name.
- Author's first name.
- Volume.
- Date/Year.
- Pages.
- ISSN.

```
openUrl.cfg.LOCAL.key1.key=title
openUrl.cfg.LOCAL.key1.tag=245
openUrl.cfg.LOCAL.key1.subfield=a
openUrl.cfg.LOCAL.key1.len1=0
openUrl.cfg.LOCAL.key1.parseStart=
openUrl.cfg.LOCAL.key1.parseEnd=
openUrl.cfg.LOCAL.key1.len2=0

openUrl.cfg.LOCAL.key2.key=aulast
openUrl.cfg.LOCAL.key2.tag=100
openUrl.cfg.LOCAL.key2.subfield=a
openUrl.cfg.LOCAL.key2.len1=0
openUrl.cfg.LOCAL.key2.parseStart=
openUrl.cfg.LOCAL.key2.parseEnd=,
openUrl.cfg.LOCAL.key2.len2=0

openUrl.cfg.LOCAL.key3.key=aufirst
openUrl.cfg.LOCAL.key3.tag=100
openUrl.cfg.LOCAL.key3.subfield=a
openUrl.cfg.LOCAL.key3.len1=0
openUrl.cfg.LOCAL.key3.parseStart=,
openUrl.cfg.LOCAL.key3.parseEnd=
openUrl.cfg.LOCAL.key3.len2=0

openUrl.cfg.LOCAL.key4.key=volume
openUrl.cfg.LOCAL.key4.tag=773
openUrl.cfg.LOCAL.key4.subfield=g
openUrl.cfg.LOCAL.key4.len1=0
openUrl.cfg.LOCAL.key4.parseStart=v.
openUrl.cfg.LOCAL.key4.parseEnd=p.
openUrl.cfg.LOCAL.key4.len2=0

openUrl.cfg.LOCAL.key6.key=date-year
openUrl.cfg.LOCAL.key6.tag=903
openUrl.cfg.LOCAL.key6.subfield=a
openUrl.cfg.LOCAL.key6.len1=4
```

**Figure 31-4. Example of fields/subfields identified**

```
openUrl.cfg.LOCAL.key6.parseStart=  
openUrl.cfg.LOCAL.key6.parseEnd=  
openUrl.cfg.LOCAL.key6.len2=0  
  
openUrl.cfg.LOCAL.key7.key=pages  
openUrl.cfg.LOCAL.key7.tag=773  
openUrl.cfg.LOCAL.key7.subfield=g  
openUrl.cfg.LOCAL.key7.len1=0  
openUrl.cfg.LOCAL.key7.parseStart=p.  
openUrl.cfg.LOCAL.key7.parseEnd=  
openUrl.cfg.LOCAL.key7.len2=0  
  
openUrl.cfg.LOCAL.key8.key=issn  
openUrl.cfg.LOCAL.key8.tag=773  
openUrl.cfg.LOCAL.key8.subfield=x  
openUrl.cfg.LOCAL.key8.len1=0  
openUrl.cfg.LOCAL.key8.parseStart=  
openUrl.cfg.LOCAL.key8.parseEnd=  
openUrl.cfg.LOCAL.key8.len2=0
```

**Figure 31-4. Example of fields/subfields identified (Continued)**

### OpenURL Standard

The OpenURL standard identifies the key fields available for use such as title, aulast, aufirst, and so on. WebVoyage follows the OpenURL standard for the HTTP POST to link resolver functionality. See the “ANSI/NISO Z39.88 - The OpenURL Framework for Context-Sensitive Services” standards document available at [www.niso.org](http://www.niso.org) that describes the OpenURL standard.



---

**How Do I Display Media Bookings in  
MyAccount?**

**32**

---

<b>Media Bookings Overview</b>	<b>32-1</b>
<b>Files</b>	<b>32-1</b>
<b>Media Bookings Implementation</b>	<b>32-2</b>



---

## How Do I Display Media Bookings in MyAccount?

# 32

---

### Media Bookings Overview

When configured, Media Scheduling bookings activity displays on My Account page in WebVoyage. A link is provided from Your Items action box to the following:

- Upcoming Bookings.
- Charged Bookings.

With this function, you can display and cancel active bookings.

**NOTE:**

Charged bookings may not be renewed or cancelled.

---

### Files

WebVoyage uses the `webvoyage.properties` file to implement the media bookings feature.

## Media Bookings Implementation

---

To implement the media bookings function, you need to configure the `webvoyage.properties` file that resides on the WebVoyage server. The `webvoyage.properties` file is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/` where `xxxdb` is your database name.

In the `webvoyage.properties` file, you need to do the following:

- Set the `option.mediaBookingsPatronInfoDisplay` parameter to `Y` (Yes). See [Figure 32-1](#).

```
option.mediaBookings.patronInfoDisplay=Y
```

---

**Figure 32-1. Media bookings parameter setting in WebVoyage**

- Set the `page.myAccount.mediaBookings.cancelAllowed` parameter to `Y` (Yes). See [Figure 32-2](#).

This is an optional setting.

This parameter causes the following to be displayed in the Upcoming Bookings section:

- Individual check box.
- Cancel All button.
- Reset button.

```
page.myAccount.mediaBookings.cancelAllowed=Y
```

---

**Figure 32-2. Media bookings cancel allowed parameter example**

- Modify label display and/or media bookings display options. See [Figure 32-3](#) for the default settings.

The `page.myAccount.mediaBookings.itemInfo` parameter may be set to the options in [Table 32-1](#).

```

page.myAccount.mediaBookings.upcomingBookings=Upcoming Bookings
page.myAccount.mediaBookings.chargedBookings=Charged Bookings

page.myAccount.mediaBookings.select.label=Select All:
page.myAccount.mediaBookings.select.option.all=All
page.myAccount.mediaBookings.cancel.all=Y
page.myAccount.mediaBookings.cancel.button=Cancel Selected Bookings
page.myAccount.mediaBookings.cancel.button.message=Cancel Selected Bookings
page.myAccount.mediaBookings.cancelBooking=Cancel Booking
page.myAccount.mediaBookings.startTime=Start Time
page.myAccount.mediaBookings.endTime=End Time
page.myAccount.mediaBookings.confirmationNumber=Confirmation Number
page.myAccount.mediaBookings.bookingType=Booking Type
page.myAccount.mediaBookings.room=Room
page.myAccount.mediaBookings.equipmentCount=Equipment Count
page.myAccount.mediaBookings.itemCount=Item Count
page.myAccount.mediaBookings.bookingType.pickup=Pickup
page.myAccount.mediaBookings.bookingType.delivery=Delivery
page.myAccount.mediaBookings.equipment=Equipment
page.myAccount.mediaBookings.items=Items
page.myAccount.mediaBookings.itemInfo=\\t

```

**Figure 32-3. Media bookings display options****Table 32-1. page.myAccount.mediaBookings.itemInfo options**

Options	Description
\t	the item's title
\i	the item's enumeration, chronology and year
\n	the item's copy number
\c	the item's call number
\b	the item's barcode
\l	the item's location

**Table 32-1. page.myAccount.mediaBookings.itemInfo options**

Options	Description
\a	the item's author

---

## How Do I Implement ImageServer in WebVoyage?

# 33

---

<b>WebVoyage ImageServer Overview</b>	<b>33-1</b>
<b>Files</b>	<b>33-1</b>
<b>ImageServer Implementation</b>	<b>33-2</b>
• display.xml	33-3
• resultsFacets.xml	33-3





---

## How Do I Implement ImageServer in WebVoyáge?

# 33

---

### WebVoyáge ImageServer Overview

For locations with ImageServer installed, WebVoyáge can retrieve and display thumbnail- or actual-resolution-size images. The thumbnail displays on the search results Titles page.

The scanned document (image) link is retrieved based on information stored in 856 $\dagger$ f. The 856 $\dagger$ z provides the description of the image that is highlighted on the search results Titles display.

**NOTE:**

If you have both ImageServer and a cover titles service installed, the cover image displays on the search results Titles page when there is both an ImageServer thumbnail image and cover image available to display.

---

### Files

WebVoyáge uses the following files to implement the ImageServer feature:

- webvoyage.properties.
- display.xsl.
- resultsFacets.xsl.

## ImageServer Implementation

---

To implement the ImageServer function in WebVoyáge, you need to configure the `webvoyage.properties` file that resides on the WebVoyáge server. The `webvoyage.properties` file is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/` where `xxxdb` is your database name.

In the `webvoyage.properties` file, you can activate and customize this feature for your site. See [Figure 33-1](#) and [Figure 33-2](#).

```
#=====
# Option to activate (True) or deactivate (False) thumbnail
# Default is deactivate thumbnail
#=====
# option.thumbnail.activate=False
option.thumbnail.activate=True
```

---

**Figure 33-1.** `webvoyage.properties` ImageServer configuration example

```
#=====
#
# Image Server cofiguration for link, thumbnail alter text
#
#=====
#imageServer.scanDoc=http://localhost:classicWebVoyagePort/cgi-bin/Pscandoc.cgi?
#imageServer.scandocAltText=Scan Document
#imageServer.thumbnailAltText=Thumbnail
#imageServer.loginRequiredText=**** Login Required ****
```

---

**Figure 33-2.** `webvoyage.properties` ImageServer configuration example



---

### Procedure 33-1. Implement ImageServer Function in WebVoyáge

---

To implement ImageServer function for WebVoyáge, do the following:

1. Confirm that the `option.thumbnail.activate` variable is active and set to the value of `True`. See [Figure 33-1](#).
  2. Remove any comment notation (`#`) to activate the `imageServer.<xxxxx>=` variables.
  3. Customize the `imageServer.scanDoc` variable to reflect your sites's URL or IP address of the server running scandoc and the port of the Classic WebVoyage.
  4. Save your changes to the `webvoyage.properties` file.
- 

### **display.xml**

---

The `display.xml` file is used to extract the 856 $\pm$ f to link to the image.

It is located in `/ml/voyager/xxxxdb/tomcat/vwebv/context/vwebv/ui/en_US/xml/contentLayout/display/` where `xxxxdb` is your database name.

### **resultsFacets.xml**

---

The `resultsFacets.xml` file provides the template to create the title result, jump bar, and so on for the search results Titles page.

It is located in `/ml/voyager/xxxxdb/tomcat/vwebv/context/vwebv/ui/en_US/xml/pageFacets/` where `xxxxdb` is your database name.



---

## **How Do I Implement Messages for Status Patron Groups?**

# **34**

---

<b>Overview of Messages for Status Patron Groups</b>	<b>34-1</b>
<b>Files</b>	<b>34-2</b>
<b>Instructions</b>	<b>34-2</b>



---

## How Do I Implement Messages for Status Patron Groups?


# 34

---

### Overview of Messages for Status Patron Groups

---

For each status patron group, you need to create an entry in `webvoyage.properties` that contains the code of the patron group defined in Voyager System Administration (see [Figure 34-1](#)) and the message to be displayed on the title and holdings pages. See [Implement Messages for Status Patron Groups](#) on [page 34-2](#) for the steps to do this.

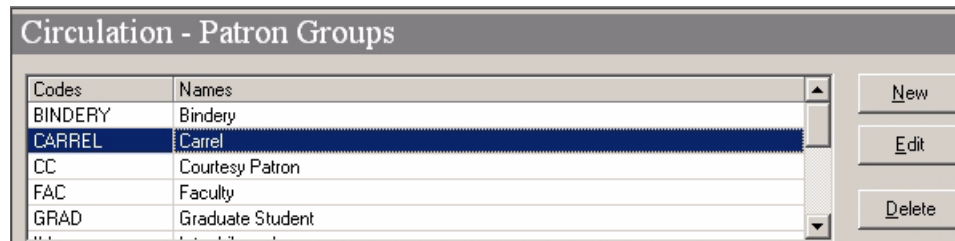

Codes	Names
BINDERY	Bindery
CARREL	Carrel
CC	Courtesy Patron
FAC	Faculty
GRAD	Graduate Student

---

**Figure 34-1.** Example of Patron Groups in Voyager System Administration

## Files

---

WebVoyáge uses the following file to implement messages for status patron groups:

- `webvoyage.properties`.

## Instructions

---

This section provides instructions for how to implement messages for status patron groups.



### Procedure 34-1. Implement Messages for Status Patron Groups

---

To implement messages for status patron groups that display on the title and holdings pages, do the following:

**NOTE:**

Directory path references to `xxxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

`/m1/voyager/xxxxdb/tomcat/vwebv/context/vwebv/ui/en_US/`

1. Make a backup copy of the `webvoyage.properties` file that is located in `/m1/voyager/xxxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/`.
2. Locate the status patron groups messages section of the `webvoyage.properties` file. See [Figure 34-2](#) for an example.

```
#####  
#  
# Status Patron Groups messages for display on title and holdings pages
```

---

**Figure 34-2. Example of status patron groups messages section**



```
#
#####
page.searchResults.titles.statusPatronGroup.GROUPCODE=Message for title page
page.myAccount.chargedItem.item.statusPatronGroup.GROUPCODE=Message for holdings charged
item
page.myAccount.reqPending.item.statusPatronGroup.GROUPCODE=Message for holdings with
request pending
```

**Figure 34-2. Example of status patron groups messages section (Continued)**

3. Edit the status patron groups messages section to include entries for each patron group defined in Voyager System Administration. See [Figure 34-3](#) for an example entry for the CARREL patron group code.

```
#####
#
# Status Patron Groups messages for display on title and holdings pages
#
#####
page.searchResults.titles.statusPatronGroup.CARREL=At the carrel
page.myAccount.chargedItem.item.statusPatronGroup.CARREL=At the carrel
page.myAccount.reqPending.item.statusPatronGroup.CARREL=At the carrel with requests pending
```

**Figure 34-3. Example of status patron groups messages customized**



**TIP:**

You may imbed substitution tokens in your messages as in `\i shelved at Carrel \W until \d`. See [Table 34-1](#) for a list of tokens.

**Table 34-1. Substitution Tokens**

Token	Description
\i	Standard item information.
\c	Outstanding number of requests.
\d	Date.

**Table 34-1. Substitution Tokens**

Token	Description
\\e	Date unless date is today.
\\t	Time.
\\u	Time if date is today.
\\l	Location.
\\F	First name field from the patron record.  <b>NOTE:</b> Only for patron status groups.
\\L	Last name field from the patron record.  <b>NOTE:</b> Only for patron status groups.
\\b	Number representing the limit for a certain item request/fine.
\\p	Number representing the amount of fines/requests that you have.
\\n	Item loan period.
\\rsloc	Routing Source Location. Routing source is the place where the item was discharged.
\\rslib	Routing Source Library. Routing source is the place where the item was discharged.
\\rtloc	Routing Target Location. Routing target is the destination.
\\rtlib	Routing Target Location. Routing target is the destination.

4. Save your changes to the `webvoyage.properties` file.
-

---

**How Do I Add/Modify Search  
Results Page Icons?**

**35**

---

<b>Add/Modify Search Results Page Icons Overview</b>	<b>35-1</b>
<b>Files</b>	<b>35-1</b>
<b>Instructions</b>	<b>35-1</b>



---

## How Do I Add/Modify Search Results Page Icons?

# 35

---

### Add/Modify Search Results Page Icons Overview

This chapter describes how to add or modify icons used on the search results page for various item types.

You can customize the labels and images (icons) for all item types with this capability.

### Files

WebVoyage uses the following file to implement icons for various item types on the search results page:

- `pageProperties.xml`.

### Instructions

This section provides instructions for how to implement icons for various item types on the search results page.



---

**Procedure 35-1. Add/Modify Search Results Page Icons**

---

To implement icons on the search results page, do the following:

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Make a backup copy of the `pageProperties.xml` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/xsl/userTextConfigs/`.
2. Locate the `<bibFormats>` section of the `pageProperties.xml` file. See [Figure 35-1](#) for an example.

---

```
<!-- ## This section defines the text and the icon to use (for results list
      icons) for bibFormat ## -->
<bibFormats>
  <bibFormat type="aa" icon="icon_book.gif">Book</bibFormat>
  <bibFormat type="ab" icon="icon_serial.gif">Periodical</bibFormat>
  <bibFormat type="ac" icon="icon_pamphlet.gif">Book</bibFormat>
  <bibFormat type="ad" icon="icon_book.gif">Book</bibFormat>
  <bibFormat type="am" icon="icon_book.gif">Book</bibFormat>
  <bibFormat type="as" icon="icon_serial.gif">Periodical</bibFormat>
  <bibFormat type="ba" icon="icon_manuscript.gif">Archival/Manuscript
    Material</bibFormat>
  <bibFormat type="bb" icon="icon_serial.gif">Periodical</bibFormat>
  <bibFormat type="bc" icon="icon_manuscript.gif">Archival/Manuscript
    Material</bibFormat>
```

---

**Figure 35-1. pageProperties <bibFormats> example**

---

```

<bibFormat type="bd" icon="icon_manuscript.gif">Archival/Manuscript
Material</bibFormat>

<bibFormat type="bm" icon="icon_manuscript.gif">Archival/Manuscript
Material</bibFormat>

<bibFormat type="bs" icon="icon_serial.gif">Periodical</bibFormat>

<bibFormat type="ca" icon="icon_music.gif">Music</bibFormat>

<bibFormat type="cb" icon="icon_serial.gif">Periodical</bibFormat>

```

**Figure 35-1.** pageProperties <bibFormats> example (Continued)

3. Edit the <bibFormats> section of the pageProperties.xml file to specify the following (see [Table 35-1](#)):

- The item type.
- The icon image file to be used.
- The label to display.

**Table 35-1.** <bibFormats> options

Option	Description
type=	Use to specify the item type.
icon=	Use to specify the name of the image.  <b>NOTE:</b> The images are located in /ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/images/bibFormat/.

4. Save your changes to the pageProperties.xml file.





---

**How Do I Modify the Renewal Status  
Messages?**

**36**

---

<b>Modify the Renewal Status Messages Overview</b>	<b>36-1</b>
<b>Files</b>	<b>36-1</b>
<b>Instructions</b>	<b>36-3</b>



---

## How Do I Modify the Renewal Status Messages?

# 36

---

### Modify the Renewal Status Messages Overview

---

This chapter describes how to modify renewal status messages.

You can customize the success/failure messages that display to patrons when a renewal is requested. See [Figure 36-1](#) on [page 36-2](#) and [Figure 36-2](#) on [page 36-3](#).

### Files

---

WebVoyage uses the following file to store renewal messages for display when patrons request renewals:

- `webvoyage.properties`.

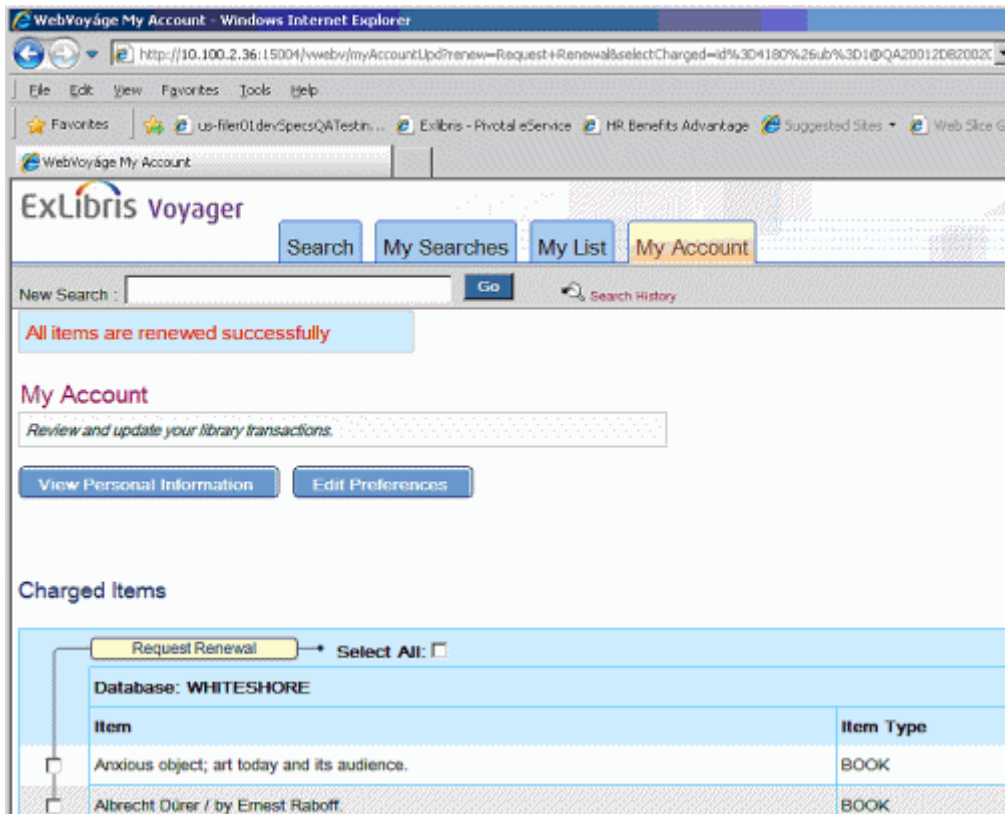


Figure 36-1. Renewal Status Message (Successful)

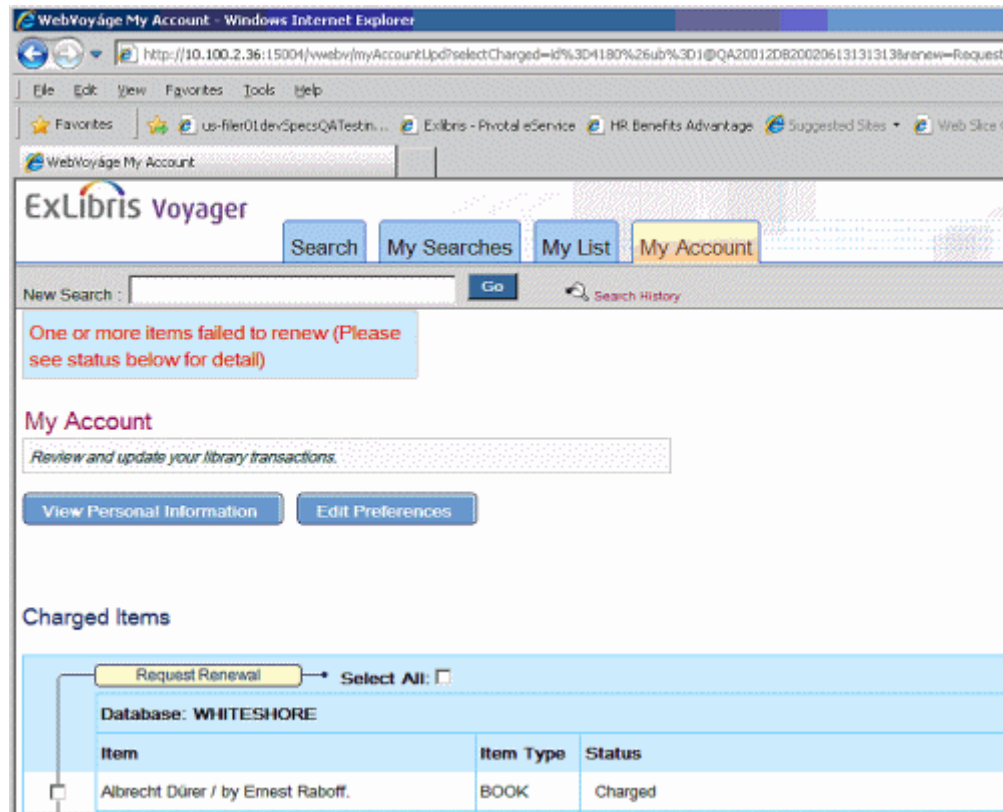


Figure 36-2. Renewal Status Message (Failed)

## Instructions

This section provides instructions for how to modify renewal status messages.



### Procedure 36-1. Modify Renewal Messages

To modify renewal status messages, do the following:

**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

`/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/`

1. Make a backup copy of the `webvoyage.properties` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/`.
2. Locate the MyAccount page charged item renewal message section of the `webvoyage.properties` file. See [Figure 36-3](#) for an example.

```
#####  
# MyAccount page charged item renewal status.  
# This status is displayed only after the renewal of item or items is performed  
#####  
page.myAccount.chargedItem.item.renewStatus.renewed=Renewed  
page.myAccount.chargedItem.item.renewStatus.notRenewed=Not Renewed  
  
#####  
# MyAccount page charged item renewal message.  
# This message is displayed only after the renewal of item or items is performed  
#####  
page.myAccount.chargedItem.item.renewMsg.success=All items are renewed successfully  
page.myAccount.chargedItem.item.renewMsg.fail=One or more items failed to renew (Please  
see status below for detail)
```

---

**Figure 36-3. Example of renewal status messages**

3. Edit the renewal status messages to your preference.
  4. Save your changes to the `webvoyage.properties` file.
-

---

**How Do I Add CGI Script Support?**

**37**

---

<b>Description For “How Do I Add CGI Script Support?”</b>	<b>37-1</b>
<b>Files</b>	<b>37-1</b>
<b>Instructions</b>	<b>37-1</b>





---

## How Do I Add CGI Script Support?

# 37

---

### Description For “How Do I Add CGI Script Support?”

---

This chapter describes how to add CGI script support for Voyager 7.x versions and later of WebVoyage.

### Files

---

This chapter uses the following files:

- `<xxxdb>_vwebv_httpd.conf`
- `apachectl`
- `helloworld.cgi`

### Instructions

---

This section provides the instructions for adding CGI script support by updating the existing WebVoyage virtual host.



### Procedure 37-1. Adding CGI Script Support

---

Use the following procedure to add CGI script support.

**NOTE:**

Directory path references to `<xxxdb>` implies that you need to substitute your database path name that can be found in the `/m1/voyager/directory`.

1. Login to the server as the root user.

```
su -
```

2. Change the directory to the Apache `ActivatedVirtualHosts` directory.

```
cd /m1/shared/apache2/conf/ActivatedVirtualHosts
```

3. Backup up the original file.

```
cp <xxxdb>_vwebv_httpd.conf ../ConfiguredVirtualHosts/  
<xxxdb>_vwebv_httpd.conf.$$
```

4. Edit the file.

```
vi <xxxdb>_vwebv_httpd.conf
```

5. Add the text shown in [Figure 37-1](#) to the existing virtual host:

```
JkUnMount /vwebv/*.cgi ajp13_lb_<db>_vwebv  
  
ScriptAlias /vwebv/cgi-bin/ /m1/voyager/<db>/tomcat/vwebv/  
context/vwebv/htdocs/cgi-bin
```

```

Listen xxx
<VirtualHost *:xxxx>
...
    JkUnMount /vwebv/*.cgi ajpl3_lb_<db>_vwebv
    ScriptAlias /vwebv/cgi-bin/ /ml/voyager/<db>/tomcat/vwebv/context/vwebv/
        htdocs/cgi-bin/
</VirtualHost>

```

**Figure 37-1. Text to Add to Existing Virtual Host**

6. Check to ensure that the configuration is okay.

```

cd /ml/shared/apache2/bin

./apachectl -t

```

7. Restart Apache.

```

./apachectl restart

```

8. Log in to the server as the voyager user.

```

su - voyager

```

9. Make the cgi-bin directory.

```

cd /ml/voyager/<db>/tomcat/vwebv/context/vwebv/htdocs

mkdir cgi-bin

```

10. Create a sample .cgi script to test.

```

cd /ml/voyager/<db>/tomcat/vwebv/context/vwebv/htdocs/cgi-
bin

vi helloworld.cgi

```

11. Add the code shown in [Figure 37-2](#) to the helloworld.cgi file.

```
#!/ml/shared/bin/perl

print "Content-type: text/html\n\n";
print "Hello, world!\n";
```

---

**Figure 37-2. Code to Add to helloworld.cgi**

12. Type :wq! to quit.

13. Make the script executable.

```
chmod 755 helloworld.cgi
```

14. Test the CGI functionality by entering the following URL in your Web browser:

```
http://<ip|name>:xxxx/vwebv/cgi-bin/helloworld.cgi
```

This should open a page that displays Hello World.

Any errors means that setup was not successfully

**OPTIONAL:**

15. *Back out your changes, if necessary, by deploying your backup file copies.*
-

---

**How Do I Suppress Patron Barcode/  
ID Prompts on Request Forms?**

**38**

---

<b>Description For “How Do I Suppress Patron Barcode/ID Prompts on Request Forms?”</b>	<b>38-1</b>
<b>Files</b>	<b>38-2</b>
<b>Instructions</b>	<b>38-2</b>



---

## How Do I Suppress Patron Barcode/ ID Prompts on Request Forms?

# 38

---

### Description For “How Do I Suppress Patron Barcode/ID Prompts on Request Forms?”

---


This chapter describes how to suppress patron barcode/ID prompts on request forms using the `page.patronRequests.idPrompt` feature in the `webvoyage.properties` file. With this feature, the patron barcode/ID request prompt (see [Figure 38-1](#)) can be optional on the patron request page.

When the patron barcode/ID prompt is suppressed, Voyager checks all of the patron’s barcodes to determine if the patron is allowed to place the request for the item.

#### NOTE:

When the following methods are used for authentication, the `page.patronRequests.idPrompt` feature is ignored and the barcode/ID prompt is not shown like when N (see [Procedure 38-1, Suppressing Patron Barcode/ID Prompts on Request Forms](#), on page [38-2](#)) is selected for `page.patronRequests.idPrompt`:

- Patron Directory Services (PDS)
- WebVoyage patron authentication adapter
- External site authentication through vxws services

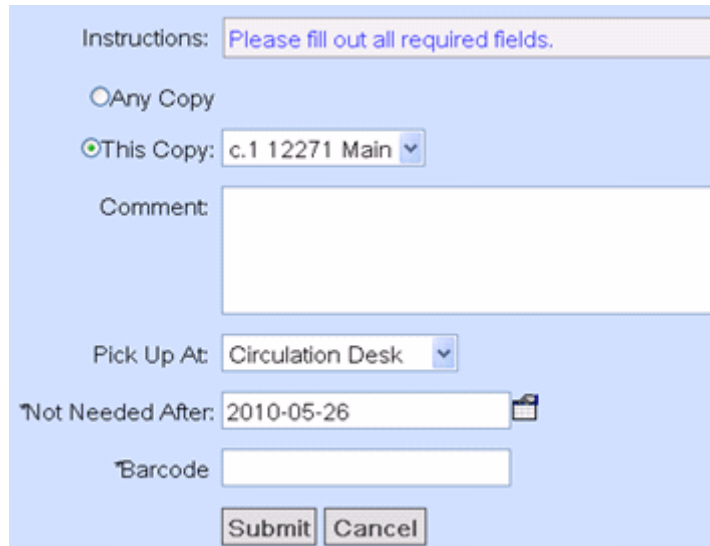A screenshot of a web form titled "Barcode Prompt Example". The form has a light blue background. At the top, there is an "Instructions:" label followed by a text box containing "Please fill out all required fields." Below this, there are two radio buttons: "Any Copy" (unselected) and "This Copy:" (selected). The "This Copy:" radio button is followed by a dropdown menu showing "c.1 12271 Main". Below the radio buttons is a "Comment:" label followed by a large text area. Further down, there is a "Pick Up At:" label followed by a dropdown menu showing "Circulation Desk". Below that is a "Not Needed After:" label followed by a date input field showing "2010-05-26" and a calendar icon. At the bottom, there is a "Barcode:" label followed by a text input field. Finally, there are two buttons: "Submit" and "Cancel".

**Figure 38-1. Barcode Prompt Example**

## Files

---

This chapter uses the following file:

- `webvoyage.properties`.

## Instructions

---

This section provides the instructions for suppressing patron barcode/ID prompts on request forms.



### **Procedure 38-1. Suppressing Patron Barcode/ID Prompts on Request Forms**

---

Use the following procedure to suppress patron barcode/ID prompts on request forms.



**NOTE:**

Directory path references to `xxxdb` implies that you need to substitute your database path name; and where `[skin]` is referenced, substitute the path name that is used at your site. The default skin path provided is `en_US` as in the following:

```
/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/en_US/
```

1. Make a backup copy of the `webvoyage.properties` file that is located in `/ml/voyager/xxxdb/tomcat/vwebv/context/vwebv/ui/[skin]/`.
2. Locate the `page.patronRequests.idPrompt` section of the `webvoyage.properties` file. See [Figure 38-2](#).

```
#####  
# Patron Requests  barcode/IID input:  
# There are two options for the value page.patronRequests.idPrompt.  
# Y = Show the barcode or Institution ID prompt on the request page, and make it mandatory  
# N = Do not show the barcode or Institution ID prompt on the request page at all.  
#####  
page.patronRequests.idPrompt=Y
```

**Figure 38-2.** `page.patronRequests.idPrompt` Section in `webvoyage.properties`

3. Enter `N` to suppress the barcode/ID prompt on the patron request page.

The default setting is `Y`.

4. Save the `webvoyage.properties` file.



# Index

## A

Advanced Search, [2-7](#)  
 architecture overview, [2-1](#)  
 Author Search, [2-10](#)  
 auto complete  
   disable, [14-1](#)

## B

Basic Search, [2-5](#)  
 bibliographic record  
   relationship  
     displaying in WebVoy ge, [6-2](#)  
     maintaining, [6-2](#)  
 buildBasicSearch, [13-7](#)  
 buildContent, [2-3](#)  
 buildCoverImage, [21-6](#)  
 buildCoverImageLinks, [21-7](#)  
 buildHtmlPage, [2-3](#), [15-2](#)  
 buildMarcDisplay, [18-3](#)  
 buildResultsCoverImage, [21-3](#)  
 buildSearchButtons, [16-5](#)

## C

Cataloging module  
   Related Records  
     maintaining, [6-2](#)  
 CGI, [37-1](#)  
 Charged Bookings, [32-1](#)  
 cl\_displayRecord.xml, [8-1](#), [8-5](#), [8-7](#), [8-8](#), [17-1](#), [17-4](#),  
   [17-5](#), [28-1](#), [28-3](#), [28-4](#)  
 cl\_displayStaff.xml, [28-1](#), [28-5](#)  
 cl\_myAccount.xml, [2-3](#), [10-1](#), [10-2](#), [10-3](#)  
 cl\_searchAdvanced.xml, [2-8](#), [16-1](#), [16-5](#), [16-6](#)  
 cl\_searchAuthor.xml, [2-11](#)  
 cl\_searchBasic.xml, [2-6](#), [13-1](#), [13-7](#), [13-9](#)

cl\_searchCourseReserves.xml, [2-13](#)  
 cl\_searchGeoCorridor.xml, [2-14](#)  
 cl\_searchGeoPolygon.xml, [2-14](#)  
 cl\_searchGeoRadius.xml, [2-14](#)  
 cl\_searchGeoRange.xml, [2-14](#)  
 cl\_searchGeoRectangle.xml, [2-14](#)  
 cl\_searchSubject.xml, [2-10](#)  
 constants.xml, [2-6](#), [2-8](#), [2-9](#), [2-11](#), [2-12](#), [2-14](#)  
 constantStrings.xml, [2-6](#), [2-8](#), [2-9](#), [2-11](#), [2-12](#), [2-14](#)  
 Course Reserves, [2-12](#)  
 CSS files  
   displayCommon.css, [17-1](#), [17-5](#), [18-5](#)  
   displayGoogleBooks.css, [20-1](#), [20-3](#)  
   frameWork.css, [2-5](#), [2-6](#), [2-7](#), [2-8](#), [2-9](#), [2-10](#), [2-11](#), [2-12](#), [2-13](#), [2-14](#), [2-15](#)  
   header.css, [2-5](#), [2-6](#), [2-8](#), [2-9](#), [2-11](#), [2-13](#), [2-14](#)  
   myAccount.css, [2-3](#), [2-5](#)  
   pageProperties.css, [2-5](#), [2-6](#), [2-7](#), [2-8](#), [2-9](#), [2-10](#),  
   [2-11](#), [2-13](#), [2-14](#), [2-15](#)  
   quickSearchBar.css, [2-5](#), [2-6](#), [2-8](#), [2-9](#), [2-11](#), [2-13](#), [2-14](#)  
   searchAdvanced.css, [2-8](#), [16-1](#), [16-4](#), [16-6](#)  
   searchAuthor.css, [2-11](#)  
   searchBasic.css, [2-7](#)  
   searchCourseReserve.css, [2-13](#)  
   searchGeospatial.css, [2-15](#)  
   searchPages.css, [2-7](#), [2-8](#), [2-10](#), [2-11](#), [2-13](#), [2-14](#), [2-15](#)  
   searchSubject.css, [2-10](#)

## D

default page, [25-3](#)  
 display cover images  
   Syndetics Solutions, [21-1](#)  
 display media bookings, [32-1](#)  
 display.xml, [11-1](#), [11-4](#), [11-5](#), [18-1](#), [18-2](#), [18-5](#), [21-2](#),  
   [21-6](#), [33-1](#), [33-3](#)  
 displaycfg.xml, [7-1](#), [8-1](#), [18-1](#), [18-2](#), [18-5](#), [21-1](#), [21-6](#), [28-1](#), [28-6](#)  
 displayChargedItems, [10-2](#)  
 displayCommon.css, [17-1](#), [17-5](#), [18-5](#)  
 displayFacets.xml, [12-1](#), [12-4](#), [12-5](#), [20-1](#), [20-3](#), [20-4](#),  
   [28-1](#), [28-7](#)  
 displayGoogleBooks.css, [20-1](#), [20-3](#)  
 displayHoldings.xml, [7-2](#)  
 displayRecord.xml, [2-2](#), [21-2](#), [21-7](#), [28-1](#), [28-2](#)

---

## E

eLink data, [4-16](#)  
external authentication, [23-1](#)

---

## F

favicon, [15-1](#)  
flowchart, [2-4](#)  
footer static links, [9-1](#)  
footer.xsl, [9-1](#), [9-4](#), [9-5](#), [19-1](#), [19-2](#), [19-4](#)  
formInput.xsl, [2-6](#), [2-8](#), [2-9](#), [2-11](#), [2-12](#), [2-14](#)  
frameWork.css, [2-5](#), [2-6](#), [2-7](#), [2-8](#), [2-9](#), [2-10](#), [2-11](#), [2-12](#), [2-13](#), [2-14](#), [2-15](#)  
frameWork.xsl, [2-3](#), [2-6](#), [2-8](#), [2-9](#), [2-11](#), [2-12](#), [2-14](#), [15-1](#), [15-2](#), [15-3](#)

---

## G

Geospatial Search, [2-14](#)  
geospatial search  
    search  
        geospatial, [22-1](#)  
Getting Started, [1-1](#)  
    prerequisite skills and knowledge, [1-1](#)  
Google Book Search, [20-1](#)  
googleBooksAvail, [20-2](#), [20-3](#)  
googleBooksAvail.js, [20-1](#), [20-2](#)

---

## H

header static links, [9-1](#)  
header.css, [2-5](#), [2-6](#), [2-8](#), [2-9](#), [2-11](#), [2-13](#), [2-14](#)  
header.xsl, [9-1](#), [9-2](#), [9-3](#), [9-4](#)  
holdingsInfo.vbib.properties, [5-3](#)  
holdingsInfo.vcit.properties, [5-3](#)  
holdingsInfo.zbib.properties, [5-3](#)  
holdingsInfo.zcit.properties, [5-3](#)

---

## I

ImageServer, [33-1](#)  
imageUtils.js, [21-1](#), [21-4](#), [21-5](#), [21-7](#)  
index.html, [25-3](#)  
internal.properties, [26-1](#), [26-2](#), [27-1](#), [27-3](#)

---

## J

JavaScript files  
    googleBooksAvail.js, [20-1](#), [20-2](#)  
    imageUtils.js, [21-1](#), [21-4](#), [21-5](#), [21-7](#)  
    pageInputFocus.js, [2-7](#), [2-8](#), [2-9](#), [2-10](#), [2-11](#), [2-12](#), [2-13](#), [2-15](#)

---

## L

limits  
    dynamically disable, [13-1](#)  
    hide on Advanced Search page, [16-1](#)  
linkresolver.properties, [5-3](#)  
local\_googleBooksAvail.xsl, [20-1](#), [20-2](#)  
login.xsl, [14-1](#), [14-2](#), [14-3](#)

---

## M

media bookings, [32-1](#)  
messages  
    no hits search results, [24-1](#)  
messages for status patron groups, [34-2](#)  
modify page messages, [24-1](#)  
myAccount.css, [2-3](#), [2-5](#)  
myAccount.xsl, [2-2](#), [2-3](#)  
myAccountLinks.xsl, [2-3](#)

---

---

## N

no hits search results message, [24-1](#)

---

## P

page  
     remove information, [10-1](#)  
 page components  
     Advanced Search, [2-7](#)  
     Author Search, [2-10](#)  
     Basic Search, [2-5](#)  
     Course Reserves, [2-12](#)  
     Geospatial Search, [2-14](#)  
     Subject Search, [2-9](#)  
 page.patronRequests.idPrompt, [38-1](#)  
 pageInputFocus.js, [2-7](#), [2-8](#), [2-9](#), [2-10](#), [2-11](#), [2-12](#), [2-13](#), [2-15](#)  
 pageMessages, [24-1](#)  
 pageProperties.css, [2-5](#), [2-6](#), [2-7](#), [2-8](#), [2-9](#), [2-10](#), [2-11](#), [2-13](#), [2-14](#), [2-15](#)  
 pageProperties.xml, [13-1](#), [13-6](#), [21-1](#), [21-2](#), [21-3](#), [22-1](#), [24-2](#), [24-3](#), [25-2](#), [26-1](#), [26-2](#), [27-1](#), [27-2](#), [35-1](#), [35-2](#)  
 Patron Directory Services, [3-1](#)  
 PDS, [3-1](#)  
 persistent link, [17-1](#)  
 prerequisites, [1-1](#)

---

## Q

quickSearchBar.css, [2-5](#), [2-6](#), [2-8](#), [2-9](#), [2-11](#), [2-13](#), [2-14](#)

---

## R

record display page  
     change format, [18-1](#)  
 Related Records  
     Cataloging module

    maintaining, [6-2](#)  
     display in WebVoyage, [6-2](#)  
 resultsFacets.xml, [21-1](#), [21-3](#), [33-1](#), [33-3](#)  
 resultsTitles.xml, [21-1](#), [21-4](#)

---

## S

search tips  
     dynamically change, [13-1](#)  
 searchAdvanced.css, [2-8](#), [16-1](#), [16-4](#), [16-6](#)  
 searchAuthor.css, [2-11](#)  
 searchBasic.css, [2-7](#)  
 searchCourseReserve.css, [2-13](#)  
 searchFacets.xml, [2-7](#), [2-8](#), [2-10](#), [2-11](#), [2-13](#), [2-14](#), [14-1](#), [14-2](#), [14-3](#)  
 searchGeospatial.css, [2-15](#)  
 searchPages.css, [2-7](#), [2-8](#), [2-10](#), [2-11](#), [2-13](#), [2-14](#), [2-15](#)  
 searchSubject.css, [2-10](#)  
 serials  
     separate display for, [8-1](#)  
 stdImports.xml, [2-3](#)  
 Subject Search, [2-9](#)  
 suppress patron barcode/ID prompts, [38-1](#)  
 Syndetics Solutions, [21-1](#)

---

## T

templates  
     buildBasicSearch, [13-7](#)  
     buildContent, [2-3](#)  
     buildCoverImage, [21-6](#)  
     buildCoverImageLinks, [21-7](#)  
     buildHtmlPage, [2-3](#), [15-2](#)  
     buildMarcDisplay, [18-3](#)  
     buildResultsCoverImage, [21-3](#)  
     buildSearchButtons, [16-5](#)  
     displayChargedItems, [10-2](#)  
     googleBooksAvail, [20-2](#), [20-3](#)  
     trimData, [21-3](#)  
 tools.xml, [2-6](#), [2-8](#), [2-9](#), [2-11](#), [2-12](#), [2-14](#)  
 tracking codes  
     add, [19-1](#)  
 trimData, [21-3](#)

---

## U

Upcoming Bookings, 32-1

---

## W

web.xml, 28-1, 28-8, 28-9

WebVoyage

displaying Related Records, 6-2

webvoyage.properties, 2-7, 2-8, 2-10, 2-11, 2-13, 2-15, 22-1, 22-2, 23-1, 23-2, 26-1, 26-2, 27-1, 27-2, 32-1, 32-2, 33-1, 33-2, 34-2, 36-1, 36-4, 38-2, 38-3

---

## X

XML files

displaycfg.xml, 7-1, 8-1, 18-1, 18-2, 18-5, 21-1, 21-6, 28-1, 28-6

displayHoldings.xml, 7-2

pageProperties, 35-1

pageProperties.xml, 13-1, 13-6, 21-1, 21-2, 21-3, 22-1, 24-2, 24-3, 25-2, 26-1, 26-2, 27-1, 27-2, 35-2

web.xml, 28-1, 28-8, 28-9

XSL files

cl\_displayRecord.xsl, 8-1, 8-5, 8-7, 8-8, 17-1, 17-4, 17-5, 28-1

cl\_displayStaff.xsl, 28-1, 28-5

cl\_myAccount.xsl, 2-3, 10-1, 10-2, 10-3

cl\_searchAdvanced.xsl, 2-8, 16-1, 16-5, 16-6

cl\_searchAuthor.xsl, 2-11

cl\_searchBasic.xsl, 2-6, 13-1, 13-7, 13-9

cl\_searchCourseReserves.xsl, 2-13

cl\_searchGeoCorridor.xsl, 2-14

cl\_searchGeoPolygon.xsl, 2-14

cl\_searchGeoRadius.xsl, 2-14

cl\_searchGeoRange.xsl, 2-14

cl\_searchGeoRectangle.xsl, 2-14

cl\_searchSubject.xsl, 2-10

constants.xsl, 2-6, 2-8, 2-9, 2-11, 2-12, 2-14

constantStrings.xsl, 2-6, 2-8, 2-9, 2-11, 2-12, 2-14

display.xsl, 11-1, 11-4, 11-5, 18-1, 18-2, 18-5,

21-2, 21-6, 33-1, 33-3

displayFacets.xsl, 12-1, 12-4, 12-5, 20-1, 20-3, 20-4, 28-1, 28-7

displayRecord.xsl, 2-2, 21-2, 21-7, 28-1, 28-2, 28-3, 28-4

footer.xsl, 9-1, 9-4, 9-5, 19-1, 19-2, 19-4

formInput.xsl, 2-6, 2-8, 2-9, 2-11, 2-12, 2-14

frameWork.xsl, 2-3, 2-6, 2-8, 2-9, 2-11, 2-12, 2-14, 15-1, 15-2, 15-3

header.xsl, 9-1, 9-2, 9-3, 9-4

local\_googleBooksAvail.xsl, 20-1, 20-2

login.xsl, 14-1, 14-2, 14-3

myAccount.xsl, 2-2, 2-3

myAccountLinks.xsl, 2-3

resultsFacets, 33-1

resultsFacets.xsl, 21-1, 21-3, 33-3

resultsTitles, 21-1, 21-4

searchFacets.xsl, 2-7, 2-8, 2-10, 2-11, 2-13, 2-14, 14-1, 14-2, 14-3

stdImports.xsl, 2-3

tools.xsl, 2-6, 2-8, 2-9, 2-11, 2-12, 2-14