

Deep Learning: Convolutional Neural Networks

```
$ echo "Data Sciences Institute"
```

Introduction: Why ConvNets?

- **Fully Connected Networks Challenges:**
 - High dimensionality of inputs (e.g., images)
 - Loss of spatial structure when flattening inputs
- **Convolutional Neural Networks (CNNs):**
 - Address high-dimensional input challenges
 - Preserve spatial structure through local receptive fields and parameter sharing
 - Efficient for image recognition and beyond due to reduced parameter count and computational efficiency

Used everywhere for Vision



[Krizhevsky 2012]



[Ciresan et al. 2013]



[Faster R-CNN - Ren 2015]




[NVIDIA dev blog]

Many other applications

- Speech recognition & speech synthesis
- Natural Language Processing
- Protein/DNA binding prediction
- Any problem with a spatial (or sequential) structure

ConvNets for image classification

CNN = Convolutional Neural Networks = ConvNet

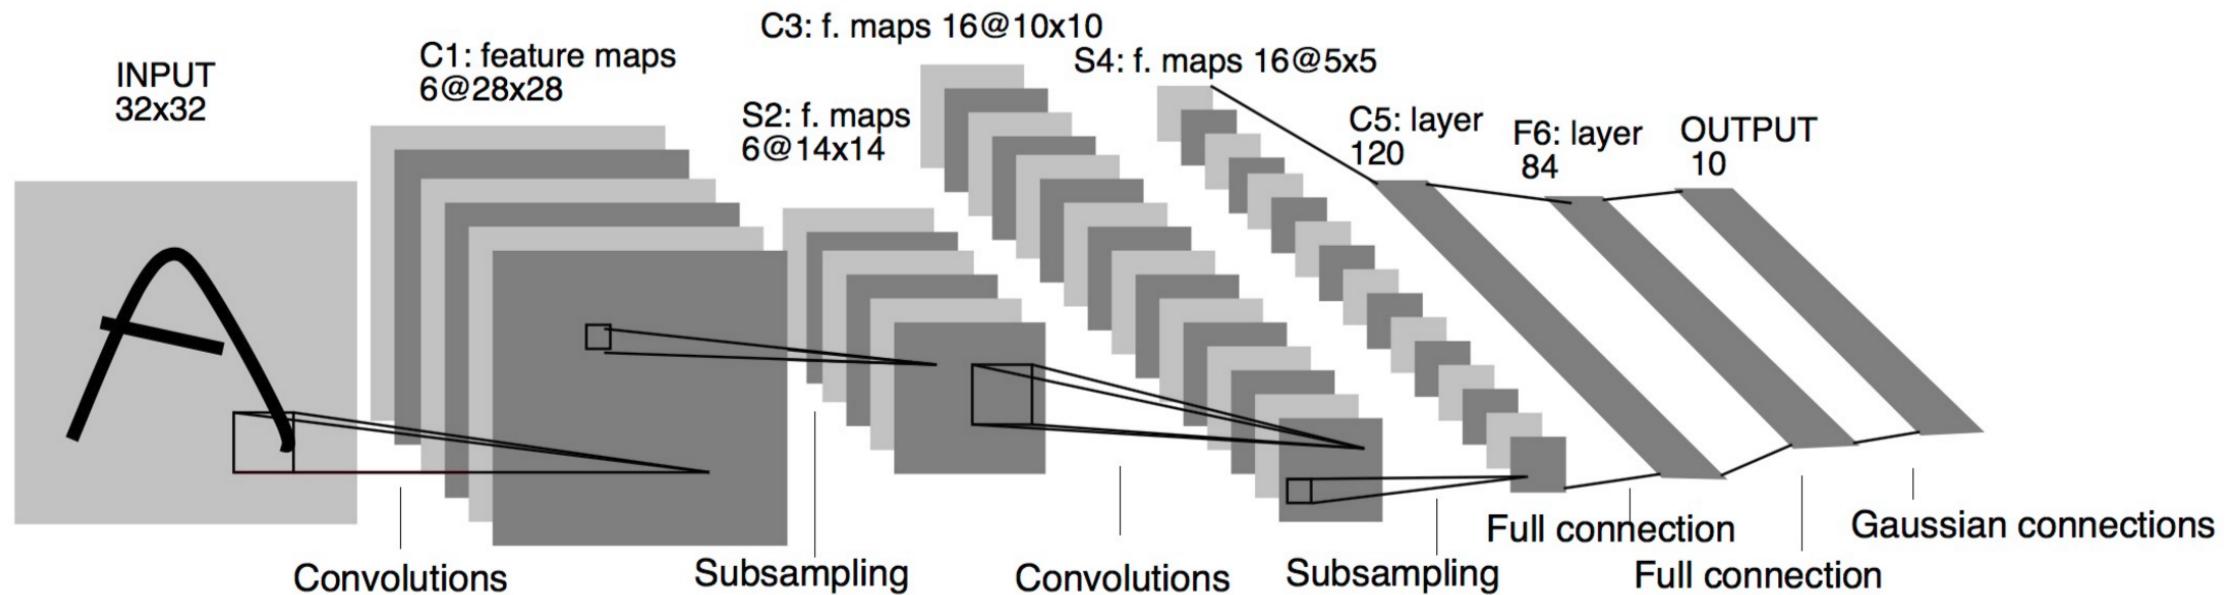

LeCun, Y., Bottou, L., Bengio, Y., and Haffner, P. (1998). Gradient-based learning applied to document recognition.

Outline

- Convolutions
- CNNs for Image Classification
- CNN Architectures

Convolutions

Motivations

Standard Dense Layer for an image input:

```
x = Input((640, 480, 3), dtype='float32')
# shape of x is: (None, 640, 480, 3)
x = Flatten()(x)
# shape of x is: (None, 640 x 480 x 3)
z = Dense(1000)(x)
```

How many parameters in the Dense layer?

$$640 \times 480 \times 3 \times 1000 + 1000 = 922M!$$

Spatial organization of the input is destroyed by `Flatten`

Fully Connected Network: MLP


```
input_image = Input(shape=(28, 28, 1))
x = Flatten()(input_image)
x = Dense(256, activation='relu')(x)
x = Dense(10, activation='softmax')(x)
mlp = Model(inputs=input_image, outputs=x)
```

Convolutional Network

```
input_image = Input(shape=(28, 28, 1))
x = Conv2D(32, 5, activation='relu')(input_image) # 
x = MaxPool2D(2, strides=2)(x) # 
x = Conv2D(64, 3, activation='relu')(x) # 
x = MaxPool2D(2, strides=2)(x) # 
x = Flatten()(x)
x = Dense(256, activation='relu')(x)
x = Dense(10, activation='softmax')(x)
convnet = Model(inputs=input_image, outputs=x)
```

2D spatial organization of features preserved until `Flatten`

Convolution in a neural network

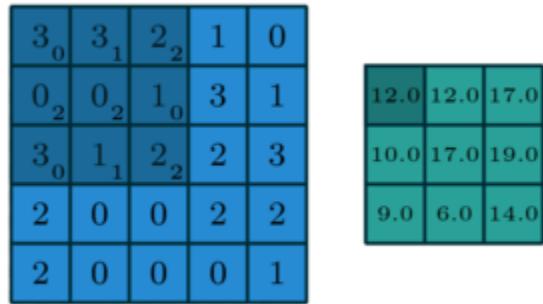

- x is a 3×3 chunk (dark area) of the image (*blue array*)
- Each output neuron is parametrized with the 3×3 weight matrix w _(small numbers)

These slides extensively use convolution visualization by V.Dumoulin available at https://github.com/vdumoulin/conv_arithmetic

Convolution in a neural network

3 ₀	3 ₁	2 ₂	1	0
0 ₂	0 ₂	1 ₀	3	1
3 ₀	1 ₁	2 ₂	2	3
2	0	0	2	2
2	0	0	0	1

12.0	12.0	17.0
10.0	17.0	19.0
9.0	6.0	14.0

- x is a 3×3 chunk (dark area) of the image (*blue array*)
- Each output neuron is parametrized with the 3×3 weight matrix \mathbf{w} _(small numbers)

The activation obtained by sliding the 3×3 window and computing:

$$z(x) = \text{relu}(\mathbf{w}^T x + b)$$

Motivations

Local connectivity

- A neuron depends only on a few local input neurons
- Translation invariance

Comparison to Fully connected

- Parameter sharing: reduce overfitting
- Make use of spatial structure: **strong prior** for vision!


Animal Vision Analogy

Hubel & Wiesel, RECEPTIVE FIELDS OF SINGLE NEURONES IN THE CAT'S STRIATE CORTEX (1959)


Channels

Colored image = tensor of shape (height, width, channels)


Convolutions are usually computed for each channel and summed:

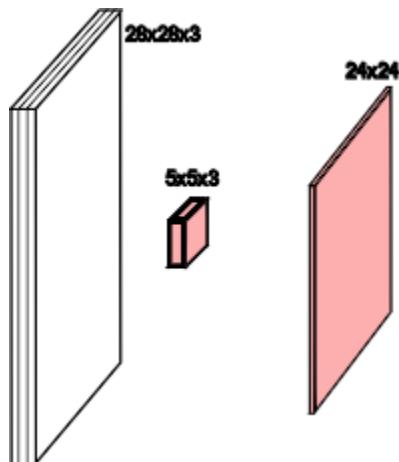


Multiple convolutions

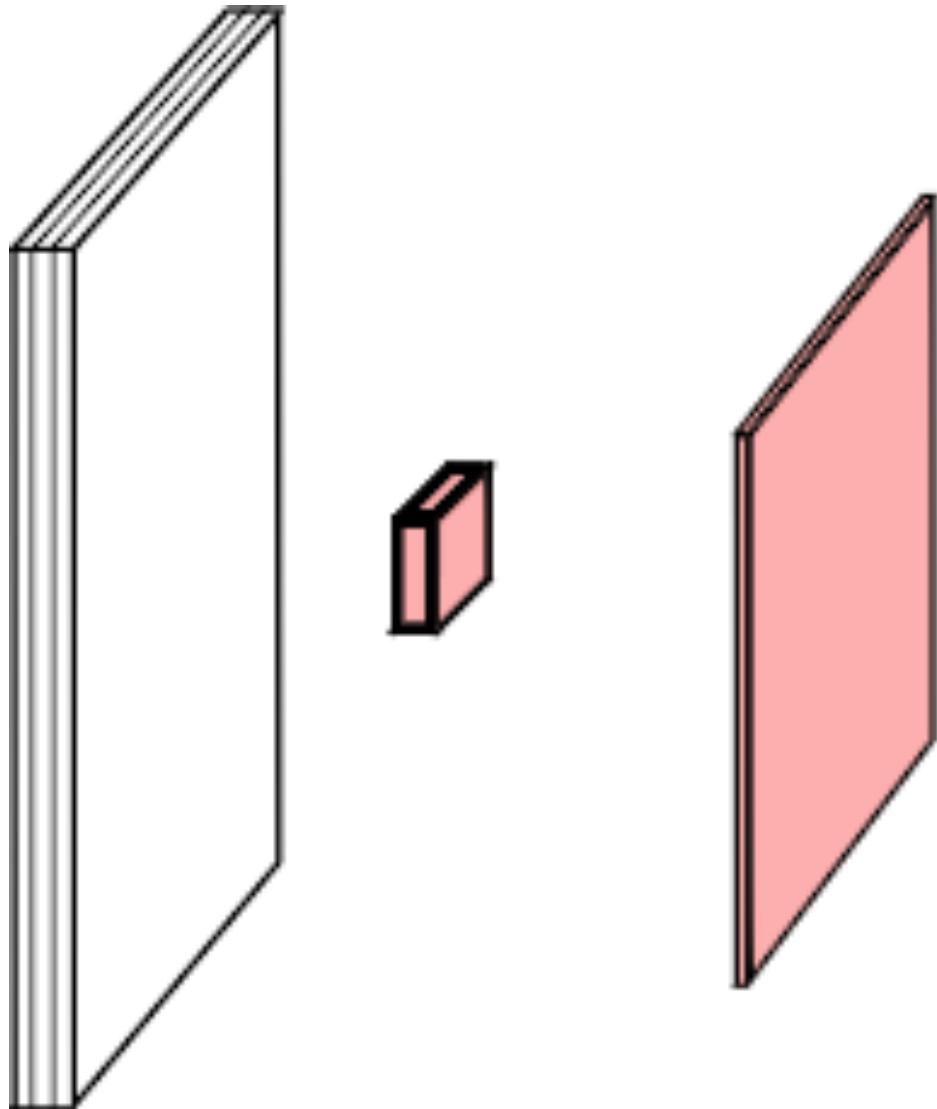


Multiple convolutions

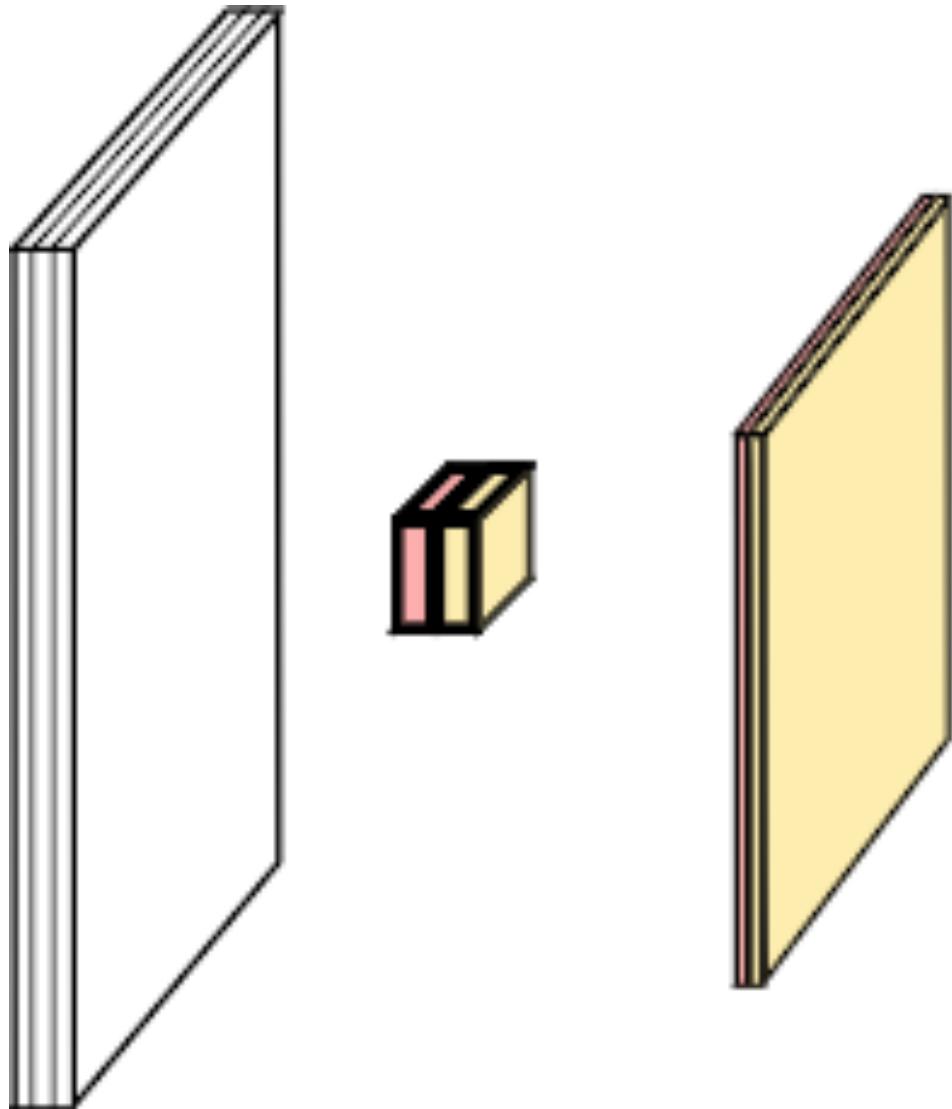


Multiple convolutions

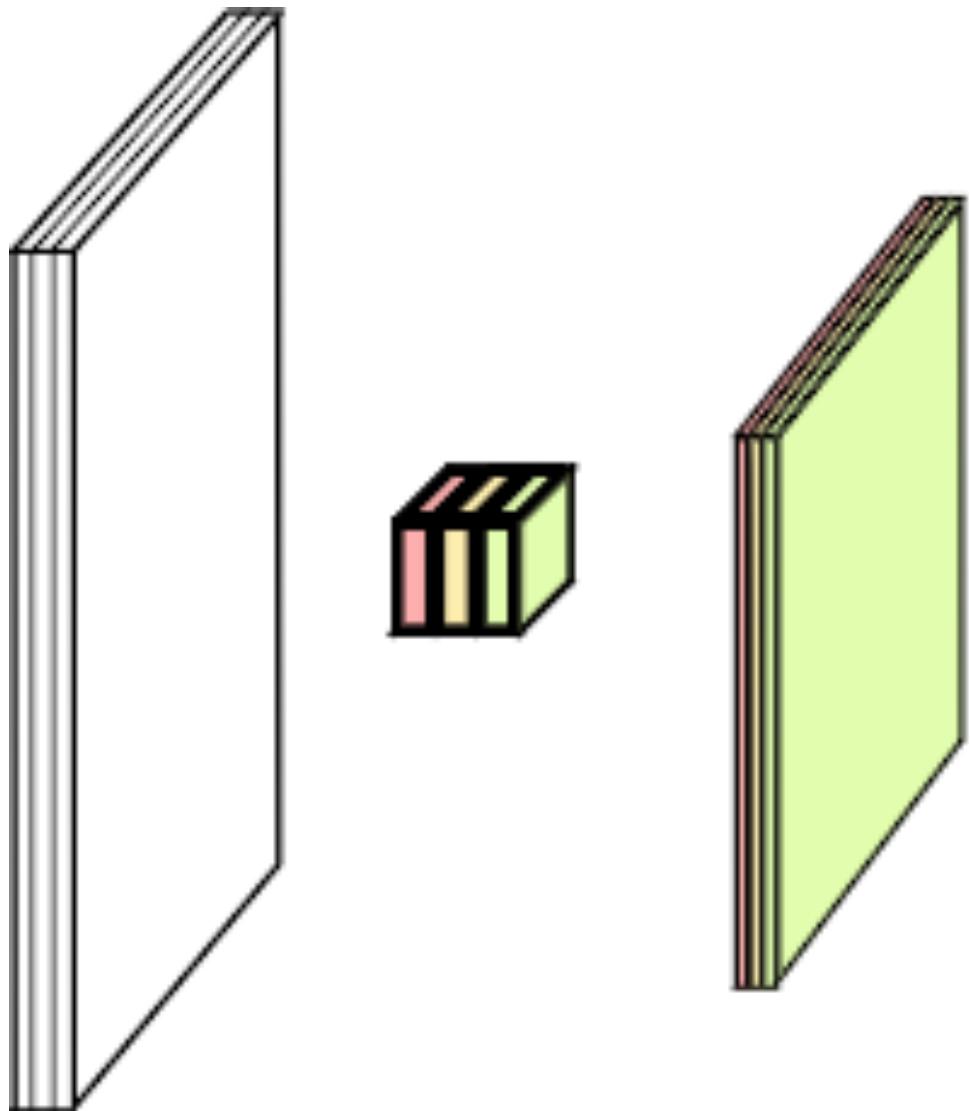


Multiple convolutions

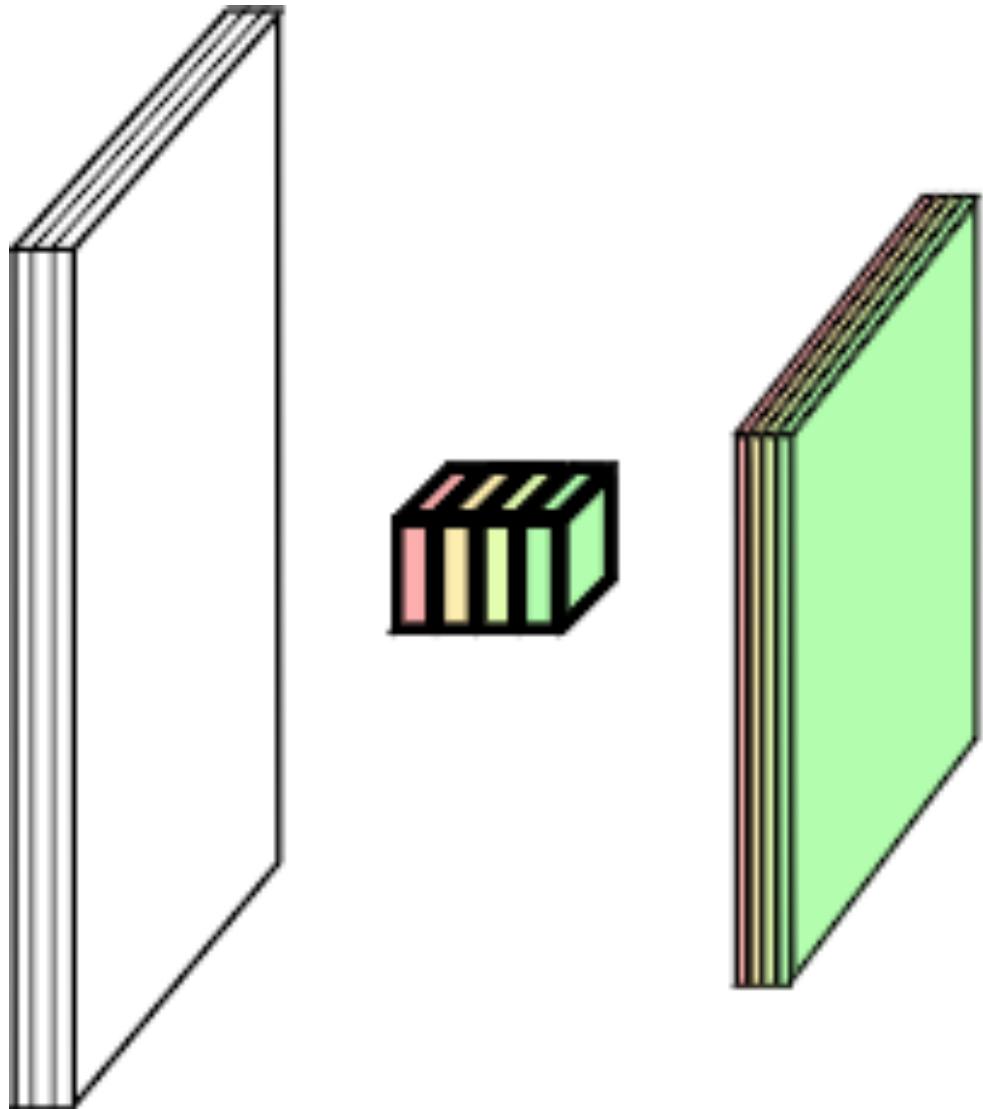

Multiple convolutions

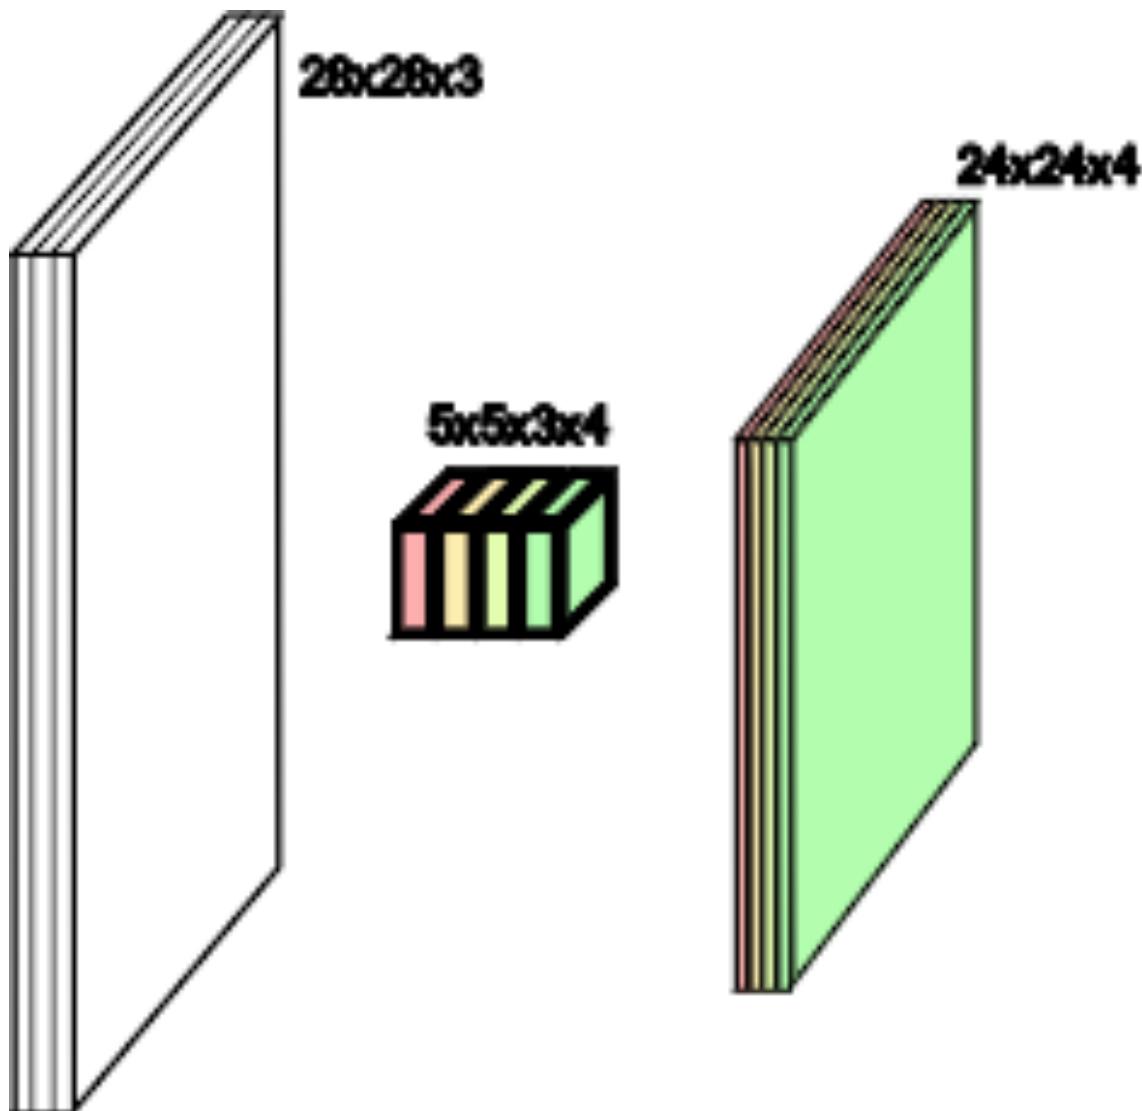


Multiple convolutions

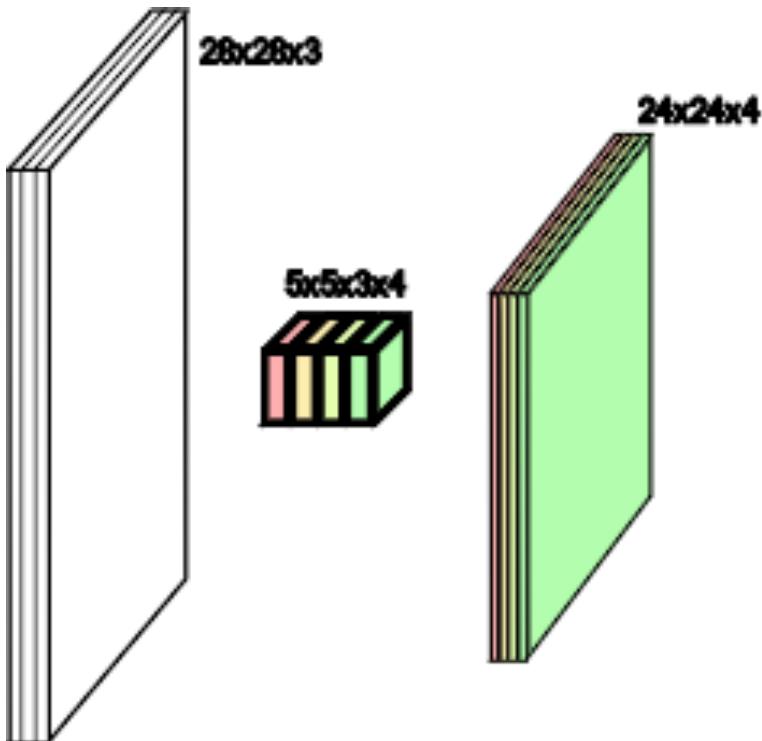

- Kernel size aka receptive field (usually 1, 3, 5, 7, 11)
- Output dimension: `length - kernel_size + 1`

Strides


- Strides: increment step size for the convolution operator
- Reduces the size of the output map

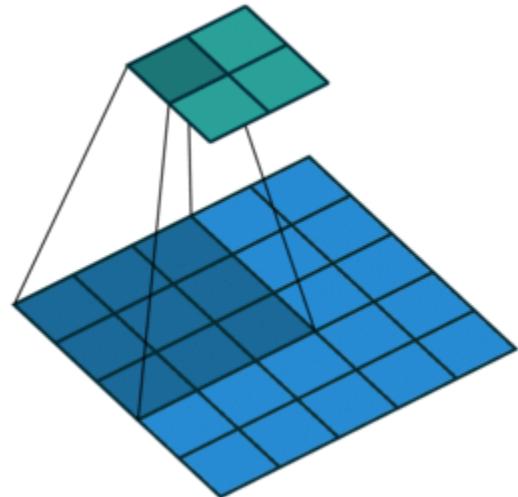

Example with kernel size 3×3 and a stride of 2 (image in blue)


Padding

- Padding: artificially fill borders of image
- Useful to keep spatial dimension constant across filters
- Useful with strides and large receptive fields
- Usually: fill with 0s

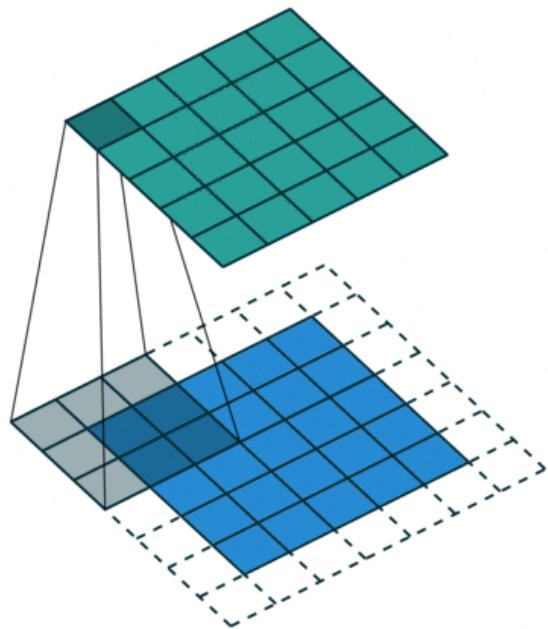

Pooling


- Spatial dimension reduction
- Local invariance
- No parameters: max or average of 2x2 units

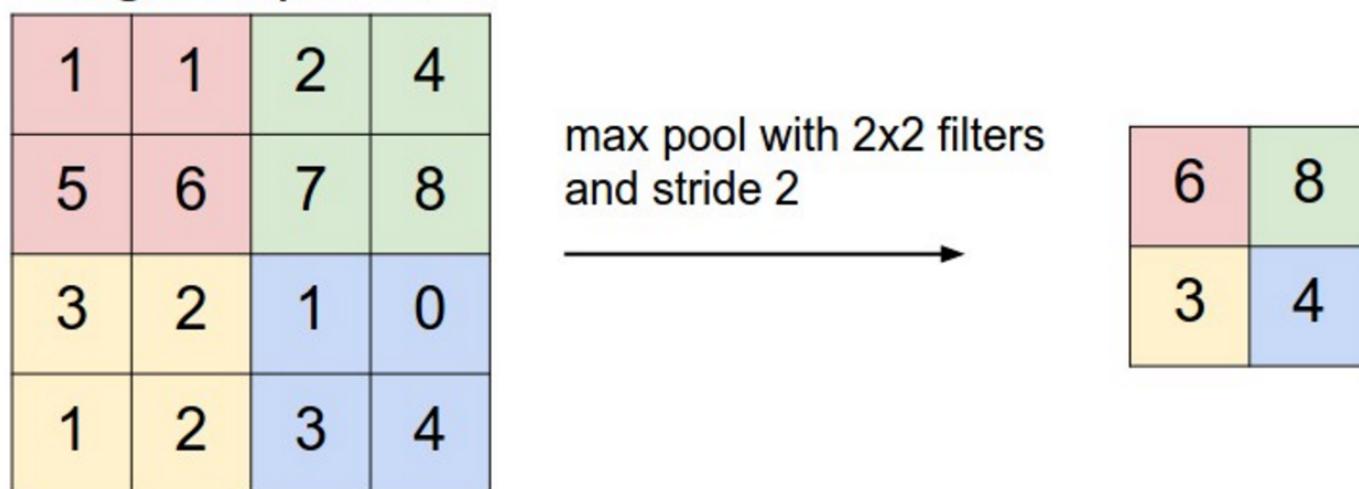

Schematic from Stanford <http://cs231n.github.io/convolutional-networks>

Pooling

- Spatial dimension reduction
- Local invariance
- No parameters: max or average of 2x2 units

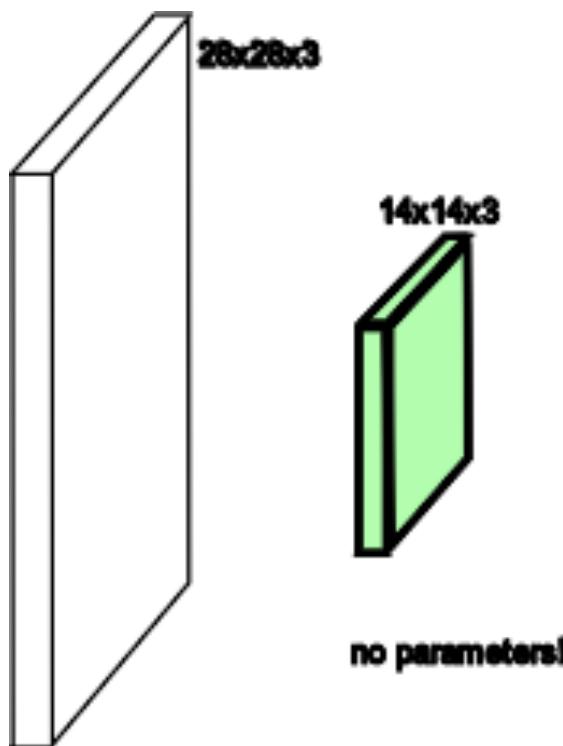


Architectures

Classic ConvNet Architecture

- Input
- Conv blocks
 - Convolution + activation (relu)
 - Convolution + activation (relu)
 - ...
 - Maxpooling 2x2
- Output
 - Fully connected layers
 - Softmax

AlexNet

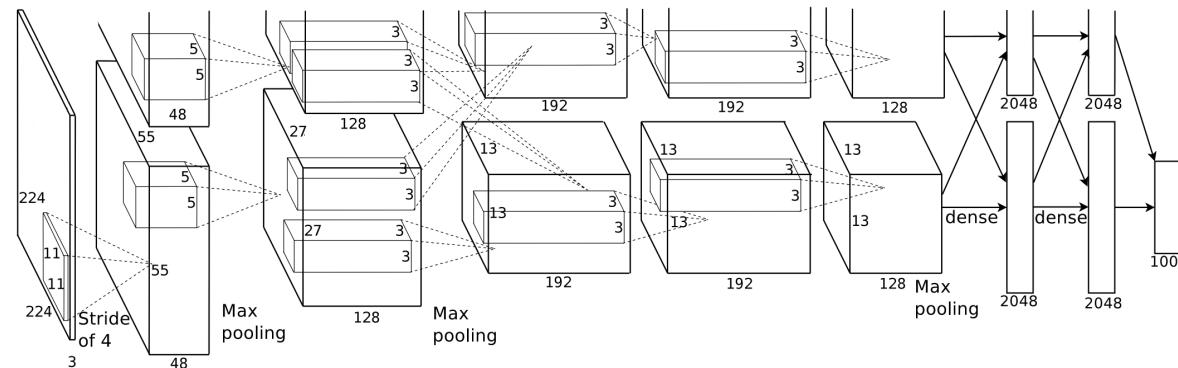


First conv layer: kernel 11x11x3x96 stride 4

- Kernel shape: (11, 11, 3, 96)
- Output shape: (55, 55, 96)
- Number of parameters: 34,944
- Equivalent MLP parameters: 43.7 × 1e9


Simplified version of Krizhevsky, Alex, Sutskever, and Hinton. "Imagenet classification with 26 DSI

AlexNet

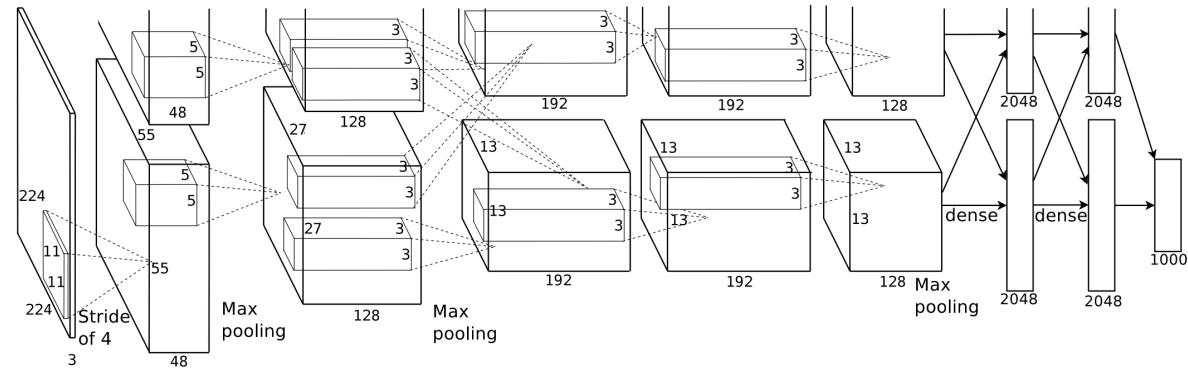


INPUT:	[227x227x3]		
CONV1:	[55x55x96]	96	11x11 filters at stride 4, pad 0
MAX POOL1:	[27x27x96]	3x3	filters at stride 2
CONV2:	[27x27x256]	256	5x5 filters at stride 1, pad 2
MAX POOL2:	[13x13x256]	3x3	filters at stride 2
CONV3:	[13x13x384]	384	3x3 filters at stride 1, pad 1
CONV4:	[13x13x384]	384	3x3 filters at stride 1, pad 1
CONV5:	[13x13x256]	256	3x3 filters at stride 1, pad 1
MAX POOL3:	[6x6x256]	3x3	filters at stride 2
FC6:	[4096]	4096	neurons
FC7:	[4096]	4096	neurons
FC8:	[1000]	1000 neurons (softmax logits)	

Hierarchical representation

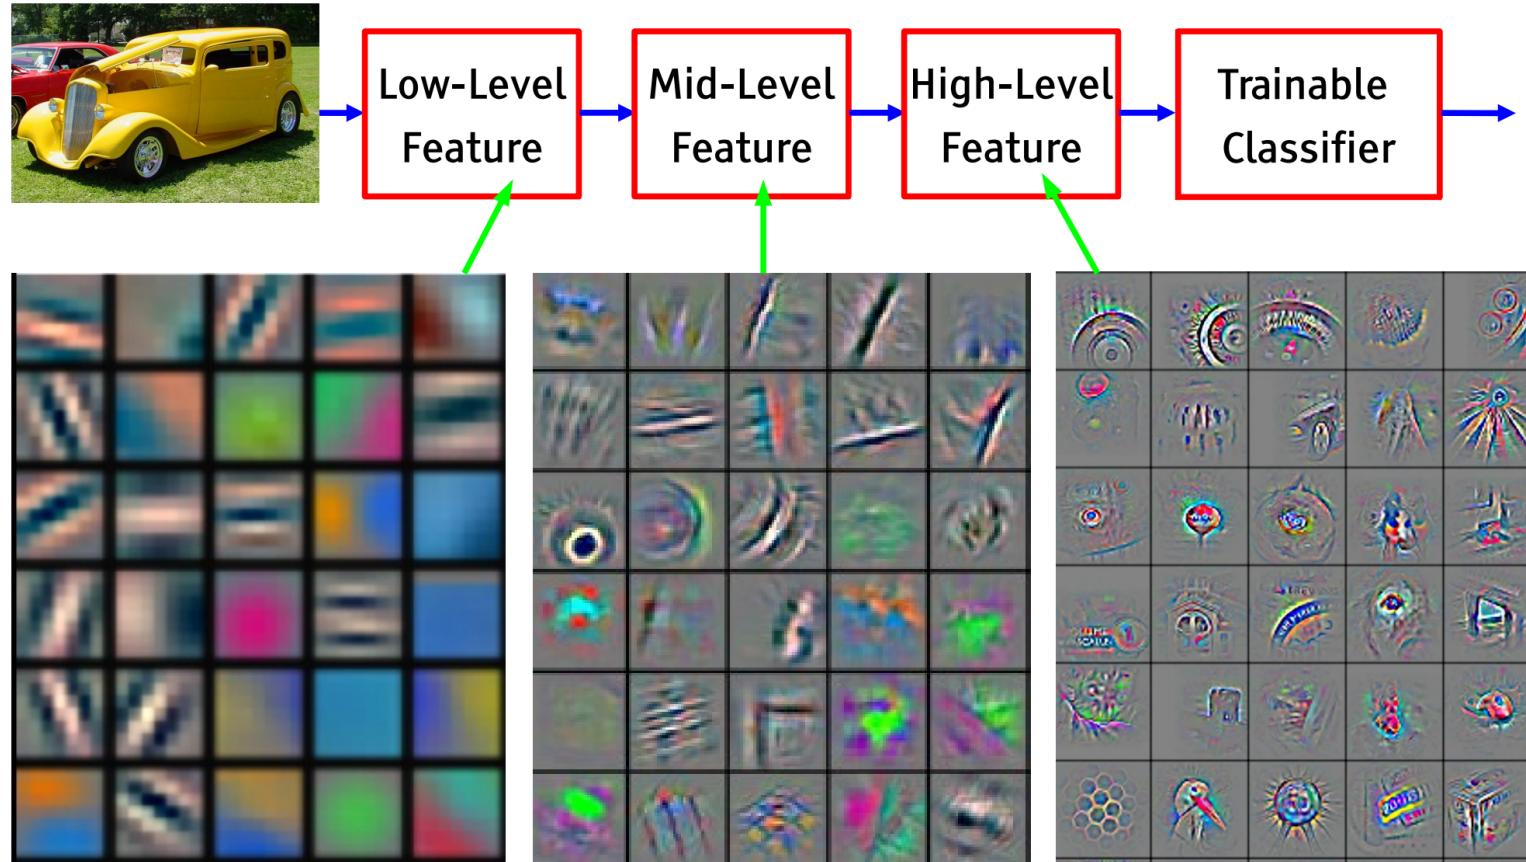

Feature visualization of convolutional net trained on ImageNet from [Zeiler & Fergus 2013]

VGG-16

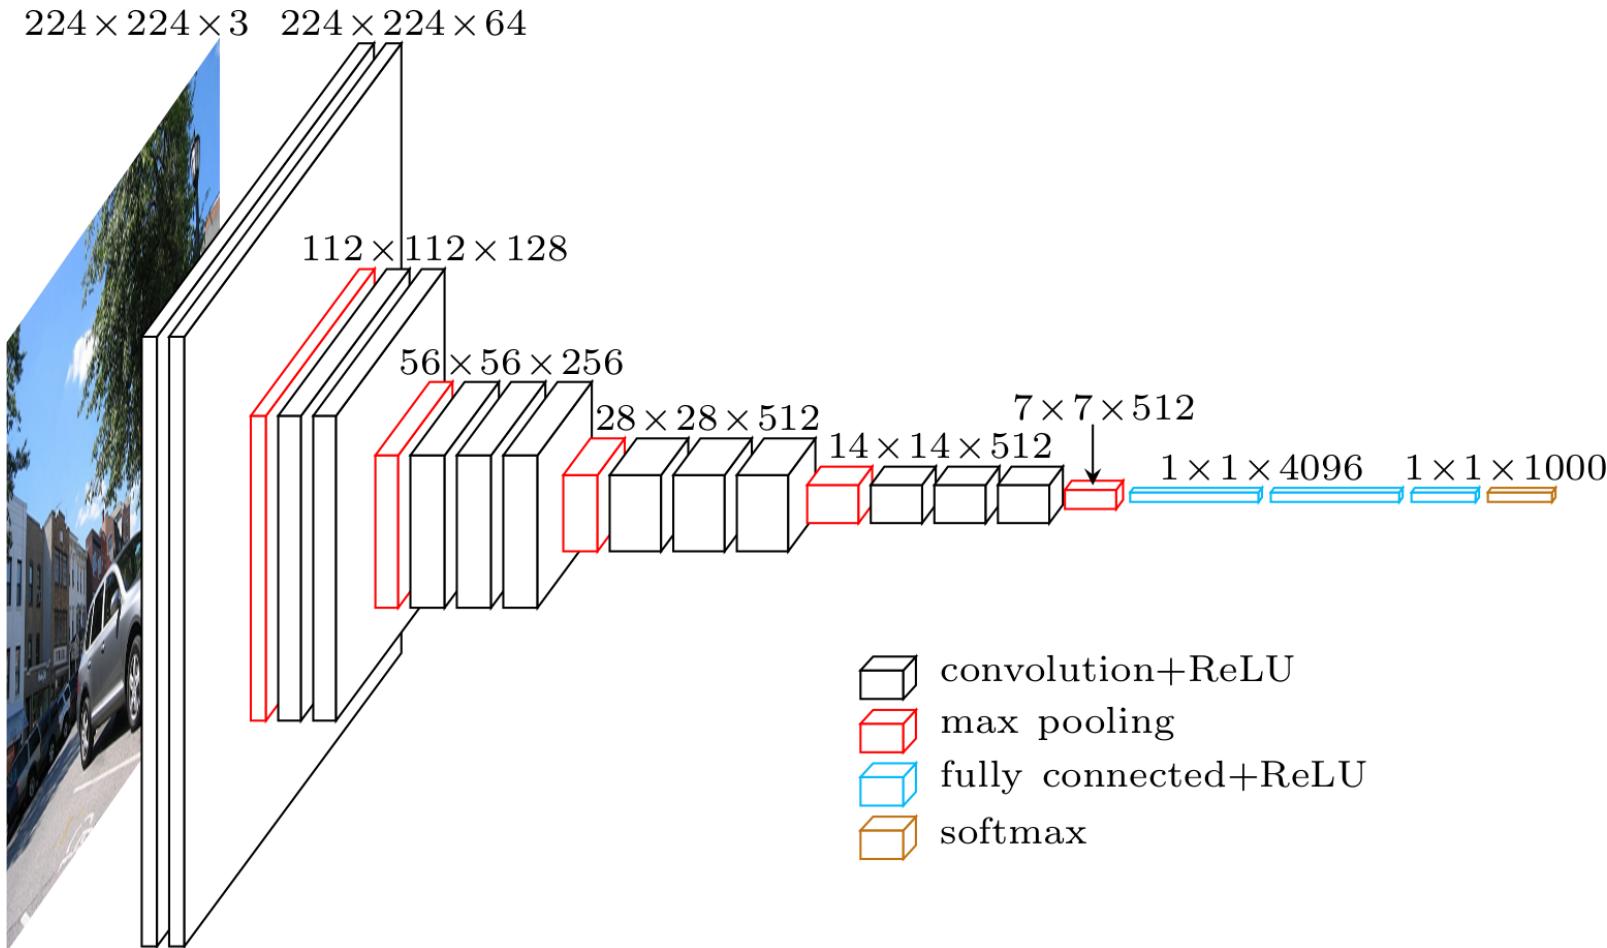

Simonyan, Karen, and Zisserman. "Very deep convolutional networks for large-scale image recognition" (2014)

VGG in Keras

```
model.add(Convolution2D(64, 3, 3, activation='relu', input_shape=(3,224,224)))
model.add(Convolution2D(64, 3, 3, activation='relu'))
model.add(MaxPooling2D((2,2), strides=(2,2)))

model.add(Convolution2D(128, 3, 3, activation='relu'))
model.add(Convolution2D(128, 3, 3, activation='relu'))
model.add(MaxPooling2D((2,2), strides=(2,2)))

model.add(Convolution2D(256, 3, 3, activation='relu'))
model.add(Convolution2D(256, 3, 3, activation='relu'))
model.add(Convolution2D(256, 3, 3, activation='relu'))
model.add(MaxPooling2D((2,2), strides=(2,2)))

model.add(Convolution2D(512, 3, 3, activation='relu'))
model.add(Convolution2D(512, 3, 3, activation='relu'))
model.add(Convolution2D(512, 3, 3, activation='relu'))
model.add(MaxPooling2D((2,2), strides=(2,2)))

model.add(Convolution2D(512, 3, 3, activation='relu'))
model.add(Convolution2D(512, 3, 3, activation='relu'))
model.add(Convolution2D(512, 3, 3, activation='relu'))
model.add(MaxPooling2D((2,2), strides=(2,2)))

model.add(Flatten())
model.add(Dense(4096, activation='relu'))
model.add(Dropout(0.5))
model.add(Dense(4096, activation='relu'))
model.add(Dropout(0.5))
model.add(Dense(1000, activation='softmax'))
```

Memory and Parameters

	Activation maps	Parameters
INPUT:	[224x224x3] = 150K	0
CONV3-64:	[224x224x64] = 3.2M	(3x3x3)x64 = 1,728
CONV3-64:	[224x224x64] = 3.2M	(3x3x64)x64 = 36,864
POOL2:	[112x112x64] = 800K	0
CONV3-128:	[112x112x128] = 1.6M	(3x3x64)x128 = 73,728
CONV3-128:	[112x112x128] = 1.6M	(3x3x128)x128 = 147,456
POOL2:	[56x56x128] = 400K	0
CONV3-256:	[56x56x256] = 800K	(3x3x128)x256 = 294,912
CONV3-256:	[56x56x256] = 800K	(3x3x256)x256 = 589,824
CONV3-256:	[56x56x256] = 800K	(3x3x256)x256 = 589,824
POOL2:	[28x28x256] = 200K	0
CONV3-512:	[28x28x512] = 400K	(3x3x256)x512 = 1,179,648
CONV3-512:	[28x28x512] = 400K	(3x3x512)x512 = 2,359,296
CONV3-512:	[28x28x512] = 400K	(3x3x512)x512 = 2,359,296
POOL2:	[14x14x512] = 100K	0
CONV3-512:	[14x14x512] = 100K	(3x3x512)x512 = 2,359,296
CONV3-512:	[14x14x512] = 100K	(3x3x512)x512 = 2,359,296
CONV3-512:	[14x14x512] = 100K	(3x3x512)x512 = 2,359,296
POOL2:	[7x7x512] = 25K	0
FC:	[1x1x4096] = 4096	7x7x512x4096 = 102,760,448
FC:	[1x1x4096] = 4096	4096x4096 = 16,777,216
FC:	[1x1x1000] = 1000	4096x1000 = 4,096,000

TOTAL activations: 24M x 4 bytes ~ 93MB / image (x2 for backward)

TOTAL parameters: 138M x 4 bytes ~ 552MB (x2 for plain SGD, x4 for Adam)

Memory and Parameters

	Activation maps	Parameters
INPUT:	[224x224x3] = 150K	0
CONV3-64:	[224x224x64] = 3.2M	(3x3x3)x64 = 1,728 # ●
CONV3-64:	[224x224x64] = 3.2M	(3x3x64)x64 = 36,864 # ●
POOL2:	[112x112x64] = 800K	0
CONV3-128:	[112x112x128] = 1.6M	(3x3x64)x128 = 73,728
CONV3-128:	[112x112x128] = 1.6M	(3x3x128)x128 = 147,456
POOL2:	[56x56x128] = 400K	0
CONV3-256:	[56x56x256] = 800K	(3x3x128)x256 = 294,912
CONV3-256:	[56x56x256] = 800K	(3x3x256)x256 = 589,824
CONV3-256:	[56x56x256] = 800K	(3x3x256)x256 = 589,824
POOL2:	[28x28x256] = 200K	0
CONV3-512:	[28x28x512] = 400K	(3x3x256)x512 = 1,179,648
CONV3-512:	[28x28x512] = 400K	(3x3x512)x512 = 2,359,296
CONV3-512:	[28x28x512] = 400K	(3x3x512)x512 = 2,359,296
POOL2:	[14x14x512] = 100K	0
CONV3-512:	[14x14x512] = 100K	(3x3x512)x512 = 2,359,296
CONV3-512:	[14x14x512] = 100K	(3x3x512)x512 = 2,359,296
CONV3-512:	[14x14x512] = 100K	(3x3x512)x512 = 2,359,296
POOL2:	[7x7x512] = 25K	0
FC:	[1x1x4096] = 4096	7x7x512x4096 = 102,760,448 # ●
FC:	[1x1x4096] = 4096	4096x4096 = 16,777,216
FC:	[1x1x1000] = 1000	4096x1000 = 4,096,000

TOTAL activations: 24M x 4 bytes ~ 93MB / image (x2 for backward)


TOTAL parameters: 138M x 4 bytes ~ 552MB (x2 for plain SGD, x4 for Adam)

ResNet

Even deeper models:

34, 50, 101, 152 layers

Source: He, Kaiming, et al. "Deep residual learning for image recognition." CVPR. 2016.

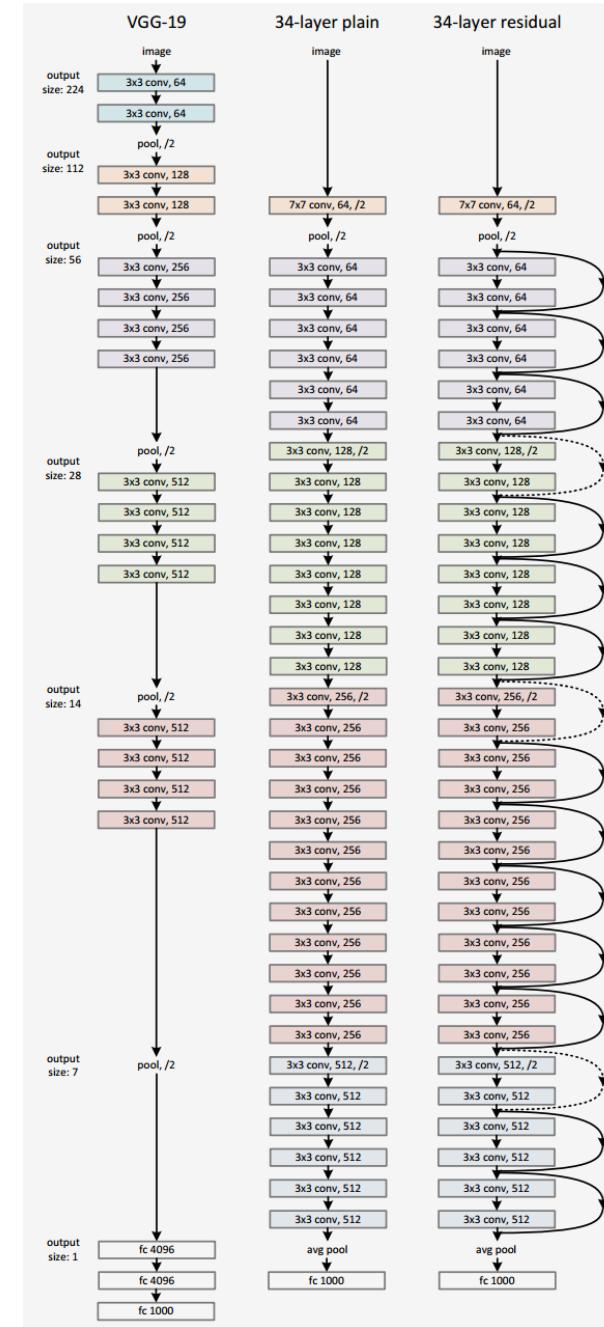

ResNet

A block learns the residual w.r.t.
identity


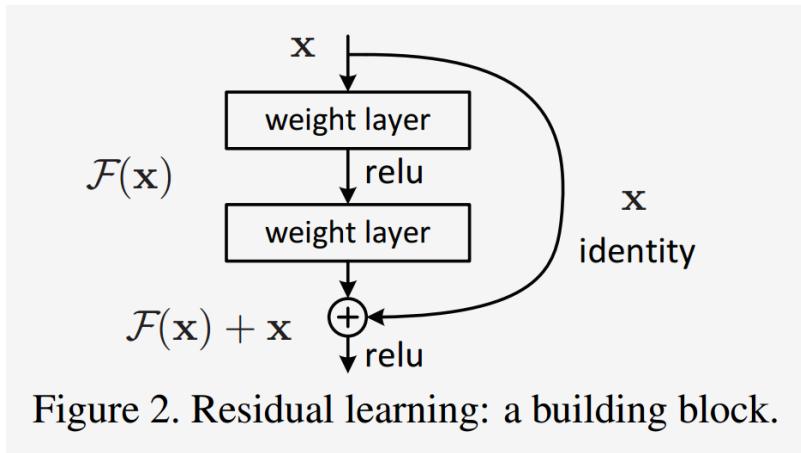


Figure 2. Residual learning: a building block.

- Good optimization properties

Source: He, Kaiming, et al. "Deep residual learning for image recognition." CVPR. 2016.

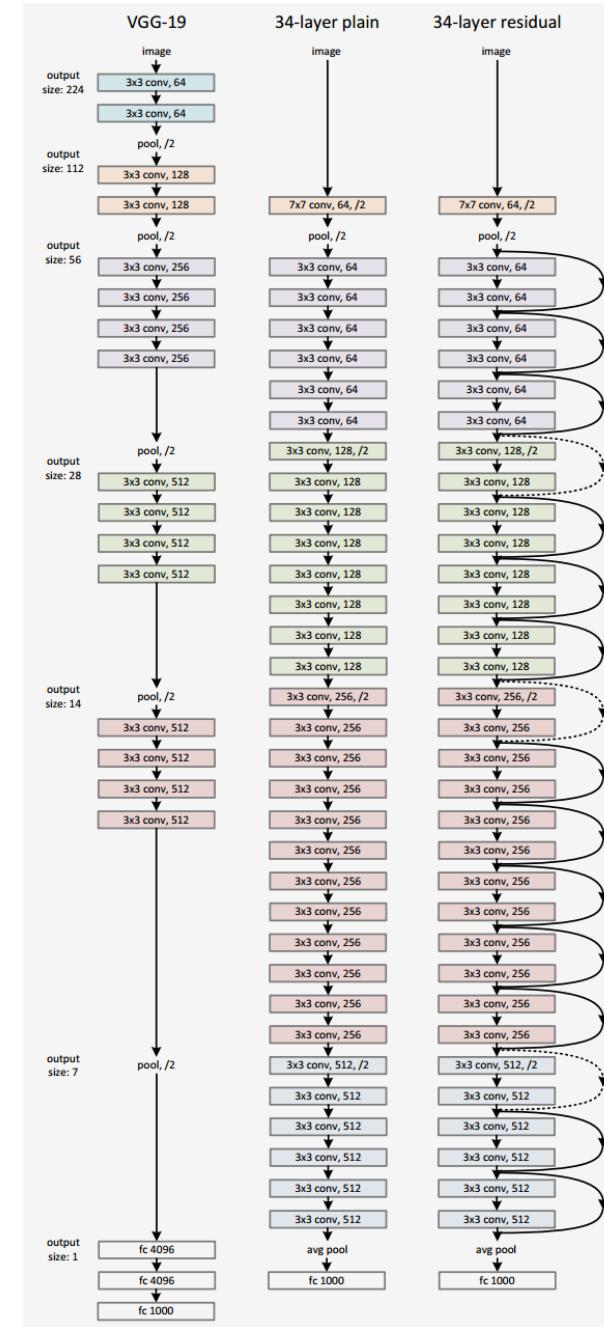


ResNet

ResNet50 Compared to VGG:


- Superior accuracy in all vision tasks **5.25%** top-5 error vs 7.1%
 - Less parameters **25M** vs 138M
 - Computational complexity **3.8B Flops** vs 15.3B Flops
 - Fully Convolutional until the last layer

Source: He, Kaiming, et al. "Deep residual learning for image recognition." CVPR. 2016.

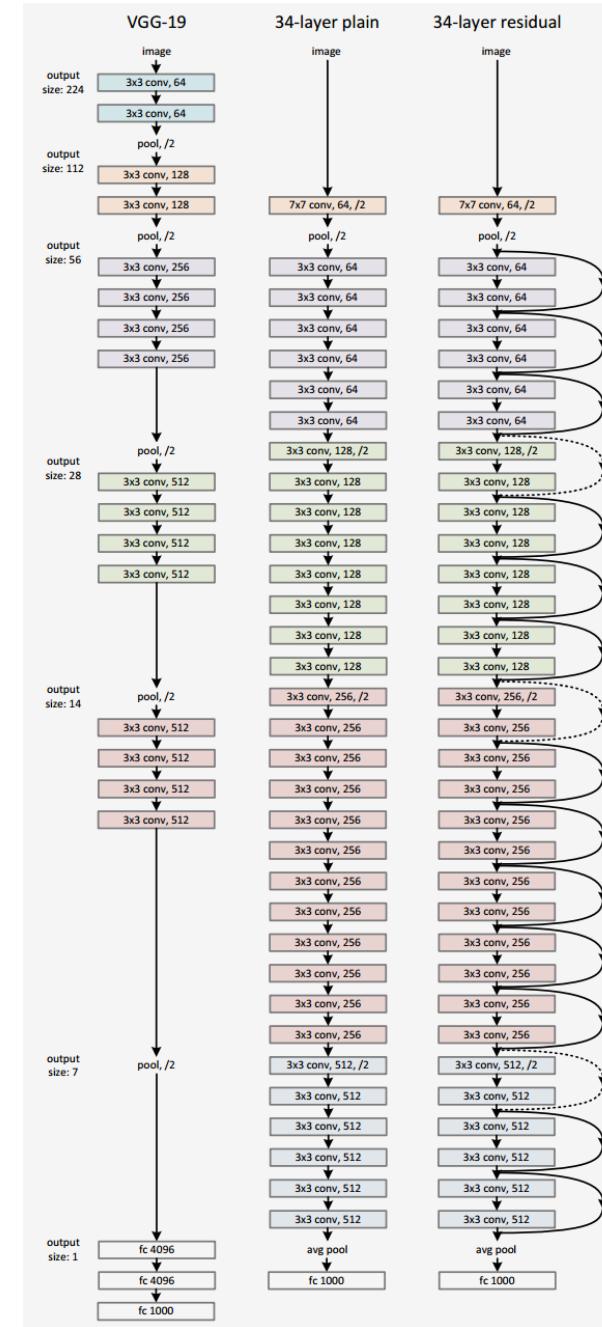

Deeper is better


ImageNet experiments

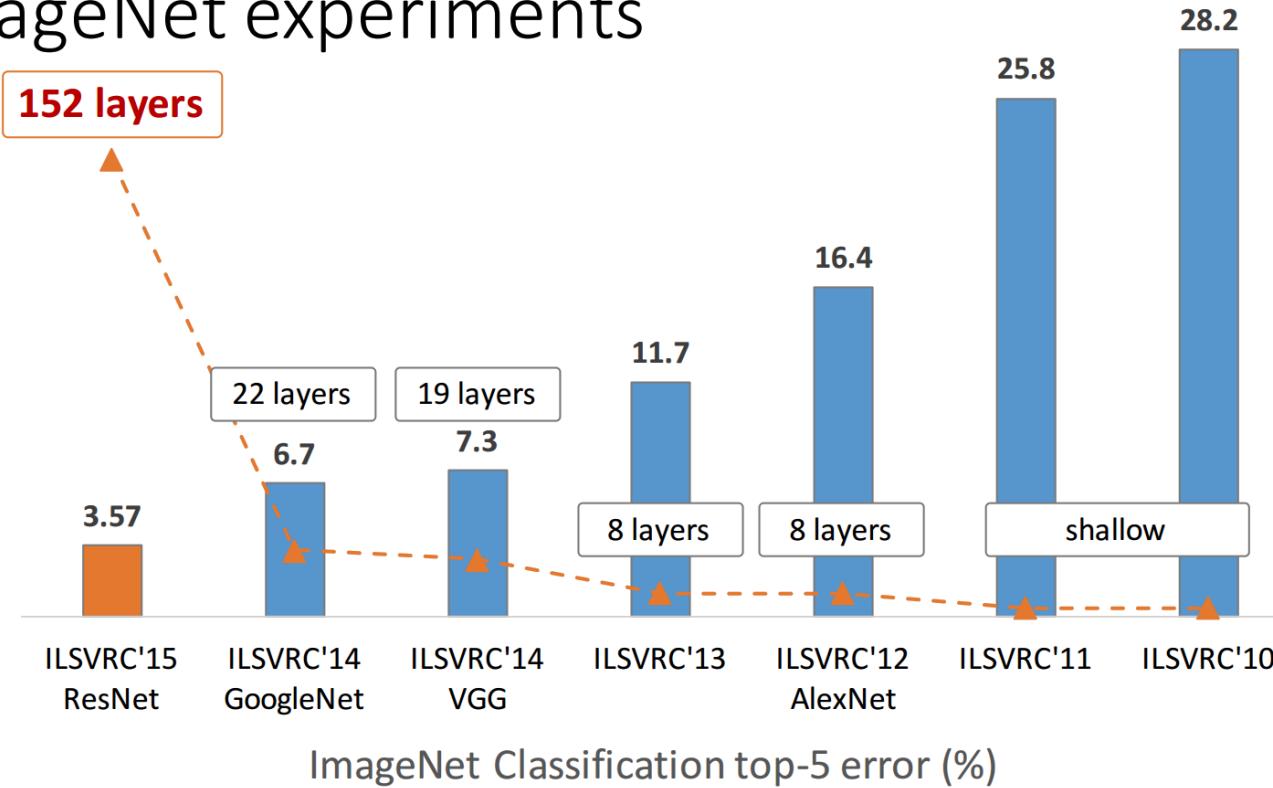

from Kaiming He slides "Deep residual learning for image recognition." ICML. 2016.

State of the art



- Finding right architectures: Active area of research

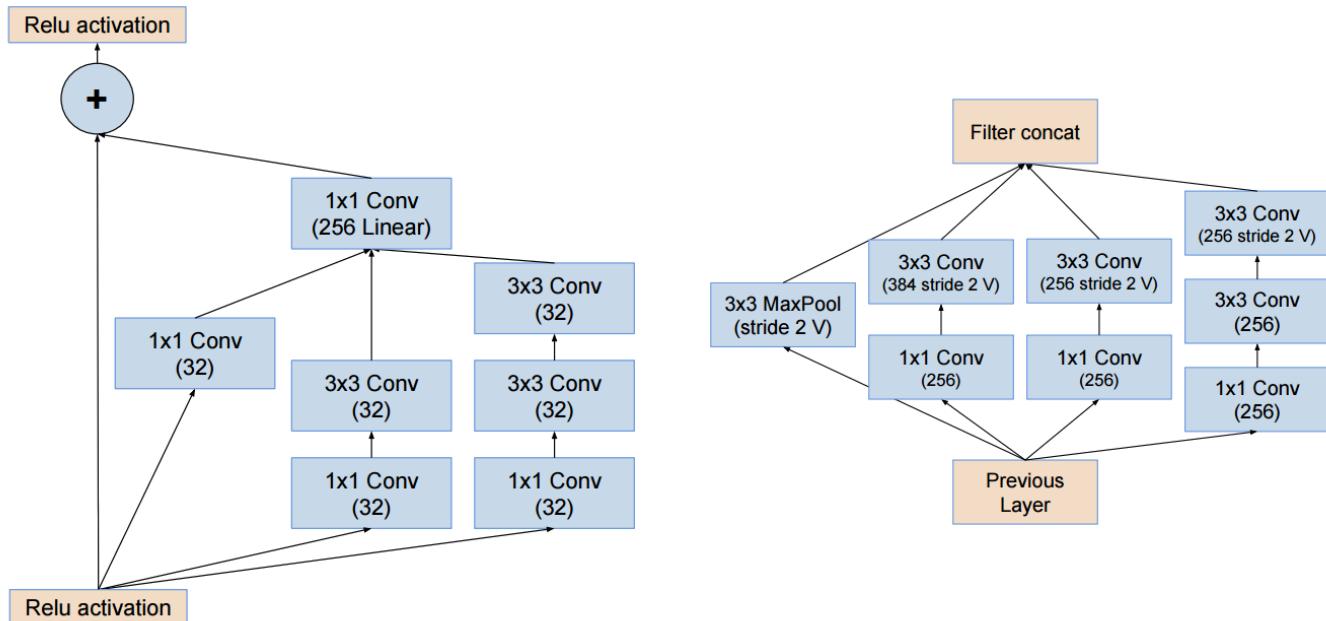

Modular building blocks engineering
see also DenseNets, Wide ResNets, Fractal ResNets, ResNeXts,
Pyramidal ResNets

State of the art

Top 1-accuracy, performance and size on ImageNet

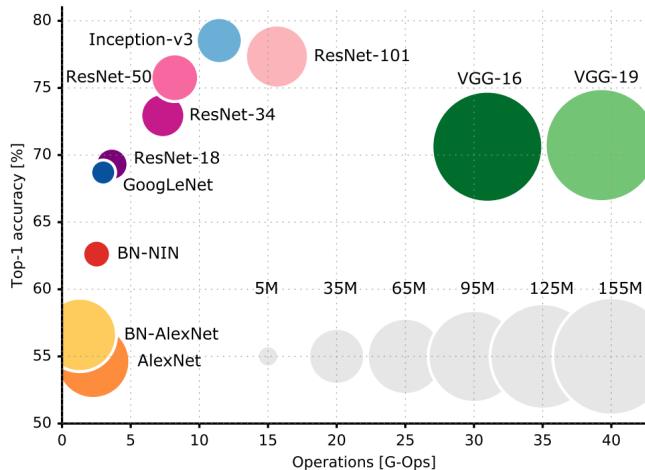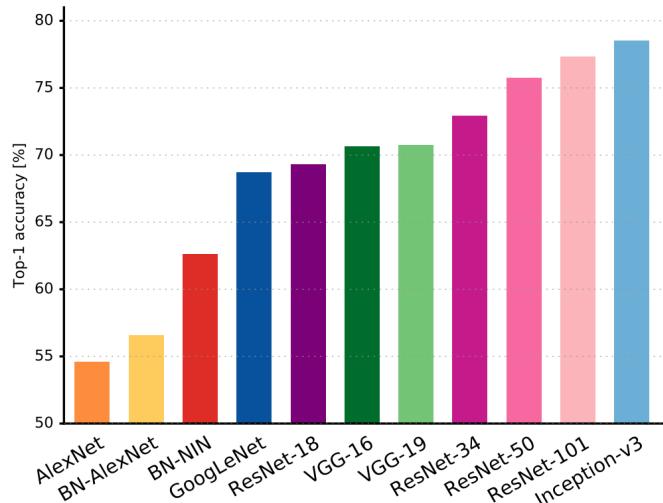

See also: <https://paperswithcode.com/sota/image-classification-on-imagenet>

Canziani, Paszke, and Culurciello. "An Analysis of Deep Neural Network Models for Practical Applications." (May 2016).

More ImageNet SOTA


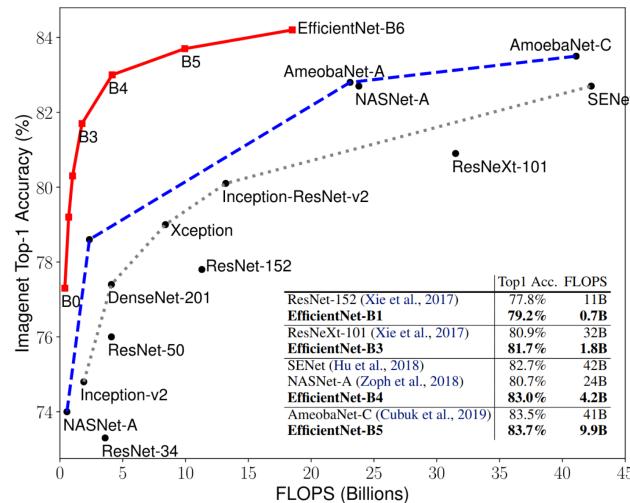


Figure 5. FLOPS vs. ImageNet Accuracy – Similar to Figure 1 except it compares FLOPS rather than model size.

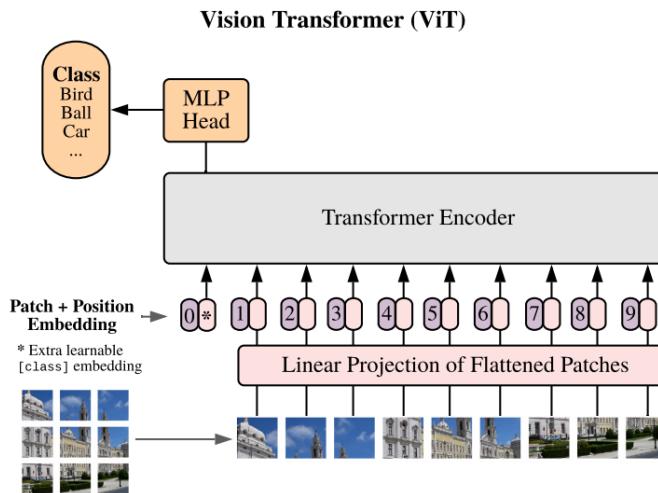

- Mingxing Tan, Quoc V. Le, [EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks](#), ICML 2019.
- Irwan Bello, [LambdaNetworks: Modeling long-range Interactions without Attention](#), ICLR 2021
- Dosovitskiy A. et al, [An Image is worth 16X16 Words: Transformers for Image Recognition at Scale](#), ICLR 2021

State of the art

Method	# Params	Extra Data	ImageNet		ImageNet-Real [6]
			Top-1	Top-5	Precision@1
ResNet-50 [24]	26M	—	76.0	93.0	82.94
ResNet-152 [24]	60M	—	77.8	93.8	84.79
DenseNet-264 [28]	34M	—	77.9	93.9	—
Inception-v3 [62]	24M	—	78.8	94.4	83.58
Xception [11]	23M	—	79.0	94.5	—
Inception-v4 [61]	48M	—	80.0	95.0	—
Inception-resnet-v2 [61]	56M	—	80.1	95.1	—
ResNeXt-101 [78]	84M	—	80.9	95.6	85.18
PolyNet [87]	92M	—	81.3	95.8	—
SENet [27]	146M	—	82.7	96.2	—
NASNet-A [90]	89M	—	82.7	96.2	82.56
AmoebaNet-A [52]	87M	—	82.8	96.1	—
PNASNet [39]	86M	—	82.9	96.2	—
AmoebaNet-C + AutoAugment [12]	155M	—	83.5	96.5	—
GPipe [29]	557M	—	84.3	97.0	—
EfficientNet-B7 [63]	66M	—	85.0	97.2	—
EfficientNet-B7 + FixRes [70]	66M	—	85.3	97.4	—
EfficientNet-L2 [63]	480M	—	85.5	97.5	—
ResNet-50 Billion-scale SSL [79]	26M	3.5B labeled Instagram	81.2	96.0	—
ResNeXt-101 Billion-scale SSL [79]	193M	3.5B labeled Instagram	84.8	—	—
ResNeXt-101 WSL [42]	829M	3.5B labeled Instagram	85.4	97.6	88.19
FixRes ResNeXt-101 WSL [69]	829M	3.5B labeled Instagram	86.4	98.0	89.73
Big Transfer (BiT-L) [33]	928M	300M labeled JFT	87.5	98.5	90.54
Noisy Student (EfficientNet-L2) [77]	480M	300M unlabeled JFT	88.4	98.7	90.55
Noisy Student + FixRes [70]	480M	300M unlabeled JFT	88.5	98.7	—
Vision Transformer (ViT-H) [14]	632M	300M labeled JFT	88.55	—	90.72
EfficientNet-L2-NoisyStudent + SAM [16]	480M	300M unlabeled JFT	88.6	98.6	—
Meta Pseudo Labels (EfficientNet-B6-Wide)	390M	300M unlabeled JFT	90.0	98.7	91.12
Meta Pseudo Labels (EfficientNet-L2)	480M	300M unlabeled JFT	90.2	98.8	91.02

Meta Pseudo Labels, Hieu Pham et al. (Jan 2021)

Pre-trained models

Pre-trained models

Training a model on ImageNet from scratch takes **days or weeks**.

Many models trained on ImageNet and their weights are publicly available!

Transfer learning

- Use pre-trained weights, remove last layers to compute representations of images
- Train a classification model from these features on a new classification task
- The network is used as a generic feature extractor
- Better than handcrafted feature extraction on natural images

Pre-trained models

Training a model on ImageNet from scratch takes **days or weeks**.


Many models trained on ImageNet and their weights are publicly available!

Fine-tuning

Retraining the (some) parameters of the network (given enough data)

- Truncate the last layer(s) of the pre-trained network
- Freeze the remaining layers weights
- Add a (linear) classifier on top and train it for a few epochs
- Then fine-tune the whole network or the few deepest layers
- Use a smaller learning rate when fine tuning

Data Augmentation

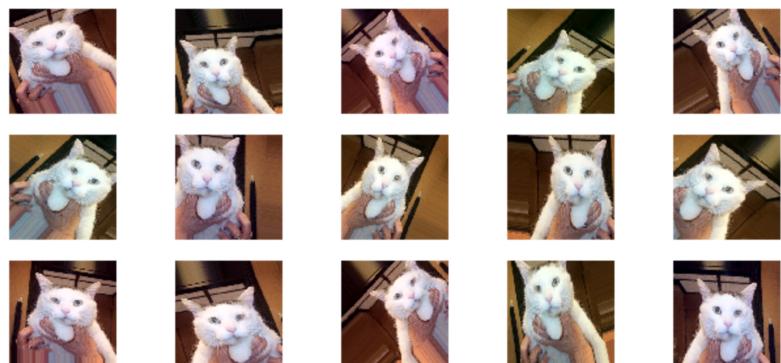

See also: [RandAugment](#) and
[Unsupervised Data Augmentation for Consistency Training](#).



Data Augmentation

With Keras:

```
from keras.preprocessing.image import ImageDataGenerator

image_gen = ImageDataGenerator(
    rescale=1. / 255,
    rotation_range=40,
    width_shift_range=0.2,
    height_shift_range=0.2,
    shear_range=0.2,
    zoom_range=0.2,
    horizontal_flip=True,
    channel_shift_range=0.2,
    fill_mode='nearest'
)

train_flow = image_gen.flow_from_directory(train_folder)
model.fit_generator(train_flow, train_flow.n)
```

Next: Lab 4!