

# Introduction to Data Access and Storage

```
$ echo "Data Sciences Institute"
```

**Introduction:**

**Welcome**

**What is SQL?**

**Data Modelling**

# Welcome / About Us


# About Us (Thomas)

- Started with SQL in first job after graduating
- Data Analyst in US healthcare until moving to Canada in 2018
- Transitioned to Data Engineer at Plan Canada
- Pursued Master of Information at UofT for R and Python focus
- Currently working on Data Governance and Ethics at Thomson Reuters
- *Have a 2 year old Samoyed named Alto who takes up a lot of my free time* ↗



# About Us (Ananya)

- UofT Computer Science and Statistics graduate, with minor in Mathematics
- Co-op at Citi (Software Development) and BMO (Business Analytics)
- RBC Capital Markets BSA using SQL for Salesforce CRM data, transitioning to Supervisory and Regulatory role soon
- Former Women in Computer Science president at UofT
- Involved with Toronto Wxmen in Data Science and RWomen at RBC

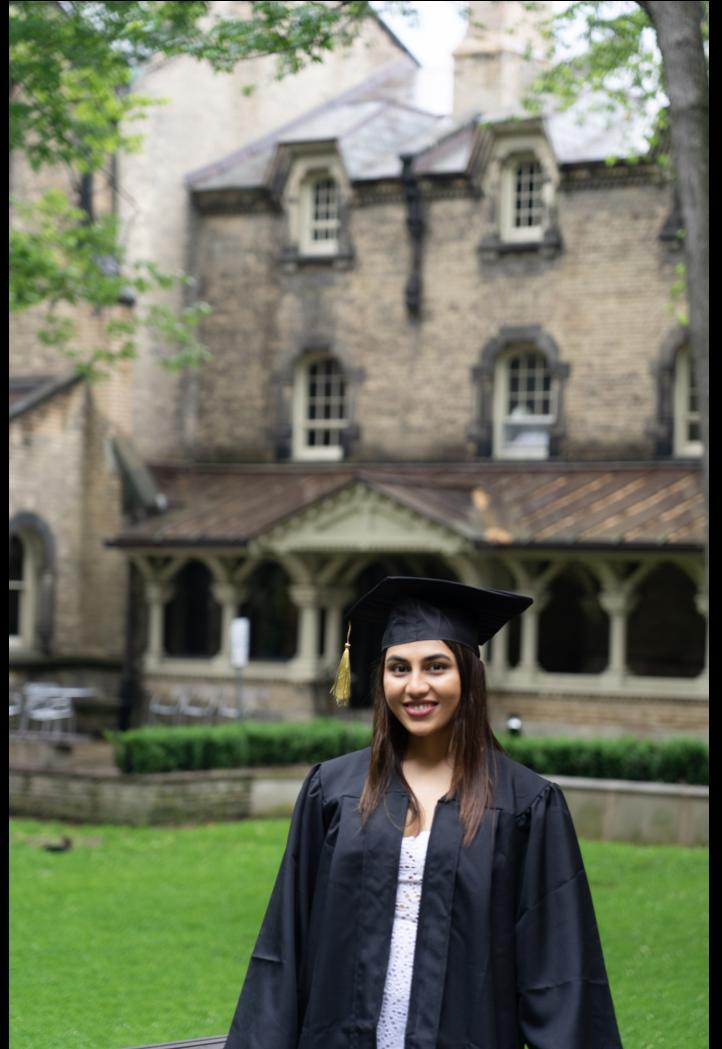

# About Us (Vishnou)

- Paris-Saclay University grad in Applied Math/Data Science
- Explored SQL, Python, R in academia, then applied in industry
- ML internships at Docugami, Ekimetrics, Stellantis, Randstad
- Currently in UofT MscAC AI program
- Working on Data Science/LLMs intersection projects
- Considering PhD for professorship
- Hobbies: guitar, saxophone, bass in music bands 🎸🎸



# Welcome / Course Content

# Course Content

- Data Modelling, Data Structures, Schemas, Basic Data Management, Normal Forms
- Basic SQL Syntax
- Essential SQL Syntax
- Advanced Techniques
- Importing and Exporting Data to and from SQL
- SQL's relationship to the Machine Learning Pipeline
- Data Stewardship, Ethics, and SQL in the Wild

# GitHub Repo

<https://github.com/UofT-DSI/sql>

- Schedule
- These slides (HTML & PDF)
- Our database for live coding
- All in-class code
- Homework (and answers, posted afterwards)
- Assignment details and rubrics
- Due Dates

 **It is crucial you visit the repo throughout the course, as I may make minor changes and push new content.**

# Course Content

- This course is an *Introduction* to SQL
- At the end of the course, I hope you will:
  - Feel comfortable with SQL
  - Know how to search for the right thing on Stack Overflow
  - Read documentation
- We won't cover advanced topics like:
  - Stored Procedures, Triggers, Jobs
  - DBA work (monitoring, server setup, etc)
  - Complex ETL or tooling



The screenshot shows the DB Browser for SQLite application. On the left, there is a tree view of database objects. In the main pane, several SQL queries are listed, each with a explanatory comment in parentheses. The queries involve selecting from tables like 'Accident' and 'Person' based on address, name, and other criteria. The results of the queries are displayed below the queries.

```
1 select *  
2 from accident,accident_report  
3 where city = 'Napa, CA'  
4 and date > '2012-02-01'  
5 and type = 'Housefire'  
6  
7 --2012-02-01: Number Security Storage stored that there were 8 accidents.  
8 --The first witness lived at the last house in "Northwestern Dr".  
9 --The second witness, named Accidents, lives somewhere in "Precious Ave", Napa, CA  
10  
11 select * from person  
12 where address_number = 1  
13 select address_number from person  
14 where address_street like '%Northwestern Dr%'  
15 order by address_number desc  
16 limit 1  
17  
18 --48971: Accused Miller 48971 308 Precious Ave 1234567890  
19 --48971: Security Systems 128909 4898 Northwestern Dr 1234567890  
20  
21 select * from person  
22 where person_id = 10  
23  
24 --I found a person and their address in the database.  
25 --This monitoring subscriber is living near me with "gold". Only gold subscribers have green flags.  
26 --The person's name is Miller with a date born earlier than 1970.  
27  
28 select * from person  
29 where id like '489%'  
30 and monitoring_address = 'gold'  
31  
32 --48971 308 Precious 1234567890 gold  
33 --489508 47518 Jeremy Brownes 1234567890 gold  
34  
35  
36 select * from person  
37 where license_id = 10  
38 select id from driver_license  
39 where place_holder like '%20120919%'  
40  
41  
42 --47518: Trevor Cheshire 4894750 312 Pico St 1234567890  
43 --47518: Jeremy Brownes 4895087 300 Washington St Apt 5A 1234567890  
44 --489508: Maxine Whaley 4897799 123 Park Rd 1234567890  
45  
46  
47 --47518: I was forced by a woman with a ton of money.
```

**Software:**  
**DB Browser for SQLite**

# Homework (required)

- Six homeworks total
- At the end of each SQL module, I will provide you with 3-10 queries to write on your own
  - Covers the topics of the modules
- Review answers in Tutorials with Ananya and Vishnou
  - I may go over one or two queries at the start of class if desired
- Designed to be relatively easy
  - Reaffirms what we wrote together
  - Doing work on your own helps reinforce the learning
- ChatGPT probably won't help you much

# Grading

- Pass/Fail. Do the work, pass the course :)
- One Assignment: Data Model Design, 40%, due TBD
- Homework: 48% (8% each), due on Thursdays and Saturdays
- Class Attendance: 12% (2% each)
  - Let Ananya or myself know if you are unable to attend a lesson
  - Code along!! Best way to learn.

**What questions do you have about the course?**

# Welcome / Quick Technical Check

# Quick Technical Check

Let's make sure everyone has DB Browser for SQLite installed.

- If not, please download it here: <https://sqlitebrowser.org/dl/>

For live coding:

- Please download/fork the FarmersMarket.db from our GH repo:
  - [FarmersMarket.db](#)
- Open it in SQLite with the "Open Database" button and navigate to wherever you have saved it

# Good to go?

If not, please message Ananya or Vishnou

Inrtoduction:

Welcome

What is SQL?

Data Modelling

# What is SQL? / SQL

# SQL Fundamentals

- SQL: Structured Query Language
  - Pronounced as either S.Q.L. (ess-cue-ell) or “sequel”
- SQL is a *query* language rather than a programming language
  - Querying is closer to telling a computer *what you want*, rather than *what is has to do*
  - SQL code is often less reproducible than other programming languages because it's domain specific
    - Some SQL code, especially more advanced procedural code, is reproducible within the same flavour
  - SQL's domain is databases and is based on set theory

# SQL Fundamentals

- Designed to manage data within Relational Database Management Systems (RDBMs), e.g.
  - MSSQL
  - Oracle DB
  - MySQL/MariaDB
  - PostgreSQL

# SQL Formatting

- Like other programming/query languages, SQL has reserved keywords/commands to perform instructional operations
  - Generally, these keywords are written in all caps: `SELECT`
  - Most modern interpreters no longer require this, but it is the expected standard
- All statements/queries should end with a semicolon
  - A few SQL constructs (like common table expressions, we'll get to these later) require them, otherwise they are optional
    - I'll almost certainly forget to use them
    - There's some debate over whether or not it's best practice

# SQL Formatting

- In SQL, white space and/or line breaks do not matter
  - Readability is important
    - Try to keep SQL statements to a reasonable screen width
    - Use sensible line breaks
    - Offset subqueries with indents

# SQL Formatting

- Code is commented in/out with `--` rather than `#`
- Code blocks can be commented out with `/* */`

```
/*
somecode spanning
multiple lines

*/
```

# What is SQL? / Flavours

# Flavours

- RDBMs differ from one to the next:
  - different keywords
    - e.g. return only 10 rows:  
`SELECT TOP 10...` vs `SELECT ... LIMIT 10`
  - different syntax
    - e.g. not equal:  
`!=` or `<>` (or both)
  - other, more nuanced/complex differences
    - e.g. architecture, data types, etc

# Flavours

- We are using *SQLite*:
  - Super easy to get setup
  - Requires almost no overhead
  - Open source, *free*
  - Similar enough in syntax to learn on
  - Used all over the world and in many applications
    - e.g. Firefox uses a SQLite backend to write a user's history locally

# Flavours

- Broad observations about Open Source systems:
  - Excellent at what they are designed for
  - Varying data types (SQLite has some unique ones!)
  - Not every command exists, but workarounds are usually possible
  - Some utilize RDBMs that feel extremely outdated

# Flavours

- Broad observations about enterprise systems:
  - Powerful and designed to handle edge cases
  - Feel a bit more refined
    - Can be version dependent
  - Tend to "lock in" businesses/organizations
    - Migration is costly, sometimes outrageously so
  - Newer players (Snowflake, Databricks, etc) and cloud providers (Azure, AWS, GCP, etc) offer a lot more functionality than just database querying
    - Sometimes use different terminology to describe SQL tasks

# What is SQL? / Environments for SQL

# Databases

- Relational databases are a collection of tables, views, procedural code, and other SQL-assisting artefacts
  - Generally the data stored in a database will be related to a real-world concept
  - Backends to data-collecting systems are often databases
    - e.g. CRMs, EMR software, ERPs, web-based applications
  - Usually not connected to other databases unless deemed necessary
  - Often transactional, meaning data is actively being written to by frontend systems
  - Tables are normalized

# Databases

- There are also non-relational databases, often referred to as NoSQL
  - We won't cover these
  - Common tools include: Amazon DynamoDB, Azure CosmosDB, MongoDB, Google Cloud Datastore

# Data Warehouses and Data Marts

- Data Warehouses are highly structured collections of (usually tabular) data
  - Data has been processed for a specific purpose, e.g. analytics
  - Data has been centralized
    - Often with the assistance of ETL (Extract, Transform, Load) tools
  - Have a lot of overhead, require governance, and strict rigidity
  - Tables are denormalized
  - Very common for enterprises, but losing traction in many industries

# Data Warehouses and Data Marts

- Data Marts are created from Data Warehouses to focus on a single subject
  - Designed to make Data Warehouses easier to use
  - Data is structured, but flexibility is driven by the purpose of the Data Mart
  - Some denormalized tables may be normalized or undergo even greater normalization
    - *The subject/purpose of the Data Mart might drive these types of decisions*
  - Common for enterprises that have Data Warehouses

# Data Lakes and Data Swamps

- Data Lakes allow on-demand access to raw, semi-structured, structured, and unstructured data
  - Not defined by a specific purpose
  - Highly scalable
  - Can be transactional, if systems are designed to produce outputs into Data Lakes
  - Often data sources for machine learning pipelines live in Data Lakes
  - Inexpensive compared to Data Warehouses
  - Increasingly common for enterprises to shift towards Data Lakes, especially with support from newer tools like Snowflake, Databricks, etc, which can maximize the analytical value of a Data Lake

# Data Lakes and Data Swamps

- Data Swamps...are poorly governed Data Lakes
  - Lack of documentation, lack of governance, poorly designed Data Lakes become Swamps
  - Avoid building these

**What questions do you have?**

Inrtoduction:

Welcome

What is SQL?

Data Modelling

# Data Modelling Topics (its a lot!)

- Relational Database Management Systems
- Data Models
- Structure of Data
- Constraints
- Entity Relationship Diagrams
- Attributes of an ERD: Entities & Relationships
- Relationship Examples
- Conceptual, Logical, Physical Models
- Assignment 1: Design a Logical Model

# Relational Database Management Systems

- Relational Database Management Systems (RDBMs) are software designed to:
- Store large amounts of data
- Utilize a query language to allow easy retrieval of the data
- Allow multiple users to access the data simultaneously
- Manage permissions for data access
- Mitigate data corruption and unauthorized access

# Relational Database Management Systems

- Generally, data is stored in a *database*
  - A database is a collection of information
  - Within a database, a collection of objects (e.g. tabular data "tables") is stored

# Relational Database Management Systems

- RDBMs allow users to define interactions between these objects, such as:
  - Establish the relationship between objects
  - Define procedural scripts to query specific data or trigger an action
  - Schedule routine work (e.g. procedures to run, maintenance, etc)

# Data Models

- A data model is a notation for describing data or information
- Data models consist of:
  - Structure of the data
  - Operations
  - Constraints on the data
  - Relationships

# Structure of Data

- SQL is comprised of tables

Breed	Affectionate w/ Family	Good w/ Other Dogs	Shedding	Coat Type	Coat Length	Playfulness	Energy
Pugs	5	4	4	Smooth	Short	5	3
Akitas	3	1	3	Double	Medium	3	4
Samoyeds	5	3	3	Double	Long	5	4

# Structure of Data

- Tables have Attributes and Observations
  - In SQL we call Attributes "Columns"
    - e.g. Breed, Coat Type, Coat Length
  - and Observations "Rows"
    - e.g. Samoyed, Double, Long
- SQL databases require tables to be named
  - e.g. We can call this table "breed\_traits"

# Structure of Data

- Columns are defined (and restricted, i.e. constrained) by data types
- Common ones include:
  - `INT` (integers: 1,2,3,-1,-2,-3)
    - most systems conserve storage space specifying their range
  - `FLOAT` , `DECIMAL` , `REAL` (decimal: 5.5, 3.333333)
  - `VARCHAR` , `NVARCHAR` , `TEXT` (text strings, with a maximum length associated: 'abc')
  - `DATE` , `DATETIME` , `TIME` (dates and times: '2023-01-09', '11:11:11.000')
- These may vary slightly by flavour (in SQLite they are simpler and less restricted)

# Structure of Data

- Data types are important:
  - They affect operation speed, storage size, data validity
    - Speed: it's computationally less expensive to compute smaller values
    - Storage: small is usually better, but the wrong size will affect systems; e.g. Psy's Gangnam Style exceeded 2,147,483,647 (32-bit signed,  $2^{32}/2-1$ ) views, causing YouTube to expand the view counter to 64-bit ( $\sim 9.2b$  if signed)
    - Validity: ensures columns contain the right type of data for operations, e.g. avoiding  $5 + \text{'ten'} = ??$

# Constraints

- Data Models also specify constraints
- Constraints are rules that must be followed:
  - Referential-Integrity constraints
    - Ensure that values in one table have corresponding values in another table
  - Attribute Constraints
    - Ensure that certain types of values are always consistent within columns
    - May also ensure whether values are unique, not missing, etc

# Constraints

- **NULL** and **NOT NULL**
  - If a value can be missing or not
- **UNIQUE**
  - All values are different
- **PRIMARY KEY (PK)**
  - Ensures each value in a column is unique within the table (e.g. an ID field)
  - One PK per table
  - Cannot be NULL
  - Ensures database integrity by restricting record deletion

# Constraints

- FOREIGN KEY (FK)
  - Creates a linkage between a column in one table and a column in another table
    - Generally, foreign keys are linked to primary keys
    - Sometimes share the same name as the linked column, but this isn't required
    - Linkage requires data types to be the same
  - As many FKS as needed per table
  - May be NULL
  - Record can be deleted

# Entity Relationship Diagrams

- Entity Relationship Diagrams (ERDs) are diagrams depicting the structure of tables within a database
  - This both *identifies the tables* and *describes their relationships*
- ERDs are useful for:
  - Database design
  - Debugging
  - Writing logical, consistent, and efficient queries

# Entity Relationship Diagrams

- There are three levels of detail for ERD depictions:
  - Conceptual model
  - Logical model
  - Physical model

# Attributes of an ERD Entity

- For a given table:
  - Name
  - Relationship to another table
  - Column Names
  - Column Types
  - Primary Keys (if present)
  - Foreign Keys (if present)

# Attributes of an ERD Relationship

- Defines which columns are related
- Defines what type of relationship exists:
  - One-to-One
  - One-to-Many
  - Many-to-Many

# Relationship Examples

**One-to-One:** where a given row within a table is associated with only a single row in another table

Table 1: Country — Table 2: Capital City

Table 1:Country	Table 2:Capital
Canada	1:1 Ottawa
USA	1:1 Washington DC
Mexico	1:1 Mexico City

# Relationship Examples

**One-to-Many:** where a given row within a table can be referenced by multiple rows in another table

# Relationship Examples

Table 1: Country — Table 2: States

Table 1:Country	Table 2:States
Canada	1: $\infty$ Alberta
Canada	1: $\infty$ British Columbia
Canada	1: $\infty$ ... (11 more rows)
USA	1: $\infty$ Alabama
USA	1: $\infty$ Alaska
USA	1: $\infty$ ... (48 more rows)
Mexico	1: $\infty$ Aguascalientes
Mexico	1: $\infty$ Baja California
Mexico	1: $\infty$ ... (30 more rows)

# Relationship Examples

**Many-to-Many:** where multiple rows within a table can be referenced by multiple rows in another table

Table 1: Employee — Table 2: Employee Type ( Next slide )

For this example, imagine the following:

Previously, A was an course instructor at DSI (python) *and* a TA at DSI (SQL). Thomas remains the instructor for SQL. Ananya is now the course support. If a table contained Employee ID and Employee Type ID, A would be listed twice.

# Relationship Examples

Table 1: Employee — Table 2: Employee Type

Employee	Employee ID
Thomas	001
A	002
Ananya	003

Type	Type ID
Instructor	10
TA	11

# Relationship Examples

Table 3: listed twice

Employee ID	Type ID
001	$\infty:\infty$ 10
002	$\infty:\infty$ 10
002	$\infty:\infty$ 11
003	$\infty:\infty$ 11


# Relationship Examples

We'd create additional Many-to-Many relationships if we created a course table, because A and Ananya are involved in multiple courses!

# Conceptual Models

- Define the tables (objects/entities) and their relationships
- Our Farmers Market database:
  - 10 tables
  - Relationships between these tables
    - e.g. product and product\_category: *what type of thing a product is*
    - product and customer\_purchases: *what products a customer has bought*
    - product and vendor\_inventory: *what products each vendor has available*
  - Not all tables share a relationship to one another, but all tables have at least one relationship

## Farmers Market Conceptual Model

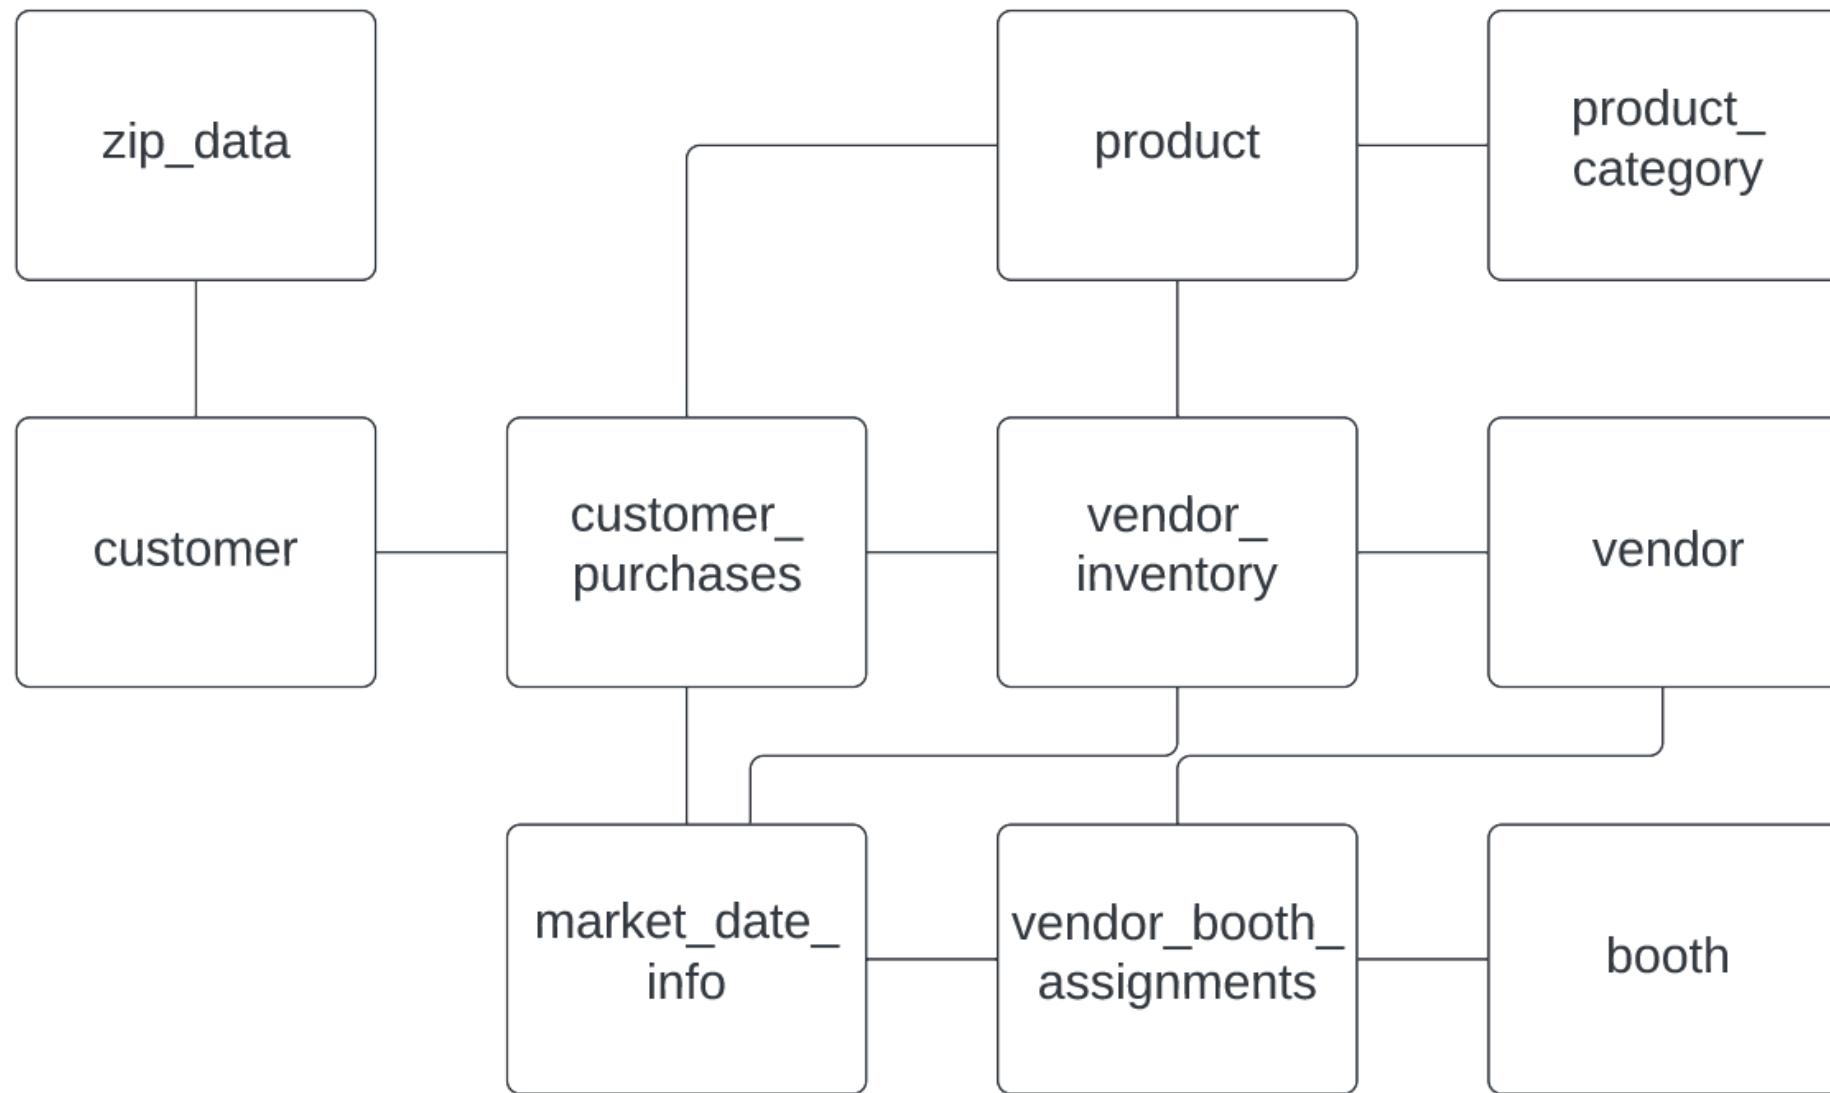


# Logical Models

- Add additional detail to the conceptual model by adding column names for each table
- Often indicate the type of relationship
  - One-to-One
  - One-to-Many
  - Many-to-Many

# Logical Models

- Our (partial) Farmers Market database:
  - product (5 columns) shares a One-to-Many relationship with vendor\_inventory (5 columns) on product\_id
  - product\_category (2 columns) shares a One-to-Many relationship with product (5 columns) on product\_category\_id
  - \_\_\_\_\_ shares a \_\_\_\_\_ relationship with \_\_\_\_\_ on vendor\_id


## Farmers Market Logical Model (partial)

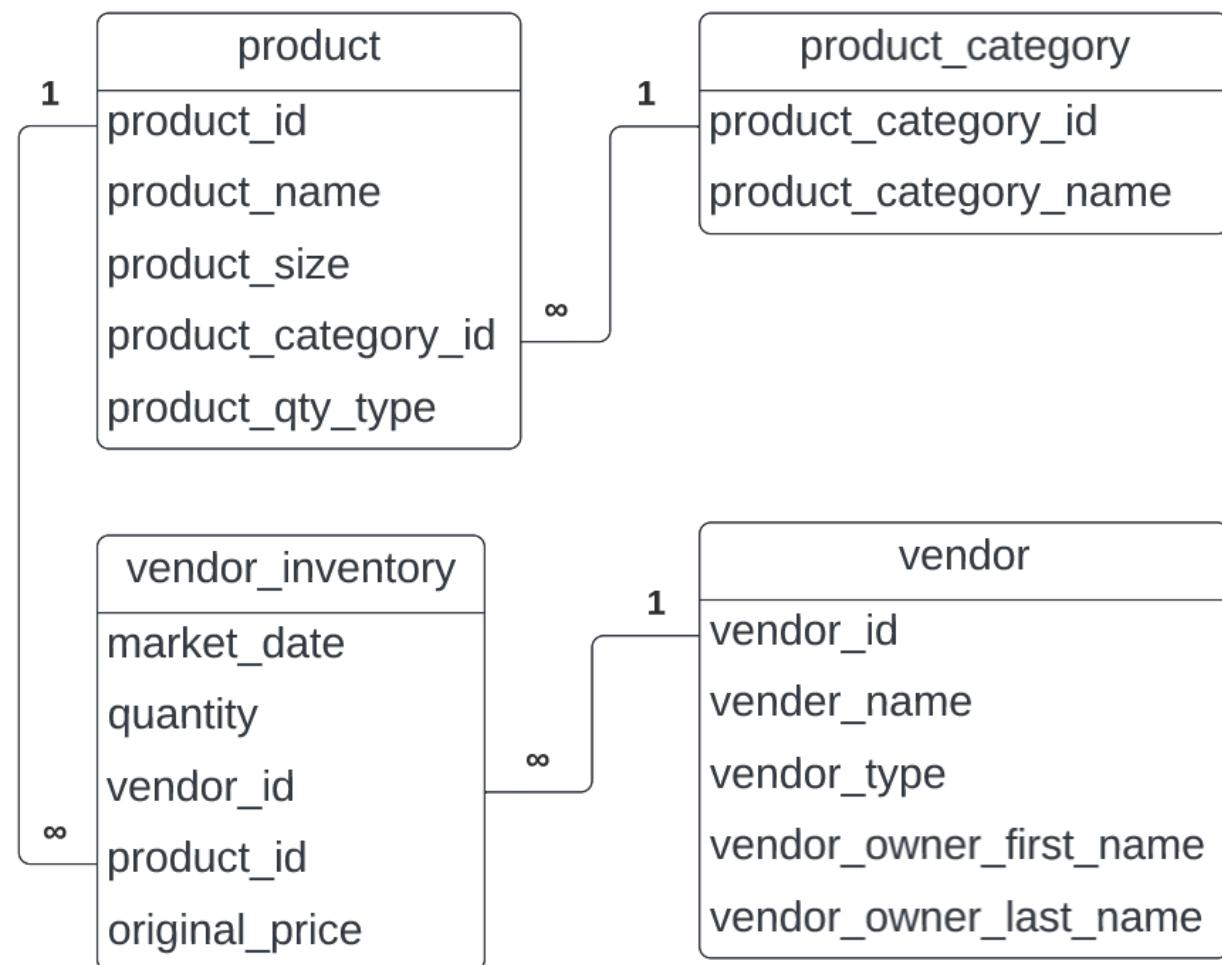

# Physical Models

- Add additional detail to the logical model by adding key type and column data type
- Our (partial) Farmers Market database:
  - vendor\_id (int) is the PK for vendor, which shares a One-to-Many relationship with vendor\_inventory on vendor\_id (FK)
  - product\_id (int) is a FK for vendor\_inventory (*so elsewhere in this diagram, we'd connect this to a PK of another table*)
  - market\_date (date) is the PK for vendor\_inventory
    - **why? 🧐💬 Think, Pair, Share**

### Farmers Market Physical Model (partial)

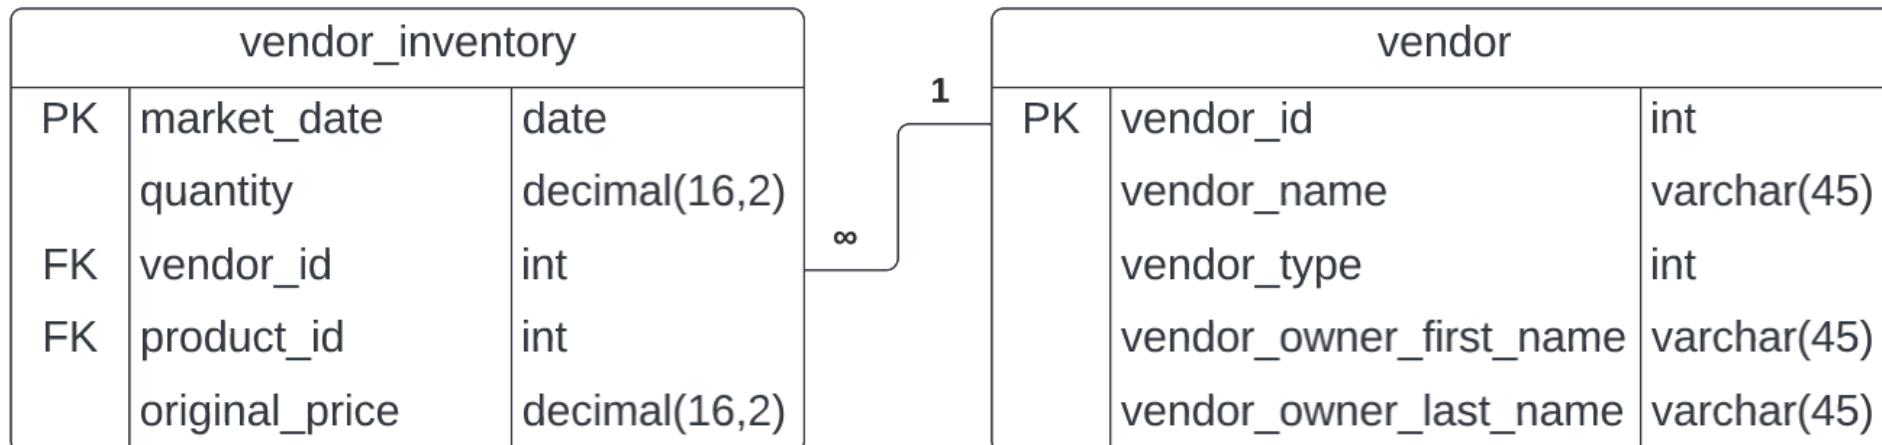

**What questions do you have about Data Modelling?**

# Assignment 1

# Assignment 1: Design a Logical Model

**Q1)** Create a logical model for a small bookstore. 

At the minimum it should have employee, order, sales, customer, and book entities (tables). Determine sensible column and table design based on what you know about these concepts. Keep it simple, but work out sensible relationships to keep tables reasonably sized. Include a date table. There are several tools online you can use, I'd recommend [Lucidchart](#) or [Draw.io](#).

# Assignment 1: Design a Logical Model

**Q2)** We want to create employee shifts, splitting up the day into morning and evening. Add this to the ERD.

# Assignment 1: Design a Logical Model

**Q3)** The store wants to keep customer addresses. Propose two architectures for the CUSTOMER\_ADDRESS table, one that will retain changes, and another that will overwrite. Which is type 1, which is type 2? *Hint, search type 1 vs type 2 slowly changing dimensions.*

**Bonus:** Are there privacy implications to this, why or why not?

# Assignment 1: Design a Logical Model

**Q4)** Review the AdventureWorks ERD here: [link](#)

Highlight at least two differences between it and your ERD. Would you change anything in yours?

What questions do you have about anything from today?