

Exception Handling

CSE 114: Introduction to Object-Oriented Programming

Ahmad Esmaili

Sony Brook University

<http://www.cs.stonybrook.edu/~cse114>

Motivation

- When a program runs into a **runtime error**, the program terminates abnormally.
 - We want to handle the runtime error so that the program can **continue to run or terminate gracefully**.

Why use Exception-Handling?

Runtime error: the user enters **a** when asked for an int

```
import java.util.Scanner;

public class TestReadNonIntAsInt {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);
        System.out.print("Enter an int: ");
        int num = input.nextInt();
        System.out.println(num);
    }
}
```

```
a
Exception in thread "main"
java.util.InputMismatchException
at java.util.Scanner.throwFor(Unknown Source)
at java.util.Scanner.next(Unknown Source)
at java.util.Scanner.nextInt(Unknown Source)
at java.util.Scanner.nextInt(Unknown Source)
at TestReadNonIntAsInt.main(TestReadNonIntAsInt.java:7)
```

Why use Exception-Handling?

It does not matter if we try differently:

```
import java.util.Scanner;
public class TestParseNonIntAsInt {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);
        System.out.print("Enter an int: ");
        String s = input.next();
        int num = Integer.parseInt(s);
        System.out.println(num);
    }
}
```

a
Exception in thread "main" [java.lang.NumberFormatException](#):
[For input string: "abc"](#)
at java.lang.NumberFormatException.forInputString(Unknown Source)
at java.lang.Integer.parseInt(Unknown Source)
at java.lang.Integer.parseInt(Unknown Source)
at TestParseNonIntAsInt.main([TestParseNonIntAsInt.java:7](#))

Why use Exception-Handling?

Another runtime error: **division with 0 (if the user enters 1 and 0)**

```
import java.util.Scanner;

public class Quotient {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);
        // Prompt the user to enter two integers
        System.out.print("Enter two integers: ");
        int number1 = input.nextInt();
        int number2 = input.nextInt();
        System.out.println(number1 + " / " + number2
            + " is " + (number1 / number2));
    }
}
```

Enter two integers: 1 0

Exception in thread "main" java.lang.ArithmeticException: / by zero at Quotient.main(Quotient.java:10)

Exception-Handling

Exception-Handling in the same method:

```
import java.util.Scanner;
public class QuotientWithException {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);
        // Prompt the user to enter two integers
        System.out.print("Enter two integers: ");
        int number1 = input.nextInt();
        int number2 = input.nextInt();
        try {
            System.out.println(number1 + " / " + number2 + " is "
                               + (number1 / number2));
        } catch (Exception ex) {
            System.out.println("Exception: " +
                               "an integer cannot be divided by zero ");
        }
        System.out.println("Execution continues ...");
    }
}
```

Exception-Handling

What if the runtime error occurs in a called method?

```
import java.util.Scanner;
public class QuotientWithMethod {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);
        // Prompt the user to enter two integers
        System.out.print("Enter two integers: ");
        int number1 = input.nextInt();
        int number2 = input.nextInt();
        try {
            int result = quotient(number1, number2);
            System.out.println(number1 + " / " + number2 + " is " + result);
        } catch (Exception ex) {
            System.out.println("Exception: an integer " +
                               "cannot be divided by zero ");
        }
        System.out.println("Execution continues ...");
    }
    public static int quotient(int number1, int number2) throws Exception{
        if (number2 == 0)
            throw new ArithmeticException("Divisor cannot be zero");
        return number1 / number2;
    }
}
```

Exception Advantages


- It enables a method to throw an exception to its caller.
- Without this capability, a method must handle the exception itself (and return an incorrect value) or terminate the program.
- Exception handling separates error-handling code from normal programming tasks, thus making programs easier to read and to modify.

Example of reading a value


- By handling an exception, your program can continuously read an input until it is correct:

```
import java.util.*;
public class InputMismatchExceptionDemo {
    public static void main(String[] args) {
        Scanner input = new Scanner(System.in);
        boolean continueInput = true;
        do {
            try {
                System.out.print("Enter an integer: ");
                int number = input.nextInt();
                // Display the result
                System.out.println("The number entered is " + number);
                continueInput = false;
            } catch (InputMismatchException ex) {
                System.out.println("Try again. Incorrect input: " +
                    "an integer is required.");
                input.nextLine(); // discard input
            }
        } while (continueInput);
    }
}
```

Exception Types

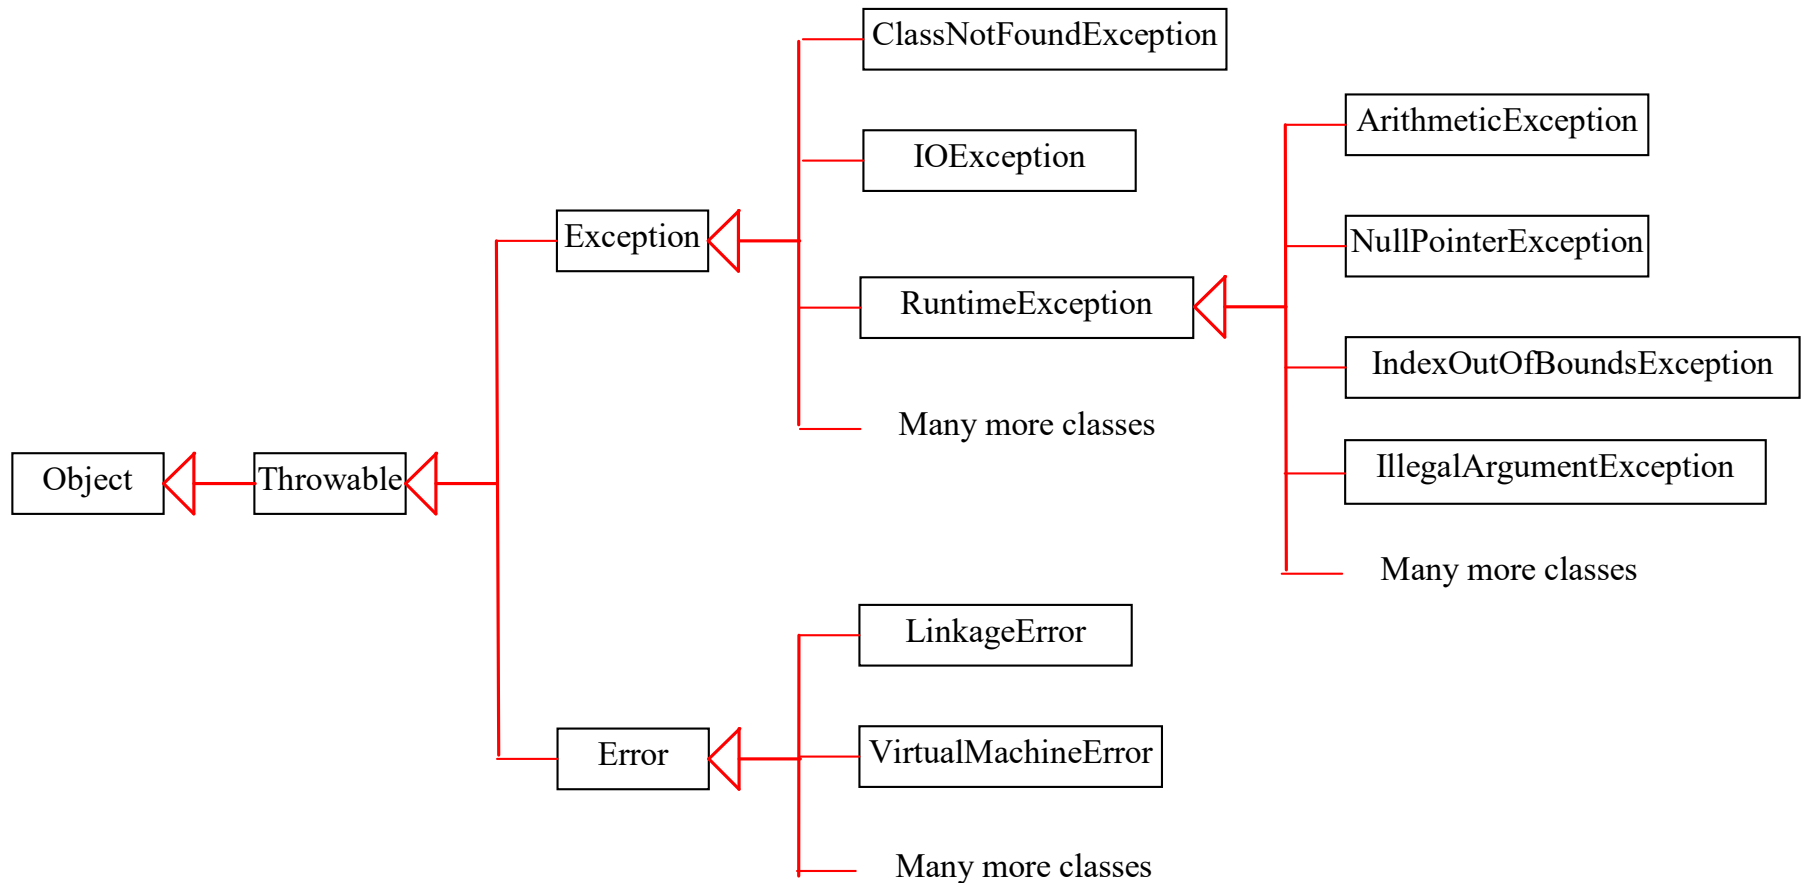


System Errors

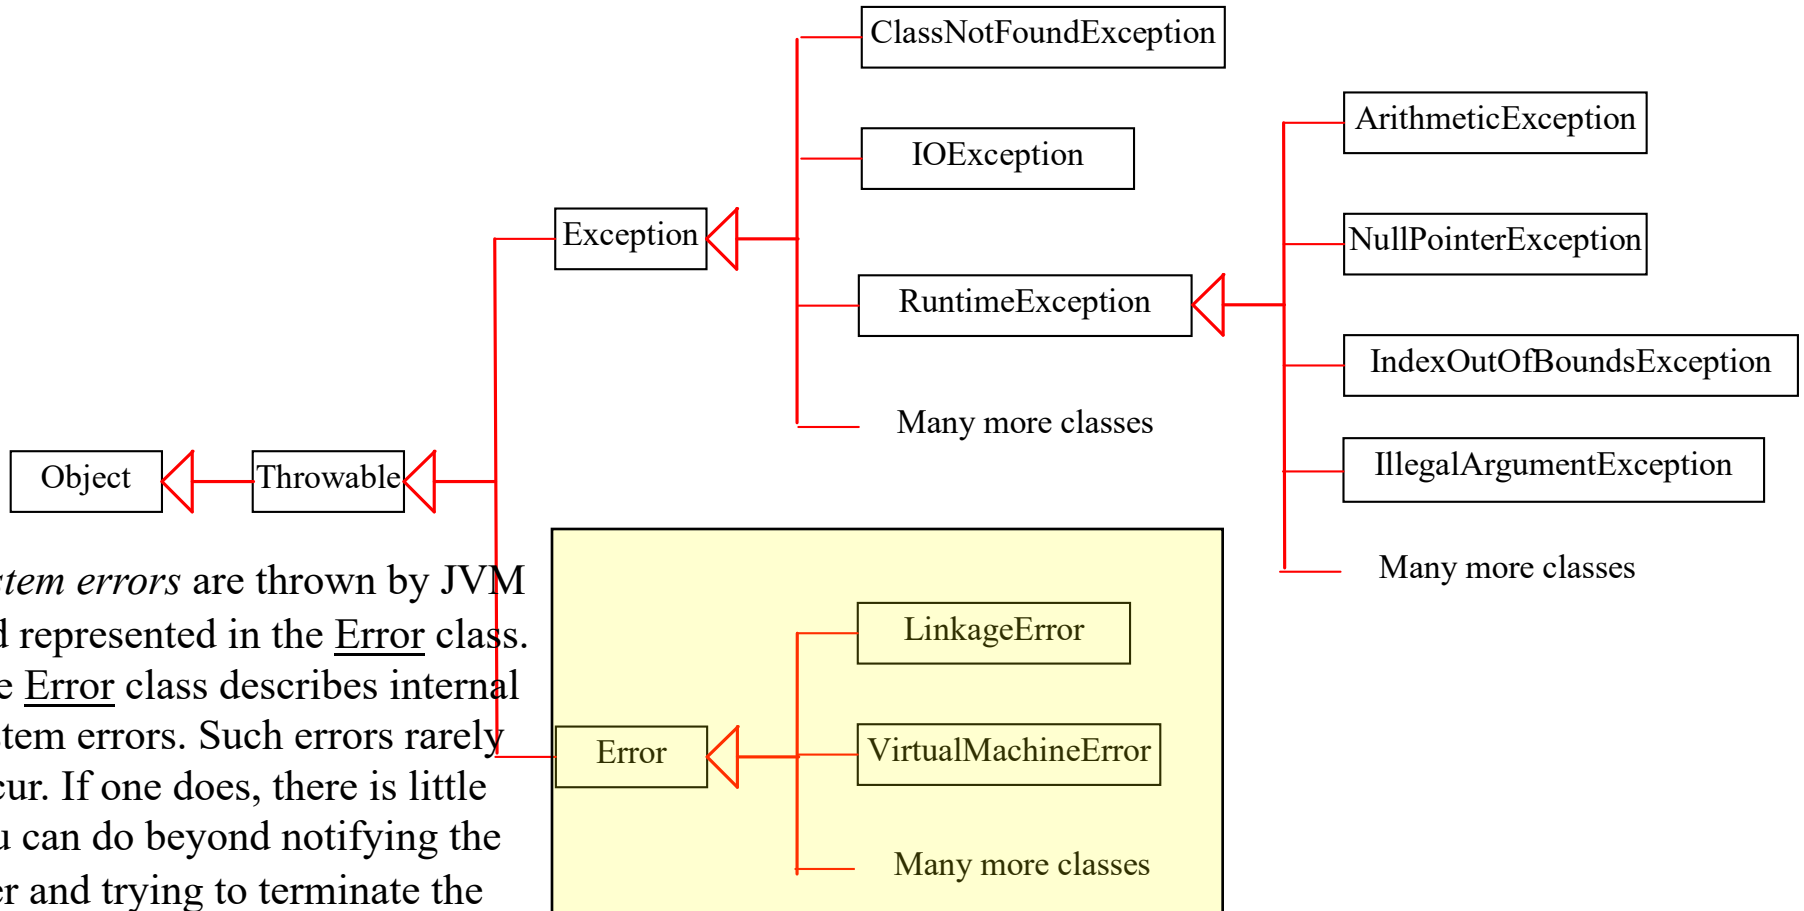


System errors are thrown by JVM and represented in the Error class. The Error class describes internal system errors. Such errors rarely occur. If one does, there is little you can do beyond notifying the user and trying to terminate the program gracefully.

Exceptions

Exception describes errors caused by your program and external circumstances. These errors can be caught and handled by your program.

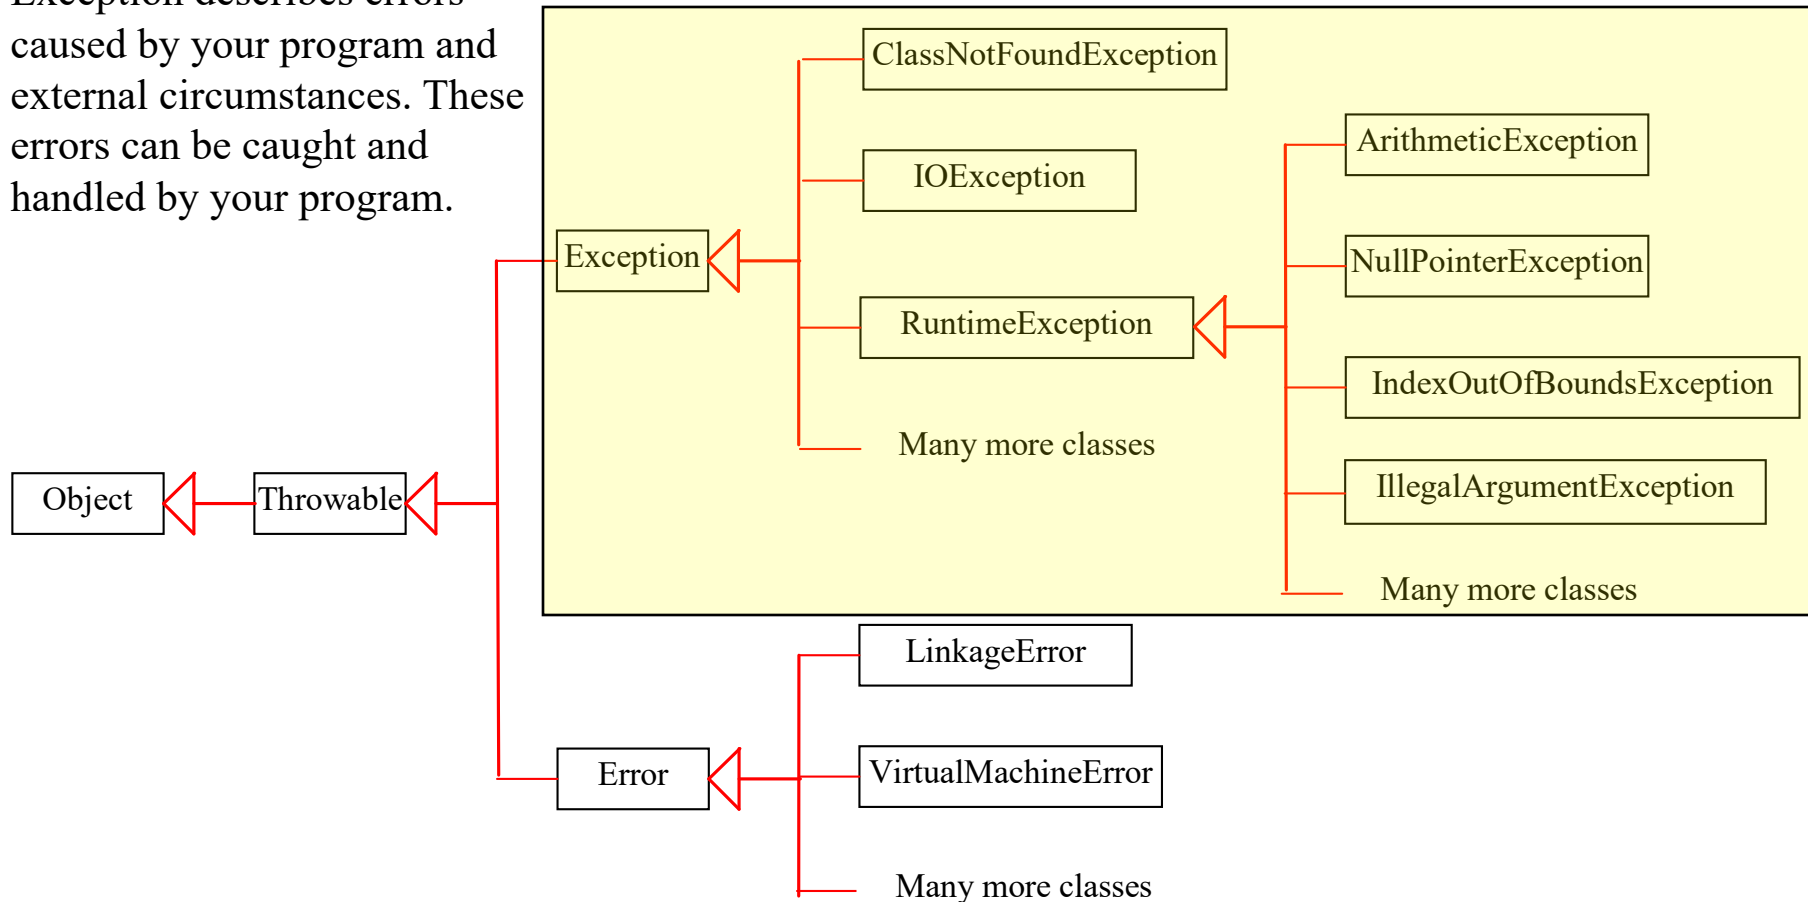


Runtime Exceptions

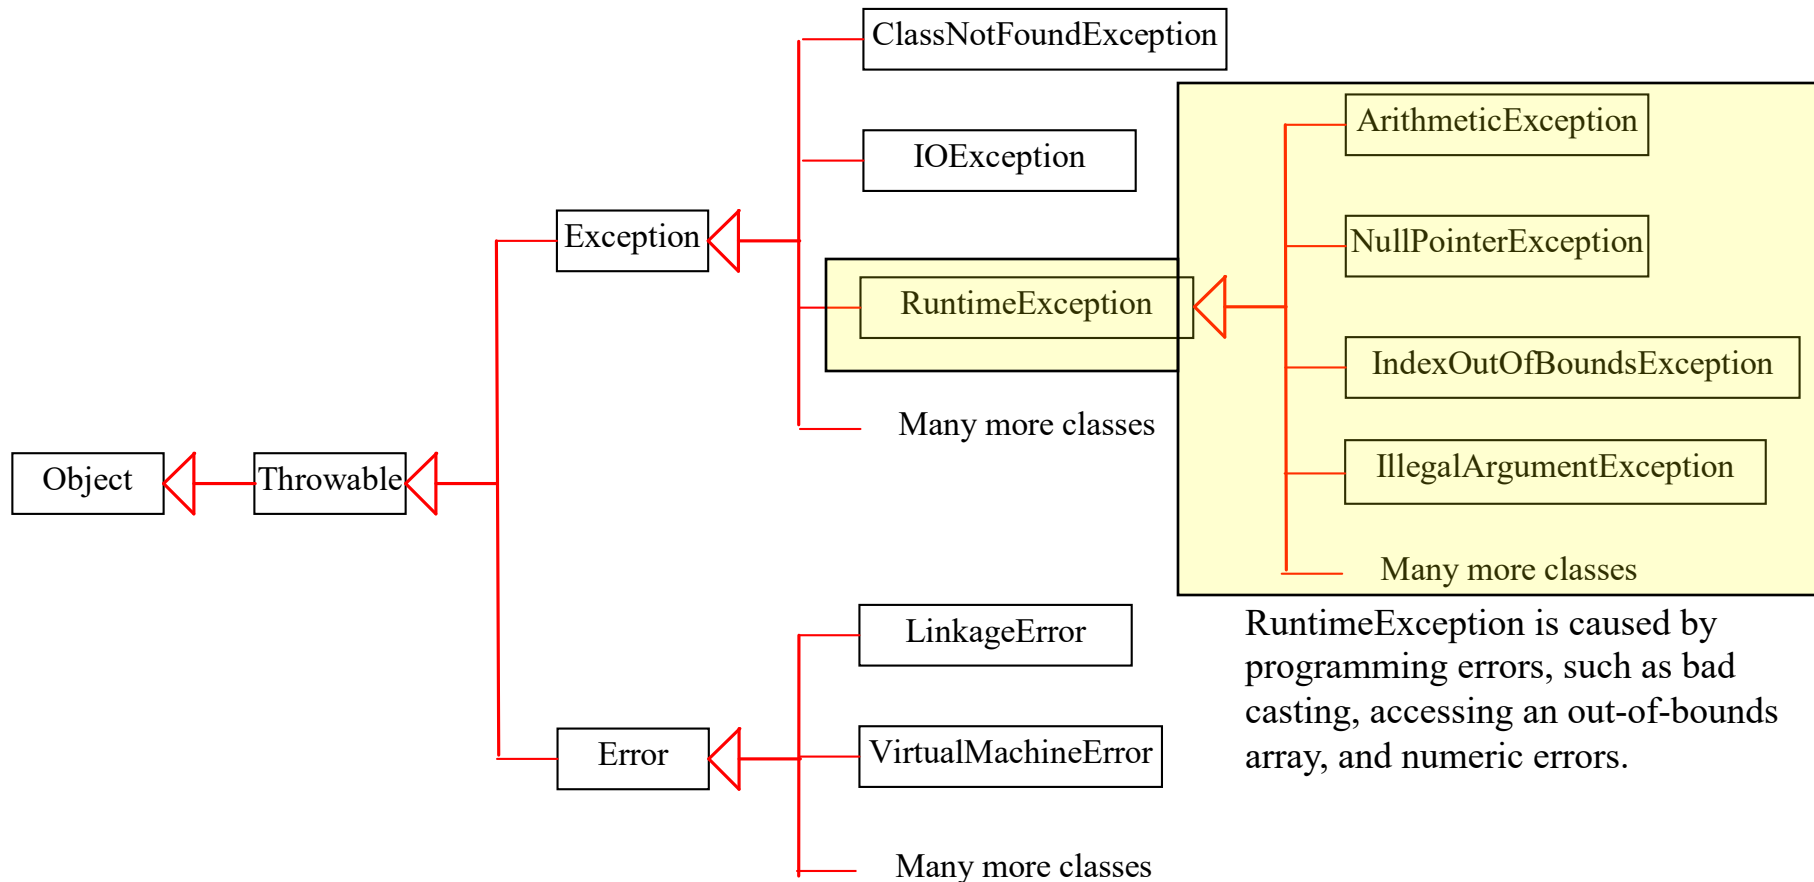

Unchecked Exceptions vs. Checked Exceptions

- RuntimeException, Error and their subclasses are known as *unchecked exceptions*.
- All other exceptions are known as *checked exceptions*, meaning that the compiler forces the programmer to check and deal with the exceptions.


Unchecked Exceptions

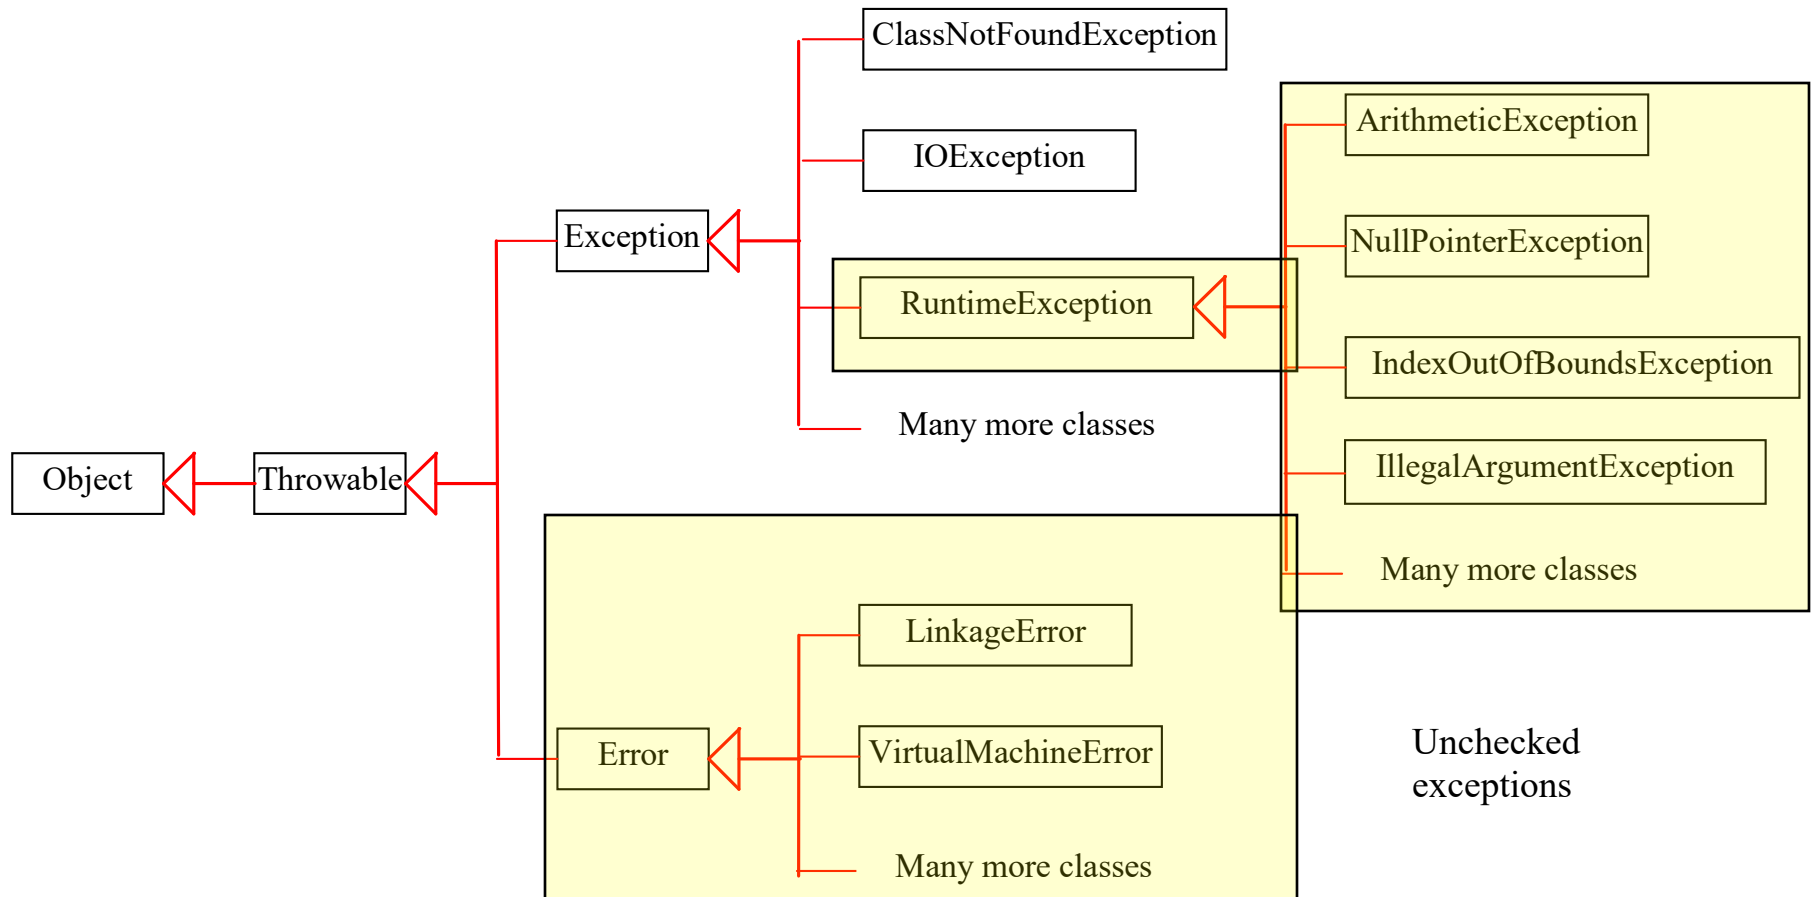

Unchecked Exceptions

- In most cases, **unchecked exceptions reflect programming logic errors that are not recoverable.**
 - For example, a `NullPointerException` is thrown if you access an object through a reference variable before an object is assigned to it; an `IndexOutOfBoundsException` is thrown if you access an element in an array outside the bounds of the array.
 - **These are the logic errors that should be corrected in the program.**
 - Unchecked exceptions can occur anywhere in the program.
 - To avoid cumbersome overuse of try-catch blocks, **Java does not mandate you to write code to catch unchecked exceptions.**

Declaring, Throwing, and Catching Exceptions

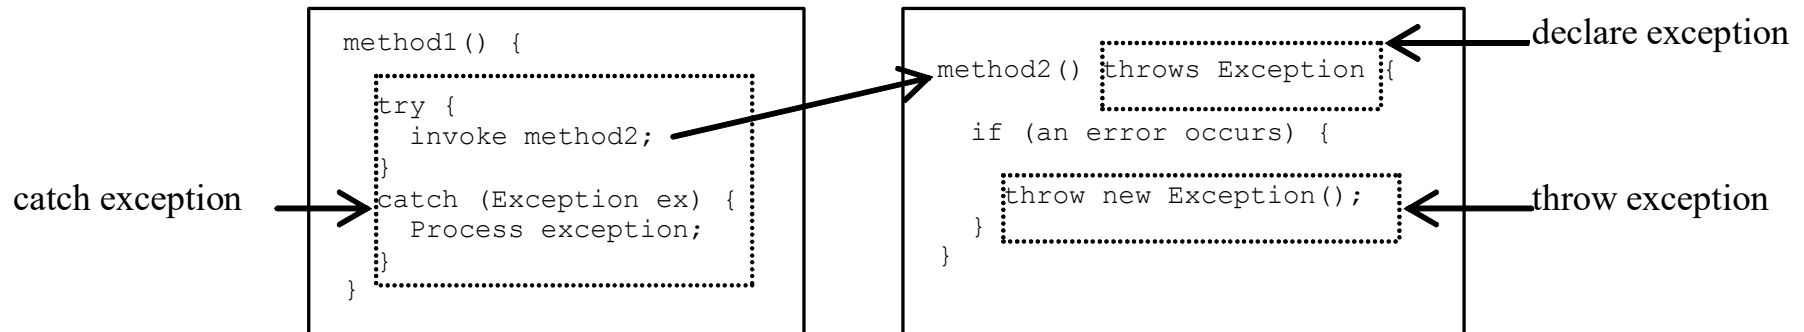

Declaring Exceptions

- Every method must state the types of checked exceptions it might throw - this is known as *declaring exceptions*:

```
public void myMethod() throws IOException
```

```
public void myMethod() throws IOException,  
OtherException, ...
```

Throwing Exceptions

- When the program detects an error, the program can create an instance of an appropriate exception type and throw it - known as *throwing an exception*:

```
throw new TheException();
```

OR

```
TheException ex = new TheException();  
throw ex;
```


Throwing Exceptions Example

```
/** Set a new radius */  
public void setRadius(double newRadius)  
    throws IllegalArgumentException {  
    if (newRadius >= 0)  
        radius = newRadius;  
    else  
        throw new IllegalArgumentException(  
            "Radius cannot be negative");  
}
```

Catching Exceptions

```
try {  
    // Statements that may throw exceptions  
    ...  
} catch (ExceptionType1 exVar1) {  
    handler for exception1;  
} catch (ExceptionType2 exVar2) {  
    handler for exception2;  
}  
...  
} catch (ExceptionTypeN exVarN) {  
    handler for exceptionN;  
}
```

Catching Exceptions

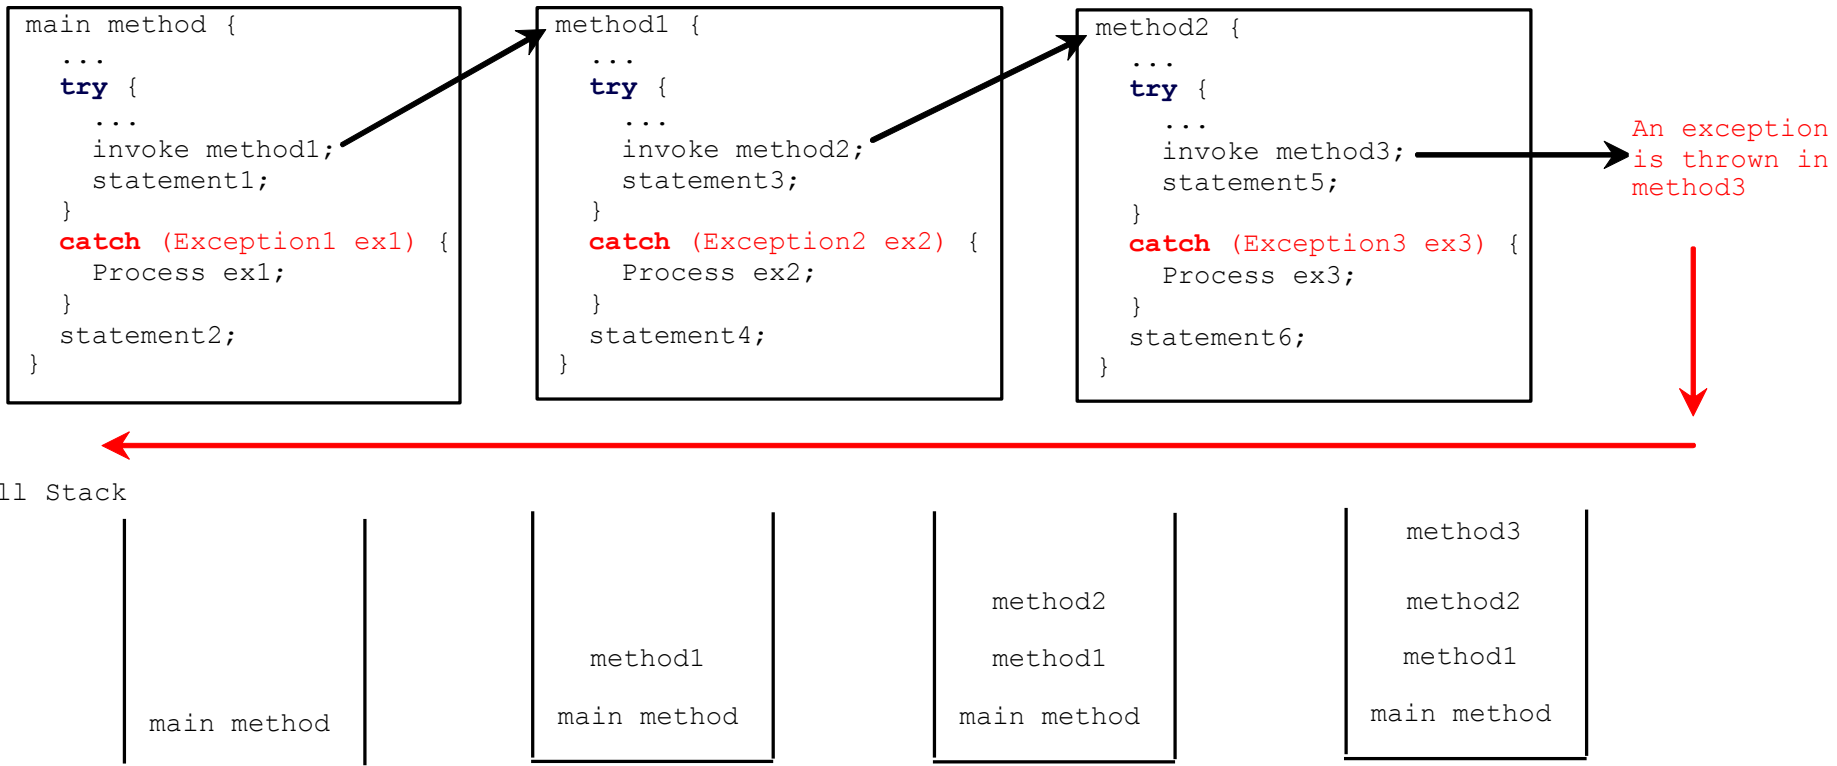

```

public class TestCatchingExceptions {
    public static void main(String[] args) {
        try {
            method1();
        } catch (Exception e) {
            System.out.println("main");
        }
        System.out.println("main continues");
    }
    public static void method1() throws Exception {
        try {
            method2();
        } catch (RuntimeException e) {
            System.out.println("method1");
        }
        System.out.println("method1 continues");
    }
    public static void method2() throws Exception {
        try {
            method3();
        } catch (ArithmeticException e) {
            System.out.println("method2");
        }
        System.out.println("method2 continues");
    }
    public static void method3() throws Exception {
        //throw new ArithmeticException(); // method2 ...
        //throw new RuntimeException();      // method1 ...
        throw new Exception();              // main ...
    }
}

```

Output:

```

// method2 can't catch
// method1 can't catch
// main catches

```

```

main
main continues

```

```

public class TestCatchingExceptions {
    public static void main(String[] args) {
        try {
            method1();
        } catch (Exception e) {
            System.out.println("main");
        }
        System.out.println("main continues");
    }
    public static void method1() throws Exception {
        try {
            method2();
        } catch (RuntimeException e) {
            System.out.println("method1");
        }
        System.out.println("method1 continues");
    }
    public static void method2() throws Exception {
        try {
            method3();
        } catch (ArithmeticException e) {
            System.out.println("method2");
        }
        System.out.println("method2 continues");
    }
    public static void method3() throws Exception {
        throw new ArithmeticException ();    // method2 ...
        //throw new RuntimeException();        // method1 ...
        //throw new Exception();              // main ...
    }
}

```

Output:

```

method2
method2 continues
// normal return to method1
method1 continues
// normal return to main
main continues

```

```

public class TestCatchingExceptions {
    public static void main(String[] args) {
        try {
            method1();
        } catch (Exception e) {
            System.out.println("main");
        }
        System.out.println("main continues");
    }
    public static void method1() throws Exception {
        try {
            method2();
        } catch (RuntimeException e) {
            System.out.println("method1");
        }
        System.out.println("method1 continues");
    }
    public static void method2() throws Exception {
        try {
            method3();
        } catch (ArithmeticException e) {
            System.out.println("method2");
        }
        System.out.println("method2 continues");
    }
    public static void method3() throws Exception {
        //throw new ArithmeticException(); // method2 ...
        throw new RuntimeException ();      // method1 ...
        //throw new Exception();           // main ...
    }
}

```

Output:

```

// method2 can't catch
// method1 catches
method1
method1 continues
// normal return to main
main continues

```

```

public class TestCatchingExceptions {
    public static void main(String[] args) {
        try {
            method1();
        } catch (Exception e) {
            System.out.println("main");
        }
        System.out.println("main continues");
    }
    public static void method1() throws Exception {
        try {
            method2();
        } catch (RuntimeException e) {
            System.out.println("method1");
        }
        System.out.println("method1 continues");
    }
    public static void method2() throws Exception {
        try {
            method3();
        } catch (RuntimeException e) {
            System.out.println("method2");
        }
        System.out.println("method2 continues");
    }
    public static void method3() throws Exception {
        //throw new ArithmeticException(); // method2 ...
        throw new RuntimeException ();      // method1 ...
        //throw new Exception();           // main ...
    }
}

```

Output:

```

// method2 catches
method2
method2 continues
// normal return to method1
method1 continues
// normal return to main
main continues

```

Catch or Declare Checked Exceptions

- Java forces you to deal with **checked exceptions**:
 - If a method declares a checked exception (i.e., an exception other than **Error** or **RuntimeException**), you must invoke it in a **try-catch** block or declare to throw the exception in the calling method
 - For example, suppose that method **p1** invokes method **p2** and **p2** may throw a checked exception (e.g., **IOException**), you have to write the code: (a) or (b):

```
void p1() {  
    try {  
        p2();  
    }  
    catch (IOException ex) {  
        ...  
    }  
}
```

(a)

```
void p1() throws IOException {  
    p2();  
}
```

(b)

```
public class CircleWithException {
    private double radius;
    private static int numberOfObjects = 0; // The number of the objects created

    public CircleWithException() {
        this(1.0);
    }
    public CircleWithException(double newRadius) throws IllegalArgumentException{
        setRadius(newRadius);
        numberOfObjects++;
    }

    public void setRadius(double newRadius) throws IllegalArgumentException {
        if (newRadius >= 0)
            radius = newRadius;
        else
            throw new IllegalArgumentException("Radius cannot be negative");
    }

    public static int getNumberOfObjects() { /** Return numberOfObjects */
        return numberOfObjects;
    }
}
```

```
public static void main(String[] args) {  
    try {  
        CircleWithException c1 = new CircleWithException(5);  
        CircleWithException c2 = new CircleWithException(-5);  
        CircleWithException c3 = new CircleWithException(10);  
    } catch (IllegalArgumentException ex) {  
        System.out.println(ex);  
    }  
    System.out.println("Number of objects created: " +  
        CircleWithException.getNumberOfObjects());  
}  
}
```

Output:
Radius cannot be negative
Number of objects created: 1

The `finally` Clause

```
try {  
    statements;  
} catch (TheException ex) {  
    handling ex;  
} finally {  
    finalStatements;  
}
```

The `finally` block *always* executes when the `try` block exits
Useful for cleanup code:

```
}finally {  
    if (out != null) {  
        System.out.println("Closing PrintWriter");  
        out.close();  
    }  
}
```

```

public class TestCatchingExceptions {
    public static void main(String[] args) {
        try {
            method1();
        } catch (Exception e) {
            System.out.println("main");
        }
        System.out.println("main continues");
    }
    public static void method1() throws Exception {
        try {
            method2();
        } catch (RuntimeException e) {
            System.out.println("method1");
        }
        System.out.println("method1 continues");
    }
    public static void method2() throws Exception {
        try {
            method3();
        } catch (ArithmeticException e) {
            System.out.println("method2");
        } finally {
            System.out.println("TESTING FINALLY");
        }
        System.out.println("method2 continues");
    }
    public static void method3() throws Exception {
        //throw new ArithmeticException(); // method2 ...
        throw new RuntimeException ();      // method1 ...
        //throw new Exception();           // main ...
    }
}

```

Output:

```

TESTING FINALLY
// method2 can't catch
// method1 catches
method1
method1 continues
// normal return to main
main continues

```

Rethrowing Exceptions

```
try {  
    statements;  
} catch (TheException ex) {  
    ...  
    throw ex;  
}
```

When To Use Exceptions

- Exception handling usually requires more time and resources because it requires instantiating a new exception object, rolling back the call stack, and propagating the errors to the calling methods.
- If an exception occurs in a method:
 - If you can handle the exception in the method where it occurs, there is no need to throw it.
 - If you want the exception to be processed by its caller, you should create an exception object and throw it.

When To Use Exceptions

- We only use exceptions to deal with unexpected error conditions.
- Do not use it to deal with simple, expected situations:

```
try {  
    System.out.println(refVar.toString());  
} catch (NullPointerException ex) {  
    System.out.println("refVar is null");  
}
```

is better to be replaced by

```
if (refVar != null)  
    System.out.println(refVar.toString());  
else  
    System.out.println("refVar is null");
```

Defining Custom Exception Classes

- Use the exception classes in the API whenever possible.
- Define custom exception classes if the predefined classes are not sufficient.
- Define custom exception classes by extending **Exception** or a subclass of **Exception**

Custom Exception Class Example

```
public class InvalidRadiusException extends Exception {  
    private double radius;  
  
    /** Construct an exception */  
    public InvalidRadiusException(double radius) {  
        super("Invalid radius " + radius);  
        this.radius = radius;  
    }  
  
    /** Return the radius */  
    public double getRadius() {  
        return radius;  
    }  
}
```

Custom Exception Class Example

```
public class CircleWithInvalidRadiusException {
    private double radius;
    public CircleWithInvalidRadiusException(double newRadius)
        throws InvalidRadiusException {
        setRadius(newRadius);
        numberOfObjects++;
    }
    public void setRadius(double newRadius) throws InvalidRadiusException {
        if (newRadius >= 0)
            radius = newRadius;
        else
            throw new InvalidRadiusException(newRadius);
    }
    public static void main(String[] args){
        try{
            CircleWithRadius c1 = new CircleWithRadius(-5);
        } catch(InvalidRadiusException e) {
            System.out.println(e.getRadius() + " is negative. No circle was created");
        }
    }
}
```

Custom Exception Class Example

```
public class AnotherException extends Exception {  
  
    /** Construct an exception with argument*/  
    public AnotherException(String message) {  
        super(message);  
    }  
  
    /** Construct an exception without argument*/  
    public AnotherException() {  
        super("Some default message");  
    }  
}
```

HW6 Input & Exception Handling

```
/**
 * Helper method to read a single integer input from the user.
 * This method will ensure that the input is valid (an integer).
 *
 * @param prompt The message to prompt the user for input.
 * @return The integer input from the user.
 */
public static int getIntInputLine(String prompt) {
    while (true) {
        try {
            System.out.print(prompt);
            return Integer.parseInt(input.nextLine());
        } catch (NumberFormatException e) {
            System.out.println("Invalid input. Please enter a valid integer.");
        }
    }
}

/**
 * Helper method to read a single string input from the user.
 * This method will read the entire line of text entered by the user.
 *
 * @param prompt The message to prompt the user for input.
 * @return The string input from the user.
 */
public static String getStringInput(String prompt) {
    System.out.print(prompt);
    return input.nextLine();
}
```

HW6 Throwing Exceptions in Methods

```
/**
 * Removes a user from the music service.
 * The user will be removed from the list of users in the system.
 *
 * @param user The User object to be removed from the system.
 * @throws IllegalArgumentException if the user is not found in the list of users.
 */
public void removeUser(User user) {
    if (!users.contains(user)) {
        throw new IllegalArgumentException("User not found.");
    }
    users.remove(user);
}

/**
 * Retrieves a user by their username.
 * Searches the list of users for a match and returns the corresponding User object.
 * If the user is not found, it returns null.
 *
 * @param username The username of the user to retrieve.
 * @return The User object associated with the given username, or null if no match is found.
 */
public User getUser(String username) {
    for (User user : users) {
        if (user.getUsername().equalsIgnoreCase(username)) {
            return user; // Return the User object if found
        }
    }
    return null; // Return null if user is not found
}
```

HW6 Throwing Exceptions in Methods

```
/**
 * Sets the duration of the song.
 * The duration must be in the "mm:ss" format (e.g., "03:45").
 * If the format is incorrect, an IllegalArgumentException is thrown.
 *
 * @param duration The duration of the song in "mm:ss" format.
 * @throws IllegalArgumentException If the duration is not in the correct format.
 */
public void setDuration(String duration) {
    if (!duration.matches("\\d+:\\d{2}")) {
        throw new IllegalArgumentException("Invalid duration format. Expected format is minutes:seconds.");
    }
    this.duration = duration;
}

/**
 * Converts the song's duration from "mm:ss" format to total seconds.
 *
 * @return The duration of the song in seconds.
 */
public int getDurationInSeconds() {
    String[] parts = duration.split(":"); // Split the duration string into minutes and seconds
    int minutes = Integer.parseInt(parts[0]);
    int seconds = Integer.parseInt(parts[1]);
    return minutes * 60 + seconds; // Convert to total seconds
}
```

Text I/O: The **File** Class

- The **File** class is intended to provide an abstraction that deals with most of the machine-dependent complexities of files and path names in a machine-independent fashion.
 - The filename is a string
 - The **File** class is a wrapper class for the file name and its directory path

Obtaining file properties and manipulating files

java.io.File	
+File(pathname: String)	Creates a File object for the specified pathname. The pathname may be a directory or a file.
+File(parent: String, child: String)	Creates a File object for the child under the directory parent. child may be a filename or a subdirectory.
+File(parent: File, child: String)	Creates a File object for the child under the directory parent. parent is a File object. In the preceding constructor, the parent is a string.
+exists(): boolean	Returns true if the file or the directory represented by the File object exists.
+canRead(): boolean	Returns true if the file represented by the File object exists and can be read.
+canWrite(): boolean	Returns true if the file represented by the File object exists and can be written.
+isDirectory(): boolean	Returns true if the File object represents a directory.
+isFile(): boolean	Returns true if the File object represents a file.
+isAbsolute(): boolean	Returns true if the File object is created using an absolute path name.
+isHidden(): boolean	Returns true if the file represented in the File object is hidden. The exact definition of <i>hidden</i> is system-dependent. On Windows, you can mark a file hidden in the File Properties dialog box. On Unix systems, a file is hidden if its name begins with a period character '.'.
+getAbsolutePath(): String	Returns the complete absolute file or directory name represented by the File object.
+getCanonicalPath(): String	Returns the same as getAbsolutePath() except that it removes redundant names, such as "." and "..", from the pathname, resolves symbolic links (on Unix platforms), and converts drive letters to standard uppercase (on Win32 platforms).
+getName(): String	Returns the last name of the complete directory and file name represented by the File object. For example, new File("c:\\book\\test.dat").getName() returns test.dat.
+getPath(): String	Returns the complete directory and file name represented by the File object. For example, new File("c:\\book\\test.dat").getPath() returns c:\\book\\test.dat.
+getParent(): String	Returns the complete parent directory of the current directory or the file represented by the File object. For example, new File("c:\\book\\test.dat").getParent() returns c:\\book.
+lastModified(): long	Returns the time that the file was last modified.
+delete(): boolean	Deletes this file. The method returns true if the deletion succeeds.
+renameTo(dest: File): boolean	Renames this file. The method returns true if the operation succeeds.

Text I/O (vs. Binary I/O)

- A **File** object encapsulates the properties of a file or a path, but *does not contain the methods for reading/writing data* from/to a file.
 - In order to perform I/O, you need to create objects using appropriate Java I/O classes: **Scanner** and **PrintWriter**

Reading Data Using Scanner

java.util.Scanner

+Scanner(source: File)

Creates a Scanner that produces values scanned from the specified file.

+Scanner(source: String)

Creates a Scanner that produces values scanned from the specified string.

+close()

Closes this scanner. 

+hasNext(): boolean

Returns true if this scanner has another token in its input.

+next(): String

Returns next token as a string.

+nextByte(): byte

Returns next token as a byte.

+nextShort(): short

Returns next token as a short.

+nextInt(): int

Returns next token as an int.

+nextLong(): long

Returns next token as a long.

+nextFloat(): float

Returns next token as a float.

+nextDouble(): double

Returns next token as a double.

+useDelimiter(pattern: String):
Scanner

Sets this scanner's delimiting pattern.

```
import java.util.Scanner;
public class ReadData {
    public static void main(String[] args) throws Exception{
        // Create a File instance
        java.io.File file = new java.io.File("scores.txt");
        // Create a Scanner for the file
        Scanner input = new Scanner(file);
        // Read data from a file
        while (input.hasNext()) {
            String firstName = input.next();
            int score = input.nextInt();
            System.out.println(firstName + " " + score);
        }
        // Close the file
        input.close();
    }
}
```

Writing Data Using PrintWriter

java.io.PrintWriter

+PrintWriter(file: File)

+print(s: String): void

+print(c: char): void

+print(cArray: char[]): void

+print(i: int): void

+print(l: long): void

+print(f: float): void

+print(d: double): void

+print(b: boolean): void

Also contains the overloaded **println** methods.

Also contains the overloaded **printf** methods.

Creates a PrintWriter for the specified file.

Writes a string.

Writes a character.

Writes an array of character.

Writes an int value.

Writes a long value.

Writes a float value.

Writes a double value.

Writes a boolean value.

A println method acts like a print method; additionally it prints a line separator. The line separator string is defined by the system. It is `\r\n` on Windows and `\n` on Unix. The printf method was introduced in §3.6, “Formatting Console Output and Strings.”

```
public class WriteData {  
    public static void main(String[] args)  
        throws Exception {  
        java.io.File file = new java.io.File("scores.txt");  
        if (file.exists()) {  
            System.out.println("File already exists");  
            System.exit(0);  
        }  
        // Create the file  
        java.io.PrintWriter output = new  
            java.io.PrintWriter(file);  
        // Write output to the file  
        output.print("Mary 100");  
        // Close the file  
        output.close();  
    }  
}
```