

# **Towards improved children automatic speech recognition**

Thesis

**Thomas Rolland**

## **Doctoral Program in Engenharia Informática e de Computadores**

Supervisor: Prof. Alberto Abad

### **Examination Committee**

Chairperson: Prof. Maria Luísa Torres Ribeiro Marques da Silva Coheur

Supervisor: Prof. Alberto Abad

Member of the Committee: Dr. Mathew Magimai Doss

**Expected 2022**



# Abstract

Speech is a fundamental communication skill used for social interaction, express feelings and needs, among others. Unfortunately, there is an increasing number of people who suffer from debilitating speech pathologies, including children. A childhood speech disorder that is not properly diagnosed and treated can have long-term negative effects in social, communication and educational situations. Hence the importance of speech therapy.

In recent years, machine learning has proven to have many applications in the health field, both for diagnosis and monitoring. Particularly, there is a growing interest in the development of automatic tools to assist speech-language pathologists. Furthermore, some automatic tools allow patients to do exercises outside the session with the therapist, for example at home. In the case of children, the exercises can be provided in a gamification context, which contributes to motivate them to practice more often. Most of these tools require reliable automatic speech recognition systems, as these are commonly used to provide pronunciation quality scores. However, despite recent significant improvements in the performance of automatic speech recognition systems for healthy adults, these systems' performance dramatically drops when considering speech from children and speakers with speech pathologies. This is mainly due to the high acoustic variability and the reduced amount of training data available.

In this proposal, we propose to investigate how machine learning algorithms in speech recognition tools for children can enable more complex exercises and better feedback. We first present a summary of existing automatic speech recognition techniques for children. In view of the need for a robust oracle model for children, this proposal will mainly focus on improving the automatic speech recognition system for children. Therefore, we identified several methods for improvement. i) Knowledge transfer on Hybrid and end-to-end models by using transfer and multi-task learning and ii) Adapter transfer in end-to-end speech recognition for a parameter efficient transfer.

# Keywords

Automatic Speech Recognition Children, Children speech, Atypical speech, Atypical speech recognition

# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Context . . . . .	3
1.2	Problem statement . . . . .	5
1.3	Contributions . . . . .	6
1.4	Structure for the thesis . . . . .	8
<b>2</b>	<b>Background - Children automatic speech recognition</b>	<b>9</b>
2.1	Children speech recognition challenges . . . . .	12
2.1.1	Speech variability . . . . .	12
2.1.2	Language and phonetic knowledge . . . . .	15
2.1.3	Data scarcity . . . . .	17
2.2	Introduction to automatic speech recognition . . . . .	19
2.2.1	A brief history of Automatic Speech Recognition . . . . .	19
2.2.1.A	Early Days . . . . .	19
2.2.1.B	The Speech Understanding Research program . . . . .	20
2.2.2	Traditional automatic speech recognition systems . . . . .	22
2.2.2.A	Feature extraction . . . . .	24
2.2.2.B	Acoustic model . . . . .	26
2.2.2.C	Pronunciation model . . . . .	27
2.2.2.D	Language model . . . . .	28
2.2.2.E	Decoder . . . . .	30
2.2.3	End-to-end automatic speech recognition . . . . .	31
2.2.3.A	Connectionist Temporal Classification . . . . .	32
2.2.3.B	Sequence to sequence . . . . .	33
2.2.4	Automatic Speech Recognition metrics . . . . .	34
2.3	Children automatic speech recognition . . . . .	35
2.3.1	Feature extraction stage . . . . .	35
2.3.2	Pronunciation and language model . . . . .	37

2.3.3	Design of acoustic models . . . . .	37
2.3.4	End-to-end models . . . . .	38
2.3.5	Data augmentation . . . . .	39
2.3.5.A	Using external data . . . . .	39
2.3.5.B	Using available data . . . . .	40
2.3.6	Training procedure for children speech recognition . . . . .	41
2.3.6.A	Transfer learning . . . . .	41
2.3.6.B	Multi-task learning . . . . .	44
2.3.6.C	Self-supervised Learning . . . . .	45
2.4	Children Corpora . . . . .	46
2.4.1	LETSREAD . . . . .	48
2.4.2	PFSTAR_SWEDISH . . . . .	48
2.4.3	ETLTDE . . . . .	48
2.4.4	CMU_KIDS . . . . .	48
2.4.5	CHOREC . . . . .	49
2.4.6	MyST . . . . .	49
2.5	Summary . . . . .	49
<b>3</b>	<b>Hybrid models for children automatic speech recognition</b>	<b>51</b>
3.1	Introduction . . . . .	53
3.2	Multi-task and Transfer learning using adult and children data . . . . .	53
3.2.1	Methodology . . . . .	53
3.2.2	Corpus . . . . .	54
3.2.3	Experimental setup . . . . .	54
3.2.4	Results . . . . .	55
3.2.5	Summary and discussion . . . . .	56
3.3	Multi-task and transfer learning using multilingual children data . . . . .	57
3.3.1	Motivation . . . . .	57
3.3.2	Proposed approach . . . . .	57
3.3.3	Setup . . . . .	58
3.3.4	Multilingual-transfer learning experiment . . . . .	59
3.3.5	Cross-lingual validation . . . . .	60
3.3.6	Summary and discussion . . . . .	61
3.4	Conclusion . . . . .	61

<b>4</b>	<b>End-to-End children automatic speech recognition</b>	<b>63</b>
4.1	Introduction . . . . .	65
4.2	Transformer model . . . . .	65
4.3	Conformer model . . . . .	68
4.4	Understand transfer learning efficacy for transformer based models . . . . .	70
4.4.1	Partial Transfer learning . . . . .	71
4.4.2	Experimental setup . . . . .	72
4.4.3	Corpus . . . . .	72
4.4.4	Implementation details . . . . .	72
4.4.5	Encoder-Decoder Transfer learning . . . . .	72
4.4.6	Modules Transfer learning . . . . .	73
4.5	Summary . . . . .	76
<b>5</b>	<b>Exploring parameters-efficient transfer learning for end-to-end children ASR</b>	<b>77</b>
5.1	Introduction . . . . .	79
5.2	Adapters . . . . .	80
5.3	Investigating Adapters for children ASR . . . . .	82
5.4	Implementation details . . . . .	84
5.5	Results . . . . .	85
5.5.1	Configurations . . . . .	85
5.5.2	Unsupervised Clustering of utterances . . . . .	86
5.6	Additional parameter-efficient procedures . . . . .	87
5.6.1	Scaled Adapters . . . . .	87
5.6.2	Convolution based Adapters . . . . .	88
5.6.3	BitFit . . . . .	88
5.6.4	Scale and Shift features . . . . .	88
5.6.5	AdapterBias . . . . .	89
5.7	Shared Adapter . . . . .	91
<b>6</b>	<b>Use of synthetic speech as data augmentation</b>	<b>93</b>
6.1	Introduction . . . . .	95
6.2	Related work . . . . .	96
6.2.1	TTS data augmentation . . . . .	96
6.2.2	Adapters . . . . .	97
6.3	Method . . . . .	98
6.4	System description . . . . .	98
6.4.1	Transformer architecture for ASR . . . . .	98

6.4.2	Multi-speaker text-to-speech: YourTTS . . . . .	99
6.5	Experimental setup . . . . .	99
6.5.1	Real speech corpus . . . . .	99
6.5.2	Synthetic data . . . . .	100
6.5.3	Experiments . . . . .	100
6.6	Results and discussion . . . . .	101
6.6.1	Comparison with existing approaches . . . . .	101
6.6.2	Effect of the number of hours . . . . .	102
6.6.3	Effect of the Adapters hyper-parameters . . . . .	102
6.7	Conclusions and future work . . . . .	103
6.8	Ongoing and future work . . . . .	103
<b>7</b>	<b>Pathology detection from speech</b>	<b>107</b>
	<b>Bibliography</b>	<b>111</b>



# List of Figures

1.1	Illustrated herein are some examples of children’s Speech and Language Technology applications that were developed during the course of this thesis. On the left is a running platformer game, where the user’s voice controls the character. Pitch dictates running and jumping actions, while energy modulates the velocity of these actions. On the right, a reading task game is depicted, wherein a robot instructs the user to read designated words.	5
2.1	Formant and cepstral variability. Figures taken from [1]	14
2.2	Segmental duration variability. Figures taken from [2]	15
2.3	Example of a standard digit pattern from Davis et al. 1952	20
2.4	Example of a decoding graph from the Harpy system for the sentence ”GIVE ME” from [3]	22
2.5	Architecture of a HMM-based speech recognition system	23
2.6	Principal block scheme of main speech features for ASR: Melspec, fbanks and MFCC coefficients from [4]	25
2.7	Three-state Hidden Markov Model for modelling phones	26
2.8	Phoneme set and examples of CMU dictionary using 39 phonemes from [5]	28
2.9	Architecture of an end-to-end speech recognition system	31
2.10	Transfer learning approaches. Figures from [6]	42
2.11	Multilingual approach using each language as a task in a multi-task learning context.	44
3.1	Multilingual transfer learning approach. Language-specific layers can be randomly initialized for a language not present during the MTL phase or use the corresponding pre-trained layers in case the target language was present during the MTL phase. Grey blocks are pre-trained during MTL phase.	58
4.1	Architecture of the standard Transformer [7]. a) scaled dot-product attention, b) multi-head self-attention, c) Transformer-encoder, d) Transformer-decoder.	66
4.2	Architecture of a Conformer layer	68
4.3	Convolution module in the context of a conformer layer	69

4.4	Up-way and down-way transfer learning experiment . . . . .	74
5.1	Residual Adapter architecture . . . . .	80
5.2	Conformer block with various residual adapter configurations. Normalisation layers are not display in this figure . . . . .	82
5.3	Conformer block with various residual adapter configurations. Normalisation layers are not display in this figure . . . . .	82
5.4	Different paramter efficent procedure for children ASR in conformer model . . . . .	87
5.5	AdapterBias, consisting of a linear layer $L_\alpha$ and a vector $\mathcal{V}$ , is added after the second feed-forward layer only in each FFN module. . . . .	89
5.6	Different paramter efficent procedure for children ASR in conformer model with shared- Adapters . . . . .	90
5.7	Shared-Adapter setup in a Conformer model . . . . .	91
6.1	Overview of a) double way fine-tuning and b) Adapter layer architecture . . . . .	97

# List of Tables

2.1	Non-exhaustive comparison of children’s speech corpora. This table has been sorted by age range. Blanks indicate unavailable information. Entries highlighted in bold correspond to the corpora used in the experiments presented in this thesis. K: Kindergarden. G: Grade	47
3.1	Number of utterances and duration of the different corpora for multi-task and transfer learning experiments using adult and children data . . . . .	54
3.2	WER results using adult data for knowledge transfer methods . . . . .	55
3.3	Statistics on the different corpora of children’s speech. . . . .	59
3.4	WER results of multilingual-transfer learning and cross-lingual experiments. MTL: Multi-Task Learning, TL: Transfer Learning, MLTL: Multilingual Transfer Learning, MLTL-olo: Multilingual Transfer Learning one-language-out . . . . .	59
4.1	My Science Tutor Children Speech Corpus statistics . . . . .	72
4.2	Encoder-Decoder experiment . . . . .	73
4.3	Modules fine-tuning experiment . . . . .	74
5.1	Results of the different Adapters configurations in both Transformer and Conformer. . . .	85
5.2	Results of the clustering approach. . . . .	86
5.3	Results without language model of Self-supervised front-end . . . . .	91
6.1	My Science Tutor Children Speech Corpus statistics . . . . .	99
6.2	Results of the different approaches (in WER). . . . .	101
6.3	Results of the different number of hours in our Adapter double-way approach with <i>Synth<sub>2</sub></i> data . . . . .	102
6.4	Results of the different configurations of Adapter double-way approach on 300h of <i>Synth<sub>2</sub></i>	102
6.5	Results without language model of Self-supervised front-end . . . . .	104



# 1

## Introduction

### Contents

1.1	Context . . . . .	3
1.2	Problem statement . . . . .	5
1.3	Contributions . . . . .	6
1.4	Structure for the thesis . . . . .	8



## 1.1 Context

The faculty of expressing or describing thoughts, feelings and needs by using language is a fundamental ability in our daily lives. As per by the Oxford dictionary, *language is defined as the system of communication in speech and writing that is used by people of a particular country or area*. Consequently, language can be conceptualised as a intricate and rule-governed system that empowers individuals to convey abstract concepts, share experiences, and take part in nuanced forms of communication. Effective communication through language begins with the conceptualization of the message to be transmitted (*conceptualisation*), followed by the selection of appropriate lexical items and subsequent grammatical encoding, culminating by their meaningful organisation (*formulation*). Subsequently, the linguistic representation is transformed into sound through the transmission of this representation from the brain to the muscles of the complex speech system including lips, larynx, glottis, lungs, jaw and tongue (*articulation*) [8]. Unlike language, which encompasses both spoken and written forms, speech specifically refers to the spoken manifestation of language.

This capability to speak and comprehend language is not inherently present but rather develops gradually over time with experience. Babies instinctively engage in pre-linguistic communication, using gestures, facial expressions, and vocalisations to articulate their basic needs. As language acquisition progresses, children transition to the babbling stage, experimenting with sound patterns. Eventually, speech emerges, marking a crucial milestone in communication development, and typically, children reach specific language milestones at particular ages. For example, around 12 to 18 months, a child usually utters their first words and starts imitating sounds. By the age of 4 to 5, children tend to formulate sentences and grasp more intricate concepts. Regarding speech sounds, younger children, approximately 1 year old, can produce basic speech sounds like /p/, /b/, /m/ while older children, around 5 years old, can articulate more complex sounds such as /r/ and /th/. This developmental stage is referred as language acquisition, and it plays a crucial role in a child’s overall development. Indeed, our daily dependence on social and communication skills endures throughout our entire lives. Consequently, it is imperative for children to develop the capacity to interact effectively with others to achieve seamless integration into society across all aspects of their lives.

Regrettably, a subset of children experience speech disorders stemming from congenital conditions such as cleft palate, cerebral palsy, and prelingual deafness. Alternatively, certain individuals may acquire speech-related issues during childhood, encompassing cognitive developmental delays, breathing-feeding-swallowing disorders and traumatic brain injuries. Notably, in 2012, empirical data [9] highlighted that 7.7% of children aged 3 to 17 in the United States exhibited communication disorders, with 5.0% of this cohort specifically presenting speech-related problems.

Furthermore, findings [10] suggests that individuals afflicted with childhood speech disorders may confront an increased prevalence of mental health challenges, diminished social well-being, and reduced

academic accomplishments in comparison to their peers. This highlights the complex nature of speech disorders in children, the consequences of which extend into adolescence and adulthood. Hence, early identification and intervention play a pivotal role in mitigating the enduring effects on these children’s social interactions, society integration, communication skills, educational progress, and overall well-being.

Pediatric Speech and Language Pathologists (SLPs) play a crucial role in providing therapy to help children overcome the effects of speech disorders and offer early diagnosis. The therapy typically includes exercises and assessments, which can be based on perceptual speech evaluations or standardised tests. To effectively engage children, these activities are often presented as games, taking into consideration the inherently limited attention span of children. Notably, SLPs frequently maintain long-term follow-ups with their patients, allowing them to monitor the evolution of speech quality over time and tailor exercises to the specific needs of each child. The adoption of this individualised therapeutic approach is essential for helping children achieve improved speech and communication skills.

However, a prominent challenge arises concerning the accessibility and availability of speech therapy services. Numerous children, particularly those residing in underserved or remote areas, encounter obstacles in accessing speech therapy resources. Additionally, the hospital environment introduces an additional layer of stress for children. While clinically necessary, the setting may inadvertently contribute to heightened anxiety and discomfort, as children may perceive it as intimidating. Furthermore, the logistical challenges associated with frequent hospital visits impose a substantial financial and time burden on families.

Another obstacle pertains to the continuity and consistency of therapy. Children may experience interruptions in their therapeutic journey due to factors such as financial constraints, scheduling conflicts, or alterations in healthcare coverage. These disruptions have the potential to impede progress and undermine the effectiveness of the therapy. Lastly, it is imperative to acknowledge that, despite professional training, inter-expert variability in perceptual assessments may persist, resulting in disparate diagnostic conclusions. To address these challenges, adopting a hybrid approach that combines in-person therapy with technology holds potential benefits [11, 12]. Teletherapy, for instance, has emerged as a promising avenue to bridge geographical gaps and deliver therapy services remotely [13].

In this context, Speech and Language Technologies (SLT) have emerged as highly pertinent within the domain of speech therapy [14]. These technologies encompass a spectrum of computational tools designed to analyse, understand and provide objective and precise automated assessments. Another benefit lies in their potential integration into gamification frameworks, thereby augmenting children’s involvement during therapy [15]. Moreover, the ability to record speech utter by the patient during a session using SLT enables post-session thorough analysis and long-term monitoring by the therapist. Due to the aforementioned reasons, the development of such tools has gained considerable attention, empowering patients to engage in exercises beyond therapy sessions, notably in a home setting. Several SLT examples





**Figure 1.1:** Illustrated herein are some examples of children’s Speech and Language Technology applications that were developed during the course of this thesis. On the left is a running platformer game, where the user’s voice controls the character. Pitch dictates running and jumping actions, while energy modulates the velocity of these actions. On the right, a reading task game is depicted, wherein a robot instructs the user to read designated words.

developed within the scope of this thesis are illustrated in Figure 1.1.

## 1.2 Problem statement

Recent years have seen an increased integration of SLT into various aspects of our daily lives, impacting a wide range of environments, including homes, transportation, education, and even the military. Noteworthy examples encompass voice assistants, hands-free computing, healthcare systems, automatic helplines, and speech-to-speech translation services. The performances progress in these applications was made possible through the use of machine learning techniques, espacially deep learning approaches, the increasing computational capacities of our devices, and the ever-growing volume of data available to train and improve these systems.

Children represent a promising target audience for SLT due to the inherent complexities of conventional computer interfaces, which pose challenges for them, limiting their capacity to fully benefit from digital platforms. Children commonly face difficulties to manipulate mouse and keyboard inputs. Additionally, the abstract nature of traditional man-machine interfaces can impede the understanding necessary for effective interaction. In this context, speech-based systems emerge as a promising alternative, offering a more natural and accessible means for children to interact with technology. Through the use of speech recognition technologies, these speech systems mitigate the barriers associated with conventional interfaces, providing a fluid and intuitive interaction paradigm that aligns more closely with the developmental stages and cognitive abilities of young users.

As previously mentioned, SLTs are gradually making their way into the field of atypical speech, particularly for children. While these automatic tools are currently in their early stages and have limitations, there is indeed a rising interest in implementing atypical speech and language therapy cutting-edge systems with a focus on assisting SLPs. In this context, systems capable of automatically recognising speech

content, assessing pronunciation quality and detecting speech pathologies could be highly valuable in supporting pediatric SLPs and patients.

All of these objectives require the implementation of a robust automatic speech recognition (ASR) system specifically tailored for healthy children, serving as a foundational model. Nevertheless, while speech recognition technologies have made substantial advancements, leading to increased accuracy, the performance of ASR systems for children remains underperforming in comparison to their adult-oriented counterparts. This discrepancy results leads into unreliable systems for children’s speech. The diminished performance can be attributed to a combination of factors, including intra- and inter-speaker variability, limited linguistic and phonetic knowledge, and the scarcity of available data.

In this thesis, we will undertake a comprehensive investigation into the intricacies of children’s speech, closely examining the inherent differences between children and adults in the domain of ASR. Through this examination, the objective is to analyse the constraints associated with the application of adult-based systems to children’s speech and, subsequently, to outline methodologies for enhancing ASR systems specifically designed to accommodate the variability present in children’s speech. The overarching aim is to establish a robust foundational system that effectively addresses the recognition of children’s speech characteristics.

Our work specifically aims to answer the following research questions:

1. Which knowledge transfer approach is best for efficiently modelling and improving automatic recognition of children’s speech? Can these approaches be used to efficiently exploit low-resource children’s speech data from multiple languages?
2. How do end-to-end automatic speech recognition models achieve state-of-the-art results for children’s ASR when finetuned from an adult model? Particularly, what are the components that are most important to fine-tune?
3. Is it possible to develop an speaker-based, parameter-efficient automatic speech recognition model?
4. Is it possible to use children’s synthetic speech to extend the amount of children’s data? How can we control the quality and speakers’ variability?

### 1.3 Contributions

This thesis began with a thorough exploration of the current state-of-the-art of children’s ASR. The primary objective was to identify the various avenues by which improvements could be envisaged throughout this thesis. The state-of-the-art review constituted a thorough examination of existing literature, research papers, and technological advancements related to children’s speech processing in general. The aim was

to understand the fundamental determinants that contribute to the decline in ASR performance for children’s speech. By meticulously assessing current research on children speech, we identified challenges and potential areas for possible impact.

Subsequent to the exhaustive literature review, our research transitioned into the implementation of Hidden Markov Model-Deep Neural Network (HMM-DNN) models for children ASR. We explored different strategies to reduce the gap observed between children and adult in the context of both English and European Portuguese speech. We identified the effectiveness of knowledge transfer methods, specifically transfer learning and multi-task learning. Transfer learning adapt speech recognition adult models, fine-tuning them for children’s speech. In the other hand, multi-task learning exposed models to both adult and children’s speech datasets simultaneously during training. In an innovative synthesis, we combined transfer learning and multi-task learning into a unified approach, the multi-task transfer learning framework. We applied this approach to multiple low-resource children’s datasets from diverse language sources:

- **Rolland, Thomas**, Alberto Abad, Catia Cucchiaroni, and Helmer Strik. "Multilingual Transfer Learning for Children Automatic Speech Recognition." *Language Resources and Evaluation Conference* (2022).

Thereafter, our research turned to the end-to-end paradigm, motivated by the encouraging improvements observed in the end-to-end children’s ASR performance. By adopting a detailed transfer learning approach, we aimed to gain a comprehensive understanding of the specific components of the end-to-end architecture that proved most relevant and played a central role in these notable score enhancements. The identification of the most relevant components allowed the development of specific algorithms aimed at further improving the model. Particularly, we explored the integration of an additional set of parameters directly into the original ASR model. This integration facilitated a parameter-efficient approach to fine-tuning the model:

- **Rolland Thomas** and Alberto Abad. "Exploring adapters with conformers for children’s automatic speech recognition." *International Conference on Acoustics, Speech and Signal Processing* (2024).

In response to the scarcity of large children’s speech datasets, we delved into the exploration of leveraging synthetic speech to augment the existing dataset. However, our investigation revealed that a mismatch between real and synthetic data hindered the results. To address this challenge, we introduced additional processing steps to efficiently incorporate synthetic data. We proposed a double-way approach, wherein the synthetic data underwent an additional set of parameters. This innovative methodology contributed to an enhanced ASR system tailored for children:

- **Rolland Thomas** and Alberto Abad. "Improved children's automatic speech recognition combining adapters and synthetic data augmentation." *International Conference on Acoustics, Speech and Signal Processing* (2024).

In tandem with the primary focus of enhancing children's ASR, this thesis extends its scope to the detection of pathologies from speech. This secondary investigation retains relevance within the broader context of the thesis, particularly as we aim to address the specific needs of children with pathological speech. We explored the use of embedding extracted from pre-trained model for the detection of different pathologies such as Alzheimer, Parkinson's disease, obstructive sleep apnea and Covid-19:

- Anna Pompili, **Thomas Rolland**, and Alberto Abad. "The INESC-ID multi-modal system for the ADRess 2020 challenge." *Interspeech* (2020).
- Catarina Botelho, Francisco Teixeira, **Thomas Rolland**, Alberto Abad, and Isabel Trancoso. "Pathological speech detection using x-vector embeddings." *arXiv preprint arXiv:2003.00864* (2020).
- Rubén Solera-Ureña, Catarina Botelho, Francisco Teixeira, **Thomas Rolland**, Alberto Abad, and Isabel Trancoso. "Transfer Learning-Based Cough Representations for Automatic Detection of COVID-19." *Interspeech* (2021).

## 1.4 Structure for the thesis

The structure of this thesis comprises five chapters. In Chapter 2, a comprehensive review of related work is conducted to establish the context and understanding of the challenges associated with automatic children's speech recognition. Furthermore, we provide an overview of the history of automatic speech recognition systems, along with an examination of the latest approaches specifically tailored to address the unique challenges posed by children's ASR. Finally, a compilation of children's speech corpora, available online and referenced in prior literature, is presented.

Following this, Chapter 3 we present our work done on the hybrid speech recognition framework.

# 2

## Background - Children automatic speech recognition

### Contents

---

2.1	Children speech recognition challenges . . . . .	12
2.2	Introduction to automatic speech recognition . . . . .	19
2.3	Children automatic speech recognition . . . . .	35
2.4	Children Corpora . . . . .	46
2.5	Summary . . . . .	49

---



Automatic Speech Recognition (ASR), or Speech-to-text (STT) refers to the process of mapping a raw spoken audio utterance into its corresponding text. The potential use of ASR applications across diverse fields has motivated the need for robust and reliable ASR systems. These applications extend across various sectors, encompassing academia, medicine, industry, and the military. Notably, ASR has made significant progress in recent years, thanks to the attention and investment from both industry and public authorities. This support has resulted in the deployment of applications such as voice assistants, hands-free interfaces, medical assistance, live translation, and more, all of which are widely used and accepted today. Nowadays, the majority of ASR applications are mainly developed and optimised for adult speech. Demonstrating high performance in conditions close to those encountered during the training phase. This focus on adult speech is explained by the potential immediate applications of ASR systems for this target audience. In addition, training ASR models on adult speech has both advantages of data availability and relatively stable aspects of adult speech characteristics. Indeed, adult speech is often more standardised, with established linguistic conventions and stable features. However, the challenge arises when such systems are applied to recognise speech in mismatched scenarios, like children’s speech. For example, in the context of children speech, ASR algorithms often exhibit a decline performances, frequently two to five times worse [16]. In this context of children’s speech, this difference of performance can be mostly attributed to the intra- and inter-speaker variability. In fact, speech serves as a channel not only for linguistic content, but also for paralinguistic cues that reveal aspects of the speaker’s identity, including age, gender, state of health, emotional state and regional origin. While this additional layer of information is incredibly valuable for human-to-human communication, it introduce more complexity and challenges for the development of a reliable ASR systems [17]. Moreover, several external factors further negatively impact the performance, including noise, speaker variability, mispronunciation, and the quality of the recording [18, 19].

The potential applications of automatic speech recognition in education and entertainment have led to a growing interest in automatic speech recognition for children. Indeed, children represent a demographic group that could well benefit from such applications for a number of reasons. Firstly, the complexity of traditional computer interfaces, such as keyboards and mice, can pose problems for young children, making speech interfaces a more accessible and user-friendly option. Secondly, speech and language applications, including reading tutors and speech and language acquisition assistants, promise to address educational inequalities among children and facilitate their integration into society by giving them personal and tailored attention.

In this chapter, we first present the various challenges associated with children’s speech recognition. These challenges encompass the unique characteristics of children’s speech, including high acoustic and linguistic variability, as well as the limited amount of labelled data available for training. We then provide a brief introduction to ASR, tracing its historical development from early pattern recognition approaches

to the advent of statistical models and the contemporary move towards end-to-end models. This historical background provides an understanding of the underlying principles behind ASR technologies. Then, the chapter then moves on to a review of state-of-the-art methods specifically designed to address the challenges posed by children’s ASR. The aim of this in-depth exploration is to provide a clear overview of the different techniques that are being used to improve children’s speech recognition. Finally, the chapter concludes with a discussion that synthesises the different perspectives presented earlier and the ones selected for this thesis.

## 2.1 Children speech recognition challenges

In this section, we explore the distinct challenges posed by children’s speech to ASR systems. In particular, we will explore the main differences with adult speech. Indeed, the main divergence between child and adult speech is mainly due to the continuous growth and intellectual development of children and has direct repercussions on automatic speech recognition scores. In order to present the different challenges associated with ASR for children, we have identified at least three of the main factors that degrade performance. First, we examine the acoustic variability of children’s speech. The acoustic characteristics of children’s speech differ considerably from those of adults due to factors such as vocal tract size, pitch modulation and articulatory differences. These variations represent a significant challenge for speech recognition systems, which are often trained on adult speech datasets. Taking this acoustic variability into account becomes imperative for the development of accurate and robust ASR models adapted to the unique characteristics of children’s speech. Next, we will present the linguistic and phonetic knowledge inherent for children. Indeed, children’s language evolves dynamically over time, with vocabulary expansion, phonetic development and language mastery. This linguistic evolution also poses challenges for ASR systems, as they need to be robust to age-specific linguistic variation and imprecise pronunciation. As with acoustic variability, effective modelling of these linguistic subtleties is important for child speech recognition systems. Finally, we present the challenge posed by the limited availability of corpora of children’s speech. Unlike adult speech, data corpora containing labelled examples of children’s speech are relatively rare and small in size. This scarcity constrains the training of robust ASR models, as it limits their exposure to the various linguistic and acoustic variations in children’s speech.

### 2.1.1 Speech variability

Speech production is a complex process involving the synchronised actions and collaboration of several elements of the speech production apparatus. These include the vocal cords, tongue, lips and mouth. The coordination of these elements leads to fluctuations in air pressure, producing a wave called speech. Speech is therefore essentially a measure of air pressure over time. The waveforms of human speech encompass



a range of frequency components from 20 Hertz (Hz) to 20 kHz. These are detected and processed by the auditory system and the human brain. Because speech is based on frequency components, an accurate understanding of frequency components, such as fundamental frequency and formant frequencies, is essential for the development of reliable speech processing tools.


The fundamental frequency, often called F0, plays a crucial role in the analysis of speech signals. It characterises the (quasi-) periodic average oscillations produced by the vibrations of the vocal folds. Measured in Hz, F0 is often considered to be the acoustic correlate of pitch. F0 shows an inverse relationship with the vibrating mass of the vocal cords, leading to distinct F0 values for different demographic groups. As a general rule, adult males have lower F0 values, ranging from around 100 to 150 Hz. Women, on the other hand, tend to have higher F0 values, generally between 200 and 300 Hz. Children, whose vocal cords are smaller, often have even higher F0 values, generally ranging from 300 to 450 Hz. These variations in F0 contribute to the perceptual differences in pitch between individuals of different ages and genders. According to [2], significant differences in F0 between male and female speakers generally appear from the age of 12. For male speakers, decreases in F0 were observed on average between the ages of 11 and 15, at the time of puberty, and did not change significantly after the age of 15. Furthermore, it was observed that the relatively large variation between male subjects at the ages of 13 and 14 also implies that the time of the beginning of puberty varies among speakers in these age groups. For female speakers, pitch drops between the ages of 7 and 12, and there is no significant change in pitch after this age. In addition, the change in F0 in female subjects is more gradual as compared to male speakers.

It is essential to emphasise that F0 is not a static parameter; on the contrary, it exhibits continuous variation within a sentence. This dynamic nature allows F0 to be used expressively in speech, conveying nuances such as accent, emotion and intonation patterns. Variations in F0 help to distinguish between different types of speech acts, such as statements, questions and exclamations.

A formant refers to a concentration of acoustic energy centred around a specific frequency in a speech waveform. As defined by the Acoustical Society of America, it is *"a range of frequencies in which there is an absolute or relative maximum in the sound spectrum. The frequency at the maximum is the formant frequency"*. Formants play a crucial role in characterising vowel sounds and distinguishing between them. In speech analysis, the first three formants, known as F1, F2 and F3, are commonly used for their importance in capturing the acoustic characteristics of vowels and their contribution to the timbre of speech sounds.

The pioneering study by Peterson and Barney in 1952 [20] marked a turning point in the exploration of the formant components of vowels, particularly in the context of children's speech. Researchers undertook a comparative analysis, examining vowel frequencies in children's speech and comparing them with those of adult men and women. This research was the first to show significant variations in vowel frequencies based on the speaker's age and gender. Building upon this foundational work, subsequent studies [1,2,21]


have provided further insights into the acoustic characteristics of children’s speech. These investigations have consistently demonstrated a correlation between acoustics and children’s age, attributing these variations primarily to the growth of the children’s vocal apparatus. The scaling behavior of formant frequencies with respect to age is showed in Figure 2.1(a). Here, the evolving vowel space, defined by four reference vowels (/IY/, /AE/, /AA/ and /UW/) linearly decreases with age and aligns with the adult level around the age of 15. Additionally, as highlighted in [1], the vowel space becomes more compact as age increases, indicative of a downward trend in the dynamic range of formant values. These variations and age-related differences emphasise the critical challenge of inter-speaker variability, especially for young children.

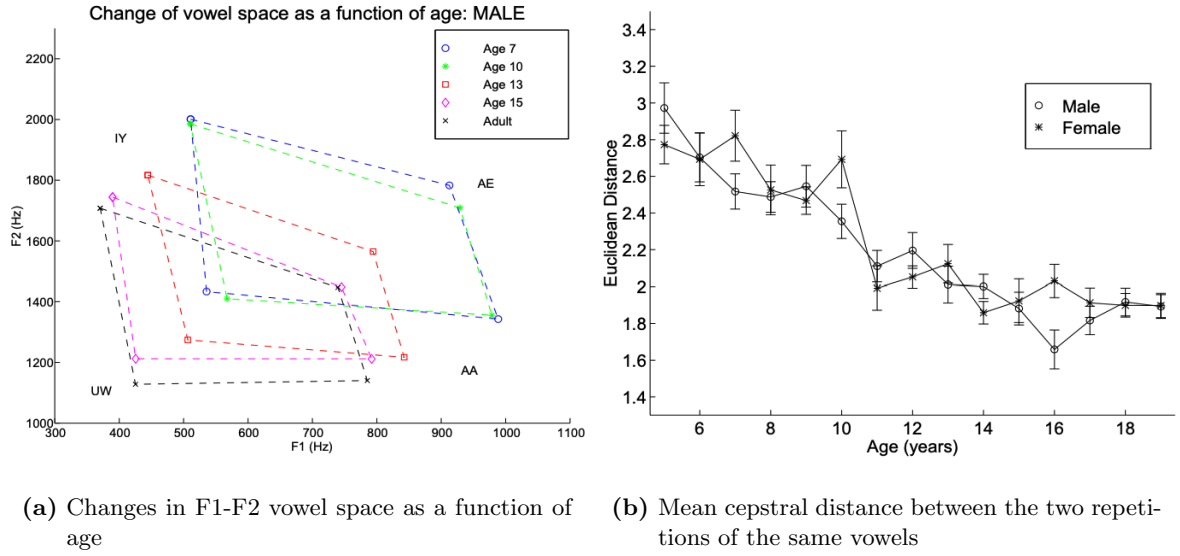

**Figure 2.1:** Formant and cepstral variability. Figures taken from [1]

In addition to inter-speaker variability, [2] also highlight the fact that children’s speech exhibits intra-speaker variability, signifying that the speech within the same individual can exhibit variations. This variability arises from two primary sources. Firstly, as previously discussed, the acoustic characteristics of children can significantly differ at different ages due to the ongoing growth of their vocal apparatus. Secondly, even at the same age, the same child may produce variable speech, even when articulating the same vowel. As depicted in Figure 2.1(b), the average cepstral distance between two repetitions of the same vowels by the same child tends to decrease with age, particularly after the age of 10. This reduction in intra-speaker variability is attributed to the progressive mastery of speech articulation components as children grow and mature their motor skills abilities. The decrease in cepstral distance suggests a more coherent and standardised articulation of vowels over time.

Segmental duration is another important aspect of human speech. A segment, as defined by Crystal [22], is: *“Any discrete unit that can be identified, either physically or auditorily, in the stream of speech”*.

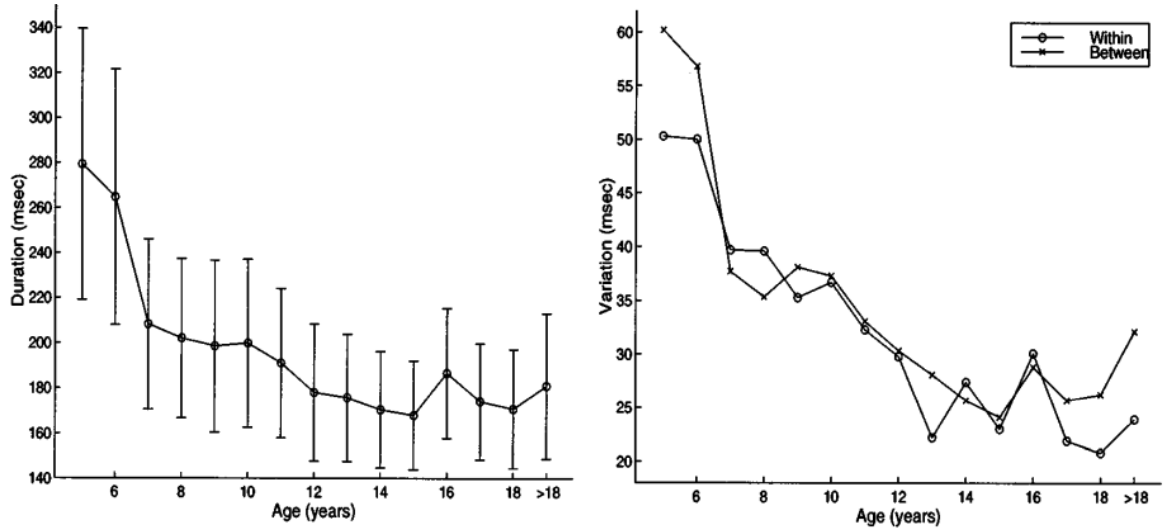

(a) Averaged-vowel duration across all vowels and subjects in each age group (b) Within- and between-subject variations. The between-subject variation is reduced by a factor of 2.0

**Figure 2.2:** Segmental duration variability. Figures taken from [2]

These segmental durations could be of vowel or sentence duration. Vowel duration, in particular, is of significant importance in vowel discrimination. Research, as presented in [2], investigates how these characteristics change in children’s speech. As demonstrated in Figure 2.2(a), the average vowels duration in children exhibits variations with age. On average, younger children tend to have longer vowel durations, resulting in a slower speaking rate. However, as children become more comfortable with the processes of speech production with age, vowel duration gradually decreases. Similarly to children frequency variations, segmental duration exhibits intra-speaker variability, as illustrated in Figure 2.2(b).

In conclusion, dealing with both intra- and inter-speaker variability in children’s speech, particularly in those under the age of 15, poses a substantial challenge for developing high-performance speech processing models. Especially, this challenge is exacerbated in the context of children’s ASR where the age of the child is often unknown. In addition, the dynamic processes of the vocal tract growth, changes in linguistic knowledge and the maturation of control of speech apparatus occur simultaneously and overlap, making it considerably more challenging to accurately disentangle and model their effects. The intricate nature of children’s speech, marked by intra and inter-speaker variations, underscores the necessity for sophisticated and adaptive models that can accommodate the unique characteristics of these speakers.

### 2.1.2 Language and phonetic knowledge

Language is a complex and multifaceted system of communication that involves the use of symbols, such as words to convey meaning. It is a uniquely human ability and serves as a fundamental aspect of

human cognition and social interaction. Linguists have identified five basic components of language [23], including phonology (sounds), morphology (structure and construction of words), semantics (meaning), syntax (grammar and sentence structure), and pragmatics (how language is used in context). It allows individuals to express thoughts, share information, and engage in social interactions. It is important to note that, languages vary across cultures and regions, exhibiting a rich diversity of sounds, structures, and expressions. Additionally, language can be spoken, written, or signed, and evolves over time. For children, the mastery of language is a crucial milestone in their cognitive development. Furthermore, language plays a central role in shaping culture, identity, and the transmission of knowledge to them. The children's ability to use language develops with age, achieving adult capabilities around the age of 13, as indicated by research [2]. This progression enables the children to transition from producing simple sounds and words to generating more complex sounds and fully articulated sentences.

During the process of language acquisition, children, constrained by their limited linguistic knowledge, often make pronunciation errors and encounter disfluencies [24]. According to [25], these errors may include a variety of phenomena, such as:

- **Substitution:** Involves the inadvertent replacement of the correct pronunciation of an entire word with an alternative rendition.
- **Omission:** Refers to the act of leaving out or neglecting a part of speech, a word, or a phrase that would typically be included in a grammatically correct or complete sentence.
- **Mispronunciation:** Involves the act of pronouncing a word or a part of a word incorrectly, deviating from the standard or expected pronunciation in a particular language or dialect.
- **Pause and Hesitation:** Entails temporary breaks or delays in speech during which a speaker might refrain from producing sound or articulate speech in a hesitant manner.
- **Filler and mumbling:** Filler encompasses linguistic elements used during pauses or hesitations when a speaker needs time to think, including unintelligible sounds, words, or phrases without significant meaning. Mumbling is characterised by unclear or indistinct speech, often marked by low volume, unclear articulation, and imprecise pronunciation.
- **False-start:** Refers to an instance where a speaker begins a sentence or an utterance and then stops abruptly before completing it. This interruption is often followed by a restart or a correction to articulate the intended message more accurately.
- **Sound-out:** Involves a pronunciation strategy in which a speaker articulates a word by pronouncing each sound or phoneme separately, rather than blending them together seamlessly.

Potamianos and Narayanan's study [26] revealed significant insights into the variability and characteristics of children's linguistics. They found that inter-speaker variability is approximately twice as much

as intra-speaker variability. Additionally, their research found that the rate of mispronunciations is twice as high for children aged 8 to 10 compared to those aged 11 to 14. Conversely, the trend is reversed for filler and pauses, where the older group exhibits a higher rate. Furthermore, younger children, of 8 to 10 years, tend to produce more false-starts and breathing.

In adult speech, pronunciation errors and disfluencies are also present, but their occurrence is typically lower than what is observed in the speech of children, as supported by studies such as [27,28]. In addition, these studies used language models specifically trained on children’s speech, demonstrating their advantages over the use of adult language models. The findings underscored the differences between children’s and adults’s linguistics, encompassing variations in grammatical structures as well as the presence of mispronunciations and disfluencies. Such insights are crucial for the development of effective language models tailored to the unique characteristics of children.

### 2.1.3 Data scarcity

In recent years, the emergence of deep learning has brought about significant advancements in the ASR field. The combination of increased computational power and the availability of large datasets has played a pivotal role in these improvements. The success of deep learning is largely attributed to deep neural networks (DNNs), which can approximate complex non-linear functions. With the help of this capability, DNNs excel in capturing complex patterns and accurate representation in speech data. However, the efficacy of a DNN in capturing speech patterns depends a lot on the availability of training data. Indeed, using large-size datasets is pivotal for enhancing the capabilities and generalization of DNN-based ASR systems. Notably, top-performing ASR systems like Whisper have been trained on exceptionally large dataset, surpassing 680,000 hours of data collected from the web [29]. There is a noticeable trend in the speech research community towards the collection of larger datasets, exemplified by initiatives such as the LibriSpeech dataset, which comprises around 1,000 hours of speech [30], and the GigaSpeech dataset, featuring 10,000 hours of speech [31].

Unfortunately, despite rare recent efforts to collect larger children datasets [32–34], the majority of publicly available children corpora include fewer than fifty hours of speech. This is significantly less than a typical adult speech corpora, which usually contains hundreds or even thousands of hours of data. Furthermore, the majority of the accessible children’s data are English corpus [32,34–37]. However, English is a resource-rich pluricentric language which should be seen more as an exceptional case, rather than an average representative. A compilation of existing datasets containing children’s speech will be presented in 2.4.

The scarcity of children’s speech datasets availability can be partially attributed to a combination of ethical, legal, and technical challenges. Collecting speech data from children raises ethical concerns related to obtaining consent, ensuring privacy, and protecting minors. The heightened awareness of online safety

and security concerns further complicates the creation and sharing of datasets that include children’s speech, as there is a need to safeguard against potential misuse and ensure the anonymity of participants. Beyond ethical and legal considerations, technical challenges also play a role. Children’s speech patterns, language development, and pronunciation can vary significantly across different age groups, as explained in previous sections, making it challenging to create datasets that accurately represent the diversity of children’s speech. Moreover, the resource-intensiveness of collecting high-quality speech data from children, which involves careful planning, recruitment efforts, and coordination with schools or parents, can further contribute to the limited availability of such datasets. Finally, collecting speech data from children is a challenging and time-consuming task. Various factors can significantly impact the quality of the gathered speech. These include children’s short attention spans, recording environments that might be noisy (such as a classroom), and the quality of the speech, which is highly dependent on the task at hand (reading tasks are generally more complex for children).

The importance of having a large database of children’s speech to cover different variabilities has been emphasised in a study conducted by Liao in 2015 [38]. In this work, the researchers trained an ASR model using a large in-house corpus of children’s speech. Notably, this corpus was comparable in size to typical adult speech corpora. The result was the attainment of state-of-the-art performance by the ASR model, even demonstrating competitiveness with adult speech recognition systems. This study underscores the crucial role of large-size and diverse children’s speech datasets in developing robust and high-performance ASR models tailored to the unique characteristics of children’s speech.

## 2.2 Introduction to automatic speech recognition

In this section, a brief historical overview of ASR is presented, laying the foundation for a subsequent exploration of predominant trends and modules within ASR systems. This comprehension is necessary for the following sections of this thesis. While not exhaustive, this overview provides essential insights, with certain topics falling beyond the scope of this thesis are intentionally omitted. For a more exhaustive understanding of ASR, readers are encouraged to consult references such as [39–41]. The section is structured as follows: Firstly, we present the historical evolution of ASR, followed by an description of traditional ASR systems, succeeded by an explanation of the end-to-end paradigm. Concluding this section, a discussion on automatic speech recognition metrics is presented.


### 2.2.1 A brief history of Automatic Speech Recognition

#### 2.2.1.A Early Days

The origins of speech recognition technology can be traced back to the 1950s and 1960s, with initial projects focusing on isolated word recognition in a speaker-dependent context. One of the earliest project in this domain was the creation of a digit recognizer at Bell Telephone Laboratories in 1952. This recogniser demonstrated the automatic recognition of telephone-quality digits spoken at normal speech rates by a single adult male, achieving an impressive accuracy of up to 99%. The system relied on formant frequency approximations to recognise entire words. It is impotant to underscore that within this recogniser, there was an absence of explicit modeling of syllables, consonants, vowels, or any other sub-word units. In this recogniser, a word was treated as a single unit, which was then compared with ten standard digit patterns to find the best match. The recognition process first involved extracting two frequency ranges, below and above 900 Hz. Motivated by the observation that these two frequency ranges approximately align with the frequencies of the first two formants in speech. Then, these formant approximations were plotted on a 2D-plot with a trace interruption period of 10ms. Finally, when presented with new audio, the system generated a plot, compared it to the reference plots of the ten digits, and returned the closest match by computing the highest relative correlation coefficient. Figure 2.3 illustrates an example of the 2D representation of the ten digits.

In 1962, IBM developed Shoebox, a device capable of recognising 16 spoken words, including the ten digits and command words such as "plus," "minus," and "total." This system employed a pattern-matching algorithm similar to the pattern-matching approach used in the Bell Telephone Laboratories's recogniser.

Nevertheless, extending such a system for a larger vocabulary would be impractical. Indeed, the template-matching approach necessitated saving each word representation on disk and comparing the unknown spoken word with all these representations. Therefore, when attempting to scale this approach

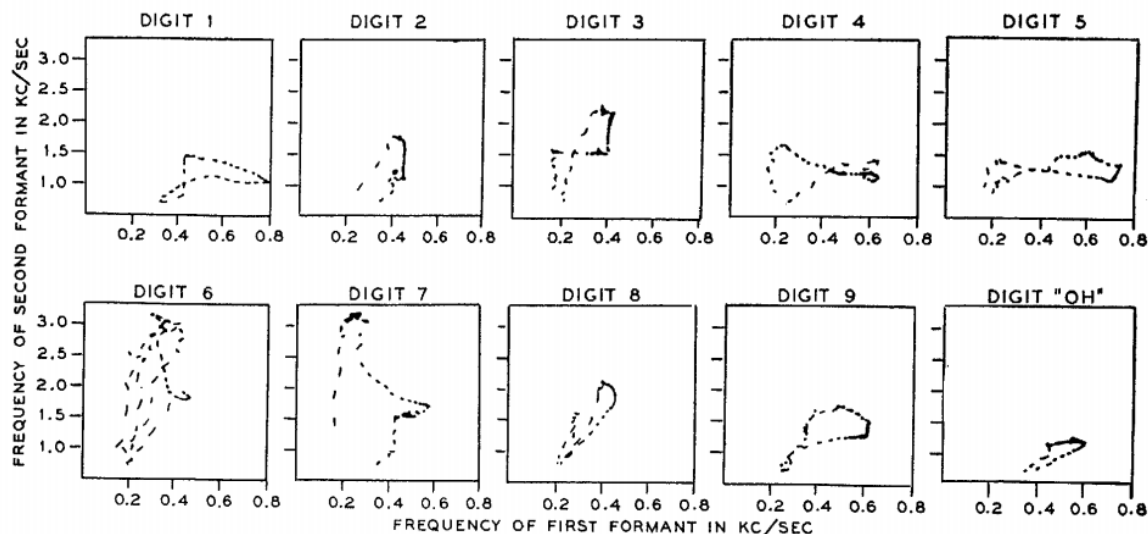

**Figure 2.3:** Example of a standard digit pattern from Davis et al. 1952

to automatic large vocabulary recognition, issues of time and disk usage complexity emerged as significant challenges. Furthermore, in order for the circuit to deliver an accuracy of the same range for a new speaker, a preliminary analysis of the speech of that individual and subsequent circuit adjustments were necessary. These limitations underscored the need for more scalable and adaptive approaches and led the field of automatic speech recognition to continued to evolve.

### 2.2.1.B The Speech Understanding Research program

In the early 1970s, subsequent to the initial success of pattern matching algorithms in single-word recognition, the Advanced Research Program Agency of the U.S. Department of Defense, ARPA, initiated funding for a five-year program called Speech Understanding Research (SUR). The overarching goal of SUR was to "obtain a breakthrough in speech understanding capability that could then be used toward the development of practical man-machine communication system". Within the context of this program, four distinct research groups were funded: two from Carnegie-Mellon University (CMU), one from Bolt Beranek and Newman Inc. (BBN Hwim), and the last one from System Development Corporation (SDC). Each group was assigned a specific task, such as dealing with facts about ships, travel budget management, and document retrieval. The ultimate objective for each group was to create a system capable of recognising simple sentences within the context of their assigned task, from a vocabulary of 1,000 words, achieving a Word Error Rate (WER) of 10% in a reasonable amount of time.

The realisation that the pattern-matching word identification strategy could not be directly applied to the challenge of sentence understanding prompted a redesign of the single-word identification system. In the first hand, one key recognition was that the acoustic characteristics of words can vary considerably based on the context of the sentence. The impracticality of storing each word and all its possible different




variations on disk became apparent. Moreover, determining the boundaries of each word was an almost impossible task, and even if these boundaries were identified, the pattern-matching computation, involving comparisons with each of the 1,000 stored words and all their possible variations, would be time-consuming and exceed the reasonable time requirement. Secondly, another crucial consideration in the redesign of the system was that the length of the spoken sentence is variable and unknown, in contrast to the relatively fixed length in single-word identification tasks. In sentence understanding, the system needed to handle variable sentence lengths, making it necessary to adopt a more flexible approach in modeling and recognizing speech.

To address these challenges, a shift was made to a smaller unit than the word for modeling speech -namely, phonemes. Phonemes are the smallest distinctive and meaningful units that compose speech. Each language is associated with a finite set of phonemes, typically fewer than 50, which can be combined to form words. This shift enabled a more efficient and flexible representation of speech, accommodating the variability in the pronunciation of words.

Among all the systems proposed in the project, the Harpy system implemented by Lowerre in 1976 by the Carnegie Mellon team exhibited the best performances [3]. Harpy is a speaker-specific system that use a pattern-matching algorithm at the phoneme level instead of the word level. The system employs a set of 98 phonemes and diphones -a pair of consecutive phonemes-, encompassing pronunciations of all words, along with a graph compiling all accepted sentences using 15,000 states. When a new spoken utterance is provided to the system, it undergoes an initial processing phase, involving low-pass filtering at 5 kHz, digitization at 10,000 samples per second, and computation of 14 linear prediction coefficients with a 10ms shift. To speed-up the decoding process, analogous adjacent acoustic segments are grouped together. Subsequently, these audio segments are compared against the 98 phoneme templates, and the system deduces the optimal path over the decoding graph. Figure 2.4 provides an exemplar illustration of a decoding graph in the Harpy system.

Notwithstanding the achievements and success of the Harpy system, it has limitations that hinder its broader applicability. As a speaker-specific system, it requires tuning for each new speaker over the 98 phoneme templates. Additionally, the system is constrained to recognising a vocabulary of no more than 1,000 words and relies on a simple handcrafted grammar, making it less reliable for handling spontaneous speech. Moreover, the decoding time of the system falls short of real-time requirements. These constraints highlight the need for more generalisable and efficient speech recognition systems, especially for handling diverse speakers and spontaneous speech scenarios. Therefore, as research progressed, the limitations of template-based approaches became apparent. This realisation prompted the exploration of probabilistic modeling techniques, marking a shift towards more sophisticated and adaptable approaches in automatic speech recognition.

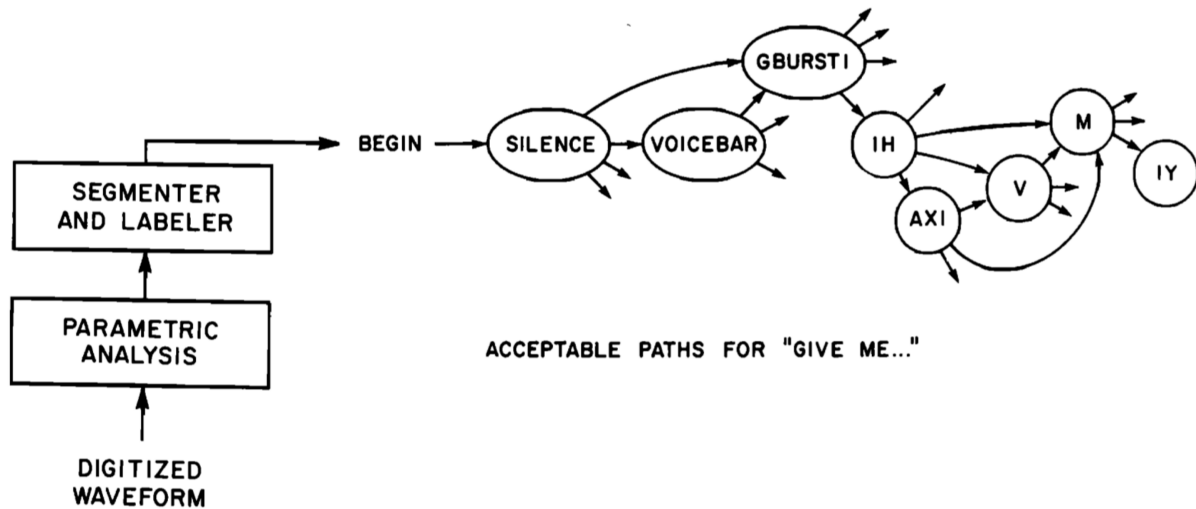


**Figure 2.4:** Example of a decoding graph from the Harpy system for the sentence "GIVE ME" from [3]

### 2.2.2 Traditional automatic speech recognition systems

In the 1970s, the introduction of Hidden Markov Models (HMMs) led to a paradigm shift in ASR research, moving away from traditional pattern-matching methods towards statistical modelling [42]. Indeed, HMMs are particularly effective at capturing the sequential and temporal nature of speech. They assume that speech can be represented as a sequence of hidden states, each state corresponding to a distinct phonetic unit. HMMs model the transitions between these states and, at each state, generate observable acoustic features. The hidden aspect refers to the fact that the underlying states are not directly observed but inferred from the observable features. HMMs are particularly well suited to modelling speech dynamics, as they can represent the variability of speech sounds over time. In the context of ASR, HMMs have been widely used to model phonemes, words or sub-word units.

Building on this foundation, the 1980s saw the emergence of Gaussian Mixture Models (GMMs), which further enhanced the statistical modeling capabilities of ASR [43]. GMMs allowed for a more flexible representation of the probability distributions underlying speech features. GMMs are used to model the statistical distribution of acoustic features associated with each hidden state in an HMM. They assume that the distribution of features can be approximated by a mixture of several Gaussian distributions. GMMs are versatile in capturing the variability of speech sounds, allowing a more flexible representation of the acoustic units. In ASR, GMMs are commonly used to model the emission probabilities associated with each state in an HMM. This means that given a particular state, the GMM provides the likelihood of observing a specific set of acoustic features. By combining the temporal modeling capabilities of HMMs with the statistical representation power of GMMs, this framework effectively captures the complex relationship between acoustic features and phonetic units.

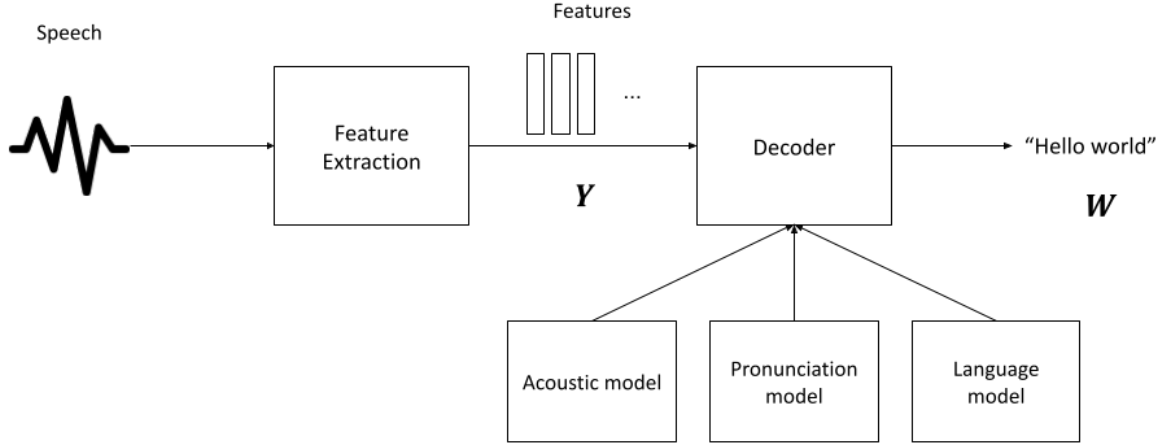

**Figure 2.5:** Architecture of a HMM-based speech recognition system

Finally, in the 1990s, statistical grammars also played a crucial role, providing a structured framework for incorporating linguistic into ASR systems [44]. Statistical grammars represent a category of grammars that integrate statistical information to characterise the probability of diverse linguistic structures. In contrast to traditional rule-based grammars, which articulate a language’s syntax through explicit rules, statistical grammars adopt a data-driven methodology. They assign probabilities to various linguistic constructions based on observed frequencies within a designated corpus.

The components illustrated in Figure 2.5 represent the traditional ASR pipeline. These components continue to form the core of modern HMM-based ASR systems. However, in more recent times, the field of ASR has witnessed a transformative shift with the adoption of deep neural networks (DNNs) instead of GMM. Called hybrid models, they combining the strengths of HMMs and DNNs and have further improved the ASR system performance [45]. A DNN is a subtype of artificial neural networks consisting of multiple layers of interconnected neurons. These neurons, organised in layers, receive an input signals, and each connection between neurons is characterised by a weight that signifies its strength. In addition, each neuron is associated with a bias, provide an additional learnable parameter. During training, the network adjusts these weights and biases to minimise the difference between predicted and actual outputs, a process known as backpropagation. Moreover, there is a non-linear activation functions within neurons, as it enables the network to model intricate, non-linear patterns of the data. The weights, biases and non-linearity allow DNNs to capture complex relationships and representations from the data, learning hierarchical features and abstracting information across multiple layers of the network.

In this statistical framework, the continuous speech audio waveform is transformed into a sequence of fixed-size acoustic vectors, denoted as  $\mathbf{X} = x_1, \dots, x_T$ . The goal of the Automatic Speech Recognition (ASR) system is to determine the sequence of words,  $\mathbf{w} = w_1, \dots, w_L$ , that is most likely to have produced the observed acoustic vector sequence  $\mathbf{X}$ . This is formulated as finding the word sequence  $\hat{\mathbf{w}}$

that maximises the conditional probability  $P(\mathbf{w}|X)$ . More formally:

$$\hat{\mathbf{w}} = \underset{\mathbf{w}}{\operatorname{argmax}} \{P(\mathbf{w}|X)\} \quad (2.1)$$

However, directly modeling the conditional probability  $P(\mathbf{w}|X)$  can be challenging. Bayes' Rule offers a way to express this probability in terms of more manageable components, specifically by decomposing it into the product of the likelihood of the observed acoustic vector sequence given the word sequence  $P(X|\mathbf{w})$  and the prior probability of the word sequence  $P(\mathbf{w})$ . Therefore, equation 2.1 became:


$$\hat{\mathbf{w}} = \underset{\mathbf{w}}{\operatorname{argmax}} \left\{ \frac{P(X|\mathbf{w})P(\mathbf{w})}{P(X)} \right\} = \underset{\mathbf{w}}{\operatorname{argmax}} \{P(X|\mathbf{w})P(\mathbf{w})\} \quad (2.2)$$

Here, the likelihood  $P(X|\mathbf{w})$  is determined by the acoustic model component, capturing the probability of observing the acoustic vector sequence  $\mathbf{X}$  given the word sequence  $\mathbf{w}$ . In parallel, the prior probability  $P(\mathbf{w})$  is determined by the language model component. The term  $P(X)$  is not essential for determining the maximum probability and can be omitted in the context of finding the most likely word sequence. Subsequent sections will provide a more in-depth exploration of these distinct components and their processes.

### 2.2.2.A Feature extraction

The feature extraction component plays a crucial role in capturing pertinent information about the linguistic content of speech. The efficacy of speech recognition systems is intricately tied to the quality of the extracted features. To this end, for each time step, the continuous waveform is transformed into a small fixed-size vector. A acceptable assumption is that speech is considered as stationary within the time span covered by a single vector. Consequently, feature vectors are typically computed at intervals of 10 milliseconds, often with a 25-millisecond overlapping window.

Within the domain of ASR, a broad range of different acoustic features can be employed. However, in the context of HMM-based models, the predominant features encompass perceptual linear prediction (PLP), mel spectrograms (melspec), filterbanks (fbanks), and Mel-frequency cepstral coefficients (MFCC). However, MFCCs as introduced by Davis and Mermelstein [46], stand as the predominant features in HMM-GMM and HMM-DNN architectures. The process of extracting MFCCs typically involves several steps to capture essential information from the speech signal. First, a preemphasis filter is applied to the signal. Subsequently, the signal is segmented into frames, and a Hamming window with a duration of 25 milliseconds is applied to each frame. The frames are then transformed into the frequency domain using the discrete Fast Fourier Transform (FFT), resulting in the magnitude spectrum. The next stage involves passing the magnitude spectrum through a bank of triangular-shaped filters. Extracting features at this point yields melspec features. The energy output from each filter is log-compressed, and

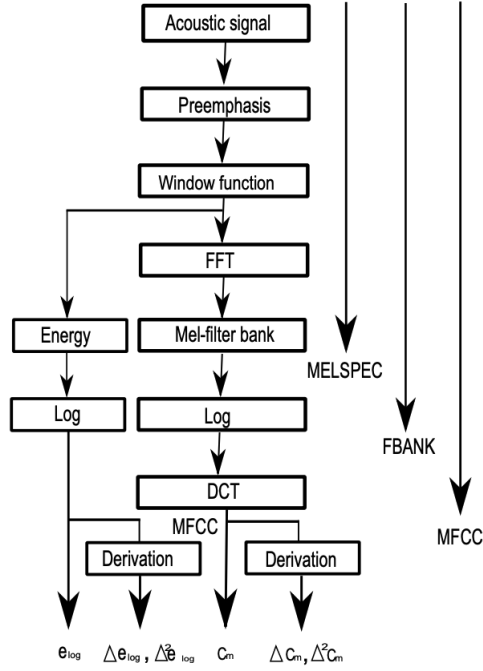


**Figure 2.6:** Principal block scheme of main speech features for ASR: Melspec, fbanks and MFCC coefficients from [4]

concluding the extraction process at this stage results in fbanks features. Finally, MFCCs are obtained by transforming the filterbank features into the cepstral domain using the Discrete Cosine Transform (DCT) to decorrelate the energies obtained from the filterbanks. The representation of this extraction process is illustrated in Figure 2.6.

To incorporate information about the dynamics of the speech signal, the feature vector for each time step is augmented with the first and second-order derivatives, commonly denoted as  $\Delta$  (Delta) and  $\Delta\Delta$  (Delta-Delta), respectively. The first-order derivative coefficients, often referred to as  $\Delta$  coefficients, are calculated by taking the difference between consecutive feature vectors. Mathematically, the  $\Delta$  coefficients for a feature vector at time  $t$  are computed as follows:

$$\Delta_i = \frac{\sum_{n=1}^N n(f_{i+n} - f_{i-n})}{2 \sum_{n=1}^N n^2} \quad (2.3)$$

Here,  $f_i$  represent the feature at the instant  $i$ . Typically,  $n$  is set to 2, indicating that the first-order derivatives are calculated by considering the differences between the feature at the current time  $t$  and its neighboring features at  $t \pm 2$ . The  $\Delta\Delta$  coefficients, also written  $\Delta^2$ , represents the second-order derivatives and are computed in a similar manner as  $\Delta$  in equation 2.3 by taking the difference between consecutive  $\Delta$  coefficients instead of the spectral feature  $f$ . The concatenation of the first-order derivative ( $\Delta$ ) and second-order derivative ( $\Delta^2$ ) features with the spectral features is denoted as  $x_i$ . Mathematically, this

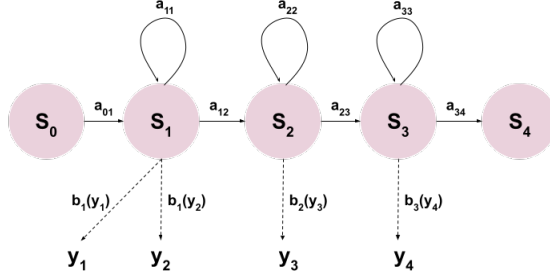

**Figure 2.7:** Three-state Hidden Markov Model for modelling phones

concatenation can be expressed as follows:

$$\mathbf{x}_i = [f_i \quad \Delta_i \quad \Delta_i^2] \quad (2.4)$$

Here,  $f_i$  represents the spectral feature at the instant  $i$ ,  $\Delta_i$  represents the first-order derivative feature at the same instant, and  $\Delta_i^2$  represents the second-order derivative feature at the same instant. The resulting feature vector  $\mathbf{x}_i$  encapsulates information about the spectral content of the speech signal as well as its temporal dynamics, providing a more comprehensive representation for subsequent processing by the ASR system, espacially the acoustic model.

### 2.2.2.B Acoustic model

The role of the acoustic model (AM) is to determine  $P(\mathbf{X}|\mathbf{w})$ . While employing a classifier such as GMM models with one GMM per phone is a straightforward approach, it tends to disregard the temporal dependencies inherent in speech, such as co-articulation. Indeed, accurately categorizing each frame necessitates the consideration of not only the current frame but also its context, encompassing both previous and following frames. Additionally, there are acoustic differences at the beginning, middle, and end of each phone, further complicating the classification task. To address these concerns, the HMM framework has been proposed as a solution [47]. HMMs offer temporal flexibility, incorporating concepts such as self-looping, and provide a well-understood framework with effective learning (Expectation Maximization) and decoding (Viterbi) algorithms.

In the HMM terminology, the observed variables, denoted as  $y_i$ , correspond to the acoustic features (e.g., speech signal), while the hidden variables are represented as states, denoted as  $s_i$ . The states are generated using a first-order Markov process, where the  $i^{th}$  state  $s_i$  depends solely on the previous state  $s_{i-1}$ . The transition from one state to another is determined by the transition probability  $a_{ij}$ . Upon entering a state  $s_i$ , an observation in the form of an acoustic vector is emitted, and this emission is modeled by the distribution  $b_i(\cdot)$  associated with that state. Typically, this emission distribution is modeled by a GMM. It is assumed that all observations are independent given the states that generated them. A

fundamental configuration in HMMs for speech recognition involves a three-state model representing the beginning, middle, and end of a phoneme, along with an initial and final state. This model, known as a monophone HMM-GMM, constitutes a basic unit for phonetic modeling. For example, since English has 44 phonemes [48], a monophone system on English will have 44 separate HMM-GMM. However, due to the influence of co-articulation effects and the desire to capture phonetic variations based on context, more complex models, such as triphone systems, are employed [49]. A triphone system aims to model each phoneme in its specific phonetic context, leading to a significantly larger number of required models. Indeed, for a language with  $N$  phonemes, there should be  $N^3$  models to train. For example, in English, which has 44 phonemes, the total number of models would be  $44 * 44 * 44$  resulting in 85,184 models. To manage the computational complexity, these models are often clustered using decision trees [50]. This hierarchical clustering helps capture phonetic variations efficiently while working with limited available data.

The concept of hybrid models gained prominence in the 1990s with the integration of multi-layer perceptrons (MLP) as replacements for GMMs in the HMM-GMM system [51, 52]. Subsequently, the introduction of DNNs, which are MLPs with a large number of hidden layers, in 2012 marked a significant advancement in various ASR tasks [45]. The efficacy of DNNs lies in their capability to capture complex and highly non-linear relationships between inputs (e.g., audio features) and outputs (e.g., phoneme labels) due to the substantial number of parameters induced by the deep architecture.

However, the training of HMM-DNN and HMM-GMM models differs. Neural networks necessitate labeled data for training, which includes both input features and corresponding output labels (e.g., phoneme labels). Standard speech training data often lacks this detailed labeling, providing only audio waveforms and utterance transcriptions. Consequently, the training of HMM-DNN models relies on alignments generated by an HMM-GMM. Therefore, the training process involves initial flat-start monophone training with HMM-GMM, followed by iterative steps into triphone training with more precise alignments. In consequence, the precision of the HMM-GMM alignment directly impacts the efficacy of DNN model training. As ASR continues to advance, the integration of various DNN architectures, including Convolutional Neural Networks (CNNs) [53], Long Short-Term Memory networks (LSTMs) [54], and Time-Delay Neural Networks (TDNNs) [55], further refines the modeling of spatial and temporal relationships, laying the foundation for more sophisticated and context-aware speech recognition systems.

### 2.2.2.C Pronunciation model

The pronunciation model in Automatic Speech Recognition (ASR), often referred to as a dictionary or lexicon, plays a crucial role in establishing the correspondence between phonetic units, such as phonemes, and the respective words in the language. In ASR systems, words are essentially comprised of phonetic segments, and the pronunciation model specifies how these segments combine to articulate the pronun-

Phoneme	Example	Translation	Phoneme	Example	Translation
AA	odd	AA D	L	lee	L IY
AE	at	AE T	M	me	M IY
AH	hut	HH AH T	N	knee	N IY
AO	ought	AO T	NG	ping	P IH NG
AW	cow	K AW	OW	oat	OW T
AY	hide	HH AY D	OY	toy	T OY
B	be	B IY	P	pee	P IY
CH	cheese	CH IY Z	R	read	R IY D
D	dee	D IY	S	sea	S IY
DH	thee	DH IY	SH	she	SH IY
EH	Ed	EH D	T	tea	T IY
ER	hurt	HH ER T	TH	theta	TH EY T AH
EY	ate	EY T	UH	hood	HH UH D
F	fee	F IY	UW	two	T UW
G	green	G R IY N	V	vee	V IY
HH	he	HH IY	W	we	W IY
IH	it	IH T	Y	yield	Y IY L D
IY	eat	IY T	Z	zee	Z IY
JH	gee	JH IY	ZH	seizure	S IY ZH ER
K	key	K IY			

**Figure 2.8:** Phoneme set and examples of CMU dictionary using 39 phonemes from [5]

ciation of each word. This mapping takes the form of an entry where all possible words are associated with their corresponding sequence of phones. Examples of words along with their corresponding phonetic sequences are illustrated in Figure 2.8. Traditionally, this mapping is obtained manually, relying on phonetic and linguistic knowledge. It’s noteworthy that a single word may have multiple pronunciations.

Furthermore, the integration of statistical grapheme-to-phoneme (G2P) tools [56] augments the lexicon by facilitating the generation of pronunciations for words that may not be explicitly included in the dictionary.

#### 2.2.2.D Language model

The language model (LM), often referred as grammar, holds a pivotal role in ASR, responsible for determining the probability  $P(\mathbf{w})$  of equation 2.2. Beyond its use in ASR, the applications of language models extends into diverse fields including Natural Language Processing (NLP) [57], computational biology [58], and data compression [59]. The two most successful approaches to language modeling widely adopted in ASR are, respectively, statistical methods and models based on deep learning.

Statistical language models rely on traditional techniques like HMM and n-grams. N-grams, which are the simplest approach for language modelling, estimate the likelihood of the next word based on the



context of the preceding  $n$  words as follows:

$$P(\mathbf{w}) = P(w_1, w_2, \dots, w_L) = \prod_{i=1}^L P(w_i | w_{i-n}, \dots, w_{i-1}) \quad (2.5)$$

The granularity of context varies from the case when  $n = 1$ , the 1-gram -or unigram (considering each word independently) to higher-order  $n$ -grams that incorporate more extensive context for enhanced accuracy. The unigram model would be defined as follows:

$$P(\mathbf{w}) = P(w_1, w_2, \dots, w_L) = \prod_{i=1}^L P(w_i) \quad (2.6)$$

Despite the evident advantages of employing a larger  $n$  for enhanced contextual information in language modeling, practical considerations and computational limitations often impose constraints on the choice of  $n$  in real-world ASR applications. The escalating combinational complexity associated with higher  $n$  values becomes computationally demanding, presenting challenges for efficient processing, storage, and training. As a result, the majority of ASR applications typically use trigrams or 4-grams, striking a balance between contextual accuracy and computational feasibility.

Furthermore, determining the start of sequence probability precisely introduces intricacies, especially with larger  $n$ -grams. Additionally, the reliance on training data poses a notable limitation for  $n$ -grams, particularly in estimating the likelihood of unseen words. This deficiency becomes apparent when facing vocabulary expansion or encountering out-of-vocabulary terms, necessitating specific techniques such as smoothing to address these challenges. [60].

In contrast, deep learning-based language models have opened up a new era, employing neural networks with complex architectures to achieve remarkable modeling capabilities. Unlike traditional n-grams, these models demonstrate a high degree of flexibility, ease training and do not require as many resources as n-grams to be efficient. Recent advances in language modeling, exemplified by state-of-the-art models such as Bidirectional Encoder Representations from Transformers (BERT) [61] or Generative Pre-trained Transformer (GPT) [62], are built on deep learning networks.


A key factor contributing to the success of deep learning language models is the incorporation of attention mechanisms. Unlike the limited contextual awareness of n-grams, attention mechanisms allocate varying degrees of importance to different words within a sentence. This approach enables the model to focus more on crucial elements, capturing intricate dependencies and semantic information that contribute to a more accurate language representation. The attention mechanism’s ability to discern and prioritise important words enhances the overall performance and effectiveness of deep learning language models.

### 2.2.2.E Decoder

In the context of ASR, the decoder role is to use the language, acoustic, and pronunciation models to determine the most likely word sequence, denoted as  $\hat{\mathbf{w}}$ , given a corresponding sequence of acoustic features, denoted as  $\mathbf{Y}$  (as referred in equation 2.1). This is achieved by employing dynamic programming to search through all potential sequences. Notably, the Viterbi algorithm [63], are instrumental in efficiently solving this decoding problem. However, in practical applications, a direct implementation of the Viterbi algorithm becomes challenging, especially for continuous speech, where considerations such as model topology, language model constraints, and computational constraints must be taken into account. N-gram language models and cross-word triphone contexts further complicate the search space. To address these challenges, various approaches have emerged.

One approach involves constraining the search space by maintaining multiple hypotheses in parallel [64] or dynamically expanding it as the search progresses [65]. Another alternative is to use beam search where the idea is to prune search path which are unlikely to succeed. More recently, recent advancements in weighted finite-state transducer (WFST) technology offer a comprehensive solution by integrating all necessary information, including acoustic models, pronunciation, and language model probabilities, into a single, highly optimised network [66,67]. This approach provides both flexibility and efficiency, making it valuable for both ASR research and practical applications. As demonstrated by the Kaldi speech recognition toolkit [68], which stands out as a widely adopted toolkit that leverages WFSTs for decoding.

Although decoders are primarily designed to find the best solution to the aforementioned probability computation in equation 2.1, they can also generate the N-best set of hypotheses. This capability enables multiple passes over the data without incurring the computational expense of repeatedly solving the probability computation from scratch. The word lattice [69] serves as a convenient structure for storing these hypotheses, consisting of nodes representing points in time and spanning arcs representing word hypotheses. Word lattices offer remarkable flexibility, allowing for rescoring by using them as input recognition networks. Furthermore, they can be expanded to facilitate rescoring by a higher-order language model.

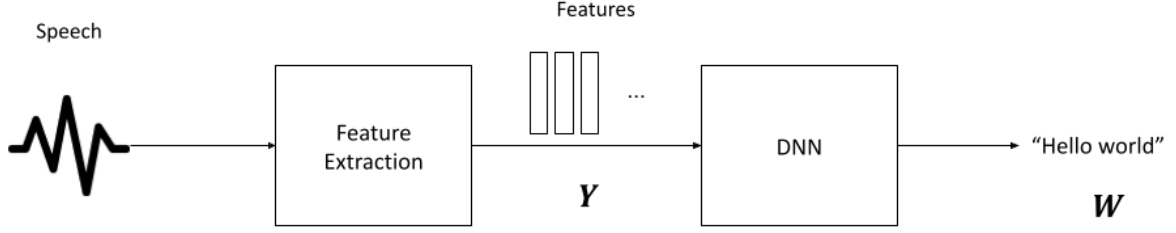

**Figure 2.9:** Architecture of an end-to-end speech recognition system

### 2.2.3 End-to-end automatic speech recognition

End-to-end speech recognition signifies a transformative paradigm in the field, presenting a streamlined and holistic approach compared to traditional HMMs-based systems. In contrast to conventional modular systems that incorporate distinct acoustic, pronunciation, and language models, end-to-end architectures propose to simplify the ASR process by directly map input audio signals to transcriptions within a single neural network model as illustrated in 2.9. Indeed, One of the key disadvantages of hybrid models is the factorized training of all modules independently, which can lead to error accumulation and mismatches between the different components. Therefore end-to-end strategy simplifies the overall system design, eliminating the requirement for pre-aligned training data and post-processing of outputs, thereby fostering a more data-driven and automatic learning process. In this paradigm, word-level transcriptions are transformed into character-level transcriptions. Considering the sequence of fixed-size acoustic vectors  $\mathbf{X} = x_1, \dots, x_T$  and the corresponding character sequence  $\mathbf{Y} = y_1, \dots, y_N$ , where  $T$  and  $N$  represent the numbers of frames and the length of the character sequence respectively, the objective of end-to-end models is to learn the conditional probability of the character  $y_i$  given the input  $\mathbf{X}$  and the preceding output  $y_{<i}$ :

$$P(\mathbf{Y}|\mathbf{X}) = \prod_{i=1}^N P(y_i|\mathbf{X}, y_{<i}) \quad (2.7)$$

In recent years, with the growing interest in the end-to-end ASR paradigm, these systems have demonstrated increasing performances. Particularly, in scenarios where a large amount of labelled training data is available, end-to-end systems have demonstrated comparable or even superior performance compared to traditional HMM-based systems across various ASR datasets [70, 71]. However, despite its promising results, end-to-end speech recognition faces a several challenges. Most importantly, these systems require a large corpus of training data to operate effectively. In the absence of such a corpus, the model may struggle to perform correctly [72]. In addition, handling rare or out-of-vocabulary words remains a significant challenge. Finally, the generalisation across new acoustic conditions of the model can be issue. Therefore, there is a need of research on end-to-end speech recognition, particularly to simplify the end-to-end design, training, and robustness of these speech recognition systems.

The overall structure of end-to-end systems depicted in figure 2.9 highlight the integration of acoustic model, pronunciation model, and language model into a single neural network in end-to-end architectures. Nevertheless, feature extraction stage remains identical to traditional ASR systems. In end-to-end systems, the most commonly employed fixed-size acoustic features are filterbanks. Motivated by the higher flexibility they provide when capturing relevant information from the speech signal compared to MFCCs.

Transitioning to the end-to-end paradigm has necessitated the development of new training approaches. Indeed, training an end-to-end model differs significantly from training traditional HMM-based systems. Notably, two training procedures have emerged in the literature of end-to-end ASR: Connectionist Temporal Classification and sequence-to-sequence architectures. Each approach comes with its own distinct features and advantages, and the subsequent sections offer a more in-depth exploration of these two methodologies. It is worth mentioning that while these are distinct methods that can function independently, they can also be employed in conjunction.

### 2.2.3.A Connectionist Temporal Classification

The first step towards end-to-end automatic speech recognition was made with the introduction of the Connectionist Temporal Classification (CTC) objective function, introduced by Grave et al. [73]. The main innovation of CTC is that it eliminates the need for pre-segmented training data, enabling the model to automatically learn the alignments between the  $N$  input speech frame  $\mathbf{X}$  and the output sequence of  $T$  phones  $\mathbf{Y}$  if  $N \leq T$ , representing a departure from the traditional HMM-based models

To this end, the CTC objective function consists of two essential sub-processes: path probability calculation and path aggregation. Consider  $\mathcal{V}$  as the set of possible paths of phone-label sequences of length  $T$ , and let  $p_k^t$  denote the probability of observing the label  $k$  at time  $t$ . It is noteworthy that CTC necessitates the length of the label sequence  $Y$  to be equal to  $T$ . To address any length difference between  $N$  and  $T$ , a blank label “-” is introduced, representing the probability of observing no label.

First, the path probability calculation involves computing the conditional probability of any path  $\pi \in \mathcal{V}$  given the observed acoustic features  $\mathbf{X}$ . Mathematically, this is expressed as:

$$p(\pi|\mathbf{X}) = \prod_{t=1}^T p_{\pi_t}^t, \forall \pi \in \mathcal{V} \quad (2.8)$$

Where  $\pi_t$  denotes the label at time  $t$  in sequence path  $\pi$ . Considering all possible paths and their respective probabilities is crucial, but direct computation becomes infeasible due to the exponential number of potential paths.

To address the computational challenges, the path aggregation step comes into play. Its purpose is to sum the probabilities of paths that correspond to the same label sequence  $\mathbf{Y}$  by marginalizing over all possible paths. The path aggregation also merge the same contiguous labels and deletes the blank

label. For example two different paths “b-ii-r-d” and “b-i-r-dd” becomes “bird”. This is mathematically represented as:

$$p(Y|X) = \sum_{\pi \in \theta_Y} p(\pi|X) \quad (2.9)$$

Where  $\theta_Y$  is a subset of  $\mathcal{V}$  of all possible path  $\pi$  corresponding, after aggregation, to the label sequence  $Y$ .

### 2.2.3.B Sequence to sequence

The sequence-to-sequence (Seq2seq) architecture, initially proposed by Sutskever for machine translation [74] and stands as a important paradigm of end-to-end ASR systems. The original context of its application was for machine translation tasks where a word sequences were translated from one language to another. The inherent challenge lies in the differing lengths of input and output sequences. However, this architectural framework, especially with the integration of attention mechanisms [75], has showcased remarkable versatility, extending its efficacy across diverse applications such as image captioning [76], conversational modeling [77], text summarisation [78], and ASR [79].

The core components of a standard Seq2seq model consist of an encoder and a decoder. The encoder processes input sequences of variable length, transforming them into a sequence of vectors often denoted as the “internal state” or “hidden representation.” This sequence of vectors encapsulates the crucial information extracted from the input features. Subsequently, the decoder uses this sequence of vector representation to generate an output sequence of tokens iteratively. Mathematically expressed as:

$$p(y_1, \dots, y_T) = \prod_{i=1}^T p(y_i | y_0, \dots, y_{i-1}, f(H)) \quad (2.10)$$

where  $f(H)$  represents a function of the encoder’s output  $H = (h_1, \dots, h_N)$ . Notably, in Seq2seq models incorporating attention mechanisms,  $f(H)$  includes attention to selectively focus on relevant segments within  $H$  for predicting the current target token. The seq2seq objective function is formulated to train the model by maximizing the conditional probability of generating the target sequence given the input sequence using negative log-likelihood loss (NLL) or cross-entropy loss (CE).

A significant difference from CTC-based models lies in the fact that Seq2seq models do not make independent assumptions about output labels. Instead, they directly model the conditional probability of each target token given the preceding tokens in the output sequence and the encoder’s output. This end-to-end approach empowers Seq2seq models to handle sequences of varying lengths, making them particularly advantageous for tasks, like speech recognition, where precise alignment between input and output is challenging.

#### 2.2.4 Automatic Speech Recognition metrics

In the domain of ASR, metrics serve as indispensable tools for assessing the accuracy and effectiveness of systems. These metrics provide quantitative evaluations that act as a crucial benchmark, enabling researchers, developers, and engineers to objectively measure the performance of their ASR models. The evaluation process of ASR systems involves a meticulous comparison between system-generated transcriptions and reference transcriptions. Among these metrics, Word Error Rate (WER) is the most commonly used for assessing speech-to-text systems. The ASR system’s output word sequence is matched with a reference transcription, and the number of substitutions (S), deletions (D), and insertions (I) are summed. As a result, WER is calculated as follows:

$$WER = \frac{S + D + I}{N} \times 100 \quad (2.11)$$

Where  $N$  is the total number of words in the reference transcription. As a result, a lower WER score is indicative of better system performance. The computation of WER is based on the Levenshtein distance, operating at the word level rather than the phoneme level. The primary goal is to quantify the dissimilarity between the ASR system’s output and the reference transcription. Notably, a WER score greater than 100% can be attained when the number of mistakes surpasses  $N$ , while a score of 0% is the minimum achievable when there are no errors in the ASR hypothesis compared to the reference.

State-of-the-art ASR systems developed by leading research institutions and companies have achieved WER scores ranging from around 4.3% to 8.13% on well resourced benchmark datasets such as the Switchboard corpus for conversational speech recognition [80] and the French subset of the read speech Common voice dataset [81] respectively. However, it is important to note that WER scores can be task-specific, and achieving high WER scores, especially in challenging conditions or for certain languages and accents, such as 38.9% for the CHiMIE-6, a low resource noise speech dataset [82].

Beyond WER, there exist other metrics derived from the same fundamental equation but operating at different levels of transcription. Examples include Phone Error Rate (PER) for languages based on phonemes and Character Error Rate (CER) which operates on character instead of word. These metrics provide a nuanced evaluation by concentrating on specific linguistic units, contributing to a comprehensive assessment of ASR system performance in diverse contexts.

## 2.3 Children automatic speech recognition

Addressing the challenges highlighted in Section 2.1 has prompted diverse initiatives across various segments of the ASR pipeline. This involves exploring improvements at the feature level, with the development of novel extraction techniques and adaptations. Data augmentation strategies have been employed to enrich training datasets, offering the model exposure to a more diverse range of children speech patterns. Modifications in annotation detail have been explored, refining the labeling process to better capture the nuances of children’s speech.

Beyond feature-level interventions, advancements in acoustic model structures have been pursued. This involves exploring new architectures and refining existing ones to better accommodate the characteristics of children’s speech. In addition, innovative training procedures have been introduced to optimise model learning from the available data.

This section reviews state-of-the-art for each of these aspects in more detail. Following this comprehensive review, we will identify and delineate the specific approaches that emerge as promising or particularly impactful for addressing the challenges associated with children’s ASR. These identified approaches will serve as the focal points for the subsequent phases of the thesis.

### 2.3.1 Feature extraction stage

Feature extraction stage is critical for identifying relevant speech signal components for both traditional and end-to-end ASR. This phase is characterised by the intentional elimination of speaker-dependent attributes, such as fundamental frequency, while simultaneously preserving the integrity of phoneme-dependent characteristics, notably exemplified by formant frequencies as described in section 2.2.2.A. In the context of children’s speech recognition, the acoustic characteristics pose unique challenges, including close fundamental frequency and formant values, as well as phonetic class overlap due to formant variability. In addition, studies by [83,84] demonstrated that in mel-filterbank-based cepstral features commonly used in the ASR field, the acoustic mismatch is exacerbated by insufficient smoothing of pitch-dependent distortion present for child speakers. To tackle these challenges, various strategies have been proposed to enhance acoustic features for children’s speech, encompassing new feature extraction, feature adaptation, and the concatenation of new features.

An early step in the direction of better feature extraction for children was the introduction of perceptual linear predictive (PLP) features in 1990 by Hermansky [85]. Indeed, PLP features demonstrated a more accurate representation of formants in children’s speech. An additional strategy employed was the use of binary-weighting of MFCCs. This approach involves truncating some of the higher coefficients to remove those with non-sufficient smoothing, as proposed by [83]. The objective is to refine the representation of MFCCs by selectively retaining non-distorted coefficients. Furthermore, Gamma-tone filterbanks were employed to wrap the spectrum on a different scale, aiming to decrease variance compared to mel-

filterbank features [86]. More recently, there has been a shift in the feature extraction stage from a hand-crafted approach to a data-driven strategy, focusing on learning relevant features directly from the raw speech signal. This approach, initially proposed by [87], is motivated by the understanding that hand-crafted features are often based on the analysis of adult speech, and they may not be optimally suited for the acoustic variability present in children’s speech. In the study conducted by [87], data-driven feature extraction was performed using CNN-based models. The results indicated that the features learned in a data-driven manner outperformed standard hand-crafted features, emphasising the potential benefits of adapting feature extraction to the specific characteristics of children’s speech. Another similar approach was proposed by [88], where the convolutional layers of the feature extractor were replaced by SincNet layers [89]. SincNet use rectangular band-pass filters instead of the standard CNN filters, enabling a reduction in the number of parameters required for raw waveform modeling. Additionally, this approach involves restricting the filter functions rather than having to learn every tap of each filter.

An alternative approach to mitigate the acoustic variability in children’s speech involves working directly with adult features and adapting them to reduce children’s acoustic variability. One common technique for this purpose is Vocal Tract Length Normalization (VTLN), which has been widely employed to normalize spectral features into a canonical space [90,91]. Research conducted using VTLN indicates a higher recognition rate when the ASR system is trained with adult speech and subsequently tested with children’s speech [92,93]. Indeed, [94] showed a strong relationship between the optimal warping factor and the age of speakers. VTLN is typically applied as a front-end processing step at the end of the feature extraction. The VTLN process involves stretching or compressing the frequency axis of the spectrum according to a warping function. This process leads to a normalisation of the spectral representation, reducing the impact of speaker variance. Nevertheless, it is important to acknowledge that recognition results achieved with VTLN compensation alone may still be sub-optimal. This is attributable to the presence of various factors, extending beyond variations in vocal tract length, that contribute to the distinct characteristics between adult and children’s speech. In addition to directly adapting speech feature, researchers have explored the normalisation of specific aspects of children’s speech to better align with adult speech characteristics. Several studies investigated the use of pitch normalisation to reduce the spectral mismatch between children’s and adult’s speech [86,95–97], while other directly normalised formant values [98,99]. Furthermore, adapting speaking rate through time-scale modification approaches has been investigated [100]. Children’s speech is typically slower than that of adults, and adjusting the speaking rate can aid in creating a more consistent representation for ASR models.

Moreover, in line with the trend of transitioning from knowledge-based to data-driven, some recent studies have explored data-driven feature adaptation methods using deep learning approaches. For instance, studies like [101,102] employed adversarial multi-task learning to generate age-invariant features. The goal is to minimise the acoustic mismatch between adult and children’s speech by leveraging adversar-



ial training techniques. Adversarial training introduces a form of competition between neural networks, with one network generating features used by the ASR and another network attempting to distinguish between the adapted children’s features and the real adult’s features. This adversarial approach aims to extract features that are less influenced by age-related variations, contributing to improved model generalisation across different age groups.

In addition to feature extraction and feature-level adaptation, certain studies have emphasised the efficacy of appending supplementary information to the acoustic features. For instance, it is a common practice to concatenate speaker embeddings, such as i-vectors [103], with acoustic features to achieve a more speaker-independent model [104]. Speaker embeddings are compact, fixed-size representations of the features of a speaker’s voice derived from their speech signals. Concatenating speaker embeddings with the acoustic features enables the model to be more robust to speaker variability, as it incorporates an explicit representation of it. Similarly, both [105, 106] proposed to concatenate various prosodic features, including loudness, voice intensity, and voice probability, with standard acoustic features. This approach has demonstrated success in reducing inter-speaker variances and enhancing discrimination between phoneme classes.

### 2.3.2 Pronunciation and language model

The conventional information provided in speech corpora typically includes audio signals, corresponding text transcriptions, and anonymized speaker identifiers. However, augmenting this data with additional information holds promise for improving children’s speech recognition systems. One pertinent aspect is incorporating the speaker’s age, a critical factor, as described in section 2.1, that could facilitate the development of age-dependent ASR systems [107, 108]. Moreover, annotating at the sub-word level, rather than the word level, has demonstrated increased performances, particularly in addressing challenges such as mispronunciations or hesitations [109]. This approach enhances robustness by focusing on smaller linguistic units allowing more flexibility. Another strategy involves the implementation of children specific pronunciation model, as illustrated in [110, 111]. These lexicons are specifically created to handle pronunciation divergences from canonical adult patterns with knowledge based children patterns. Finally, the creation of language models explicitly tailored for children’s speech can further improve the recognition accuracy [27, 28]. These models capture the linguistic nuances and variations intrinsic to children’s language. The integration of these strategies collectively contributes to the development of more effective and adaptive ASR systems for children.

### 2.3.3 Design of acoustic models

The acoustic model is a pivotal component in ASR for children’s speech, as acoustic variability significantly affects the degradation of recognition accuracy compared to linguistic variability. Consequently,

the design of the acoustic model is crucial for ensuring robustness to the specific characteristics of children’s speech.

Initially, the transition from monophone to triphone Hidden Markov Model-Gaussian Mixture Model (HMM-GMM) models helped improve performance by capturing coarticulation effects [26, 93]. A literature review [112] indicates that much of the research on children’s ASR is based on HMM-GMM models [112]. However, acoustic models for children naturally align with the latest advancements in acoustic modeling for adults. Therefore, the design transitions from HMM-GMM to Hidden Markov Model-Deep Neural Network (HMM-DNN), as proposed by [6].

The limitations of traditional fully connected neural networks in providing sufficient contextual information prompted their replacement by TDNN layers, as proposed in [113]. TDNNs function similarly to one-dimensional convolutional neural networks. At each time step, both the current time-step frame and its corresponding left and right context are considered, in contrast to traditional DNNs that focus solely on the current time step. To further improve the model’s capacity to capture extensive contextual information, multiple layers of TDNN. In addition, motivated by the large overlaps between neighboring input context sub-sampling was introduced. Sub-sampling involves allowing gaps between frames in the context window. While TDNN were demonstrated as successful design for children ASR [114], they were quickly replaced by factorised time-delay neural network (TDNN-F). Indeed, TDNN-F were introduced as an improvement of regular TDNN [115] by decomposing the weight matrix using singular value decomposition (SVD). A more detailed explanation of TDNN-F will be provided in section 3.2.2 (FAKE REF). This enhancement was especially proven effective for children’s ASR [116], outperforming both GMM and TDNN approaches in multiple children datasets. This efficacy can be attributed to the SVD factorisation which divided the weight matrix into two smaller rank matrices, functioning as bottleneck layers. To this day, TDNN-F are the state-of-the-art design for efficient HMM-based children ASR system.

These advancements in neural network architectures, such as TDNN and TDNN-F, showcase the ongoing efforts to refine acoustic models for children’s speech recognition, addressing specific challenges and optimising model capabilities to adapt to the unique characteristics of children’s speech.

### 2.3.4 End-to-end models

The success of end-to-end paradigm in outperforming traditional HMM-based models across various ASR adult datasets has prompted exploration in the domain of children’s ASR. However, when attempting to train end-to-end models from scratch using limited children’s datasets, these models were found to underperform compared to their HMM-based counterparts [117]. To address this challenge, a different training approach was adopted, leveraging pre-trained adult models as a starting point for training, transfer learning, this strategy will be explained in more detail in section 2.3.6.A. Using this transfer learning strategy in conjunction of end-to-end models, they have been able to outperform HMM-based

models. In their experiments, [117–120] explored various end-to-end architectures for children’s ASR. The architectures investigated included Listen, Attend, and Spell [121], recurrent neural networks (RNN), ResNet [122], and Transformer [123]. Among these architectures, [117] demonstrated that the Transformer model using a mix of Sequence-to-sequence and CTC losses emerged was the most effective in many cases, demonstrating promising results in the context of children’s ASR.

### 2.3.5 Data augmentation

Deep learning’s success can be largely attributed to its ability to effectively use massive amounts of data to recognise patterns and be robust to variabilities. However, the scarcity of data of children’s speech significantly contributes to performance deterioration as compared to adults. This challenge is even more pronounced for languages other than English, where fewer resources are generally available. To address this problem of data scarcity, researchers have explored various data augmentation approaches with the aim of artificially increasing the amount of training data. In the literature, there are two main approaches to data augmentation: using solely the data that is currently available or incorporating external data from diverse sources.

#### 2.3.5.A Using external data

The most natural source of speech data to augment children speech training data, is the one which is available in extensive quantity, adult speech data. Studies [124, 125] validate the idea that leveraging out-of-domain adult speech data effectively enhanced the automatic recognition of children’s speech. Notably, improvements were observed when incorporating adult female speech, given the inherent narrower frequency ranges mismatch between females and children compared to adult men speech. Similarly, the study presented in [126] suggested augmenting speech training data by directly incorporating additional children’s data. The observed improvements underscore the significance of leveraging a diverse range of children’s speech samples in the augmentation process.

Beyond traditional sources of speech data, researchers have delved into the use of synthetic data as a supplementary resource for training children’s ASR. The idea behind employing synthetic speech data revolves around generating speech signals that perceptually resemble children’s speech. In this regard, voice conversion has emerged as a notable method. Voice conversion involves leveraging extensive adult datasets and transforming them into children’s speech while preserving the content.

Various voice conversion approaches have been applied to the generation of synthetic children’s speech, encompassing classical signal processing manipulations such as vowel stretching [127], fundamental frequency shift [128], and spectral envelope wrapping [129]. Additionally, studies like Shuyang’s work [130] have investigated the combined use of these signal processing manipulations to further improve the ASR system. Moreover, deep learning methods, particularly Generative Adversarial Networks (GANs), have

also played a role in voice conversion. In [131], a GAN was used to transform children’s speech into adult-like speech by reducing variability. Therefore, this approach can use non-transformed adult speech as data augmentation rather than converting adult speech into children’s speech. This strategy aims to reduce variability by training the generator to produce adult-like speech from children’s speech. The GAN model comprises a generator responsible for creating synthetic data and a discriminator distinguishing between generated and real data samples in an adversarial way. During inference, the discriminator is removed, leaving only the generator to convert children’s speech into adult-like speech.

Beside voice conversion, Text-to-Speech (TTS) systems have been used to generate speech examples directly from text. Recent advancements in TTS systems, such as Tacotron2 [132] and VITS [133], have enhanced the realism of generated speech utterances. Consequently, some researchers have explored the use of TTS outputs as data augmentation for adult ASR tasks [134]. However, children’s speech exhibits more complex traits than adults, including substandard or unclear pronunciation and acoustic variability. As a result, the quality of children’s TTS is often inconsistent. To address this, [135] proposed data selection strategies based on speaker embedding similarity between the reference speaker and the speaker embedding extracted from generated speech utterances. Hence, eliminating synthetic utterances that significantly deviate from their reference examples. This approach significantly improved the recognition score for various children’s speech recognition tasks.

### 2.3.5.B Using available data

In scenarios where the inclusion of external data is not possible, there is a necessity to enhance model robustness by directly modifying the existing dataset. An established approach to enhance the model robustness involves generating augmented versions of the original data, by adding diverse acoustic perturbations to them. Typically, these perturbations are additive noise, babble noise, white noise, music and reverberation [136–140]. This augmentation strategy which introduces noise and reverberation into the existing dataset, aims to simulate real-world conditions where environmental factors can impact the recognition of speech signals.

An alternative strategy for augmenting the original speech dataset involves creating copies where the dimensions of the speech signal are perturbed. These perturbations include modifications along the time axis, as demonstrated by speed perturbation to better match children’s speaking rate variability [141], and modifications along the frequency axis [142] through vocal tract length perturbation [143], simulating variations in vocal tract dimensions. More recently, techniques like SpecAugment [144] were found particularly effective, especially in the end-to-end paradigm. SpecAugment involves random masking of frequencies and time bands within the spectrogram in conjunction with time and frequency warping.

Finally, as mentioned in Section 2.1.2, it is crucial to recognise the presence of disfluencies and errors in children’s speech, presenting inherent challenges to the learning process of ASR models, especially

in reading tasks. Therefore, to enhance the model’s robustness in handling such errors, a noteworthy proposition by [145] involves the manual creation of synthetic reading errors. This involves manual interventions, specifically achieved by cutting the signal, resulting in a deletion error, or incorporating speech elements produced by other children to simulate substitution or insertion errors.

### 2.3.6 Training procedure for children speech recognition

In the domain of HMM-based ASR systems for children, several strategies have been employed to adapt acoustic models for enhanced performance. Notably, adaptation techniques such as Maximum Likelihood Linear Regression (MLLR) and Maximum A-Posteriori (MAP) have been applied with success. Additionally, the use of Speaker Adaptive Training (SAT), specifically based on Feature MLLR (fMLLR) or Constrained MLLR (CMLLR), has proven effective in improving the performances of ASR systems designed for children [1, 28, 110, 146].


As mentioned in Section 2.1.3, the integration of DNNs into children’s ASR systems necessitates a substantial amount of labeled data to provide optimised performances. The efficacy of DNNs rely on their two-pass iterative training procedure, involving a forward and a backward pass. In the forward pass, the input corpus is fed to the network, generating prediction outputs. Subsequently, the loss is computed by comparing these predictions with the groundtruth target values. To mitigate prediction errors, adjustments to network weights are made through the use of gradient descent technique during the backpropagation phase, leveraging the computed loss. The training process continues through multiple iterations of these forward and backward passes until the model converges.

In response to the challenges posed by the distinctive variations in children’s speech, novel adaptations of this training pipeline have been proposed. Noteworthy among these is transfer learning, which leverages efficient pre-trained DNN models. Additional, multi-task learning has been explored to capture shared representations across related tasks, while self-supervised learning has emerged as a promising paradigm that enables the model to glean information about speech without relying on labeled data.

#### 2.3.6.A Transfer learning

When confronted with a new problem, humans exhibit the ability to draw upon information from prior tasks as an inductive bias. This cognitive capacity enables individuals to avoid starting the learning process entirely from scratch by leveraging knowledge acquired from past tasks. This ability, often referred to as transfer learning, may be defined as the capacity to identify and use knowledge from previous tasks as a foundation for approaching new tasks.

In contrast, in the context of machine learning, algorithms are generally developed from scratch on a specific task, lacking the inherent capability to transfer knowledge. Therefore, the concept of transfer learning (TL), or parameter transfer, has emerged as a pivotal bridge between artificial and biological

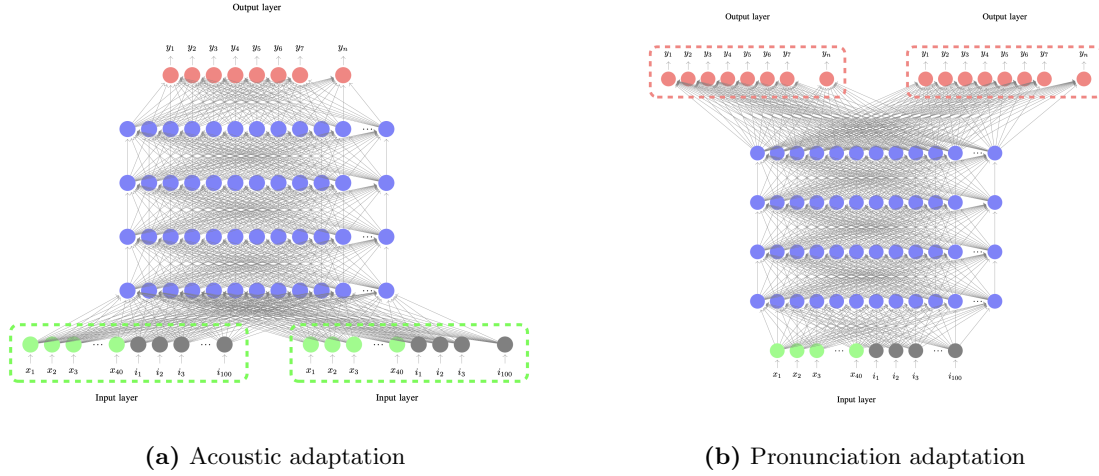

**Figure 2.10:** Transfer learning approaches. Figures from [6]

intelligence. In this paradigm, a model’s parameters are initialised with values derived from another well-resourced model trained on a related source task. Subsequently, the model’s parameters are adapted, also called fine-tuned, with data from the new domain, adjusting parameters to better align with the target task. This knowledge transfer allows the model to leverage underlying characteristics acquired from the source task, contributing to enhanced performance when applied to the target task.

Furthermore, a notable advantage of TL is its ability to require a reduced amount of training data for adaptation. By building upon a pre-trained model, it leverages the knowledge acquired during the initial training on a source task. The target model can exploit the informations encapsulated in the pre-trained parameters, mitigating the demand for an extensive dataset in the target domain. This makes transfer learning particularly advantageous in scenarios where labeled data is difficult to obtain, such as children’s speech.

A common assumption in deep learning TL is that the lower layers, situated closer to the input, tend to capture more signal-specific characteristics, whereas the higher layers, in proximity to the output, capture more task-specific information [147, 148]. This hierarchical organisation within neural networks aligns with the notion that lower layers are learning general representations of input data, or low-level features, while higher layers specialise in extracting intricate patterns that are specifically relevant to the task at hand.

In recent years, TL has emerged as a highly successful technique across various applications, particularly effective for low-resource tasks, in domains such as as language understanding [61], character recognition [149], and dysarthric speech recognition [150], among others. The successes in these domains have motivated interest in exploring the utility of transfer learning for children’s speech recognition. In particular, given the prevalence of large adult speech corpora, acoustic models trained on adult are in-

creasingly efficient and contain many acoustic and phonetic informations that can be used for efficient adaptation to children’s speech. Since children’s speech variabilities are present in both acoustics and linguistics, [6] proposed investigating three distinct transfer learning methods to assess the contributions of acoustic adaptation, pronunciation adaptation, and their combination in the context of children’s speech recognition.

Acoustic adaptation targets the lower-level layers, leveraging the established notion that these layers capture acoustic properties. The methodology involves freezing the weights of the top-level layer and applying transfer learning to the lower-level layers, as depicted in Figure 2.10(a). In experiments conducted by [6] and [151], acoustic transfer learning from an adult model to children’s speech, by retraining only the first layers, yielded substantial relative WER improvements of 38% and 26%, respectively, compared to the performance of adult models. Impressively, the acoustic adaptation outperformed a randomly initialised acoustic model trained on the same children’s data, achieving a 4.9% relative WER improvement.


Pronunciation adaptation, based on the idea that higher-level layers capture task-specific information, focuses on adapting these layers while keeping lower-level layers frozen. As illustrated in Figure 2.10(b), [6] conducted experiments applying pronunciation adaptation to the last layers of the model, resulting in a significant 31% relative WER improvement compared to the performance of the adult model. However, when compared to a randomly initialised acoustic model trained with the same children’s data, pronunciation adaptation degrades by 5.6% relative WER.

In recent years, transfer learning (TL) has emerged as a highly successful technique across various applications, particularly proving effective in low-resource tasks such as language understanding [61], character recognition [149], and dysarthric speech recognition [150], among others. The achievements in these domains have spurred interest in exploring the utility of transfer learning for children’s speech recognition, a domain often characterized by limited labeled data.

Given the prevalence of large corpora derived from adult speech, recent acoustic models trained on adult data have demonstrated high efficiency and encapsulate rich acoustic and phonetic information. Motivated by these successes, [6] proposed investigating three distinct transfer learning methods to assess the contributions of acoustic adaptation, pronunciation adaptation, and their combination in the context of children’s speech recognition.

Acoustic adaptation targets the lower-level layers, leveraging the established notion that these layers capture acoustic properties. The methodology involves freezing the weights of the top-level layer and applying transfer learning to the lower-level layers, as depicted in Figure 2.10(a). In experiments conducted by [6] and [151], acoustic transfer learning from an adult model to children’s speech, by retraining only the first layers, yielded substantial relative Word Error Rate (WER) improvements of 38% and 26

Pronunciation adaptation, premised on the idea that higher-level layers capture task-specific infor-

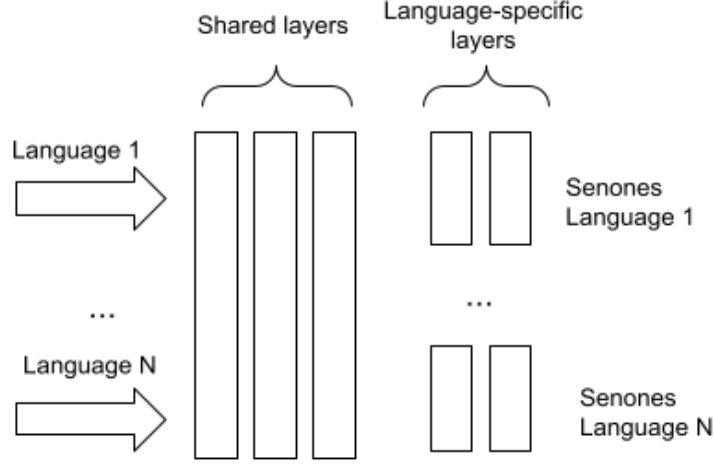

**Figure 2.11:** Multilingual approach using each language as a task in a multi-task learning context.

mation, focuses on adapting these layers while keeping lower-level layers frozen. As illustrated in Figure 2.10(b), [6] conducted experiments applying pronunciation adaptation to the last layers of the model, resulting in a significant 31

Finally, the combination of acoustic and pronunciation adaptation, achieved through fine-tuning the entire network, demonstrated outperforms performances compared to individual adaptations. This aligns with recent observations in end-to-end models, where transfer learning from an adult pre-trained model outperformed training from scratch using only children’s data only [117, 118]. These findings underscore the efficacy of transfer learning strategies for optimising acoustic and pronunciation adaptation in children’s ASR.

### 2.3.6.B Multi-task learning

Multi-task learning (MTL), like to transfer learning, draws inspiration from biological intelligence. In contrast to transfer learning, MTL does not train solely on source and target tasks in a sequential manner, here MTL simultaneously train on multiple tasks at the same time. The fundamental objective of MTL is to discover shared representations among related tasks. In general, a typical MTL model consists of two distinct components. The first part is a sub-network shared by all tasks, while the second part consists of task-specific output sub-networks, as illustrated in Figure 2.11. The shared layers facilitate the learning of a joint representation that is more robust, enhancing the model’s reliability across diverse tasks.

More formally, for any task  $i$  the corresponding output of the forward pass will be:

$$f(X_i; \{M_i, M_c\}) = f_i(f_c(X_i, M_c); M_i) \quad (2.12)$$



where  $X_i$  is the data associated with the task  $i$ ,  $M_i$  represents the task-specific parameters of the model, and  $M_c$  corresponds to the parameters that are shared (or common) across all tasks.

In consequence, the performances of MTL is intricately tied to the degree of relatedness among tasks used during training. Indeed, its efficacy diminishes when confronted with outlier tasks that are unrelated to the majority of the other tasks. This sensitivity is due to the inherent challenge of learning common representations for tasks that lack substantial relatedness to one another [152]. This task-relatedness consideration underscores the importance of thoughtful task selection when using MTL techniques.

Moreover, MTL has been used effectively in a variety of areas, including natural language processing [153], computer vision [154] and bioinformatics [155]. MTL has been naturally applied in the field of automatic speech recognition [156] with directly application to low-resource ASR [157]. Given that ASR for children represents a resource-limited task, MTL has been proposed as a strategy to mitigate the issue of data scarcity. Notably, studies such as [151] and [158] successfully applied MTL to Mandarin and English-speaking children, with a 16.96% relative improvement in WER for the English children.

### 2.3.6.C Self-supervised Learning

A first step towards self-supervised learning (SSL) was the introduction of semi-supervised techniques, such as pseudo-labeling. Semi-supervised approaches were a dominant training strategies for using unlabeled data. In particular, The pseudo-labeling starts with the training of a "teacher" model on a set of supervised data. Subsequently, pseudo-labels are generated for unlabeled data by leveraging the predictions of the trained teacher model. Following this, a "student" model is trained using a combined dataset comprising both supervised and pseudo-labeled data. Importantly, the pseudo-labeling process can be iteratively repeated multiple times to enhance the quality of teacher-generated labels [159, 160]. It is noteworthy that, as of today, some of the most effective ASR models, such as the Whisper model, leverages pseudo-labeling as a crucial component of its training strategy [29]. However, the performances of semi-supervised, and particularly pseudo-labeling, has been found to be highly dependent on the quality of the teacher model, prompting the need for more robust and sophisticated training strategies.

In this context, SSL has emerged as a paradigm designed to acquire general data representations directly from unlabeled examples, subsequently allowing transfer learning on a small amount of labeled data. This approach has proven particularly successful in the domain of natural language processing [161] and computer vision [162]. One notable first attempt to bring SSL to the speech domain was made by the introduction of the problem-agnostic speech encoder (PASE) and its extension, PASE+. These innovations demonstrated the capability to learn meaningful speech information such as speaker identities, phonemes, and emotions. The PASE framework operates by encoding raw speech waveforms into a representation, which is then input to multiple regressors and discriminators. The regressors within PASE are standard features computed from the input waveform. While the discriminators focus on positive or

negative samples and are trained to effectively separate them. Both the regressors and discriminators play a crucial role in incorporating prior knowledge into the encoder, a key factor for deriving meaningful and robust representations.

Recently, self-supervised systems have obtained remarkable results with the introduction of models employing BERT-like training methodologies, such as Wav2vec2 [163] and HuBERT [164]. Notably, the success of these models can be attributed to the conjunction use of masking, discrete speech units, contextualized representations, and contrastive loss. The integration of masking techniques allows these models to effectively learn contextualised representations by masking certain portions of the input data and predicting them based on the remaining context. The use of discrete speech units enable the model to be more robust to variations, while the contrastive loss functions enhances the discriminative power of these models by encouraging the model to differentiate between positive and negative samples. Motivated by the successes of SSL methods in overcoming challenges in low-resource ASR tasks, such as low-resource languages [165], noisy speech [166], and accented speech [167], the integration of SSL for children’s ASR marked its debut in 2021, with a first place in a non-native children’s speech recognition challenge [168]. Subsequent to this notable success, the application of SSL for children’s ASR has gained increased attention, especially with the use of models like Wav2vec2 [169–171]. A concise analysis of various SSL approaches for children ASR has been conducted within the context of this thesis, and the findings are presented in Annex (PUT ANNEX REF HERE).

## 2.4 Children Corpora

As described in Chapter 2.1.3, notwithstanding recent efforts to assemble dedicated databases for children’s speech, the quantity of available data remains lower compared to that for adults. Collecting speech data from children is challenging in many ways, from factors such as limited attention spans, frequent mispronunciations, ungrammatical expressions, and the use of non-standard vocabulary. These difficulties involved in capturing high-quality child speech data contribute to the scarcity of publicly accessible child speech corpora. The relatively modest sizes of these datasets present obstacles to research efforts and impede progress in developing reliable ASR systems for children.

Table 2.1 presents a compilation of existing corpora of children’s speech. Notably, approximately one-third of the available corpora are in English. Likewise, a comparable proportion is specifically oriented towards children under the age of 4. It is crucial to acknowledge the inherent trade-offs in these corpora, involving considerations of speaker diversity, total duration, and the number of utterances.

Subsequently, the remainder of this section will go through an examination of the children’s speech corpora employed in this thesis.

Corpus	Languages	# Spkrs	# Utt	Dur.	Age Range	Date
Providence Corpus [172]	English	6		363h	1-3	2006
Lyon Corpus [173]	French	4		185h	1-3	2007
CASS-CHILD [174]	Mandarin	23		631h	1-4	2012
Demuth Sesotho Corpus [175]	Sesotho	4	13250	98h	2-4	1992
NITK Kids' Speech Corpus [176]	Kannada	160		10h	2-6	2019
CHIEDE [177]	Spanish	59	15,444	8h	3-6	2008
CUChild [178]	Cantonese	1,986			3-6	2020
EmoChildRu [179]	Russian	100	20,000	30h	3-7	2015
CNG Portuguese children [180]	Portuguese	510		21h	3-10	2013
AusKidTalk <sup>1</sup> [34]	English	750		600h	3-12	2021
UCLA JIBO kids [181]	English	130			4-7	2019
<b>PF-STAR-SWEDISH</b> [182]	Swedish	198	8,909	6h	4-8	2005
SLT 2021 [183]	Mandarin	981		58h	4-11	2021
PF-STAR Children British [37, 182, 184]	English	158		14.5h	4-14	2006
AD-child. RU [185]	Russian	278			4-16	2019
TBALL [186]	English	256	5,000	40h	5-8	2005
SPECO [187]	Hungarian	72		12h	5-11	1999
UltraSuite [188]	English	86	14,456	37h	5-14	2019
CID read speech corpus [189]	English	436			5-18	1996
Persian Kids Speech Corpus [190]	Persian	286	162,395	33h	6-9	2022
<b>Letsread</b> <sup>2</sup> [191]	Portuguese	284	4,629	14h	6-10	2016
<b>CMU kids Corpus</b> [35]	English	76	5,180		6-11	1997
CFSC [192]	Filipino	57		8h	6-11	2012
IESC-Child [193]	Spanish	174	19,793	34h	6-11	2020
CU Children's read and prompted [194]	English	663	66300		K-G5	2001
<b>Chorec</b> <sup>2</sup> [195]	Dutch	400	3,065	25h	6-12	2008
ChildIt2 [196]	Italian	96	4,875	9h	6-14	2016
TIDIGITS [197]	English	101			6-15	1993
CSLU Kids' Speech Corpus [36]	English	1,100	1,017		K-G10	2007
SingaKids-Mandarin [33]	Mandarin	255	79,843	125h	7-12	2016
ChildIt corpus [198]	Italian	171			7-13	2007
VoiceClass Database [199]	German	170			7-14	2010
Deutsche Telekom telephone [199]	German	106			7-14	2010
Jasmin [200]	Dutch			63h	7-16	2008
Tgr-child corpus [198]	Italian	30			8-12	2007
SponIt corpus [198]	Italian	21			8-12	2007
Swedish NICE Corpus [201]	Swedish	75	5,580		8-15	2005
CHIMP spontaneous speech [26]	English	160			8-14	2002
SpeeCon corpus [202]	20 Languages				8-15	2002
Rafael.0 telephone corpus [107]	Danish	306			8-18	1996
<b>Boulder Learning - MyST</b> [32]	English	1,371	228,874	384h	G3-G5	2019
CU Story Corpus [194]	English	106	5,000	40h	G3-G5	2003
<b>ETLT</b> <sup>2</sup> [203]	L2 German		1,674	6h	9-16	2020
Lesetest corpus [204]	German	62			10-12	2000
FAU Aibo Emotion Corpus [205]	German	51	13,642	9h	10-13	2002
PIXIE corpus [206]	Swedish	2,885				2003
Takemaru-kun corpus [207]	Japanese	17,392				2007
CALL-SLT [208]	German		5,000			2014

<sup>1</sup> To this day, data collection for this dataset is not complete.

<sup>2</sup> Information displayed here correspond to a subset of the original data used in this proposal.

**Table 2.1:** Non-exhaustive comparison of children's speech corpora. This table has been sorted by age range. Blanks indicate unavailable information. Entries highlighted in bold correspond to the corpora used in the experiments presented in this thesis. K: Kindergarten. G: Grade

### 2.4.1 LETSREAD

LetsRead database [191] is a read-aloud speech database of European Portuguese from children aged 6 to 10, from 1st to 4th grade. This corpus is composed of a total of 284 children, 147 girls and 137 boys, whose mother tongue is European Portuguese. Children from private and public Portuguese schools were asked to carry out two tasks: reading sentences and a list of pseudo-words. The difficulty of the tasks varies depending on the school year of the child. For this proposal, we excluded all utterances from the pseudo-word reading task because we do not include pseudo-words in the language model and lexicon in our experiments.

### 2.4.2 PFSTAR\_SWEDISH

The PFStar children’s speech corpus [182] was collected as part of the EU FP5 PFSTAR project. It contains more than 60 hours of speech. This corpus is divided into two parts: native-language speech and non-native language part. The native-language speech part contains recordings of British English, German and Swedish children, from 4 to 14 years old. The non-native language part consists of speech by Italian, German and Swedish children speaking English. In this work, we only used the native language Swedish part, consisting of speech by 198 native Swedish children, between 4 and 8 years old recorded in the Stockholm area, imitating an adult who read the text from a screen.

### 2.4.3 ETLTDE

Extended Trentino Language Testing (ETLT) corpus [203] has been collected in northern Italy for assessing English and German proficiency of Italian children between 9 and 16 years old, by asking them to answer questions. The data collection was carried out in schools. On average the signal quality is good, but some background noise is often present (doors, steps, keyboard typing, background voices, street noises if the windows are open, etc). In addition, many answers are whispered and difficult to understand. For this thesis, we only used the German-transcribed subset (named ETLTDE), around 6h divided into training and test partitions.

### 2.4.4 CMU\_KIDS

The CMU kids corpus [35] contains English sentences read aloud by children, 24 males and 52 females, from 6 to 11 years old. In total, 5,180 utterances were recorded with one sentence per utterance. This database was created to train the SPHINX II [209] automatic speech recognition system within the LISTEN project at Carnegie Mellon University (CMU).

### 2.4.5 CHOREC

The Chorec corpus [195] consists of 400 Dutch-speaking elementary school children, between 6 and 12 years old, reading words, pseudo-words and stories. The difficulty of the reading task was adapted to children with 9 different levels. Recordings were made in schools, leading to some environmental noises (school bells, children entering the playground etc.). For this thesis, similarly to the LETSREAD dataset, we discarded pseudo-word utterances.

### 2.4.6 MyST

My Science Tutor (MyST) Children Speech Corpus [32] is currently one of the largest publicly available corpora of English children’s speech, with around 400 hours. This is about 10 times more than all other English children’s speech corpora combined. It consists of conversations between children and a virtual tutor in 8 scientific domains. Speech was collected from 1,372 students in third, fourth and fifth grades. Partitioning of the corpus is already available, ensuring reasonably representation of each scientific domain and that each student is present in only one partition. However, only 45% of the utterances were transcribed at the word level. Furthermore, for the purposes of this thesis, we decided to remove all utterances shorter than one second and longer than 30 seconds. After this filtering, 81971 utterances from 736 speakers for a total of 151 hours remain.

## 2.5 Summary

In this chapter, we provided an overview of children’s ASR, its inherent challenges, and the ongoing responses from the research community. The complexity of ASR in children arises primarily from the developmental nuances of the vocal apparatus, resulting in an acoustic mismatch with adult speech, although this mismatch gradually diminishes until around the age of 15. Despite sustained efforts, ASR for children remains a ctive and challenging area of research.

Our examination in this chapter highlights that knowledge transfer approaches, such as transfer learning and multi-task learning, appear to be promising avenues for improving children’s ASR. Additionally, the exploration of synthetic speech generation, using TTS systems, has captured our attention as a potential strategy for improvement. These methodologies will be applied and explored in-depth in the subsequent chapters of this thesis.

Moreover, we have presented a comprehensive comparison of children’s speech corpora, which, to the best of our knowledge, stands as the most exhaustive compilation available. This analysis provides valuable insights into the landscape of available datasets for children’s speech.



# 3

## Hybrid models for children automatic speech recognition

### Contents

---

3.1	Introduction . . . . .	53
3.2	Multi-task and Transfer learning using adult and children data . . . . .	53
3.3	Multi-task and transfer learning using multilingual children data . . . . .	57
3.4	Conclusion . . . . .	61

---





## 3.1 Introduction

In Chapter 2, we saw how a HMM-GMM or HMM-DNN ASR system may integrate knowledge into the automatic speech recognition pipeline. It uses knowledge from language model, acoustic model, and vocabulary to reduce the amount of speech data required to generate appropriate results. According to the literature, these results can be further improved with inductive bias approaches such as transfer learning and multi-task learning [151]. For years, hybrid configurations have been a privileged setting for the children’s ASR community. As a matter of fact, between 2009 and 2020, 80% of published research on children’s speech recognition was based on hybrid systems, with 45% using HMM-GMM and 35% HMM-DNN. However, during the same period, 63% of published work was conducted for English [210]. As a result, it is uncertain how children’s speech from other languages relates to the various approaches used in English, particularly transfer and multi-task learning.

This chapter will investigate these strategies in a variety of scenarios employing non-English data. First, we present transfer and multi-task learning using adult speech as an inductive bias, as is common in the literature. Second, because there is a lack of data for both adult and children’s low-resource languages, we investigate the same methodologies using only children’s speech. Finally, we present our approach, multilingual transfer learning, which combines transfer and multi-task learning to produce a more robust model for speech recognition in low-resource children setting.

## 3.2 Multi-task and Transfer learning using adult and children data

### 3.2.1 Methodology

Motivated by the success of knowledge transfer approaches for ASR children using adult data in the research [6, 151, 158], we intend to validate these findings using a low-resource language. Indeed, using adult data for pre-training makes sense since adult speech is more stable and less prone to variation. Using adult speech to train a speech recognition algorithm makes it simpler to extract and recognize intrinsic and meaningful speech patterns.

For this proposal, we assess children’s speech recognition performances in four distinct configurations:

1. **Adult model:** Using a model trained from scratch with only adult data.
2. **Children model:** Using a model trained from scratch with only children data.
3. **Multi-task model:** Using a model trained jointly on adult and children data in parallel using multi-task learning.

4. **Transfer learning:** Using a model that has been fine-tuned on children data from the adult model of configuration 1.

### 3.2.2 Corpus

As stated in the introduction, we aim to evaluate the performance of children’s speech in a low-resource language. To this end, we decided to use European Portuguese corpora. European Portuguese can be considered a low-resource language since most adult speech corpora do not exceed 100 hours [211]. In this experiment, we used LetsRead, a child corpus, described in section 2.4 and BD-PUBLICO as adult corpus. The statistics of all these two corpora are provided in the following table 3.1. The rest of this section provides further information about the BD-PUBLICO corpus.

Corpus name	Train	Test
BD-PUBLICO	8085 utt	412 utt
<i>Adult</i>	21h48	01h10
LETSREAD	3590 utt	1039 utt
<i>Children</i>	12h00	02h30

**Table 3.1:** Number of utterances and duration of the different corpora for multi-task and transfer learning experiments using adult and children data

### BD-PUBLICO

The BD-PUBLICO database (Base de Dados em Português eUropeu, vocaBulário Largo, Independente do orador e fala COntínua) [212] consists of reading sentences extracted from Portuguese newspaper PÚBLICO. The sentences that are read correspond to a total of 6 months of news (equivalent to 10M words and 156k different forms). It is composed of 120 speakers, and graduate and undergraduate students from Instituto Superior Técnico (Lisbon). This corpus is considered an adult dataset since all students are between 19 and 28 years old. All recordings were performed in good noise condition, in a soundproof room at INESC-ID (Lisbon), at a sampling frequency of 16kHz and using a high-quality microphone. In addition, a pronunciation lexicon with citation phonemic transcriptions for each word was produced. Finally, manually corrections were applied to the automatically generated transcriptions.

We divided the BD-PUBLICO corpus into three unique sets with balanced gender partitioning: 1) A training set of 80 sentences by 100 speakers. 2) A development set of 40 sentences performed by a total of 10 speakers. Finally, a test set of 40 sentences by 10 speakers.

### 3.2.3 Experimental setup

All experiments were carried out using the Kaldi open-source toolkit [68]. First, for each corpus, an independent HMM-GMM acoustic model was trained to produce the necessary alignment for the HMM-

DNN model. Then, HMM-DNN acoustic models were trained using 40-dim filter-banks (fbanks) in addition to a 40-dim Spectral Subband Centroid (SSC) features [213]. These features are known to have similar properties to formant frequencies. Thus, we expect them to help vowel recognition and lead to better recognition of children’s speech. The resulting 80-dim input features are then augmented by a 100-dim i-vector. Concatenating speaker embeddings to the input features helps to improve model speaker robustness [103]. For our experiments, we use an i-vector extractor trained on a set of pooled children data from different languages.

Data augmentation was applied to all training corpora by perturbing the speaking rate of each training utterance by 0.9 and 1.1 factors; as well as volume perturbation. This helps the network to be more robust to rate and volume variability on the test sets. To further improve the robustness of the model, SpecAugment [144] was applied on top of the fbanks and SSC features by randomly masking time and frequency bands.

For all experiments, we kept the same HMM-DNN acoustic model architecture using lattice-free maximum mutual information (LF-MMI) objective with a learning rate of 2.0E-4. The acoustic model architecture is divided into two parts: i) six convolutional neural network layers and seven TDNN-F layers of dimension 1024 and followed by ii) two TDNN layers of dimension 450 and a fully-connected layer.

For the transfer learning experiments, only the first part of the network will be fine-tuned, while the second part will be dropped and replaced by randomly initialized ones. Similarly, for the multi-task learning experiment, the first part will be shared between the adult and the child, while the second part will be independent.

### 3.2.4 Results

Method	Adult WER ↓	Children WER ↓
Adult model	3.82%	102.83%
Children model	45.56%	26.88%
Multi-task model	4.59%	27.65%
Transfer learning	-	25.36%

**Table 3.2:** WER results using adult data for knowledge transfer methods

The WER scores for all settings are presented in table 3.2. In the first row, we notice that employing a model trained on adult data yields a WER of 102.83% on the children’s test set. This model achieves 3.82% for BD-PUBLICO. This degradation in the children’s compared to adults’ scores demonstrates the presence of considerable variability in children’s speech, which has a detrimental impact on the ASR scores. It supports the idea that an acoustic model designed exclusively for children is necessary because child speech is currently unusable with adult systems.

Training the acoustic model directly on the children’s data, on the other hand, considerably improved the word error rate on the children’s data to 26.88%. Since the model observes acoustic variability during training, it becomes more robust to it. While the model improved for children, it deteriorated adult speech recognition performance to 45.56 % WER. This confirms the acoustic mismatch between adult and children speech once more. We compare transfer and multi-task learning approaches using these two experiments as a baseline.

When the model was trained jointly utilising adult and children data in the scenario of multi-task learning, the recognition score of the adults and children decreased marginally when compared to the adult and child model baselines. Unlike in the adult and child models, where the mismatch significantly reduced the children’s score in the adult model and the adult’s score in the child model, both recognition scores in this multi-task learning scenario are comparable to their respective ”trained from scratch” baselines. These results were achieved by including corpus-specific layers into the acoustic model architecture. Indeed, the model’s shared component will learn the key characteristics of Portuguese speech, while the corpus-specific part will focus on how to apply them to adults and children, respectively.

In the fourth line, Training over children data with a pre-trained Portuguese adult model as initialization enhanced the result to 25.36% WER. When compared to weights random initialization, it is shown that the weights of the adult model are a beneficial starting configuration and allow the transfer learning model to learn relevant patterns for children. It avoids the need for the model to learn these patterns from scratch, using data from a highly variable source. As a result, transfer learning may be considered a viable strategy for improving the ASR performance for children’s speech. This finding is consistent with the literature on hybrid models [6, 151].

### 3.2.5 Summary and discussion

In this study, we conducted a knowledge transfer technique analysis to improve the results of ASR systems for children. We corroborate the acoustic mismatch between adult and child speech and the importance of the model encountering child data and its variability. Our investigations revealed that the transfer learning approach is a promising way to improve low-resource children’s speech recognition scores. Furthermore, multi-task learning was found to be helpful in the setting of mixed adult-child ASR acoustic modelling. However, in this study, we focus on the transfer from adults to children. It is not clear how such a system can work using only children’s data.


### 3.3 Multi-task and transfer learning using multilingual children data

#### 3.3.1 Motivation

In this section, we study whether the performance of children’s ASR for low-resourced languages may be improved by combining children’s resources from different languages. In many cases, there is limited or no data for both adults and children. Therefore, we propose using several small-sized corpora of children from various languages to overcome the substantial acoustic variability and data scarcity issues. The current study extends standard multilingual training and transfer learning for hybrid HMM-DNN ASR by combining them in a meaningful way to use knowledge from heterogeneous data. First, a multilingual model trained with a multi-task learning objective tries to optimise network parameters to the specific characteristics of children’s speech in multiple languages/tasks simultaneously. Subsequently, this multilingual model is used to improve ASR for a target language –potentially different from those used in the multilingual training stage– by using transfer learning. We address the following research question: Does this two-step training strategy outperform conventional single language/task training for ’s speech, as well as multilingual and transfer learning alone?

#### 3.3.2 Proposed approach

We propose to combine transfer learning (TL) and multi-task learning (MTL) together for improved acoustic modelling of hybrid HMM-DNN ASR. The proposed approach consists of a two-stage procedure using both MTL and TL that extends the existing techniques since these are usually applied separately. First, a multilingual model trained with a multi-task learning objective attempts to optimize the network parameters to the particular characteristics of children’s speech in multiple languages in parallel. In this work, the model is considered multilingual because all the tasks trained during multitask learning are a corpus of children from different languages. Secondly, we adapt this model for a specific children’s corpus with TL. The motivation for using TL as a second stage is to take advantage of the robust pre-trained model trained during the MTL phase. Indeed, this pre-trained model has potentially learned cross-linguistic information about children’s speech but has also seen more children’s data than a model trained in a single language. For this purpose, the acoustic model is divided into two parts: the layers close to the input are shared across all languages and the top layers are language-specific. That is, there are as many output layers as there are languages, i.e. children corpora. Notice that one can incorporate a new language/task in this second stage by adding a new language-specific output, even if this new language/task has not been seen during MTL training (figure 3.1). Our hypothesis is that the more data has been seen by the acoustic model, the better the shared layers can capture the underlying characteristics of children’s speech during the first stage of the procedure. These characteristics can be

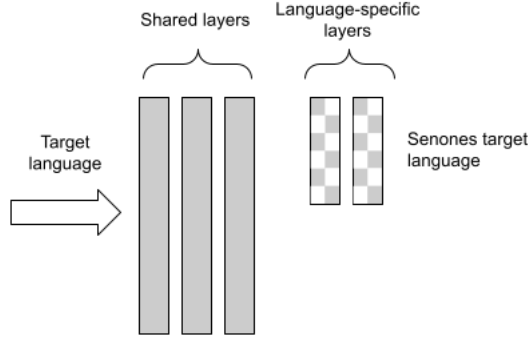

**Figure 3.1:** Multilingual transfer learning approach. Language-specific layers can be randomly initialized for a language not present during the MTL phase or use the corresponding pre-trained layers in case the target language was present during the MTL phase. Grey blocks are pre-trained during MTL phase.

used effectively, later, by the language-specific layers and during the second step of the procedure (figure 3.1).

Although the approaches adopted in this work have been used previously in other studies, for instance [151] and [158] where they successfully applied MTL using children speaking Mandarin and English, obtaining a relative improvement of 16.96% WER in the English children case, it is clear that successful performance of a methodological approach in the case of English cannot be expected to generalize to other contexts and languages. As we all know, English is a large-size, resource-rich pluricentric language which should be seen more as an exceptional case, rather than an average representative. Against this background, it is important to emphasize that there is a need for research that investigates whether methods that have already been tested for English also work in new contexts such as those of mid-sized languages with fewer resources than English, like Dutch, Portuguese, Swedish and German.

### 3.3.3 Setup

All experiments were conducted using five children corpora, each from a different language. Namely PFSTAR.SWE, ETLTDE, CMU, LETSREAD and CHOREC. All those datasets have been described in section 2.4. Table 6.1 presents statistics about the duration, number of utterances and language. Notice that in this work we have only used small datasets to better reflect the average size of the available children’s speech corpora.

We employ the same experimental design as the prior experiment with adult data from section 3.2.3 setup, where the acoustic model is divided in two. The first part is shared across all languages, whereas the second is language specific. Furthermore, each corpus, i.e. each language, uses an independent language model and lexicon that is constant throughout all experiments in order to assess solely the acoustic model contribution.

Corpus name	Language	Train	Test
PFSTAR_SWE	Swedish	6030 utt 04h00	2879 utt 01h48
ETLTDE	L2 German	1445 utt 04h41	339 utt 01h06
CMU	English	3637 utt 06h26	1543 utt 02h45
LETSREAD	Portuguese	3590 utt 12h00	1039 utt 02h30
CHOREC	Dutch	2490 utt 20h12	575 utt 04h42

**Table 3.3:** Statistics on the different corpora of children’s speech.

### 3.3.4 Multilingual-transfer learning experiment

	PFSTAR_SWE	ETLTDE	CMU	LETSREAD	CHOREC
Language	<i>Swedish</i>	<i>German</i>	<i>English</i>	<i>Portuguese</i>	<i>Dutch</i>
Single language	54.36%	44.69%	21.26%	26.88%	25.15%
MTL	54.95%	42.46%	23.01%	27.45%	25.10%
TL from PFSTAR_SWE	-	42.23%	20.62%	26.47%	24.65%
TL from ETLTDE	53.60%	-	20.90%	26.61%	25.42%
TL from CMU	52.83%	41.54%	-	26.49%	24.58%
TL from LETSREAD	52.50%	41.77%	20.41%	-	24.60%
TL from CHOREC	52.20%	40.28%	19.77%	26.05%	-
TL Average	52.78%	41.46%	20.43%	26.41%	24.81%
TL Best	52.20%	40.28%	19.77%	26.05%	24.58%
MLTL	<b>51.67%</b>	<b>38.04%</b>	<b>19.33%</b>	<b>25.75%</b>	<b>23.78%</b>
MLTL-olo	<b>51.58%</b>	40.05%	<b>19.67%</b>	26.20%	<b>24.57%</b>

**Table 3.4:** WER results of multilingual-transfer learning and cross-lingual experiments. MTL: Multi-Task Learning, TL: Transfer Learning, MLTL: Multilingual Transfer Learning, MLTL-olo: Multilingual Transfer Learning one-language-out

Table 3.4 presents the WER results of the multilingual transfer learning (MLTL) approach compared to three different methods: baseline, trained on each corpus individually for 4 epochs; Multi-task Training (MTL) alone, trained jointly using all corpora for 4 epochs ; Transfer Learning (TL) alone, adapted for the target language using in turn one of the other 4 baseline models as a source, leading to 4 results per target language. In addition, for clarity, we summarise the transfer learning scores with the average of the 4 scores and the best of the 4 for each target.

Firstly, it is important to emphasise that the baseline scores correctly reflect the different tasks the children were asked to perform and the corresponding amount of data available for each corpus. The best WER score, 21.26% for CMU, can be explained by the reading-aloud-sentences task nature of this corpus. Thus, the language model can more easily compensate for the acoustic model errors. In addition, Chorec and LetsRead, as the largest corpora in our experiment, also yield relatively good results for children’s

speech recognition. On the other hand, ETLTDE and PFSTAR\_SWE show the worse WER results with 44.69% and 54.36% WER, respectively. This can be explained by the amount of data available and by the language model which does not compensate as much as the CMU model. Especially for ETLTDE, since it is the only corpus that does not contain scripted text, but spontaneous responses. In addition, the age range of PFSTAR\_SWE children also plays a critical role in performance, since younger children generally yield worse performance scores [6].

Turning to multi-task learning, among all the approaches presented, only MTL fails to improve the baseline performance for almost all languages, which is in contradiction with [151]. However, it can be explained by the differences in terms of the size of the child’s speech corpora used. The smaller the size of the corpora used, the more difficult it is to model the acoustic variation in the children’s speech.

Concerning TL, all performance scores outperform their corresponding baseline, confirming that TL is an adequate method for children’s ASR since it allows the system to be confronted with more children, thus with more variation. Precisely, table 3.4 shows that the best pre-trained model for knowledge transfer is Chorec. This makes sense since Chorec is the largest corpus, representing about 40% of the total data used in our experiments.

Finally, MLTL shows an average relative improvement in WER of 7.73% compared to the baseline, slightly higher than the average (TL Avg) and the best (TL Best) transfer learning performance, with an average relative improvement of 4.50% and 2.66%, respectively.

The strength of MLTL is that it can benefit both from MTL and TL, minimizing some of their associated weaknesses. Attending to our results, MTL does not improve single language training. We believe that the unbalanced amount of data, the significant differences among data sets and the use of segmental optimization (lattice-free MMI) can partially explain these results. Nevertheless, we hypothesize that the multi-task objective leans the network towards better optimization of the lower layers, rather than optimizing the upper language-specific layers, can still be beneficial for TL. Regarding TL, one can observe considerable performance variations depending on the pre-trained model used as the source model, probably due to a poorer initialisation of lower layers that is less efficient for TL. The MLTL experiments show that we can overcome these drawbacks by combining both MTL and TL, thus, validating the effectiveness of this approach for robust speech recognition of children.

### 3.3.5 Cross-lingual validation

In the previous section, we saw that the MLTL approach yields better results than separate multi-task and transfer-learning frameworks.

To further validate the hypothesis that the shared lower layers are able to learn meaningful information about children’s speech characteristics, regardless of the language, we perform a cross-language experiment following a leave one-language-out cross-validation setting. In this experiment, we keep one



language out of the multi-task training and use it only during the TL phase to adapt the acoustic model parameters.

We repeated this procedure for each corpus in our experiment. As in the previous experiment, we used 4 epochs for each learning phase. The last row of Table 3.4 presents the results of the cross-language experiment.

For all corpora, the MLTL one-language-out (MLTL-olo) approach outperforms the baseline WER score with an average relative improvement of 5.56%. Improvements are more important for the small corpora ETLTDE and CMU, with a relative improvement of 14.88% and 9.07%, respectively. PFS-TAR.SWE does not benefit as much, with only 5.05% relative improvement. This is mainly due to the age differences with the children in the other corpora used in the MTL phase. Indeed, the children in PFSTAR.SWE are much younger (see section 3.3.3 for more details). Therefore, we conclude that the shared layers have learned the underlying multilingual features of children.

It is also interesting to compare MLTL-olo with the results of transfer learning alone. In both cases, the pre-trained models used have never seen the target language data. We observe that the results between the MLTL-olo and TL Best are extremely close, with small improvement with the MLTL-olo, only the best transfer learning model on LetsRead is slightly better than MLTL. This means that during multilingual training the system learned, at least, the best representation of the available children’s characteristics. This is consistent with our hypothesis of the important role of the multilingual training phase in our two-step procedure.

### 3.3.6 Summary and discussion

In this work, we addressed the following research question: Does the two-step training strategy we propose in the current chapter outperform conventional single language/task training for children’s speech, as well as multilingual and transfer learning alone. Our results provide a positive answer to this question, by showing that the limitations of MTL and TL can be overcome by the multilingual transfer learning approach, even in a low-resource scenario, leading to an average relative improvement of 7.73%. Multilingual pre-training is also beneficial for transfer learning with an unseen language, with an average relative improvement of 5.56%. Multilingual transfer learning thus seems to be an appropriate method to address children’s speech recognition in a challenging context.

## 3.4 Conclusion

In this chapter, we look at the current state of the art for a Hybrid HMM-DNN speech recognition system for children. We illustrated that transfer learning is the most promising strategy for addressing children’s ASR variability because it makes efficient use of the knowledge contained in the pre-trained

source model. A pre-trained model that can be trained on both adults or children. The multi-task learning does not produce the greatest results alone, but we showed that the shared part of the model is capable of learning relevant information for all tasks jointly. Furthermore, we proposed in this chapter to combine these two approaches in our multilingual transfer learning system. Using the capacity of learning relevant information of the multi-task learning approach and the capabilities of efficient use of pre-existing knowledge from transfer learning.

# 4

## End-to-End children automatic speech recognition

### Contents

---

4.1	Introduction . . . . .	65
4.2	Transformer model . . . . .	65
4.3	Conformer model . . . . .	68
4.4	Understand transfer learning efficacy for transformer based models . . . .	70
4.5	Summary . . . . .	76

---



## 4.1 Introduction

The growing popularity of deep learning has witnessed numerous successful applications in ASR. Not only recently, that end-to-end models have shown their capability to outperform hybrid HMM-DNN systems for a variety of speech recognition tasks, including children’s ASR. The primary advantage of end-to-end speech recognition systems lies in merging the entire training process within a single neural network, thereby eliminating potential behavioral incompatibilities that may arise between independently trained modules.

However, the application of the end-to-end paradigm for children’s ASR is a relatively recent development and has not been extensively explored, mainly due to the challenge of data scarcity in the context of children’s speech [117–120]. Additionally, end-to-end models often necessitate a larger number of parameters to achieve the desired robustness and flexibility. Consequently, training them on small datasets becomes increasingly challenging [214]. Despite these challenges, the exploration of end-to-end models holds promise for advancing the state-of-the-art in children’s ASR.


As mentioned in section 2.2.3, the recent increased interest in end-to-end speech recognition, has led development the several architecture, encompassing recurrent neural networks [215], neural transducers [216], and the Transformer architecture [7]. Among these, the Transformer architecture stands out as it consistently delivers state-of-the-art results in large-vocabulary speech recognition, demonstrating its efficacy across both adult and children’s speech domains [117].

This chapter will dives into more details of the Transformer design as well as the adapter transfer for children ASR, a parameter-efficient transfer for Transformer models that we have recently proposed.

## 4.2 Transformer model

Introduced in 2017 by Vaswani et al. [7], the Transformer architecture is a sequence-to-sequence encoder-decoder model that relies solely on self-attention mechanisms, completely discarding the use of recurrence and convolutions. This design choice addresses challenges such as vanishing gradient issues commonly associated with recurrent neural networks. Another notable difference with recurrent neural networks is that the Transformer computes the dependencies between each pair of positions simultaneously, rather than one by one, by directly encoding the position in the sequence. This enables more parallelisation and therefore a faster training process.

Since its introduction, the Transformer architecture had a tremendous impact across various domains, including Natural Language Processing (NLP) [61,62], computer vision [217], and speech processing [79]. The Transformer’s capacity to capture intricate dependencies and patterns in sequences has established it as a popular architecture in the deep learning field, contributing to advancements and breakthroughs across various applications, such as ChatGPT [218] or Dall-E [219].

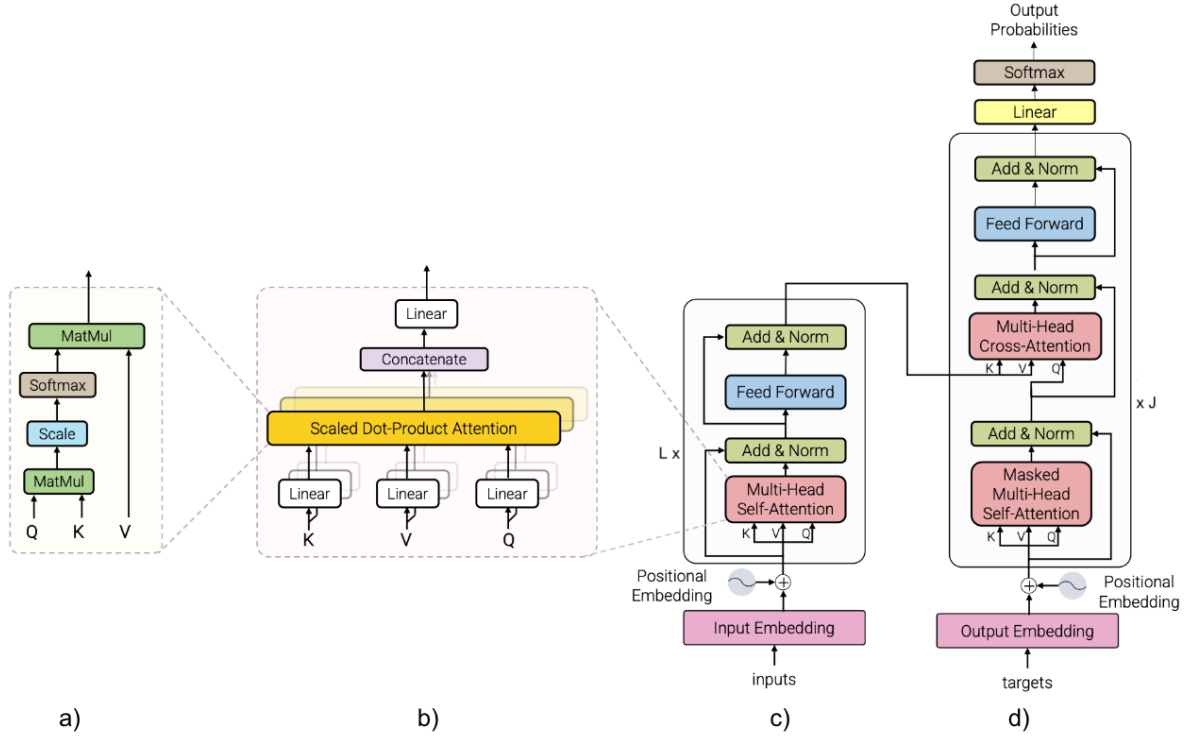

**Figure 4.1:** Architecture of the standard Transformer [7]. a) scaled dot-product attention, b) multi-head self-attention, c) Transformer-encoder, d) Transformer-decoder.

The Transformer encoder-decoder architecture, as depicted in Figure 4.1, consists of an encoder (c) and a decoder (d). Prior to entering the encoder or decoder, both inputs and targets undergo processing through an embedding layer. This involves the use of learned embeddings to convert input tokens and output tokens into vectors of dimension  $d_{\text{model}}$ . Since the transformer model contains no recurrence and no convolution mechanisms, information about the relative or absolute position of the tokens must be injected in the sequence to allow the model to make use of the order of the sequence. To achieve this, information about the relative or absolute position of the tokens is obtained through the summation of the input/output embedding and the positional embedding. While various alternatives for positional encodings were used, Vaswani et al. [7] proposed the use of sinusoidal and cosine functions with different frequencies, as follows:

$$PosEnc_{(pos, 2i)} = \sin\left(pos/10000^{2i/d_{\text{model}}}\right) \quad (4.1)$$

$$PosEnc_{(pos, 2i+1)} = \cos\left(pos/10000^{2i/d_{\text{model}}}\right) \quad (4.2)$$

Where  $pos$  is the current token or label position and  $i$  is the dimension.

The encoder's primary objective is to transform the input sequence  $X = x_1, \dots, x_T$  into a series of continuous representations  $Z = z_1, \dots, z_T$ . The encoder is structured as a stack of  $L$  identical layers,

each comprising two sub-modules: the multi-head self-attention (MHSA) and the position-wise fully connected feed-forward network (FFN). Each of these modules are followed by a normalisation with a residual connection.

Subsequently, the continuous representations  $Z$  are fed into the decoder. The decoder is responsible for constructing an output sequence  $Y = y_1, \dots, y_N$  one element at a time. At each time step, the decoder receives both the encoder outputs and the last decoder output in an auto-regressive manner. Similar to the encoder, the decoder is composed of a stack of  $J$  identical layers. Nevertheless, in comparison to the encoder, the decoder encompasses a third sub-module, which performs multi-head attention (MHA) over the output of the encoder stack. The self-attention sub-module in the decoder stack is modified to prevent positions from attending to subsequent positions. This masking combined with a modified MHA prevents the attention to use subsequent positions, ensuring that the prediction at time-step  $i$  solely depends on the previous  $< i$  time-steps.

The MHA module relies on scaled dot-product attention [7], as illustrated in Figure 4.1(a). Scaled dot-product attention focuses on determining how relevant a particular token is with respect to other tokens in the sequence and is defined as follows:

$$\text{Attention}(Q, K, V) = \text{softmax} \left( \frac{QK^T}{\sqrt{d_k}} \right) V \quad (4.3)$$

Here, the input consists of queries  $Q$ , keys  $K$  of dimension  $d_k$ , and values  $V$  of dimension  $d_v$ . The dot product of the query with all keys is divided by  $\sqrt{d_k}$ , and the result passes through a softmax function to obtain attention weights. The attention weights are then multiply with the values. When  $d_k$  is large, the scaling  $\frac{1}{\sqrt{d_k}}$  restrains the dot product from growing large in magnitude. Note that the Multi-Head Self-Attention (MHSA) is a specific case of MHA where  $K$ ,  $V$ , and  $Q$  are all the same input of the module.

Instead of performing a single scaled dot-product attention, the MHA module linearly projects  $h$  times  $K$ ,  $V$ , and  $Q$  with different, learned, linear projections to dimensions  $d_k$ ,  $d_k$ , and  $d_v$  respectively. The attention function 4.3 is then applied in parallel to each of the  $h$  projected versions. The output of each of the  $h$  attention functions, of dimension  $d_v$ , is concatenated and projected one final time, as depicted in Figure 4.1(b). Each of the  $h$  attention functions is called a head, while the overall is called Multi-head attention (MHA) or Multi-Head self-attention (MHSA) if  $K$ ,  $V$  and  $Q$  are the same. More formally:

$$\text{MultiHead}(Q, K, V) = \text{Concat}(\text{head}_1, \dots, \text{head}_h) W^O \quad (4.4)$$

where

$$\text{head}_i = \text{Attention}(QW_i^Q, KW_i^K, VW_i^V) \quad (4.5)$$


and the different projection matrices are  $W_i^Q \in \mathbb{R}^{d_{\text{model}} \times d_k}$ ,  $W_i^K \in \mathbb{R}^{d_{\text{model}} \times d_k}$ ,  $W_i^V \in \mathbb{R}^{d_{\text{model}} \times d_v}$ , and  $W^O \in \mathbb{R}^{hd_v \times d_{\text{model}}}$ .

Furthermore, in addition to the attention modules, each layer within the encoder and decoder encompasses a FFN module. This network is applied to each position separately and identically, and it consists of two linear transformations with a Rectified Linear Unit (ReLU) activation in between. While attention capture interdependencies between the element of the sequence regardless of their position, the FFN non-linearly transform each input token independently:

$$\text{FFN}(x) = \max(0, xW_1 + b_1)W_2 + b_2 \quad (4.6)$$


With  $W_1 \in \mathbb{R}^{d_{\text{model}} \times d_{\text{ffn}}}$ ,  $b_1 \in \mathbb{R}^{d_{\text{ffn}}}$ ,  $W_2 \in \mathbb{R}^{d_{\text{ffn}} \times d_{\text{model}}}$  and  $b_2 \in \mathbb{R}^{d_{\text{model}}}$ . Typically  $d_{\text{ffn}}$  is usually set to  $4 \times d_{\text{model}}$ .

### 4.3 Conformer model

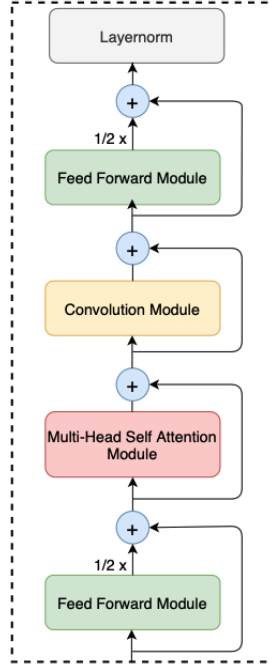

**Figure 4.2:** Architecture of a Conformer layer



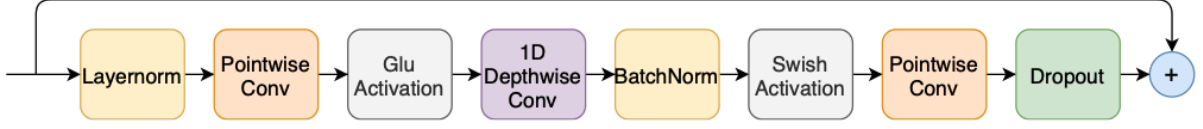

**Figure 4.3:** Convolution module in the context of a conformer layer

Transformers are recognised for their effectiveness in capturing global information within sequential tasks, thanks to the attention mechanism. Conversely, CNNs excel in capturing local features within data. To leverage the complementary strengths of both architectures, various approaches have been explored [220, 221], and the Conformer architecture [222] stands out as a notable combination of Transformers and CNNs.

This combination involves incorporating CNNs into the conventional Transformer architecture, as depicted in Figure 4.2. Specifically, a Conformer block comprises four modules arranged sequentially: a FFN module, a MHSA module, a convolution module, and a second FFN module. Notably, the Conformer block features two FFN modules sandwiching the MHSA module and the Convolution module. This design is inspired by Macaron-Net [223], which advocates replacing the original FFN in the Transformer block with two half-step FFN modules—one before the attention layer and one after. Similar to Macaron-Net, half-step residual weights is employed for the FFN modules. More formally, for an input  $x_i$  to a Conformer block  $i$ , the output  $y_i$  of the block is defined as follows:

$$\begin{aligned}
 \tilde{x}_i &= x_i + \frac{1}{2}FFN(x) \\
 x'_i &= \tilde{x}_i + MHSA(\tilde{x}_i) \\
 x''_i &= x'_i + Conv(x'_i) \\
 y_i &= LayerNorm(x''_i + \frac{1}{2}FFN(x''_i))
 \end{aligned} \tag{4.7}$$

More specifically, the convolution modules, inspired by [224] and illustrated in Figure 4.3., starts with a gating mechanism [225] involving a pointwise convolution and a gated linear unit (GLU). Subsequently, a single 1-D depthwise convolution layer is employed. Finally, this 1-D depthwise convolution is followed by a Batchnorm and then a Swish activation layer.

## 4.4 Understand transfer learning efficacy for transformer based models

Motivated by the limited availability of children’s speech data, TL emerges as a promising strategy to overcome this challenge in children’s ASR. TL involves leveraging pre-trained models, typically trained on extensive out-of-domain datasets of adult speech, and adapting them to the specific characteristics of children’s speech through a re-training phase using a smaller, in-domain dataset of children’s speech. This approach has shown effectiveness in both traditional HMM-DNN approaches [104] and modern end-to-end ASR paradigms [117, 118]. In chapter 3, we presented the effectiveness of TL in improving HMM-TDNN-F models for both European-Portuguese and English children’s speech.

While the end-to-end paradigm has become state-of-the-art for some children’s datasets, particularly when adapted from pre-trained adult models using TL, it involves merging all components of traditional ASR (acoustic, pronunciation, and language models) into a single neural network. This unique neural network design leads to an increased number of parameters for end-to-end models. Therefore, there is a need to understand how these large pre-trained models behave when fine-tuned with limited downstream data. To address this, we propose to explore TL for children’s speech using both Transformer models and the Conformer architecture, a variant of the Transformer specifically designed for speech tasks.

Investigating TL for large-size models is a crucial step in the development of robust children’s ASR, given the widely acknowledged issue of overparameterisation in large Transformer-like models. For example, models like BERT [61] have been widely recognized as overparameterised in various studies within the Natural Language Processing (NLP) field [226, 227]. Overparameterisation occurs when models have more parameters than necessary for a given task. Notably, observations suggest that certain components or layers of the architecture can be removed without compromising performance and, in some cases, may even lead to slight performance gains [226–228]. This recognition has fueled successful compression studies, including pruning and distillation techniques [229, 230].

Furthermore, the acknowledgment of overparameterisation in Transformer-based models raises questions about the efficiency and computational cost of these architectures. Larger models tend to be more prone to overfitting, as demonstrated in a study where an ASR model was scaled up to 10 billion parameters [231]. Overfitting can be a concern when applying TL as using an overfitted pre-trained model could potentially lead to decreased performances. Therefore, there is a need for ablation studies, involving the systematic removal of components of the model, to understand which parts contribute significantly to the performances [232, 233]. These studies, predominantly explored in the field of computer vision [228], align with the Lottery Ticket hypothesis formulated by Frankle and Carbin [234]: “A randomly-initialized, dense neural network contains a subnetwork that is initialized such that—when trained in isolation—it can match the test accuracy of the original network after training for at most the same number of iterations”.

Understanding the contribution of the different components of the large-size model not only helps optimise model architectures for specific tasks but also reduces the computational demands of training and inference. This is particularly relevant in scenarios with resource constraints, such as limited computational power, memory, and training data.

While these ablation works have been extensively studied in NLP and computer vision, this approach remains under-explored for speech tasks. Specifically, the recent successes of distillation and pruning techniques for speech models [235–237], suggest that overparameterisation may also be present in ASR models. In the context of children’s ASR, where data scarcity is a significant challenge, understanding and addressing overparameterisation could pave the way for the development of more tailored and efficient models, with improved performances. Notably, the Transformer and Conformer architectures have exhibited promising results in ASR applications, making them particularly compelling subjects for further investigation.

#### 4.4.1 Partial Transfer learning

Our aim is to undertake a comprehensive exploration of TL, specifically on end-to-end ASR for children’s speech. Notably, the previous research in this field has been focused on HMM-DNN models, as illustrated by the work of Shivakumar et al. [104]. It is noteworthy that the existing works on the end-to-end paradigm have only centered on the entire model fine-tuning, leaving a notable gap in the understanding of the impact of fine-tuning individual components.

Firstly, we perform a meticulous examination of the TL process, specifically isolating the effects on individual components of the Encoder and Decoder, in comparison to the fine-tuning of the entire model. The prevailing hypothesis asserts that the Encoder is capturing acoustic information, while the Decoder more linguistic informations. Considering the important presence of acoustic variability in children’s speech, our investigation extended to discern which layers of the Encoder are more relevant for achieving effective TL.

Subsequently, our focus shifts to delineating the distinctive contributions of modules within both the Transformer and Conformer architectures during the fine-tuning process of adapting a pre-trained adult model to children’s speech. Within the Transformer model, a granular analysis will be conducted to assess the roles of the MHSA module, the FFN, and the normalisation layers independently. Similarly, within the Conformer model, we evaluate the significance of the MHSA, FFN, normalisation, and convolution modules. This exhaustive examination is meticulously designed to identify the components that play a pivotal role in fine-tuning.

#### 4.4.2 Experimental setup

#### 4.4.3 Corpus

Training	Validation	Test
60897 utterances	10044 utterances	4079 utterances
566 speakers	79 speakers	91 speakers
113 hours	18 hours	13 hours

**Table 4.1:** My Science Tutor Children Speech Corpus statistics

In this experiment, we decided to use the Boulder Learning My Science Tutor (MyST) corpus, as detailed in section 2.4. This choice aligns with the nature of the task assigned to the children in the MyST corpus, which involves spontaneous speech. The end-to-end paradigm, by encapsulating both the acoustic model and language model within the same network, requires careful consideration. Indeed, if the model is trained on a limited set of prompts, from a dataset focused on reading tasks for example, it may learn and overfit to those specific prompts, yielding unreliable results.

For the purposes of our experiments, we decided to remove all utterances shorter than one second and longer than 20 seconds and shorter than one second. Typically, utterances shorter than one second were found to predominantly contain silence alone, while those longer than 20 seconds were constrained by our GPU limitations. The details of the filtered corpora used in our work are presented in Table 4.1.

#### 4.4.4 Implementation details

All experiments were conducted using the SpeechBrain toolkit [238]. The Transformer model encompasses 12 Transformer layers in the encoder and 6 Transformer layers in the decoder, all with a hidden dimension of 512. Similarly, the Conformer architecture featured 12 Conformer layers in the encoder and 6 Transformer layers in the decoder, with a hidden dimension of 512. Both configurations used 8 heads for all MHSA, a FFN hidden dimension of 2048, and a dropout rate of 0.1. These models were pre-trained on a large English adult speech corpus, specifically the LibriSpeech dataset [30], and are publicly available<sup>1</sup>. Furthermore, for all experiments, the same Transformer language model was employed, trained on 10 million words from LibriSpeech transcriptions. Our training involved 30 epochs with a learning rate of  $8e-5$ . Furthermore, in line with findings of [117], a combination of CTC and Seq2Seq losses was used, with respective weights of 0.3 and 0.7.

#### 4.4.5 Encoder-Decoder Transfer learning

Table 4.2 summarises the results of the impact of isolating fine-tuning of the encoder and decoder components within Transformer and Conformer ASR models. For the Transformer model, using fine-tuning

<sup>1</sup><https://huggingface.co/speechbrain/asr-transformer-transformerlm-librispeech>  
<https://huggingface.co/speechbrain/asr-conformer-transformerlm-librispeech>

Transformer	WER ↓	Trained parameters
Full model	12.99%	71.5M
Encoder only	<b>TODO%</b>	37.8M
Decoder only	15.95%	25.2M
<hr/>		
Conformer		
Full model	12.28%	109M
Encoder only	<b>11.24%</b>	75.9M
Decoder only	16.94%	25.2M

**Table 4.2:** Encoder-Decoder experiment

then entire model exhibits a WER of 12.99% using 71.5 million parameters. Isolating the encoder component leads to a significant improvement in WER, with TODO% WER with a reduced parameter count of 37.8 million. Parallely, fine-tuning the decoder underperform compared to both full model and Encoder only fine-tuning by achieving a WER score of 15.95% training 25.2 million parameters.

Turning to the Conformer model, the full model achieves a WER of 12.28% with 109 million parameters updated. Isolating the transfer learning on the encoder component only yields a remarkable improvement, resulting in a WER of 11.24% with a parameter count of 75.9 million. Conversely, when the decoder only is fine-tuned the performances degrade with a higher WER of 16.94% using a parameter count of 25.2 million. Notably, the Conformer architecture consistently outperform the Transformer across all configurations, emphasising its effectiveness for speech related tasks. In addition, these results underscore the important role of the encoder in both Transformer and Conformer ASR models, highlighting its importance in capturing the inherent variabilities in children’s acoustics. It confirms that the acoustics variabilities represent the most important source of variabilities as suggested by [6].

Recognising the important role of the Encoder in the fine-tuning process for children ASR, our investigation further look to determine the specific layers that are the most relevant during this TL process. To this end, we adopt a meticulous approach of fine-tuning the Encoder incrementally, adding one layer at a time. This step-by-step TL procedure is executed in each directionally, one commencing from the input layer while the other one from the output layer of the encoder, the up-way and down-way respectively. In other words, the up-way, incremental fine-tuning beginning with the input layer and progressively incorporating subsequent layers towards the output layer. While, the down-way initiates fine-tuning from the output layer, systematically integrating preceding layers towards the input layer.

#### 4.4.6 Modules Transfer learning

The results of the transfer learning experiments, focusing on fine-tuning specific components of the Transformer and Conformer ASR models for children’s speech, are presented in Table 4.3. In addition of the WER evaluation metric, we also display the number of trained parameters.

The baseline performance of the Transformer pre-trained model without any fine-tuning (correspond-

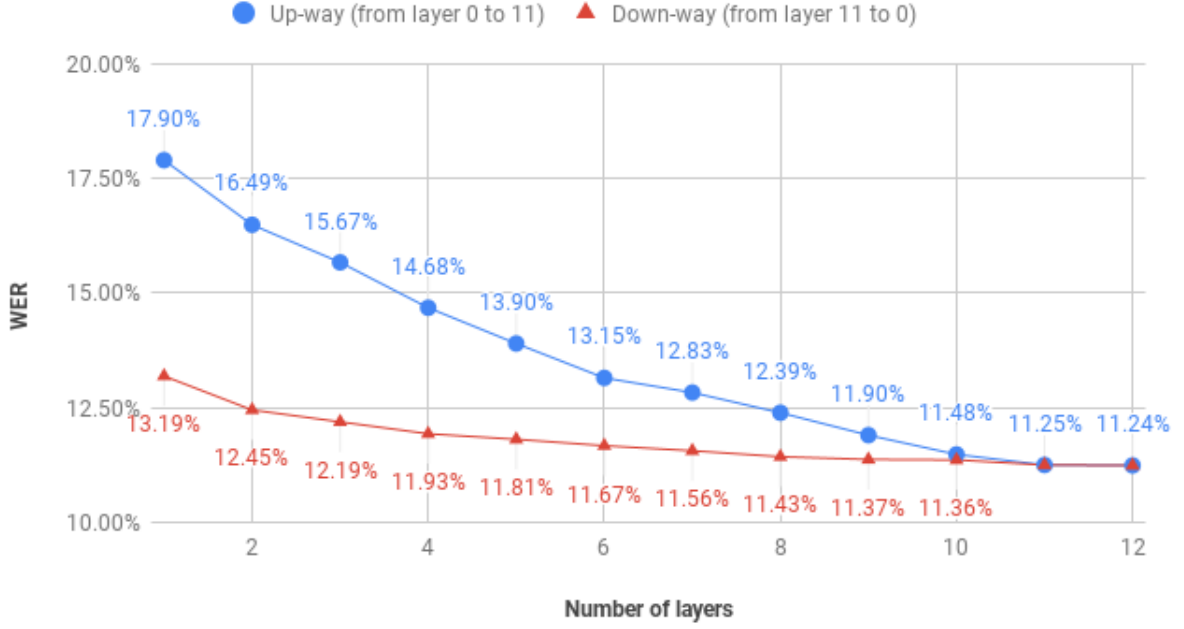


Figure 4.4: Up-way and down-way transfer learning experiment

Transformer	WER ↓	Trained parameters
None	25.04%	-
Full model	12.99%	71.5M
Normalisation	17.00%	57.9K
MHSA	12.19%	25.2M
FFN	<b>11.84%</b>	37.8M
<b>Conformer</b>		
None	21.75%	-
Full model	12.28%	109M
Normalisation	15.61%	63.7K
MHSA	11.90%	15.7M
Convolution Module	11.67%	9.7M
FFN	<b>11.11%</b>	63M
↪ Module 1	11.44%	25.2M
↪ Module 2	11.48%	25.2M
↪ Up-linear ( $W_1$ )	11.47%	31.5M
↪ Down-linear ( $W_2$ )	11.40%	31.5M

Table 4.3: Modules fine-tuning experiment

ing to *None* line) yields a WER of 25.04%. In contrast, the fine-tuning of the full Transformer model exhibits a noteworthy improvement, achieving a WER of 12.99% with 71.5 million parameters trained.

The fine-tuning of specific components reveals valuable observations. Applying normalisation alone results in a modest improvement WER of 17.00% compared to keeping the pre-trained model, this using 57.9 thousand parameters. The MHSA module outperforms normalisation and full fine-tuning, achieving a WER of 12.19% with a parameter count of 25.2 million. However, the most important improvement is observed with the FFN module, which attains a remarkable WER of 11.84% with 37.8 million parameters. Remarkably, both MHSA and the FFN modules, when fine-tuned individually, already outperform the full model performance. This implies that the decrease in the number of parameters, coupled with the significance of these modules, may play a substantial role in the enhanced performances.

Turning to the Conformer model, the baseline WER without fine-tuning is 21.75%, with no additional parameters. The full fine-tuning of the Conformer model improved performance, yielding a WER of 12.28% with 109 million parameters.

Fine-tuning specific Conformer modules offers further granularity. First, the normalisation finetuning, in a similar way as observed in the Transformer configuration, yield a score of 15.61% WER, with 63.7 thousand parameters. Then, the MHSA module proves effective by already providing better result than the full full-tuning with a WER of 11.90%, this by fine-tuning 15.7 million parameters. The convolution modules outperform the MHSA with a WER of 11.67% with less parameters used, 9.7%. However, as in the Transformer model, the FFN module stands out prominently, demonstrating a WER of 11.11% with a parameter count of 63 million. Notably, the MHSA, convolution modules and FFN modules, when fine-tuned in isolation, surpass the performance of the full Conformer model.

As FFN, consistently proved to be the most relevant component to fine-tune for children ASR, no matter the configuration. We decided to delve deeper into the FFN submodule. There is two way to see this subdivision, first using the macaron style of the Conformer FFn layer, including two modules, one before the MHSA and one after the convolution module will be respectively called Module 1 and Module 2. The second approach to subdivide the FFN layers would be to only look at the up-linear and down-linear, respectively  $W_1$  and  $W_2$  equation 4.6. Module 1 and Module 2 achieve WERs of 11.44% and 11.48%, respectively, each by fine-tuning 25.2 million parameters. The Up-linear and Down-linear submodules exhibit WERs of 11.47% and 11.40%, respectively, with parameter counts of 31.5 million. The subdivision of the FFN modules do not allow to perform better than their coupled usage. This show the importance of the full FFN modules in Transformer based end-to-end models.

These comprehensive study not only highlight the importance of the various components within Transformer and Conformer ASR models but also underscore the effectiveness of fine-tuning only specific modules compared to the full model fine-tuning, especially the FFN module, in achieving improved performance.

## 4.5 Summary

We covered the state-of-the-art for end-to-end children’s speech recognition in this chapter. Particularly, the usage of the Transformer architecture in conjunction with transfer learning. In a similar way as chapter ??, to avoid a drop in performances attributable to an acoustic mismatch between children and adults, the end-to-end model should be trained with children’s data. In contrast to previous work, we demonstrated that fine-tuning only a portion of the transformer modules, particularly the FFN submodule, yields better results since it serves as a key-value memory. As a result, we placed our adapter subsequent to it. The adapter’s role is to accomplish knowledge transfer, which is related to transfer learning. Rather than updating the complete model’s weights, we just tweak an extra module, hence fewer parameters. This adapter transfer achieves almost identical results as the entire model fine-tuning. In addition, adapters are useful in the context of customized models, where training and storing a whole model for each age group or each child can be expensive and time-consuming.

In addition, we proposed the variational adapter, a variant of the traditional adapter based on variational auto-encoders. Compared to the adapter, which takes a bottleneck encoder-decoder structure with a linear layer as encoder and a linear layer as decoder, the variational adapter’s encoder consists of two branches,  $\mu$  and  $\sigma$ . The outputs of these two branches are used as the mean and variance vector to sample the input of the decoder. By doing so, we enforce the adapter’s input variability to be contained in the  $\sigma$  branch. A branch which is suppressed during inference. As a result, we reduce input variability while maintaining the same size as standard adapters.



# 5

## Exploring parameters-efficient transfer learning for end-to-end children ASR

### Contents

---

5.1	Introduction . . . . .	79
5.2	Adapters . . . . .	80
5.3	Investigating Adapters for children ASR . . . . .	82
5.4	Implementation details . . . . .	84
5.5	Results . . . . .	85
5.6	Additional parameter-efficient procedures . . . . .	87
5.7	Shared Adapter . . . . .	91

---




## 5.1 Introduction

The use of increasingly larger models coupled with the abundance of massive datasets is driving rapid advancements in many domains of machine learning, encompassing NLP [62] and computer vision [219]. In the context of ASR, this trend of scaling up models is exemplified by state-of-the-art models such as Whisper [29] and HuBERT [164], where the number of parameters exceeds 1 billion. Research has underscored the interconnected nature of the training dataset size and the number of model parameters, identifying them as mutual bottlenecks that influence the performances of machine learning models. This observation accentuates the significance of scaling these two dimensions in tandem for the development of more robust and effective ASR models [239]. Typically, to scaling up the model size a combination of an increased number of layers and an expansion of the model’s hidden dimensions is used [231].

However, the challenge arises when only a limited amount of data is available, making it challenging to train these large models from scratch, as highlighted by recent studies [117, 118]. Hence, as discussed in the preceding chapter, transfer learning emerges as a well-established and effective paradigm to tackle to problematic of limited dataset. Nevertheless, despite its efficacy, we emphasised certain limitations that may potentially impede the performance of fine-tuning. Specifically, attempting to fine-tune these large models using a downstream dataset limited in size can be challenging. Indeed, in addition to be an expensive process, using small amount of data on such big model could potentially result in overfitting. This issue necessitates careful consideration, particularly in light of the recent evolution towards ever-growing pre-trained model sizes. Additionally, even following last chapter highlights where only specific parts of the model were fine-tuned, the different part of the model could be intricately linked to the overall model size. For example, FFN modules usually represent substantial portion, around 70% of the total number of parameters. This insight underscores the persistence of the challenge associated with model size, even when fine-tuning only specific components. Finally, TL on large amount of parameters is memory-storage-inefficient, especially when there is a need to store a replicas of the billion of parameters models for many different small tasks.

Consequently, there is a growing need for more parameter-efficient transfer learning (PETL) as lightweight alternatives. Among the approaches introduced by the research community, residual Adapter modules stand out as the most popular and promising [240, 241]. Specifically tailored for Transformer-based systems, Adapters integrate a compact set of additional layers into a pre-trained source model. This design enables Adapters to enhance computational efficiency, resulting in faster training and addressing the challenge of catastrophic forgetting. Diverging from conventional transfer learning methods, where the source pre-trained model’s weights are entirely replaced, Adapter-transfer maintains the integrity of the backbone model. Therefore, when the Adapter modules are removed, the initial pre-trained model remains unchanged. This preservation of the backbone model is a crucial advantage as it offer increased flexibility. Furthermore, owing to their limited number of trainable parameters, Adapters demonstrate a



**Figure 5.1:** Residual Adapter architecture

decreased susceptibility to overfitting, thereby contributing to improved generalisation performance.

In this chapter, motivated by these promising characteristics, our investigation will delve into the use of Adapters in the specific context of children’s ASR. We will explore different Adapter configurations within both Transformer and Conformer architectures. Additionally, as a comparative analysis to Adapters, we will explore the application of other PETL approaches in the context of children’s ASR. Lastly, we will introduce a novel type of Adapter, referred to as shared-Adapters, taking advantage from the overparameterisation inherent in Transformer-based models.

## 5.2 Adapters

Adapters were initially introduced in the NLP field to efficiently adapt large models, such as Transformers, using minimal amount of parameters for text classification [240]. As an alternative to full model fine-tuning, Adapter-transfer involves training an extra small number of task-specific parameters while keeping the original model frozen. This is done at each Transformer layer level by plugging them after the Multi-Head Attention (MHA) and Feedforward Neural Network (FFN) modules, a setup often referred to as the *Houlsby* configuration. Subsequently, [241] demonstrated that Adapters placed only after the FFN modules were sufficient for achieving efficient performances, referred to as the *Pfeiffer* configuration. Generally, Adapters employ a bottleneck architecture, consisting of a normalisation layer followed by a projection-down linear layer with a non-linear activation, and subsequently a projection-up linear layer. Finally, a residual connection is applied by summing the input of the Adapter with its output. The overall structure is illustrated in Figure 5.1. Research suggests that the hidden dimension, between the down and up projections, may not always benefit from a bottleneck structure, where  $d_{hidden} < d_{model}$ , and the optimal design may vary depending on the downstream task. In some tasks, an hidden dimension larger than the model size itself, in other words  $d_{hidden} > d_{model}$ , has been proven more effective [171].

Some of the main advantages of Adapters are their parameter efficiency and modularity. This efficiency is particularly interesting when working with large pre-trained models, while the modularity is valuable

when a large number of tasks need to be trained. Mathematically, the structure of an Adapter can be expressed as follows:

$$adapter(x) = x + (W_{up}(f(W_{down}g(x) + b_{down}))) + b_{up} \quad (5.1)$$

Where  $W_{down}$  and  $W_{up}$  denote the weights of the projection-down and projection-up linear layers, and  $b_{down}$  and  $b_{up}$  represent the corresponding biases. The function  $f(\cdot)$  is a non-linear activation, while  $g(\cdot)$  a layer normalisation or identity function. Finally,  $x$  corresponds the input given to the Adapter.

In terms of computation, Adapters offer the advantage of faster training, given that they update fewer parameters compared to fully fine-tuning models. However, there might be a slight processing delay during inference due to the addition of extra parameters introduced by the Adapters, this difference is generally minimal and can be well-managed [242].


Adapter-transfer has gained increased attention in the context of ASR tasks [243–245], particularly owing to its modular nature, which has proven advantageous in the context of multi-lingual ASR [246–248]. In these studies, distinct Adapters were trained for each language, contributing to enhanced performance compared to a monolingual model and mitigating certain challenges associated with transfer learning, such as overfitting. This modular approach provides a tailored solution, as each Adapter designed for a specific language can effectively capture the diverse acoustic characteristics unique to that language.

In addition, researchers have explored the use of Adapters in the context of SSL. In SSL, larger model are typically employed to capture a wide range of information from speech for application in a broad spectrum of tasks [171, 249]. However, the computational cost and scalability to multiple tasks can pose a challenge. Notably, once the model is fine-tuned for a specific task, the entire model is fixed for that task, and re-loading and re-training the base model are necessary for transferring to a different task. Therefore, the use of Adapters has proven effective in addressing these challenges by providing a modular and parameter-efficient task-specific adaptation.


Additionally, the effectiveness of Adapters has been demonstrated in addressing challenges related to low-resource and atypical speech recognition scenarios [250]

Finally, the effectiveness of Adapters has also been demonstrated in addressing challenges related to low-resource and atypical speech recognition scenarios [250]. In such scenarios, similarly to children’s speech, there is limited availability of labeled data and atypical speech characteristics. As a result, Adapters provide a valuable solution by efficiently adapting large pre-trained models to these challenging tasks.

However, the application of Adapters in the context of children’s ASR has received limited attention, with only one notable study by [171]. In this study, the authors proposed integrating and training Adapters within SSL models, followed by fine-tuning the entire model, including the adapter weights, for better modeling of children’s speech. This represents a pioneering effort to leverage Adapters for

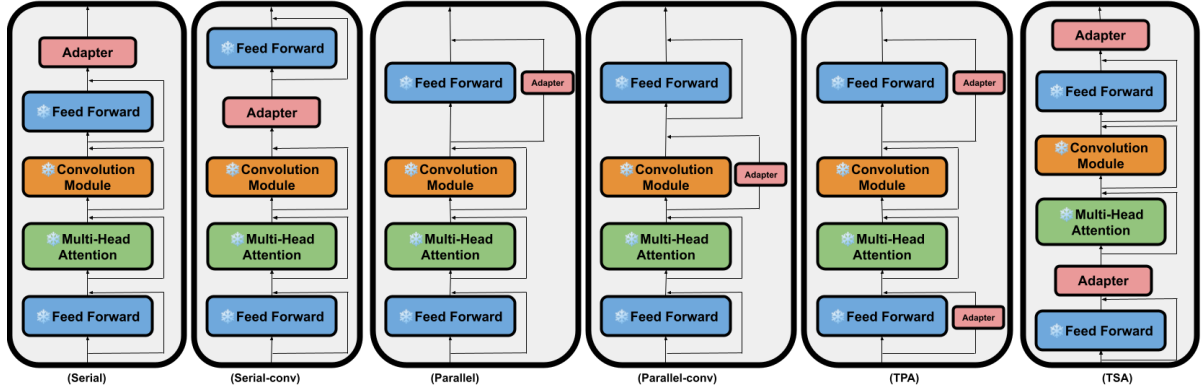

**Figure 5.2:** Conformer block with various residual adapter configurations. Normalisation layers are not display in this figure

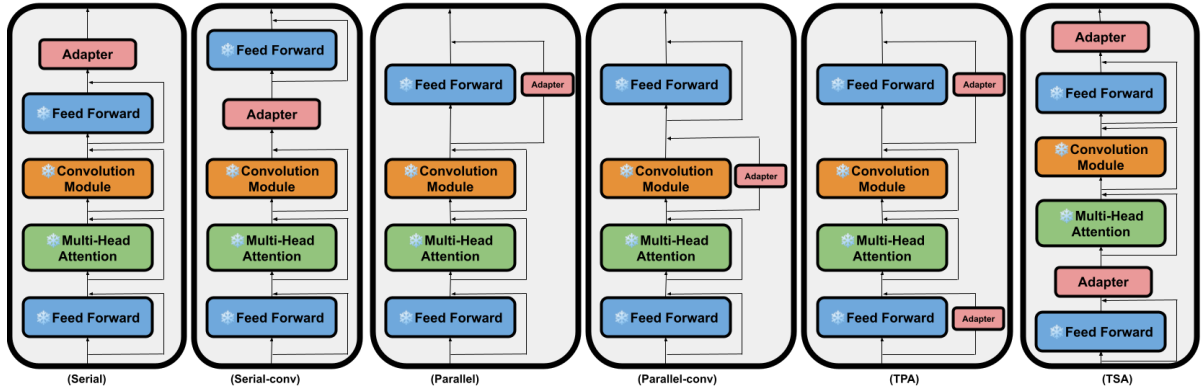

**Figure 5.3:** Conformer block with various residual adapter configurations. Normalisation layers are not display in this figure

adapting large-scale models to the unique characteristics of children’s speech.

### 5.3 Investigating Adapters for children ASR

In this section, we delve into the application of Adapter-transfer as PETL for both Transformer and Conformer architectures in the domain of children’s ASR. Building upon our findings from the previous chapter, where we identified the FFN modules as the most relevant component to fine-tuning in a Transformer-based model, we opt to leverage Adapters for modifying the output of these FFN modules. Additionally, considering our results that underscore the significance of fine-tuning the Encoder, our primary emphasis will be on investigating the implementation of Adapters within the Encoder. Specifically, for the Transformer architecture, we investigate two integration methods: parallel and serial placement with the FFN component. Such configurations were used in prior work [251] and are depicted in Figure 5.2.

In the case of the Conformer architecture, we explore six distinct Adapter configurations, as illustrated in Figure 5.3. The initial two configurations mirror our Transformer investigation, involving both parallel and serial placements, either after or in parallel with the second FFN layer [244]. Additionally, we assess a configuration that introduces an Adapter following the convolution module, denoted as the "serial-conv" setup used in [245]. Notably, although the FFN component has been identified as the most crucial for fine-tuning, promising results have also been observed by fine-tuning the convolution modules [244]. Furthermore, [244] introduces two variants of the parallel setup: "parallel-conv," where the Adapter operates in parallel with the convolution module, and "TPA," which deploys two adapters in parallel with both FFN modules in the Conformer layer. This comprehensive exploration of Adapter configurations within both architectures aims to discern the most effective adaptation strategies for children’s speech in the context of ASR.

In the case of serial configurations, the integration of adapter information is performed with the preceding component denoted as  $P$ . The specific component  $P$  varies depending on the configuration and can be either FFN or convolution modules. This integration is realised through the following process:

$$output = Adapter(P(x)) \quad (5.2)$$

where  $x$  represents the input of component  $P$ .

For parallel configurations, the integration process varies slightly. In this scenario, the adapter’s output is combined with the output of component  $P$  as follows:

$$output = x + 0.5 \cdot P(x) + (Adapter(x) - x) \quad (5.3)$$

where  $x$  is the input of component  $P$ .

To comprehensively explore all feasible configurations, we introduce two novel setups. The first one is referred to as "Two Serial Adapters" or "TSA," where two Adapters are sequentially positioned after each FFN component in all layers. The second configuration combines TPA and TSA, resulting in the integration of four Adapter modules both in parallel and serially at the two FFN modules level.

Moreover, we consider three distinct configurations where Adapters are placed in the Decoder. It is important to note that in the Conformer architecture, the decoder is a regular Transformer. Therefore, we evaluate the "Serial" and "Parallel" setups. Subsequently, we investigate the combination of the most effective encoder Adapter configuration with both Decoder configurations. To the best of our knowledge, there is no prior research that formally investigates the influence of Adapters within an ASR decoder.

Finally, motivated by the observed strong correlation between children’s speech variability and age, we explore the possibility of training specialised Adapters. However, considering the high inter-speaker variabilities in children’s speech, using age directly may not effectively capture children with similar

acoustic characteristics. Additionally, in many children’s speech datasets, precise age information is often not provided. To address this, we partition the training dataset into groups of speakers with similar acoustic characteristics based on unsupervised clustering. In practice, we apply a k-means clustering algorithm on the x-vector representation [252] of all training utterances. Subsequently, distinct Adapters are trained for each speaker cluster separately. During the testing phase, the closest clusters of group of speaker is determined for each test utterance, and the corresponding Adapters specific to that group are employed for decoding.

The primary objective of these experiments is to investigate whether Adapters trained on comparable speech characteristics yield improvements over a general Adapter on the entire training set. Indeed, children’s speech is inherently atypical and displays a significant degree of variability, making it imperative to assess the efficacy of existing methods. In prior work, different configurations were employed resulting in a lack of standardised evaluation.

## 5.4 Implementation details

All experiments were performed using the SpeechBrain toolkit [238]. We used 12 Transformer or Conformer layers for the encoder, for the Transformer and Conformer model respectively, and 6 Transformer layers for the decoder, all with dimensions 512. These models have been pre-trained using the LibriSpeech dataset [30] and are publicly available<sup>1 2</sup>. Furthermore, for all of our experiments, we used the same Transformer language model, trained on 10 million words on the LibriSpeech transcriptions. The adapter architecture consists of a first linear layer projection to dimension 512 with a ReLu activation, followed by another linear layer projection to dimension 512 with a residual connection of the adapter input. For all Adapters, in the initialisation process, we set  $W_{down}$  to all zeros, and  $W_{up}$ ,  $b_{down}$ ,  $b_{up}$  are initialised using Xavier initialisation [253].

The use of a hidden-dimension size equal to the model size (instead of a bottleneck) was motivated by previous research exploring hidden-dimension size, that consistently demonstrated that larger dimensions tend to yield improved performance scores [244]. All models were trained for 30 epochs, with a learning rate of  $8 \cdot 10^{-4}$  for Adapters experiments and of  $8 \cdot 10^{-5}$  for fine-tuning the entire model. For the clustering experiments, we use the k-means clustering algorithm on the speaker-embedding of each utterance. The speaker embeddings were extracted using a publicly pre-trained ECAPA-TDNN model, trained on adult speech<sup>3</sup>.

---

<sup>1</sup><https://huggingface.co/speechbrain/asr-transformer-transformerlm-librispeech>

<sup>2</sup><https://huggingface.co/speechbrain/asr-conformer-transformerlm-librispeech>

<sup>3</sup><https://huggingface.co/speechbrain/spkrec-ecapa-voxceleb>



**Table 5.1:** Results of the different Adapters configurations in both Transformer and Conformer.

Method	WER	Trained params
Transformer		
<i>Frozen</i>	25.04%	-
<i>Full fine-tuning</i>	12.99%	71.5M
Serial	12.78%	6.3M
Parallel	<b>12.62%</b>	6.3M
Conformer		
<i>Frozen</i>	21.75%	-
<i>Full fine-tuning</i>	12.28%	109.1M
Serial	11.76%	6.3M
Serial-Conv	11.78%	6.3M
Parallel	11.72%	6.3M
Parallel-conv	11.79%	6.3M
TPA	<b>11.58%</b>	12.6M
TSA	11.75%	12.6M
Serial (Decoder)	18.09%	3.2M
Parallel (Decoder)	17.76%	3.2M
TPA + Parallel (Decoder)	<b>11.47%</b>	15.8M

## 5.5 Results

### 5.5.1 Configurations

In this section, we present a comprehensive evaluation of Adapter configurations applied to both Transformer and Conformer models, assessing their performance based on Word Error Rate (WER), as presented in Table 6.2. First, we assess the Transformer model when no fine-tuning was applied (*Frozen*), resulting in a WER of 25.04%. Conversely, *Full Fine-Tuning* involved complete fine-tuning of the entire model, working as our baseline system, reducing the WER significantly to 12.99%, at the expense of 71.5 million trainable parameters. Turning to the Adapter setups, we investigate the “Serial” and “Parallel” configurations, both equipped with 6.3 million trainable parameters. The “Parallel” emerged as the best configuration, achieving the lowest WER of 12.62% compared to 12.78% for the “Serial”. These results underscore the effectiveness of Adapter configurations within the Transformer architecture, as they both perform slightly better than the full-finetuning.

Next, we investigated the Conformer model, we once again explored *Frozen* and *Full Fine-Tuning*. In *Frozen* the pre-trained model remained untouched, yielding a WER of 21.75%. The Full fine-tuning, in a similar way as the Transformer, led to enhanced performance, reducing the WER to 12.28% with a total of 109.1 million trainable parameters. We can observe that given the same pre-training dataset, the Conformer architecture outperforms the regular Transformers. Within the set of adapter configurations, “Serial” achieved a WER of 11.76%, while “Parallel” demonstrated slightly better performance with a

**Table 5.2:** Results of the clustering approach.

# of clusters	Average WER
1	11.58%
2	<b>11.50%</b>
3	11.57%
4	11.51%

WER of 11.72%. These results indicated that “Parallel” Adapters were more effective in improving WER in the Conformer model. When Adapters are placed after the convolution layer, with the “Serial-conv” and “Parallel-conv” configuration, both slightly under-perform compared to Adapters placed after the second FFN component with respective scores of 11.78% and 11.79%. Finally, we evaluated the “TPA” and “TSA” configurations. The “TPA” configuration emerged as the most promising, with a very remarkable WER of 11.58% using 12.6 million trainable parameters, while “TSA” achieved a WER of 11.75%, which is slightly under-performing compared to the “TPA” configuration.

In addition, we evaluated the use of Adapters in the decoder. As the decoder of the Conformer architecture is a regular Transformer, we only evaluate the “Serial” and “Parallel” setup, which respectively reached 18.09% and 17.76% WER with 3.2 million parameters. Results showed that Adapters are more relevant when plugged into the encoder. It confirms that acoustic variability plays a critical role in the degradation of children’s ASR performance. Finally, combining “TPA” in the encoder layers with “Parallel” Adapters in the decoder outperforms Adapters in the encoder only, with 11.47% WER. Consequently, this configuration stands as the most effective model.


We performed statistical tests (Matched Pairs Sentence-Segment Word Error) across all Adapter setups in comparison to the full fine-tuning configuration using SCTK, the NIST Scoring Toolkit <sup>4</sup>. The results reveal that, in all scenarios, the  $p$ -value is less than or equal to 0.001. This observation denotes statistical significance, indicating evidence against the null hypothesis.

These results collectively illustrate the versatility and effectiveness of different Adapter configurations within the Transformer and Conformer model for the children’s ASR task. “TPA” Adapters in the Encoder combined with “Parallel” Adapters in the Decoder showcased outstanding performance, highlighting their potential as a fine-tuning replacement in large model children ASR scenarios.

### 5.5.2 Unsupervised Clustering of utterances

In this section, we present the outcomes of our clustering approach, as summarised in Table 5.2. We investigated the influence of varying cluster numbers on ASR performance, ranging from 1 to 4 clusters using the “TPA” in the encoder-only configuration. Notably, when the data remained unclustered (one

<sup>4</sup><https://github.com/usnistgov/SCTK/tree/master>

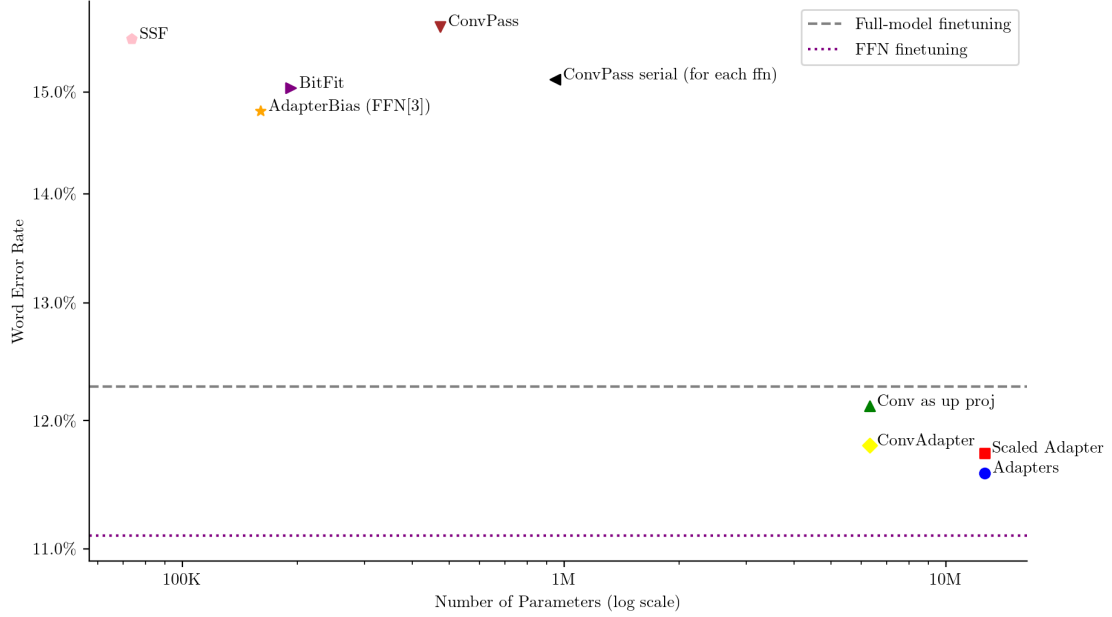

**Figure 5.4:** Different parameter efficient procedure for children ASR in conformer model

cluster), the ASR system exhibited a WER of 11.58%. However, the two-cluster configuration surpassed the others, achieving a superior performance of 11.50%. This result suggests that partitioning the data into two distinct clusters enables the Adapters to more effectively capture underlying patterns intricately linked to their respective clusters, consequently enhancing the recognition scores. Furthermore, we explored the impact of increasing the number of clusters to three and four, revealing only marginal differences in performance, with WERs of 11.57% and 11.51%, respectively. These findings underscore the role of data clustering in children’s ASR systems.

## 5.6 Additional parameter-efficient procedures

### 5.6.1 Scaled Adapters

Scaled or Gated Adapters are an extension of the traditional residual Adapters [247]. A couple of works used it in different context,

## 5.6.2 Convolution based Adapters

### 5.6.3 BitFit

Bias-Term Fine-Tuning, known as BitFit, is a PETL method introduced by [254] for NLP tasks. The main idea behind BitFit is to fine-tune only the bias terms and the task-specific classification layer while keeping the rest of the model frozen. This approach aims to achieve efficient fine-tuning with reduced computational requirements in a similar way as our partial fine-tuning experiments in chapter 4. The fine-tuning of bias terms can be seen as introducing a task-specific shift to the token representations.

The authors highlight three key properties of BitFit. Firstly, it matches of a fully fine-tuned model, showcasing its ability to maintain comparable results while significantly reducing the number of parameters to be trained. Secondly, BitFit is designed to adapt to tasks arriving sequentially, eliminating the need for simultaneous access to all datasets. This adaptability enhances the model’s versatility in handling diverse tasks with varying data distributions over time. Thirdly, BitFit exhibits parameter efficiency by fine-tuning only a small subset of the model’s parameters.


In our experiment, the pre-trained model and children’s ASR task shared the same output dimensions and character encoding. In consequence, we excluded the fine-tuning of the task-specific classification layer. The training process consisted of 30 epochs with a learning rate of  $8 \times 10^{-4}$ .

### 5.6.4 Scale and Shift features

Scale and Shift features (SSF) was introduced an PETL alternative approach by Lian and al. [255] for image classification. The primary objective of SSF is to establish a generalised method for efficient model fine-tuning without the introduction of task-specific inference parameters. Drawing inspiration from feature modulation techniques such as [256, 257], the SSF method modulate deep features extracted by a pre-trained model by scaling and shifting them to match the distribution of a target dataset. The intuition behind SSF comes from the inherent disparities in data distributions between upstream and downstream datasets. Directly applying model weights trained on an upstream dataset to a downstream dataset frequently leads to a performance degradation due to the disparities between the two datasets [258]. The SSF method addresses this challenge by introducing scale  $\gamma$  and shift  $\beta$  parameters, which could be considered as the variance and mean used to modulate the features extracted from the pre-trained model. This modulation ensures that the adapted features align with the characteristics of the upstream dataset. Formally, given an input  $x$ , the modulated output  $y$  is calculated by:

$$y = \gamma \odot x + \beta \tag{5.4}$$

Notably, the scale and shift parameters in SSF remain independent on any input and have a unified learnable parameter-space for different tasks. Another noteworthy advantage of SSF is its reliance on

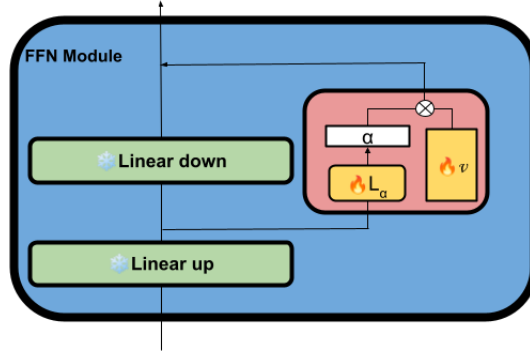

**Figure 5.5:** AdapterBias, consisting of a linear layer  $L_\alpha$  and a vector  $\mathcal{V}$ , is added after the second feed-forward layer only in each FFN module.

linear transformations, which can be seamlessly merged into the original pre-trained weights during model re-parameterization in the inference phase. This integration avoid the need for additional parameters removing the extra-computation time of other PETL such as Adapters.


In practical terms, SSF are introduced after each modules within the Conformer architecutre (FFNs, MHSA and Convolution modules). In the original paper, they also finetuned the Head-layers as the task is a image classification task, as our both upstream and downstream tasks, respectively adult and children ASR, share the same output dimension and character encoding, we do not finetune this extra layer and only use the SSF method.

In practice, the SSF modulation is integrated after each operations of the neural network. For our experiments, each operations corespond the different modules within the Conformer architecture, specifically the FFNs, MHSA and Convolution modules. It is noteworthy that, in the original paper, the authors also fine-tuned an Head-layer, as the output of the upstream and downstream image classification tasks are different. However, in our experiment, both the upstream and downstream tasks involve English ASR with shared output dimensions and characters encoding. Therefore, we did not include the head-layer fine-tuning and exclusively employed the SSF method. Our training compromise 30 epochs with a learning rate of  $8 \cdot 10^{-4}$ .

### 5.6.5 AdapterBias

Following the success of BitFit [254], which aims to introduce task-specific shifts to each output representation by selectively fine-tuning only the bias terms of a pre-trained model, recent research has suggested that certain tokens may hold more significance than others for specific tasks. While BitFit uniformly applies the same shift across all tokens regardless of their relevance to the task, [259] proposes AdapterBias to address this limitation.

AdapterBias comprises two essential modules: a vector  $\mathcal{V}$  and a linear layer  $L_\alpha$ . The vector  $\mathcal{V}$

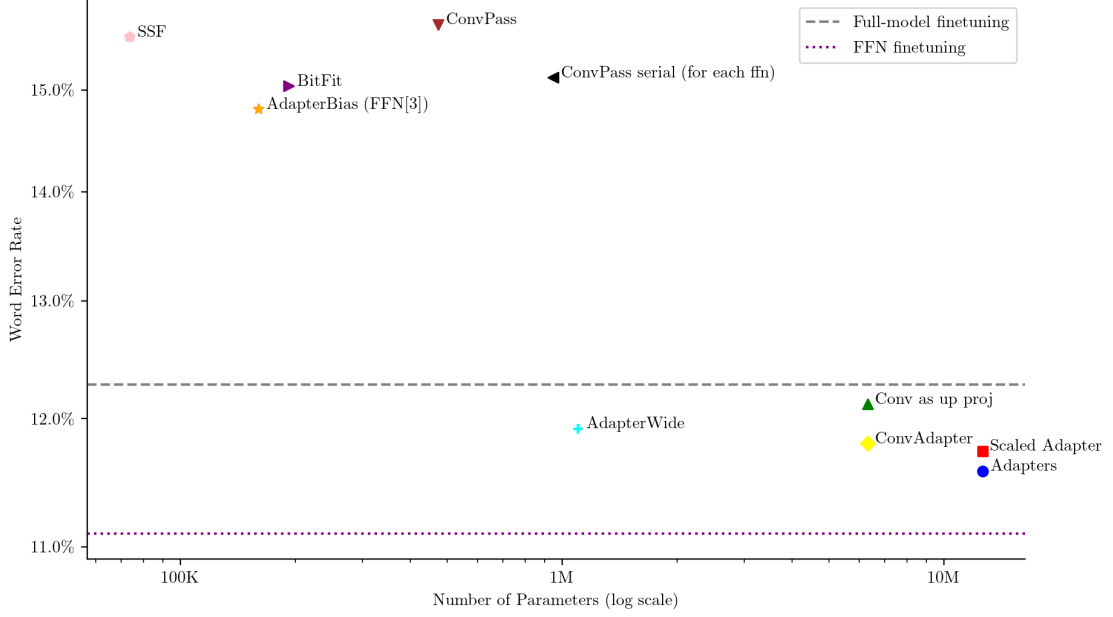

**Figure 5.6:** Different paramter efficient procedure for children ASR in conformer model with shared-Adapters

represents a task-specific shift added to the output of each FFN modules, acknowledging that tokens more closely related to the task should be assigned to larger representation shifts than others. On the other hand, the linear layer  $L_\alpha$  generates a token-dependent weight vector  $\alpha = [\alpha_1, \alpha_2, \dots, \alpha_m]^T$ , where  $\alpha_i$  is the weight associated with the representation shift of the  $i^{th}$  token. By applying these token-specific weights to the task-specific representation shift  $\mathcal{V}$ , AdapterBias focuses on tokens which are more crucial to the task, allowing efficient and fine adaptation to various downstream tasks.

The output of AdapterBias is defined as the bias (B), represented as the outer product of  $\mathcal{V}$  and the learned weights vector  $\alpha$ . Mathematically, the output of AdapterBias is expressed as follows:

$$B = \mathcal{V} \otimes \alpha^T \quad (5.5)$$

Here,  $\otimes$  denotes the element-wise multiplication of the task-specific shift vector  $\mathcal{V}$  and the token-dependent weight vector  $\alpha$ . In our experimental setup, we conducted the training for AdapterBias by integrating them into the second linear layer of each of the two FFN modules within the Conformer architecture. We trained AdapterBias for 30 epochs, employing a learning rate of  $8 \times 10^{-4}$ .

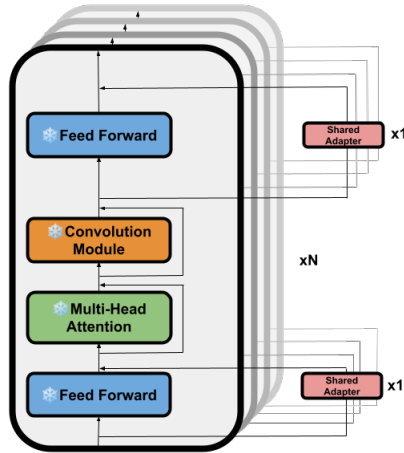


Figure 5.7: Shared-Adapter setup in a Conformer model

## 5.7 Shared Adapter

The final research direction we want to explore in this thesis is self-supervised learning (SSL) as a front-end feature rather than typical filter banks or MFCCs. For these models, the training process is separated into two stages. The first phase of training is self-supervised, which implies that no labels are used during training. The objective of this first phase is to present a large amount of unlabelled data to the system so that it learns a good speech representation. The second stage of learning is supervised fine-tuning, in which the model is taught to predict specific phonemes using the robust representation acquired in the previous stage with the help of a small amount of labelled data. In this category, two models stand out as state-of-the-art: Wav2Vec 2.0 [163] and HuBert [164]. As a preliminary experiment, to asses the usability of such frameworks for children ASR, we trained a BiLSTM model using the output of a variety of frozen self-supervised systems. For this experiment we used a subset of 50h of the Myst corpus [32], and the preliminary findings are displayed in the table 6.5

Front-end	UER	WER
Fbanks	12.29%	35.14%
TERA [260]	11.31%	31.80%
Audio Albert [261]	12.28%	34.69%
Wav2Vec2.0 Base	7.37%	19.76%
Wav2Vec2.0 Large	7.00%	18.76%
Distill HuBert [236]	9.22%	25.75%
HuBert Base	7.40%	19.77%
HuBert Large	<b>6.03%</b>	<b>15.41%</b>

Table 5.3: Results without language model of Self-supervised front-end

Where Base, and Large represent the same model with different number of parameters (in the order Base < Large). Even though we did not use a language model in this pilot experiment, the results are of

the same order as those reported in section 6.6 obtained with a transformer and a transformer language model. Such results demonstrate that SSL learns substantial speech characteristics. For future research, we aim to explore in depth what information is encoded in SSL models and why they work well on children, and how we may use this knowledge to enhance children’s ASR.



# 6

## Use of synthetic speech as data augmentation

### Contents

---

6.1	Introduction . . . . .	95
6.2	Related work . . . . .	96
6.3	Method . . . . .	98
6.4	System description . . . . .	98
6.5	Experimental setup . . . . .	99
6.6	Results and discussion . . . . .	101
6.7	Conclusions and future work . . . . .	103
6.8	Ongoing and future work . . . . .	103

---



Children’s automatic speech recognition (ASR) poses a significant challenge due to the high variability nature of children’s speech. The limited availability of training datasets hampers the effective modelling of this variability, which can be partially addressed using a text-to-speech (TTS) system for data augmentation. However, generated data may contain imperfections, potentially impacting performance. In this work, we use Adapters to handle the domain mismatch when fine-tuning with TTS data. This involves a two-step training process: training adapter layers with a frozen pre-trained model using synthetic data, then fine-tuning both adapters and the entire model with a mix of synthetic and real data, where only synthetic data passes through the adapters. Experimental results demonstrate up to 6% relative reduction in WER compared to the straightforward use of synthetic data, indicating the effectiveness of adapter-based architectures in learning from imperfect synthetic data.

## 6.1 Introduction

Advances in deep learning and large amounts of training data have greatly improved automatic speech recognition (ASR). ASR is now widely used in applications like automatic transcription and home assistants. However, the recognition of children’s speech remains challenging. This is because children’s speech differs significantly from adults due to developmental changes in their speech production apparatus [?]. These changes lead to shifts in fundamental frequencies, altered temporal and spectral characteristics, and increased disfluencies [2, 24]. Additionally, children’s limited linguistic and phonetic knowledge further complicates speech recognition [107]. Finally, the scarcity of children’s speech data also limits the robustness of ASR models to these variabilities.

To bridge the gap between adult and children’s automatic speech recognition, significant improvements have been made to the ASR pipeline. These advancements include techniques like Vocal Tract Length Normalization (VTLN) [90], pitch and formant modification [96], and adversarial multi-task learning [101]. In [?], a large dataset of children’s speech, comparable in size to an adult corpus, was used to train an ASR model. This system achieved state-of-the-art performance, showcasing that neural networks can effectively learn from diverse and variable children’s speech data when there is ample training data. However, acquiring and annotating datasets for training speech recognition models can be notably challenging and costly, especially for children, as their attention span is limited, and they may not consistently follow prompts during reading tasks. An alternative approach is to generate synthetic datasets using a text-to-speech (TTS) model. TTS can bypass the difficulties of collecting and annotating real children’s speech data. Some studies have explored TTS for ASR, either by directly using synthetic speech for training or as a form of data augmentation [134]. However, synthesizing children’s speech is challenging due to their inherent substandard and imprecise pronunciation [135]. Therefore, using synthetic data directly could lead to a performance decrease [135, 262].

In this paper, we introduce a novel technique called ”Adapter double-way fine-tuning” to enhance

ASR models for children, even when using imperfect data augmentation. Our approach involves adding additional adapter layers to the existing ASR model during fine-tuning, similar to [171]. These adapter layers are customised to address the domain mismatch between real and synthetic data. We achieve this through a two-step training procedure. In the first step, the adapter layers are trained exclusively using synthetic data while keeping the pre-trained model frozen. In the second step, we fine-tune both the trained adapters and the entire model using a combination of synthetic and real data. Crucially, our approach differentiates between synthetic and real data during fine-tuning. Synthetic data passes through the adapter layers, while real data bypasses them. This approach enables the effective use of imperfect synthetic data to enhance ASR performance for children.

## 6.2 Related work

### 6.2.1 TTS data augmentation

The advancement of TTS systems, achieving human-like quality, enables effective TTS-based data augmentation in ASR. This approach, as shown in studies like [134], involves generating synthetic speech from text using TTS models, then combining it with real speech for training, resulting in performance enhancements. Notably, this approach is not limited to well-resourced tasks and has succeeded in low-resource scenarios, as demonstrated in [?]. Nevertheless, TTS data augmentation offers only modest improvement due to the domain mismatch between synthetic and real speech. In order to mitigate the mismatch with real data and to reduce speaker dependency, the use of discrete representations based on VQ-wav2vec has been proposed [?].

Another approach to mitigate the domain mismatch between synthetic and real speech is through the use of data selection techniques, as suggested by [135]. By selectively choosing high-quality synthetic speech data. This data selection process ensures that only the most reliable and accurate synthetic speech samples are used during data augmentation. The results presented in [135] demonstrate the effectiveness of employing i-vector speaker-embedding cosine similarity as a metric for data selection, compared to metrics like error rate, acoustic posterior, and synthetic discriminator.

In Synth++ [262], an extension to the data selection technique is proposed, by incorporating separate batch normalization statistics for real and synthetic samples. While data selection handles artefacts and over/under-sampling, double batch normalization aims to further bridge the synthetic-real data gap during training. This approach uses rejection sampling based on a DNN’s output. Where the DNN is trained on a 5-dimensional features vector derived from a pre-trained ASR model, including cross-entropy loss, CTC loss [?], word error rate (WER), lengths of tokens in prediction text, and length of tokens in target text, offering valuable insights into speech quality and characteristics.

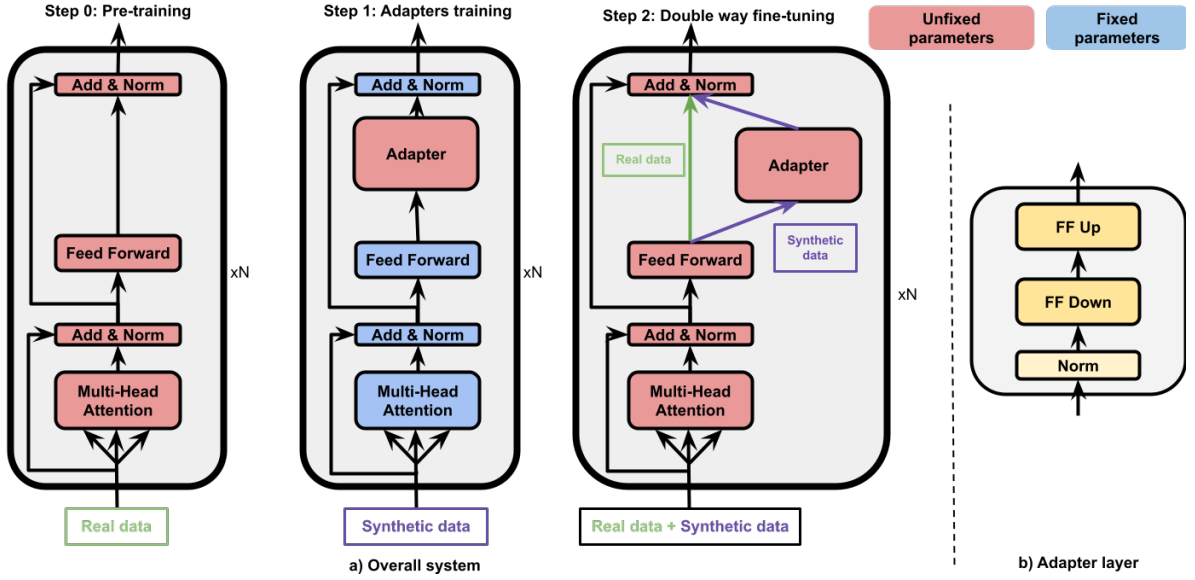


Figure 6.1: Overview of a) double way fine-tuning and b) Adapter layer architecture

## 6.2.2 Adapters

Adapters were first introduced for natural language processing (NLP) tasks as a simpler alternative to full model fine-tuning [240]. They involve adding a small number of extra parameters to each layer of the transformer model. Unlike full fine-tuning, which modifies the entire model, adapters enable targeted adjustments within specific layers while keeping pre-trained parameters intact. These adapters typically follow a bottleneck architecture with down-projection and up-projection, as seen in Figure 6.1-b. The bottleneck architecture’s purpose is to introduce non-linear transformations, enabling Adapters to capture task-specific features and learn task-specific modifications effectively.

Since their proposal, adapters have demonstrated effectiveness in diverse NLP tasks, including language understanding and neural machine translation [263]. Additionally, there is a growing interest in applying adapters to automatic speech recognition. For instance, [250] explored adapters for atypical speech, focusing on pathological and accented speech. In children’s ASR, Adapters are employed within the Draft framework [171]. This approach inserts and trains Adapters at each block of a pre-trained self-supervised learning (SSL) model using an SSL loss. Subsequently, the entire model, including the Adapters, undergoes fine-tuning with ASR losses. By combining SSL pre-training, Adapters, and full fine-tuning, this approach uses the advantages of SSL, the adaptability of adapters, and task-specific fine-tuning to enhance the recognition accuracy of ASR systems for children’s speech.

## 6.3 Method

Expanding on the achievements of the Draft Framework and Synth++, our approach utilizes Adapters as a substitute for the double batch normalization layer of the Synth++ framework. Our aim is to improve the performance of a pre-trained ASR model through data augmentation using synthetic data. In our methodology, we employed filtered synthetic data, implementing a speaker-embedding cosine similarity metric to retain synthetic utterances that exhibited high-quality generation. Our approach introduces two extra steps following the standard ASR model training (Step 0). Figure 6.1-a provides an overview of our proposed methodology.

Step 1 entails training Adapter layers while keeping the ASR model parameters fixed. These Adapter layers are placed after the transformer layers' feed-forward component, aiming to learn a projection that aligns synthetic children's speech with real children's speech within the transformer layers. This step is crucial as Adapter layers require this learning process. Without it, the subsequent fine-tuning in Step 2 could be more challenging and less effective.

In Step 2, we fine-tune both the adapters from Step 1 and the pre-trained ASR model using a mix of synthetic and real data. A crucial aspect of our approach is how we handle data flow within the model. Real samples bypass the adapter layers as they don't need further adjustments, directly passing through the original ASR model components. Synthetic data, on the other hand, goes through the adapter layers for necessary modifications to align better with real children's speech characteristics. This differential treatment of data optimises adapter usage, potentially improving the ASR system's overall performance.

During inference, the Adapter layers become unnecessary and are discarded because the test data only contains real samples. It is important to mention that Steps 1 and 2 can be iteratively repeated with newly generated synthetic data, although this aspect is not investigated in this paper and is a subject for future research.

In summary, our approach uses adapter modules to improve the performance of a pre-trained ASR model through the integration of filtered synthetic data augmentation.

## 6.4 System description

### 6.4.1 Transformer architecture for ASR

The Transformer architecture, initially developed for tasks like machine translation [123], was found to be highly effective and widely used in various domains, including computer vision [?] and language understanding [61]. In speech recognition, it takes acoustic features as input, processes them through an encoder to create high-level representations, and uses these for token prediction in a decoder. Training typically combines a sequence-to-sequence approach with a CTC loss [?]. Recent studies, such as [118],

demonstrate that fine-tuning adult pre-trained Transformer-based models with children’s speech data yield better results than traditional HMM-DNN based models, making the Transformer-based and End-to-end models a suitable choice for children’s ASR.

In our experiments, we employed the SpeechBrain toolkit [238] for the ASR part of our system, using a pre-trained Transformer model<sup>1</sup>, trained on the LibriSpeech dataset [30]. This model includes 12 encoder layers and 6 decoder layers, each having a dimension of 512. Additionally, we incorporated a Transformer language model trained on a 10 million-word corpus.

#### 6.4.2 Multi-speaker text-to-speech: YourTTS

In this work, we used the pre-trained YourTTS<sup>2</sup> model proposed by [?] based on the Coqui toolkit. YourTTS is a TTS model that is built upon the Variational Inference with adversarial learning for end-to-end Text-to-Speech (VITS). It incorporates several novel modifications to enable zero-shot multi-speaker and multilingual synthesis. YourTTS use a 10-layer Transformer-based text encoder with 196 hidden channels. It can be used in a multilingual fashion by using a 4-dimensional language embedding concatenated with the embedding of each input character, for the purpose of our experiment, the multilingual aspect was discarded to only keep the English language. The decoder has four affine coupling layers, each with four WaveNet blocks for high-quality speech generation. YourTTS uses an external H/ASP speaker encoder to generate 512-dimensional speaker embeddings for individual speakers, serving as reference speakers for the model. Additionally, YourTTS incorporates a HifiGAN vocoder [?]. As YourTTS is an end-to-end model, the vocoder is connected to the TTS model using a variational autoencoder (VAE). For a comprehensive understanding of the YourTTS architecture and training, detailed information can be found in the original paper [?].

### 6.5 Experimental setup

#### 6.5.1 Real speech corpus

**Table 6.1:** My Science Tutor Children Speech Corpus statistics

	Training	Validation	Test
# of utterances	60897	10044	4079
# of speakers	566	79	91
# of hours	113	18	13

In this study, we used the My Science Tutor (MyST) Children Speech Corpus, referred to as the

<sup>1</sup><https://huggingface.co/speechbrain/asr-transformer-transformerlm-librispeech>

<sup>2</sup><https://coqui.ai/blog/tts/yourtts-zero-shot-text-synthesis-low-resource-languages>

”Real” set. This corpus contains around 400 hours of speech collected from 1,372 students in grades three to five. It comprises conversations with a virtual tutor spanning eight scientific domains. Notably, only 45% of the utterances in the corpus are transcribed. For our experiments, we filtered out utterances shorter than one second and longer than 30 seconds due to GPU memory constraints. Additional details on the filtered corpora are provided in Table 6.1.

### 6.5.2 Synthetic data

To adapt YourTTS for generating children’s speech, we fine-tuned YourTTS using the MyST training set. In this study, we developed two TTS systems with different parameter settings to investigate their performance and output quality under varying conditions.

The first model, referred to as TTS<sub>1</sub>, underwent fine-tuning for 250 epochs without including the speaker encoder loss. In contrast, the second system, labelled TTS<sub>2</sub>, was fine-tuned for 50 epochs while incorporating the speaker encoder loss. This incorporation improved the alignment between the generated speech and the reference speaker embedding provided to the model.

The first TTS model, TTS<sub>1</sub>, was used to generate 300 hours of synthetic data referred to as *Synth*<sub>1</sub>. The second TTS model, TTS<sub>2</sub>, was employed to generate a larger volume of synthetic data, up to 1,000 hours, denoted as *Synth*<sub>2</sub>. To compare the performance of *Synth*<sub>1</sub> and *Synth*<sub>2</sub>, a subset of 300 hours was extracted from the *Synth*<sub>2</sub> dataset. The full 1,000-hour set was exclusively used to evaluate the impact of different amounts of synthetic data, both reduced and increased.

In both *Synth*<sub>1</sub> and *Synth*<sub>2</sub>, we used randomly selected d-vectors and text transcriptions from the MyST training set. Notably, the selected d-vectors did not match the associated transcriptions to introduce variability into the synthetic data. We used MyST transcriptions to generate synthetic data, exposing the TTS model to its unique transcription style, including elements like ”UM” hesitations. This approach helps the model learn and reproduce the specific transcription characteristics of the MyST data. To assess the filtering effect, we generated an extra 300-hour set for both *Synth*<sub>1</sub> and *Synth*<sub>2</sub> without using speaker embedding data selection. Our data selection method relied on cosine similarity using x-vectors from a pre-trained x-vector extractor<sup>3</sup>. We applied a cosine similarity threshold of 0.75 to discard bad synthetic utterances. We also explored the data selection mechanism suggested by [262] but found it unsatisfactory, opting instead for speaker-embedding similarity as the selection criterion.

### 6.5.3 Experiments

We evaluated our Adapter double-way fine-tuning approach in a series of experiments, comparing it to existing methods. We started with baseline models fine-tuning an adult model to children’s speech using real data for 20 and 25 epochs (step 0 in Figure 6.1-a). Next, we assessed the TTS models’

---

<sup>3</sup><https://huggingface.co/speechbrain/spkrec-ecapa-voxceleb>



Method	Synth <sub>1</sub>	Synth <sub>2</sub>
<i>Real</i> (20 epochs)	12.99%	
<i>Real</i> (25 epochs)	13.15%	
<i>Real</i> + Non filtered <i>Synth</i>	13.41%	13.24%
<i>Real</i> + <i>Synth</i> [135]	13.09%	12.98%
<i>Synth</i> alone	40.58%	40.21%
Norm double-way (from adult)	12.89%	13.04%
Norm double-way (from children)	13.56%	13.87%
Adapter double-way (Ours)	<b>12.42%</b>	<b>12.31%</b>

**Table 6.2:** Results of the different approaches (in WER).

performances using only *Synth*<sub>1</sub> and *Synth*<sub>2</sub> data. We also explored data filtering’s impact by comparing models trained on filtered and unfiltered versions of *Synth*<sub>1</sub> and *Synth*<sub>2</sub>, along with their combination with *Real* data. These models were trained for 20 epochs. We also explored double-way normalization inspired by Synt++. In one scenario, we fine-tuned the adult model for 20 epochs using a mix of filtered synthetic and real data with double-way normalization (*Norm double-way from adult* in Table 6.2). In another scenario, we trained the double-way normalization model for 5 epochs with the baseline model as initialization, referred to as *Norm double-way from children*. Finally, we implemented our *Adapter double-way* approach, training the models for 5 epochs with the baseline model as initialisation. Different hyper-parameter configurations will be explored in section 6.6.

## 6.6 Results and discussion

### 6.6.1 Comparison with existing approaches

The results of the various approaches are summarized in Table 6.2. Our baseline models achieved a WER score of 12.99%. Training for 25 epochs led to over-fitting and a decrease in performance. Filtered *Synth*<sub>1</sub> and *Synth*<sub>2</sub> data improved WER by 2% compared to unfiltered data, but using only filtered TTS speech (*Synth* alone) resulted in a significant 40% WER on the *Real* test set, highlighting the domain mismatch between real and synthetic. Our experiments found that double batch normalization did not improve the baseline model’s performance and even led to a 5% relative decrease in WER performance when evaluated with the baseline model as initialisation. This highlights the need for alternative methods to address the domain mismatch between real and synthetic speech data. Our double-way adapter fine-tuning approach, initialised with the baseline model (step 0 in Figure 6.1), outperformed all other methods. It achieved a 4% and 5% relative WER improvement over the baseline on *Synth*<sub>1</sub> and *Synth*<sub>2</sub> respectively, demonstrating the effectiveness of our approach compared to longer training on the *Real* set.

Amount of TTS data	WER
0h	12.99%
10h	12.73%
50h	12.54%
100h	12.49%
300h	<b>12.31%</b>
600h	12.57%
1000h	13.14%

**Table 6.3:** Results of the different number of hours in our Adapter double-way approach with *Synth<sub>2</sub>* data

Location	Bottleneck size	5 epochs	20 epochs
Encoder	64	12.58%	12.24%
Encoder	128	12.31%	12.45%
Encoder	256	<b>12.25%</b>	12.32%
Encoder	1024	12.42%	<b>12.22%</b>
Encoder	2048	12.57%	12.47%
Encoder-Decoder	128	12.45%	12.48%
Skip step 0	256	12.30%	-
Skip step 0 and 1	256	13.28%	-

**Table 6.4:** Results of the different configurations of Adapter double-way approach on 300h of *Synth<sub>2</sub>*

### 6.6.2 Effect of the number of hours

Table 6.3 summarizes the impact of varying amounts of synthetic data from *Synth<sub>2</sub>* on our adapter double-way approach. Using a small amount of synthesized speech (10 to 50 hours) yields limited ASR performance improvement. While excessive TTS data (600 to 1,000 hours) can introduce noise. Thus, it’s crucial to use an appropriate amount (100 to 300 hours) to balance between robustness and avoiding noise introduction.

### 6.6.3 Effect of the Adapters hyper-parameters

To assess the robustness of our approach, we assessed the Double-way adapter in diverse configurations. This involved experimenting with different bottleneck sizes (ranging from 64 to 2048), varying the number of training epochs (5 and 20), exploring the use of Adapters in the decoder of the transformer model, and conducting an ablation study by skipping step 0 and step 0 and 1.

Table 6.4 summarizes the results, highlighting that the optimal configuration uses adapters with a size of 1024 in the encoder only, coupled with 20 training epochs, resulting in a 6% relative WER reduction when compared to the baseline. Importantly, all configurations demonstrated superior performance to the baseline, underscoring the effectiveness of our approach.

Our findings suggest that extended training periods were beneficial for larger Adapter bottleneck sizes, without indications of overfitting. Moreover, adding Adapters to the decoder did not significantly improve results. Finally, skipping step 0 (pre-training) did not significantly degrade results, but skipping

both step 0 and step 1 (pre-training and Adapter pre-training) led to performance degradation, indicating the importance of Adapter pre-training for improved performance.

## 6.7 Conclusions and future work

We introduced the combined use of Adapters and synthetic data augmentation for children’s speech recognition. Our two-step training procedure, involving training Adapter layers using synthetic data and subsequent fine-tuning of Adapters and the entire model with a combination of synthetic and real data, yielded improvements over the baseline and previous approaches in various configurations. For future work, we will explore an iterative approach with newly generated TTS data and varying the amount of real data used.

## 6.8 Ongoing and future work

In order to answer the following research questions: *Is it possible to develop an age-based, parameter-efficient automatic speech recognition model?; Is it possible to use children’s synthetic speech to extend the amount of children’s data? How can we control the quality and speakers’s variability?; - Given that self-supervised representation based ASR for adults matches or surpasses current state-of-the-art, are these representation appropriate for children’s speech?* , we want to pursue three research directions in the future work of this thesis: As a first direction, we want to keep exploring adapter transfer. For example, as proposed by Pfeiffer [264], employing multiple adapters trained on different age groups or children corpus and combining them with an attention mechanism. It may also be interesting to investigate the use of explicit speaker information for robust adapter transfer [265]. Furthermore, as explained in section ??, Adapter module is structurally similar to an auto-encoder, thus it would be interesting to modify the structure of the adapter to follow the latest development in auto-encoder research. For instance, using neural discrete representations with the help of vector-quantized codebook [266] at the end of the adapter’s down-projection.

As a second direction we want to investigate on the use of Text-to-speech (TTS) data augmentation. Indeed, as mentioned in section 2.1.3, one of the most significant obstacles in children automatic speech recognition is the lack of training data. One solution to this problem is voice conversion, in which the adult speech is transformed to child speech and then used for augmentation. However, the modified adult data can only capture a subset of the aspects of children’s speech. As a result, it is important to generate children voice data directly from text [135]. A multi-speaker TTS system using speaker embeddings and text as input can be used to produce a synthesized utterance with the variability of child speaker. Indeed, the speaker embedding includes acoustic variability informations, which we want to find in the output utterance [133, 267]. One of the most challenging aspects of this approach is that the TTS model for

children produces unequal quality speech due mainly to acoustic variability, and hence the ASR system suffers when trained with this additional synthetic data. Furthermore, because we intend to augment the original data with TTS data, there may be a domain shift that worsens the ASR performance. To address both of these concerns, a speaker embedding-based data selection method has been suggested, based on the computation of the cosine-similarity between the input speaker embedding and the speaker embedding obtained from the output utterance. [135]. More recently, in order to minimise domain shift, two separate normalisation layers have been employed, one for the original data and one for the TTS data. [262]. In our research, we want to combine these two approaches to maximise the contribution of TTS data during training. In addition, we want to investigate whether the use of a GAN [268], which could create an artificial children embedding, could alleviate the problem of the limited number of speakers during training.

The final research direction we want to explore in this thesis is self-supervised learning (SSL) as a front-end feature rather than typical filter banks or MFCCs. For these models, the training process is separated into two stages. The first phase of training is self-supervised, which implies that no labels are used during training. The objective of this first phase is to present a large amount of unlabelled data to the system so that it learns a good speech representation. The second stage of learning is supervised fine-tuning, in which the model is taught to predict specific phonemes using the robust representation acquired in the previous stage with the help of a small amount of labelled data. In this category, two models stand out as state-of-the-art: Wav2Vec 2.0 [163] and HuBert [164]. As a preliminary experiment, to assess the usability of such frameworks for children ASR, we trained a BiLSTM model using the output of a variety of frozen self-supervised systems. For this experiment we used a subset of 50h of the Myst corpus [32], and the preliminary findings are displayed in the table 6.5

Front-end	UER	WER
Fbanks	12.29%	35.14%
TERA [260]	11.31%	31.80%
Audio Albert [261]	12.28%	34.69%
Wav2Vec2.0 Base	7.37%	19.76%
Wav2Vec2.0 Large	7.00%	18.76%
Distill HuBert [236]	9.22%	25.75%
HuBert Base	7.40%	19.77%
HuBert Large	<b>6.03%</b>	<b>15.41%</b>

**Table 6.5:** Results without language model of Self-supervised front-end

Where Base, and Large represent the same model with different number of parameters (in the order Base < Large). Even though we did not use a language model in this pilot experiment, the results are of the same order as those reported in section 6.6 obtained with a transformer and a transformer language model. Such results demonstrate that SSL learns substantial speech characteristics. For future research, we aim to explore in depth what information is encoded in SSL models and why they work well on

children, and how we may use this knowledge to enhance children's ASR.



# 7

## Pathology detection from speech





As mentioned in the previous section, SLT can assist paediatric speech therapists by automatically assessing pronunciation quality and identifying pathological conditions. Although the primary aim of this thesis was to improve ASR for reliable assessment of pronunciation quality. We also contributed to the identification of pathological conditions from speech, which will be discussed in this section.

The potential of speech as a non-invasive biomarker for evaluating a speaker’s health for both physical and psychological disorders has repeatedly been proven by the results of several works [269, 270]. Traditional speech-based disease classification systems have focused on carefully researched, knowledge-based features. However, these features do not always capture the full disease’s symptomatology and may even ignore some of its more subtle signs. This has led research to move towards generic representations that intrinsically model the symptoms. However, there are not enough pathological speech data available to train a large model directly. In our work [271], we proposed to assess speaker embedding, such as *i-vectors* [103] and *x-vectors* [252], applicability as a generic feature extraction method to the detection of Parkinson’s disease (PD) and Obstructive Sleep Apnea (OSA). All disease classifications were performed with a support-vector-machine (SVM) classifier. Our experiments with European Portuguese datasets support the hypothesis that discriminative speaker embeddings contain information relevant to disease detection. In particular, we found evidence that these embeddings contain information that hand-crafted features fail to represent, thus proving the validity of our approach. It was also observed that x-vectors are more suitable than i-vectors for tasks whose domain does not match the training data, such as verbal task mismatch and cross-lingual. This indicates that x-vectors embeddings are a strong contender in the replacement of knowledge-based feature sets for PD and OSA detection.

Later, in [272], we proposed to extend the aforementioned work by classifying Alzheimer’s disease with the conjunction of both acoustic and textual feature embeddings. In this end, speech signals are encoded into *x-vector* using pre-trained models. For textual input, contextual embedding vectors are first extracted using an English Bert model [61] and then used to feed a bidirectional recurrent neural network with attention. This multi-model system, based on the combination of linguistic and acoustic information, attained a classification accuracy of 81.25%. Results have shown the importance of linguistic features in the classification of Alzheimer’s disease, which outperforms the acoustic ones in terms of accuracy.

Finally, we further extend the idea of using pre-trained representation to automatically detect COVID-19 from cough recordings. We leverage transfer learning to develop a set of COVID-19 classification subsystems based on deep cough representation extractors called experts. Individual decisions of three experts are fed to a calibrated decision-level fusion system. This ensemble of expert subsystems based on cough representations is expected to produce well-calibrated log-likelihood scores over a wide range of operating points. The output can be more easily interpreted by a human expert and incorporated into the decision-making process. Our results show competitive performance compared to hand-crafted features, although they are still far from those required to become a reliable tool to assist COVID-19

screening.

# Bibliography

- [1] M. Gerosa, D. Giuliani, S. Narayanan, and A. Potamianos, “A review of asr technologies for children’s speech,” in *Proceedings of the 2nd Workshop on Child, Computer and Interaction*, ser. WOCCI ’09. New York, NY, USA: Association for Computing Machinery, 2009. [Online]. Available: <https://doi.org/10.1145/1640377.1640384>
- [2] S. Lee, A. Potamianos, and S. Narayanan, “Acoustics of children’s speech: Developmental changes of temporal and spectral parameters,” *The Journal of the Acoustical Society of America*, vol. 105, no. 3, pp. 1455–1468, 1999. [Online]. Available: <https://doi.org/10.1121/1.426686>
- [3] D. H. Klatt, “Review of the arpa speech understanding project,” *The Journal of the Acoustical Society of America*, vol. 62, no. 6, pp. 1345–1366, 1977.
- [4] E. Kikтова, M. Lojka, M. Pleva, J. Juhar, and A. Cizmar, “Comparison of different feature types for acoustic event detection system,” in *Multimedia Communications, Services and Security: 6th International Conference, MCSS 2013, Krakow, Poland, June 6-7, 2013. Proceedings 6*. Springer, 2013, pp. 288–297.
- [5] R. Weide *et al.*, “The carnegie mellon pronouncing dictionary,” *release 0.6*, [www.cs.cmu.edu](http://www.cs.cmu.edu), 1998.
- [6] P. G. Shivakumar and P. Georgiou, “Transfer learning from adult to children for speech recognition: Evaluation, analysis and recommendations,” 2018.
- [7] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, L. Kaiser, and I. Polosukhin, “Attention is all you need,” *Advances in neural information processing systems*, vol. 30, 2017.
- [8] W. J. Levelt, *Speaking: From intention to articulation*. MIT press, 1993.
- [9] L. Black, A. Vahratian, and H. Hoffman, “Communication disorders and use of intervention services among children aged 3–17 years: United states, 2012; us department of health and human services,

- centers for disease control and prevention,” *National Center for Health Statistics: Atlanta, GA, USA*, 2015.
- [10] D. Langbecker, C. L. Snoswell, A. C. Smith, J. Verboom, and L. J. Caffery, “Long-term effects of childhood speech and language disorders: A scoping review,” *South African Journal of Childhood Education*, vol. 10, no. 1, pp. 1–13, 2020.
  - [11] D. Hilty, S. Chan, J. Torous, J. Mahautmr, and D. Mucic, “New frontiers in healthcare and technology: Internet-and web-based mental options emerge to complement in-person and telepsychiatric care options,” *J Health Med Informatics*, vol. 6, no. 4, pp. 1–14, 2015.
  - [12] J. E. Barnett, “Utilizing technological innovations to enhance psychotherapy supervision, training, and outcomes,” *Psychotherapy*, vol. 48, no. 2, p. 103, 2011.
  - [13] M. C. Hughes, J. M. Gorman, Y. Ren, S. Khalid, and C. Clayton, “Increasing access to rural mental health care using hybrid care that includes telepsychiatry,” *Journal of Rural Mental Health*, vol. 43, no. 1, p. 30, 2019.
  - [14] V. Mendoza Ramos, “The added value of speech technology in clinical care of patients with dysarthria,” Ph.D. dissertation, University of Antwerp, 2022.
  - [15] R. Brewer, L. Anthony, Q. Brown, G. Irwin, J. Nias, and B. Tate, “Using gamification to motivate children to complete empirical studies in lab environments,” in *Proceedings of the 12th international conference on interaction design and children*, 2013, pp. 388–391.
  - [16] A. Potamianos and S. Narayanan, “Robust recognition of children’s speech,” *IEEE Transactions on Speech and Audio Processing*, vol. 11, no. 6, pp. 603–616, 2003.
  - [17] Y. Li, Z. Zhao, O. Klejch, P. Bell, and C. Lai, “Asr and emotional speech: A word-level investigation of the mutual impact of speech and emotion recognition,” *arXiv preprint arXiv:2305.16065*, 2023.
  - [18] J. Li, L. Deng, Y. Gong, and R. Haeb-Umbach, “An overview of noise-robust automatic speech recognition,” *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 22, no. 4, pp. 745–777, 2014.
  - [19] B. King, I.-F. Chen, Y. Vaizman, Y. Liu, R. Maas, S. H. K. Parthasarathi, and B. Hoffmeister, “Robust speech recognition via anchor word representations,” 2017.
  - [20] G. E. Peterson and H. L. Barney, “Control methods used in a study of the vowels,” *The Journal of the Acoustical Society of America*, vol. 24, no. 2, pp. 175–184, 1952. [Online]. Available: <https://doi.org/10.1121/1.1906875>

- [21] Q. Li and M. J. Russell, “Why is automatic recognition of children’s speech difficult?” in *Proc. 7th European Conference on Speech Communication and Technology (Eurospeech 2001)*, 2001, pp. 2671–2674.
- [22] D. CRYSTAL, “A dictionary of linguistics and phonetics (5th edn.). oxford: Blackwell publishing, 2003. pp. 508. isbn 0 631 22664 8,” *Journal of the International Phonetic Association*, vol. 34, pp. 100 – 101, 01 2004.
- [23] L. C. Moats and S. Brady, *Speech to print: Language essentials for teachers*. Paul H. Brookes Pub., 2000.
- [24] H. Tulsiani, P. Swarup, and P. Rao, “Acoustic and language modeling for children’s read speech assessment,” in *2017 Twenty-third National Conference on Communications (NCC)*. IEEE, 2017, pp. 1–6.
- [25] H. H. Clark and E. V. Clark, “Psychology and language,” 1977.
- [26] A. Potamianos and S. Narayanan, “Spoken dialog systems for children,” in *ICASSP, IEEE International Conference on Acoustics, Speech and Signal Processing - Proceedings*, vol. 1, 06 1998, pp. 197 – 200 vol.1.
- [27] S. Das, D. Nix, and M. Picheny, “Improvements in children’s speech recognition performance,” *Proceedings of the 1998 IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP ’98 (Cat. No.98CH36181)*, vol. 1, pp. 433–436 vol.1, 1998.
- [28] S. S. Gray, D. Willett, J. Lu, J. Pinto, P. Maergner, and N. Bodenstab, “Child automatic speech recognition for us english: child interaction with living-room-electronic-devices,” in *WOCCI*, 2014.
- [29] A. Radford, J. W. Kim, T. Xu, G. Brockman, C. McLeavey, and I. Sutskever, “Robust speech recognition via large-scale weak supervision,” in *International Conference on Machine Learning*. PMLR, 2023, pp. 28 492–28 518.
- [30] V. Panayotov, G. Chen, D. Povey, and S. Khudanpur, “Librispeech: An asr corpus based on public domain audio books,” in *ICASSP*, 2015, pp. 5206–5210.
- [31] G. Chen, S. Chai, G. Wang, J. Du, W.-Q. Zhang, C. Weng, D. Su, D. Povey, J. Trmal, J. Zhang *et al.*, “Gigaspeech: An evolving, multi-domain asr corpus with 10,000 hours of transcribed audio,” *arXiv preprint arXiv:2106.06909*, 2021.
- [32] W. Ward, R. Cole, D. Bolaños, C. Buchenroth-Martin, E. Svirsky, and T. B. Weston, “My science tutor: A conversational multimedia virtual tutor.” *Journal of Educational Psychology*, vol. 105, pp. 1115–1125, 2013.

- [33] N. F. Chen, R. Tong, D. Wee, P. X. Lee, B. Ma, and H. Li, "Singakids-mandarin: Speech corpus of singaporean children speaking mandarin chinese." in *Interspeech*, 2016, pp. 1545–1549.
- [34] B. Ahmed, K. Ballard, D. Burnham, T. Sirojan, H. Mehmood, D. Estival, E. Baker, F. Cox, J. Arciuli, T. Benders *et al.*, "Auskidtalk: an auditory-visual corpus of 3-to 12-year-old australian children's speech," in *Annual Conference of the International Speech Communication Association (22nd: 2021)*. International Speech Communication Association, 2021, pp. 3680–3684.
- [35] M. Eskenazi, J. Mostow, and D. Graff, "The cmu kids speech corpus," *Corpus of children's read speech digitized and transcribed on two CD-ROMs, with assistance from Multicom Research and David Graff. Published by the Linguistic Data Consortium, University of Pennsylvania*, 1997.
- [36] K. Shobaki, J.-P. Hosom, and R. Cole, "The ogi kids' speech corpus and recognizers," in *Proc. of ICSLP*, 2000, pp. 564–567.
- [37] M. Russell, "The pf-star british english children's speech corpus," 2006.
- [38] H. Liao, G. Pundak, O. Siohan, M. Carroll, N. Coccaro, Q.-M. Jiang, T. N. Sainath, A. Senior, F. Beaufays, and M. Bacchiani, "Large vocabulary automatic speech recognition for children," in *Interspeech*, 2015.
- [39] M. Benzeghiba, R. De Mori, O. Deroo, S. Dupont, T. Erbes, D. Jouvet, L. Fissore, P. Laface, A. Mertins, C. Ris *et al.*, "Automatic speech recognition and speech variability: A review," *Speech communication*, vol. 49, no. 10-11, pp. 763–786, 2007.
- [40] S. Karpagavalli and E. Chandra, "A review on automatic speech recognition architecture and approaches," *International Journal of Signal Processing, Image Processing and Pattern Recognition*, vol. 9, no. 4, pp. 393–404, 2016.
- [41] S. J. Arora and R. P. Singh, "Automatic speech recognition: a review," *International Journal of Computer Applications*, vol. 60, no. 9, 2012.
- [42] K. H. Davis, R. Biddulph, and S. Balashek, "Automatic recognition of spoken digits," *The Journal of the Acoustical Society of America*, vol. 24, no. 6, pp. 637–642, 1952. [Online]. Available: <https://doi.org/10.1121/1.1906946>
- [43] S. Young, G. Evermann, M. Gales, T. Hain, D. Kershaw, X. Liu, G. Moore, J. Odell, D. Ollason, D. Povey *et al.*, "The htk book," *Cambridge university engineering department*, vol. 3, no. 175, p. 12, 2002.
- [44] P. C. Woodland and S. J. Young, "The htk tied-state continuous speech recogniser." in *Eurospeech*, 1993.

- [45] G. Hinton, L. Deng, D. Yu, G. E. Dahl, A.-r. Mohamed, N. Jaitly, A. Senior, V. Vanhoucke, P. Nguyen, T. N. Sainath, and B. Kingsbury, “Deep neural networks for acoustic modeling in speech recognition: The shared views of four research groups,” *IEEE Signal Processing Magazine*, vol. 29, no. 6, pp. 82–97, 2012.
- [46] S. Davis and P. Mermelstein, “Comparison of parametric representations for monosyllabic word recognition in continuously spoken sentences,” *IEEE Transactions on Acoustics, Speech, and Signal Processing*, vol. 28, no. 4, pp. 357–366, 1980.
- [47] J. Baker, “The dragon system—an overview,” *IEEE Transactions on Acoustics, Speech, and Signal Processing*, vol. 23, no. 1, pp. 24–29, 1975.
- [48] A. L. Bizzocchi, “How many phonemes does the english language have?” *International Journal on Studies in English Language and Literature (IJSELL)*, vol. 5, no. 10, pp. 36–46, 2017.
- [49] R. Schwartz, Y. Chow, O. Kimball, S. Roucos, M. Krasner, and J. Makhoul, “Context-dependent modeling for acoustic-phonetic recognition of continuous speech,” in *ICASSP’85. IEEE International Conference on Acoustics, Speech, and Signal Processing*, vol. 10. IEEE, 1985, pp. 1205–1208.
- [50] L. R. Bahl, P. V. deSouza, P. Gopalakrishnan, D. Nahamoo, and M. Picheny, “Context dependent modeling of phones in continuous speech using decision trees,” in *Speech and Natural Language: Proceedings of a Workshop Held at Pacific Grove, California, February 19-22, 1991*, 1991.
- [51] H. A. Bourlard and N. Morgan, *Connectionist speech recognition: a hybrid approach*. Springer Science & Business Media, 2012, vol. 247.
- [52] H. Meinedo, D. Caseiro, J. Neto, and I. Trancoso, “Audimus. media: a broadcast news speech recognition system for the european portuguese language,” in *International Workshop on Computational Processing of the Portuguese Language*. Springer, 2003, pp. 9–17.
- [53] K. J. Lang, A. H. Waibel, and G. E. Hinton, “A time-delay neural network architecture for isolated word recognition,” *Neural networks*, vol. 3, no. 1, pp. 23–43, 1990.
- [54] H. Sak, A. W. Senior, and F. Beaufays, “Long short-term memory recurrent neural network architectures for large scale acoustic modeling,” 2014.
- [55] A. Waibel, T. Hanazawa, G. Hinton, K. Shikano, and K. J. Lang, “Phoneme recognition using time-delay neural networks,” in *Backpropagation*. Psychology Press, 2013, pp. 35–61.
- [56] K. Yao and G. Zweig, “Sequence-to-sequence neural net models for grapheme-to-phoneme conversion,” *arXiv preprint arXiv:1506.00196*, 2015.

- [57] G. Sidorov, F. Velasquez, E. Stamatatos, A. Gelbukh, and L. Chanona-Hernández, “Syntactic n-grams as machine learning features for natural language processing,” *Expert Systems with Applications*, vol. 41, no. 3, pp. 853–860, 2014.
- [58] S. Vishnoi, P. Garg, and P. Arora, “Physicochemical n-grams tool: A tool for protein physicochemical descriptor generation via chou’s 5-step rule,” *Chemical Biology & Drug Design*, vol. 95, no. 1, pp. 79–86, 2020. [Online]. Available: <https://onlinelibrary.wiley.com/doi/abs/10.1111/cbdd.13617>
- [59] V. H. Nguyen, H. T. Nguyen, H. N. Duong, and V. Snasel, “n-Gram-Based Text Compression,” *Computational Intelligence and Neuroscience*, vol. 2016, p. 9483646, Nov. 2016, publisher: Hindawi Publishing Corporation. [Online]. Available: <https://doi.org/10.1155/2016/9483646>
- [60] S. Chen and R. Rosenfeld, “A survey of smoothing techniques for me models,” *IEEE Transactions on Speech and Audio Processing*, vol. 8, no. 1, pp. 37–50, 2000.
- [61] J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova, “Bert: Pre-training of deep bidirectional transformers for language understanding,” 2019.
- [62] T. Brown, B. Mann, N. Ryder, M. Subbiah, J. D. Kaplan, P. Dhariwal, A. Neelakantan, P. Shyam, G. Sastry, A. Askell *et al.*, “Language models are few-shot learners,” *Advances in neural information processing systems*, vol. 33, pp. 1877–1901, 2020.
- [63] A. Viterbi, “Error bounds for convolutional codes and an asymptotically optimum decoding algorithm,” *IEEE Transactions on Information Theory*, vol. 13, no. 2, pp. 260–269, 1967.
- [64] V. Valtchev, J. Odell, P. Woodland, and S. Young, “A novel decoder design for large vocabulary recognition,” in *Proceedings of ICSLP*, 1994.
- [65] X. Aubert and H. Ney, “Large vocabulary continuous speech recognition using word graphs,” in *1995 International Conference on Acoustics, Speech, and Signal Processing*, vol. 1. IEEE, 1995, pp. 49–52.
- [66] M. Mohri, “Finite-state transducers in language and speech processing,” *Computational linguistics*, vol. 23, no. 2, pp. 269–311, 1997.
- [67] D. Caseiro and I. Trancoso, “Using dynamic wfst composition for recognizing broadcast news,” in *Seventh International Conference on Spoken Language Processing*, 2002.
- [68] D. Povey, A. Ghoshal, G. Boulianne, L. Burget, O. Glembek, N. Goel, M. Hannemann, P. Motlicek, Y. Qian, P. Schwarz *et al.*, “The kaldi speech recognition toolkit,” in *IEEE 2011 workshop on*



- automatic speech recognition and understanding*, no. CONF. IEEE Signal Processing Society, 2011.
- [69] F. Richardson, M. Ostendorf, and J. R. Rohlicek, “Lattice-based search strategies for large vocabulary speech recognition,” in *1995 International Conference on Acoustics, Speech, and Signal Processing*, vol. 1. IEEE, 1995, pp. 576–579.
  - [70] A. Hannun, C. Case, J. Casper, B. Catanzaro, G. Diamos, E. Elsen, R. Prenger, S. Satheesh, S. Sengupta, A. Coates *et al.*, “Deep speech: Scaling up end-to-end speech recognition,” *arXiv preprint arXiv:1412.5567*, 2014.
  - [71] S. Karita, N. Chen, T. Hayashi, T. Hori, H. Inaguma, Z. Jiang, M. Someki, N. E. Y. Soplin, R. Yamamoto, X. Wang, S. Watanabe, T. Yoshimura, and W. Zhang, “A comparative study on transformer vs rnn in speech applications,” in *2019 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU)*, 2019, pp. 449–456.
  - [72] D. Wang, X. Wang, and S. Lv, “An overview of end-to-end automatic speech recognition,” *Symmetry*, vol. 11, p. 1018, 08 2019.
  - [73] A. Graves, S. Fernández, F. Gomez, and J. Schmidhuber, “Connectionist temporal classification: Labelling unsegmented sequence data with recurrent neural networks,” in *Proceedings of the 23rd International Conference on Machine Learning*, ser. ICML ’06. New York, NY, USA: Association for Computing Machinery, 2006, p. 369–376. [Online]. Available: <https://doi.org/10.1145/1143844.1143891>
  - [74] I. Sutskever, O. Vinyals, and Q. V. Le, “Sequence to sequence learning with neural networks,” *Advances in neural information processing systems*, vol. 27, 2014.
  - [75] D. Bahdanau, K. Cho, and Y. Bengio, “Neural machine translation by jointly learning to align and translate,” *arXiv preprint arXiv:1409.0473*, 2014.
  - [76] O. Vinyals, A. Toshev, S. Bengio, and D. Erhan, “Show and tell: A neural image caption generator,” in *2015 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2015, pp. 3156–3164.
  - [77] O. Vinyals and Q. Le, “A neural conversational model,” *arXiv preprint arXiv:1506.05869*, 2015.
  - [78] R. Nallapati, B. Zhou, C. Gulcehre, B. Xiang *et al.*, “Abstractive text summarization using sequence-to-sequence rnns and beyond,” *arXiv preprint arXiv:1602.06023*, 2016.
  - [79] L. Dong, S. Xu, and B. Xu, “Speech-transformer: a no-recurrence sequence-to-sequence model for speech recognition,” in *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2018, pp. 5884–5888.

- [80] Z. Tüske, G. Saon, and B. Kingsbury, “On the limit of english conversational speech recognition,” *arXiv preprint arXiv:2105.00982*, 2021.
- [81] D. Bermuth, A. Poeppel, and W. Reif, “Scribosermo: fast speech-to-text models for german and other languages,” *arXiv preprint arXiv:2110.07982*, 2021.
- [82] W. Chan, D. Park, C. Lee, Y. Zhang, Q. Le, and M. Norouzi, “Speechstew: Simply mix all available speech recognition data to train one large neural network,” *arXiv preprint arXiv:2104.02133*, 2021.
- [83] S. Ghai and R. Sinha, “Exploring the role of spectral smoothing in context of children’s speech recognition,” in *Tenth Annual Conference of the International Speech Communication Association*, 2009.
- [84] S. Ghai, “Addressing pitch mismatch for children’s automatic speech recognition,” Ph.D. dissertation, 2011.
- [85] H. Hermansky, “Perceptual linear predictive (plp) analysis of speech.” *The Journal of the Acoustical Society of America*, vol. 87 4, pp. 1738–52, 1990.
- [86] S. Shahnawazuddin, Ankita, A. Kumar, and H. K. Kathania, “Gammatone-filterbank based pitch-normalized cepstral coefficients for zero-resource children’s asr,” in *International Conference on Speech and Computer*. Springer, 2023, pp. 494–505.
- [87] S. P. Dubagunta, S. Hande Kabil, and M. Magimai-Doss, “Improving children speech recognition through feature learning from raw speech signal,” in *ICASSP 2019 - 2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2019, pp. 5736–5740.
- [88] J. Fainberg, O. Klejch, E. Loweimi, P. Bell, and S. Renals, “Acoustic model adaptation from raw waveforms with sincnet,” in *2019 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU)*, 2019, pp. 897–904.
- [89] M. Ravanelli and Y. Bengio, “Speaker recognition from raw waveform with sincnet,” 2019.
- [90] L. Lee and R. C. Rose, “Speaker normalization using efficient frequency warping procedures,” in *1996 IEEE International Conference on Acoustics, Speech, and Signal Processing Conference Proceedings*, vol. 1. IEEE, 1996, pp. 353–356.
- [91] R. Serizel and D. Giuliani, “Vocal tract length normalisation approaches to dnn-based children’s and adults’ speech recognition,” in *SLT Workshop*, 2014, pp. 135–140.
- [92] F. Claus, H. Gamboa Rosales, R. Petrick, H.-U. Hain, and R. Hoffmann, “A survey about asr for children,” in *Speech and Language Technology in Education*, 2013.

- [93] A. Potamianos, S. Narayanan, and S. Lee, “Automatic speech recognition for children,” in *Fifth European Conference on Speech Communication and Technology*, 1997.
- [94] A. Potamianos and R. C. Rose, “On combining frequency warping and spectral shaping in hmm based speech recognition,” in *1997 IEEE International Conference on Acoustics, Speech, and Signal Processing*, vol. 2. IEEE, 1997, pp. 1275–1278.
- [95] G. Yeung and A. Alwan, “A frequency normalization technique for kindergarten speech recognition inspired by the role of f0 in vowel perception,” *Interspeech 2019*, 2019.
- [96] S. Shahnawazuddin, R. Sinha, and G. Pradhan, “Pitch-normalized acoustic features for robust children’s speech recognition,” *IEEE Signal Processing Letters*, vol. 24, no. 8, pp. 1128–1132, 2017.
- [97] S. Shahnawazuddin, A. Dey, and R. Sinha, “Pitch-adaptive front-end features for robust children’s asr,” in *INTERSPEECH*, 2016.
- [98] H. Kathania, S. Kadiri, P. Alku, and M. Kurimo, “A formant modification method for improved asr of children’s speech,” *Speech Communication*, vol. 136, pp. 98–106, 01 2022.
- [99] U. L. Kumar, M. Kurimo, and H. K. Kathania, “Effect of linear prediction order to modify formant locations for children speech recognition,” in *International Conference on Speech and Computer*. Springer, 2023, pp. 483–493.
- [100] H. K. Kathania, S. Shahnawazuddin, W. Ahmad, N. Adiga, S. K. Jana, and A. B. Samaddar, “Improving children’s speech recognition through time scale modification based speaking rate adaptation,” in *2018 International Conference on Signal Processing and Communications (SPCOM)*. IEEE, 2018, pp. 257–261.
- [101] R. Duan and N. F. Chen, “Senone-aware adversarial multi-task training for unsupervised child to adult speech adaptation,” in *ICASSP 2021 - 2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2021, pp. 7758–7762.
- [102] L. Rumberg, H. Ehlert, U. Lüdtkke, and J. Ostermann, “Age-invariant training for end-to-end child speech recognition using adversarial multi-task learning,” *Proc. Interspeech 2021*, pp. 3850–3854, 2021.
- [103] A. Senior and I. Lopez-Moreno, “Improving dnn speaker independence with i-vector inputs,” in *ICASSP*, 2014, pp. 225–229.
- [104] P. G. Shivakumar and P. Georgiou, “Transfer learning from adult to children for speech recognition: Evaluation, analysis and recommendations,” *Computer speech & language*, vol. 63, p. 101077, 2020.

- [105] H. K. Kathania, S. Shah Nawazuddin, N. Adiga, and W. Ahmad, "Role of prosodic features on children's speech recognition," in *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2018, pp. 5519–5523.
- [106] V. Kadyan, T. Hasija, and A. Singh, "Prosody features based low resource punjabi children asr and t-nt classifier using data augmentation," *Multimedia Tools and Applications*, vol. 82, no. 3, pp. 3973–3994, 2023.
- [107] J. Wilpon and C. Jacobsen, "A study of speech recognition for children and the elderly," in *ICASSP*, vol. 1, 1996, pp. 349–352 vol. 1.
- [108] R. Gale, L. Chen, J. Dolata, J. Van Santen, and M. Asgari, "Improving asr systems for children with autism and language impairment using domain-focused dnn transfer techniques," in *Interspeech*, vol. 2019. NIH Public Access, 2019, p. 11.
- [109] A. Hagen, B. Pellom, and R. Cole, "Highly accurate children's speech recognition for interactive reading tutors using subword units," *Speech Communication*, vol. 49, no. 12, pp. 861–873, 2007. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0167639307000878>
- [110] P. G. Shivakumar, A. Potamianos, S. Lee, and S. S. Narayanan, "Improving speech recognition for children using acoustic adaptation and pronunciation modeling," in *WOCCI*, 2014, pp. 15–19.
- [111] Q. Li and M. J. Russell, "An analysis of the causes of increased error rates in children's speech recognition," in *Seventh International Conference on Spoken Language Processing*, 2002.
- [112] V. Bhardwaj, M. T. Ben Othman, V. Kukreja, Y. Belkhier, M. Bajaj, B. S. Goud, A. U. Rehman, M. Shafiq, and H. Hamam, "Automatic speech recognition (asr) systems for children: A systematic literature review," *Applied Sciences*, vol. 12, no. 9, p. 4419, 2022.
- [113] V. Peddinti, D. Povey, and S. Khudanpur, "A time delay neural network architecture for efficient modeling of long temporal contexts," in *Sixteenth annual conference of the international speech communication association*, 2015.
- [114] M. Kumar, S. H. Kim, C. Lord, T. D. Lyon, and S. Narayanan, "Leveraging linguistic context in dyadic interactions to improve automatic speech recognition for children," *Computer speech & language*, vol. 63, p. 101101, 2020.
- [115] D. Povey, G. Cheng, Y. Wang, K. Li, H. Xu, M. Yarmohammadi, and S. Khudanpur, "Semi-orthogonal low-rank matrix factorization for deep neural networks," in *Interspeech*, 2018, pp. 3743–3747.

- [116] F. Wu, L. P. García-Perera, D. Povey, and S. Khudanpur, “Advances in automatic speech recognition for child speech using factored time delay neural network.” in *Interspeech*, 2019, pp. 1–5.
- [117] L. Gelin, M. Daniel, J. Piquier, and T. Pellegrini, “End-to-end acoustic modelling for phone recognition of young readers,” *Speech Communication*, vol. 134, pp. 71–84, 2021.
- [118] P. Gurunath Shivakumar and S. Narayanan, “End-to-end neural systems for automatic children speech recognition: An empirical study,” *Computer Speech & Language*, vol. 72, p. 101289, 2022.
- [119] G. Chen, X. Na, Y. Wang, Z. Yan, J. Zhang, S. Ma, and Y. Wang, “Data augmentation for children’s speech recognition—the” ethiopian” system for the slt 2021 children speech recognition challenge,” *arXiv preprint arXiv:2011.04547*, 2020.
- [120] S.-I. Ng, W. Liu, Z. Peng, S. Feng, H.-P. Huang, O. Scharenborg, and T. Lee, “The cuhk-tudelift system for the slt 2021 children speech recognition challenge,” *arXiv preprint arXiv:2011.06239*, 2020.
- [121] W. Chan, N. Jaitly, Q. V. Le, and O. Vinyals, “Listen, attend and spell,” *arXiv preprint arXiv:1508.01211*, 2015.
- [122] S. Targ, D. Almeida, and K. Lyman, “Resnet in resnet: Generalizing residual architectures,” *arXiv preprint arXiv:1603.08029*, 2016.
- [123] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, L. Kaiser, and I. Polosukhin, “Attention is all you need,” 2017.
- [124] M. Qian, I. McLoughlin, W. Quo, and L. Dai, “Mismatched training data enhancement for automatic recognition of children’s speech using dnn-hmm,” in *2016 10th International Symposium on Chinese Spoken Language Processing (ISCSLP)*. IEEE, 2016, pp. 1–5.
- [125] J. Fainberg, P. Bell, M. Lincoln, and S. Renals, “Improving children’s speech recognition through out-of-domain data augmentation.” in *Interspeech*, 2016, pp. 1598–1602.
- [126] M. Matassoni, R. Gretter, D. Falavigna, and D. Giuliani, “Non-native children speech recognition through transfer learning,” in *ICASSP*, 2018, pp. 6229–6233.
- [127] T. Nagano, T. Fukuda, M. Suzuki, and G. Kurata, “Data augmentation based on vowel stretch for improving children’s speech recognition,” in *2019 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU)*. IEEE, 2019, pp. 502–508.
- [128] G. Yeung, R. Fan, and A. Alwan, “Fundamental frequency feature normalization and data augmentation for child speech recognition,” in *ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2021, pp. 6993–6997.

- [129] M. Dua, V. Kadyan, N. Banthia, A. Bansal, and T. Agarwal, "Spectral warping and data augmentation for low resource language asr system under mismatched conditions," *Applied Acoustics*, vol. 190, p. 108643, 2022.
- [130] Z. Shuyang, M. Singh, A. Woubie, and R. Karhila, "Data augmentation for children asr and child-adult speaker classification using voice conversion methods."
- [131] P. Sheng, Z. Yang, and Y. Qian, "Gans for children: A generative data augmentation strategy for children speech recognition," in *2019 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU)*. IEEE, 2019, pp. 129–135.
- [132] J. Shen, R. Pang, R. J. Weiss, M. Schuster, N. Jaitly, Z. Yang, Z. Chen, Y. Zhang, Y. Wang, R. Skerrv-Ryan *et al.*, "Natural tts synthesis by conditioning wavenet on mel spectrogram predictions," in *2018 IEEE international conference on acoustics, speech and signal processing (ICASSP)*. IEEE, 2018, pp. 4779–4783.
- [133] J. Kim, J. Kong, and J. Son, "Conditional variational autoencoder with adversarial learning for end-to-end text-to-speech," in *International Conference on Machine Learning*. PMLR, 2021, pp. 5530–5540.
- [134] A. Laptev, R. Korostik, A. Svishev, A. Andrusenko, I. Medennikov, and S. Rybin, "You do not need more data: Improving end-to-end speech recognition by text-to-speech data augmentation," in *2020 13th International Congress on Image and Signal Processing, BioMedical Engineering and Informatics (CISP-BMEI)*. IEEE, 2020, pp. 439–444.
- [135] W. Wang, Z. Zhou, Y. Lu, H. Wang, C. Du, and Y. Qian, "Towards data selection on tts data for children's speech recognition," in *ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2021, pp. 6888–6892.
- [136] F.-H. Liu, Y. Gao, L. Gu, and M. Picheny, "Noise robustness in speech to speech translation," in *Eighth European Conference on Speech Communication and Technology*, 2003.
- [137] C. Ris and S. Dupont, "Assessing local noise level estimation methods: Application to noise robust asr," *Speech Communication*, vol. 34, no. 1, pp. 141–158, 2001, noise Robust ASR. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0167639300000510>
- [138] L. Gelin, M. Daniel, T. Pellegrini, and J. Pinquier, "Babble noise augmentation for phone recognition applied to children reading aloud in a classroom environment," in *Speech in Noise Workshop (SPiN)*, 2020.

- [139] L. Couvreur and C. Couvreur, “On the use of artificial reverberation for asr in highly reverberant environments,” in *Proc. 2nd IEEE Benelux Signal Processing Symposium (SPS-2000)*, Hilvarenbeek, The Netherlands. Citeseer, 2000, pp. S001–S004.
- [140] J. Malek, J. Zdansky, and P. Cerva, “Robust automatic recognition of speech with background music,” in *2017 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2017, pp. 5210–5214.
- [141] T.-H. Lo, F.-A. Chao, S.-Y. Weng, and B. Chen, “The ntnu system at the interspeech 2020 non-native children’s speech asr challenge,” *arXiv preprint arXiv:2005.08433*, 2020.
- [142] V. P. Singh, H. Sailor, S. Bhattacharya, and A. Pandey, “Spectral modification based data augmentation for improving end-to-end asr for children’s speech,” *arXiv preprint arXiv:2203.06600*, 2022.
- [143] N. Jaitly and G. E. Hinton, “Vocal tract length perturbation (vtlp) improves speech recognition,” in *Proc. ICML Workshop on Deep Learning for Audio, Speech and Language*, vol. 117, 2013, p. 21.
- [144] D. S. Park, W. Chan, Y. Zhang, C.-C. Chiu, B. Zoph, E. D. Cubuk, and Q. V. Le, “SpecAugment: A simple augmentation method for automatic speech recognition,” in *INTERSPEECH*, 2019.
- [145] L. Gelin, T. Pellegrini, J. Piquier, and M. Daniel, “Simulating reading mistakes for child speech transformer-based phone recognition,” in *Annual Conference of the International Speech Communication Association (INTERSPEECH)*, 2021.
- [146] D. Elenius and M. Blomberg, “Adaptation and normalization experiments in speech recognition for 4 to 8 year old children.” in *Interspeech*, 2005, pp. 2749–2752.
- [147] Y. Bengio, A. Courville, and P. Vincent, “Representation learning: A review and new perspectives,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 35, no. 8, pp. 1798–1828, 2013.
- [148] J. Yosinski, J. Clune, Y. Bengio, and H. Lipson, “How transferable are features in deep neural networks?” 2014.
- [149] D. C. Cireşan, U. Meier, and J. Schmidhuber, “Transfer learning for latin and chinese characters with deep neural networks,” in *The 2012 International Joint Conference on Neural Networks (IJCNN)*, 2012, pp. 1–6.
- [150] R. Takashima, T. Takiguchi, and Y. Ariki, “Two-step acoustic model adaptation for dysarthric speech recognition,” in *ICASSP*, 2020, pp. 6104–6108.

- [151] R. Tong, L. Wang, and B. Ma, “Transfer learning for children’s speech recognition,” *2017 International Conference on Asian Language Processing (IALP)*, pp. 36–39, 2017.
- [152] Y. Zhang and Q. Yang, “An overview of multi-task learning,” *National Science Review*, vol. 5, no. 1, pp. 30–43, 2018.
- [153] R. Collobert and J. Weston, “A unified architecture for natural language processing: Deep neural networks with multitask learning,” in *ICML*, ser. ICML ’08. New York, NY, USA: Association for Computing Machinery, 2008, p. 160–167. [Online]. Available: <https://doi.org/10.1145/1390156.1390177>
- [154] R. Girshick, “Fast r-cnn,” in *Proceedings of the IEEE international conference on computer vision*, 2015, pp. 1440–1448.
- [155] L. Xie, S. He, Z. Zhang, K. Lin, X. Bo, S. Yang, B. Feng, K. Wan, K. Yang, J. Yang *et al.*, “Domain-adversarial multi-task framework for novel therapeutic property prediction of compounds,” *Bioinformatics*, vol. 36, no. 9, pp. 2848–2855, 2020.
- [156] S. R. Madikeri, B. K. Khonglah, S. Tong, P. Motlicek, H. Bourlard, and D. Povey, “Lattice-free maximum mutual information training of multilingual speech recognition systems.” in *INTERSPEECH*, 2020, pp. 4746–4750.
- [157] A. Abad, P. Bell, A. Carmantini, and S. Renais, “Cross lingual transfer learning for zero-resource domain adaptation,” in *ICASSP*, 2020, pp. 6909–6913.
- [158] L. Wei, W. Dong, B. Lin, and J. Zhang, “Multi-task based mispronunciation detection of children speech using multi-lingual information,” in *APSIPA ASC*. IEEE, 2019, pp. 1791–1794.
- [159] G. Zavaliagkos and T. Colthurst, “Utilizing untranscribed training data to improve performance.” in *LREC*. Citeseer, 1998, pp. 317–322.
- [160] J. Ma, S. Matsoukas, O. Kimball, and R. Schwartz, “Unsupervised training on large amounts of broadcast news data,” in *2006 IEEE International Conference on Acoustics Speech and Signal Processing Proceedings*, vol. 3. IEEE, 2006, pp. III–III.
- [161] J. Sarzynska-Wawer, A. Wawer, A. Pawlak, J. Szymanowska, I. Stefaniak, M. Jarkiewicz, and L. Okruszek, “Detecting formal thought disorder by deep contextualized word representations,” *Psychiatry Research*, vol. 304, p. 114135, 2021.
- [162] O. Henaff, “Data-efficient image recognition with contrastive predictive coding,” in *International conference on machine learning*. PMLR, 2020, pp. 4182–4192.



- [163] A. Baevski, Y. Zhou, A. Mohamed, and M. Auli, “wav2vec 2.0: A framework for self-supervised learning of speech representations,” *Advances in Neural Information Processing Systems*, vol. 33, pp. 12 449–12 460, 2020.
- [164] W.-N. Hsu, B. Bolte, Y.-H. H. Tsai, K. Lakhota, R. Salakhutdinov, and A. Mohamed, “Hubert: Self-supervised speech representation learning by masked prediction of hidden units,” *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 29, pp. 3451–3460, 2021.
- [165] M. Riviere, A. Joulin, P.-E. Mazaré, and E. Dupoux, “Unsupervised pretraining transfers well across languages,” in *ICASSP 2020-2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2020, pp. 7414–7418.
- [166] Y. Wang, J. Li, H. Wang, Y. Qian, C. Wang, and Y. Wu, “Wav2vec-switch: Contrastive learning from original-noisy speech pairs for robust speech recognition,” in *ICASSP 2022-2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2022, pp. 7097–7101.
- [167] J. Li, V. Manohar, P. Chitkara, A. Tjandra, M. Picheny, F. Zhang, X. Zhang, and Y. Saraf, “Accent-robust automatic speech recognition using supervised and unsupervised wav2vec embeddings,” *arXiv preprint arXiv:2110.03520*, 2021.
- [168] G. Xu, S. Yang, L. Ma, C. Li, and Z. Wu, “The tal system for the interspeech2021 shared task on automatic speech recognition for non-native childrens speech.” in *Interspeech*, 2021, pp. 1294–1298.
- [169] R. Jain, A. Barcovski, M. Yiwere, D. Bigioi, P. Corcoran, and H. Cucu, “A wav2vec2-based experimental study on self-supervised learning methods to improve child speech recognition.” *IEEE Access*, 2023.
- [170] R. Jain, A. Barcovski, M. Yiwere, P. Corcoran, and H. Cucu, “Adaptation of whisper models to child speech recognition,” *arXiv preprint arXiv:2307.13008*, 2023.
- [171] R. Fan and A. Alwan, “Draft: A novel framework to reduce domain shifting in self-supervised learning and its application to children’s asr,” *arXiv preprint arXiv:2206.07931*, 2022.
- [172] K. Demuth, J. Culbertson, and J. Alter, “Word-minimality, epenthesis and coda licensing in the early acquisition of english,” *Language and speech*, vol. 49, no. 2, pp. 137–173, 2006.
- [173] K. Demuth and A. Tremblay, “Prosodically-conditioned variability in children’s production of french determiners,” *Journal of child language*, vol. 35, no. 1, pp. 99–127, 2008.
- [174] J. Gao, A. Li, and Z. Xiong, “Mandarin multimedia child speech corpus: Cass-child,” in *2012 International Conference on Speech Database and Assessments*, 2012, pp. 7–12.

- [175] K. Demuth, “The acquisition of sesotho,” in *The crosslinguistic study of language acquisition*. Psychology Press, 1992, pp. 557–638.
- [176] P. B. Ramteke, S. Supanekar, P. Hegde, H. Nelson, V. Aithal, and S. Koolagudi, “Nitr kids’ speech corpus,” *emotion*, vol. 491, pp. 4–15, 2019.
- [177] M. Garrote and A. Moreno Sandoval, “Chiede, a spontaneous child language corpus of spanish,” in *Proceedings of the 3rd International LABLITA Workshop in Corpus Linguistics*, 2008.
- [178] S.-I. Ng, C. W.-Y. Ng, J. Wang, T. Lee, K. Y.-S. Lee, and M. C.-F. Tong, “Cuchild: A large-scale cantonese corpus of child speech for phonology and articulation assessment,” *arXiv preprint arXiv:2008.03188*, 2020.
- [179] E. Lyakso, O. Frolova, E. Dmitrieva, A. Grigorev, H. Kaya, A. A. Salah, and A. Karpov, “Emochildru: emotional child russian speech corpus,” in *International Conference on Speech and Computer*. Springer, 2015, pp. 144–152.
- [180] A. Hämäläinen, S. Rodrigues, A. Jádice, S. M. Silva, A. Calado, F. M. Pinto, and M. S. Dias, “The cng corpus of european portuguese children’s speech,” in *International Conference on Text, Speech and Dialogue*. Springer, 2013, pp. 544–551.
- [181] G. Yeung, A. L. Bailey, A. Afshan, M. Tinkler, M. Q. Pérez, A. Martin, A. A. Pogossian, S. Spaulding, H. W. Park, M. Muco *et al.*, “A robotic interface for the administration of language, literacy, and speech pathology assessments for children.” in *SLaTE*, 2019, pp. 41–42.
- [182] M. Russell, S. D’Arcy, M. Wong, A. Batliner, M. Blomberg, and M. Gerosa, “The pf-star children’s speech corpus,” in *Interspeech 2005*, 2005.
- [183] F. Yu, Z. Yao, X. Wang, K. An, L. Xie, Z. Ou, B. Liu, X. Li, and G. Miao, “The slt 2021 children speech recognition challenge: Open datasets, rules and baselines,” in *2021 IEEE Spoken Language Technology Workshop (SLT)*. IEEE, 2021, pp. 1117–1123.
- [184] M. Russell, “The pf-star british english childrens speech corpus,” *The Speech Ark Limited*, 2006.
- [185] E. Lyakso, O. Frolova, A. Kaliyev, V. Gorodnyi, A. Grigorev, and Y. Matveev, “Ad-child. ru: Speech corpus for russian children with atypical development,” in *International Conference on Speech and Computer*. Springer, 2019, pp. 299–308.
- [186] A. Kazemzadeh, H. You, M. Iseli, B. Jones, X. Cui, M. Heritage, P. Price, E. Anderson, S. Narayanan, and A. Alwan, “Tball data collection: the making of a young children’s speech corpus,” in *Ninth European Conference on Speech Communication and Technology*, 2005.

- [187] F. Csatári, Z. Bakcsi, and K. Vicsi, “A hungarian child database for speech processing applications,” in *Sixth European Conference on Speech Communication and Technology*, 1999.
- [188] A. Eshky, M. S. Ribeiro, J. Cleland, K. Richmond, Z. Roxburgh, J. Scobbie, and A. Wrench, “Ultrasuite: a repository of ultrasound and acoustic data from child speech therapy sessions,” *arXiv preprint arXiv:1907.00835*, 2019.
- [189] S. Lee, A. Potamianos, and S. Narayanan, “Acoustics of children’s speech: Developmental changes of temporal and spectral parameters,” *The Journal of the Acoustical Society of America*, vol. 105, no. 3, pp. 1455–1468, 1999.
- [190] M. Khanzadi, H. Veisi, R. Alinaghizade, and Z. Soleymani, “Persian phoneme and syllable recognition using recurrent neural networks for phonological awareness assessment,” *Journal of AI and Data Mining*, vol. 10, no. 1, pp. 117–126, 2022.
- [191] J. Proença, D. Celorico, S. Candeias, C. Lopes, and F. Perdigão, “The letsread corpus of portuguese children reading aloud for performance evaluation,” in *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC’16)*, 2016, pp. 781–785.
- [192] R. M. Pascual and R. C. L. Guevara, “Developing a children’s filipino speech corpus for application in automatic detection of reading miscues and disfluencies,” in *TENCON 2012 IEEE Region 10 Conference*, 2012, pp. 1–6.
- [193] H. Pérez-Espinoza, J. Martínez-Miranda, I. Espinoza-Curiel, J. Rodríguez-Jacobo, L. Villaseñor-Pineda, and H. Avila-George, “Iesc-child: An interactive emotional children’s speech corpus,” *Computer Speech & Language*, vol. 59, pp. 55–74, 2020. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0885230817301547>
- [194] A. Hagen, B. Pellom, and R. Cole, “Children’s speech recognition with application to interactive books and tutors,” in *2003 IEEE Workshop on Automatic Speech Recognition and Understanding (IEEE Cat. No. 03EX721)*. IEEE, 2003, pp. 186–191.
- [195] L. Cleuren, J. Duchateau, P. Ghesquiere *et al.*, “Children’s oral reading corpus (chorec): description and assessment of annotator agreement,” *LREC 2008 Proceedings*, pp. 998–1005, 2008.
- [196] P. COSI, G. PACI, G. SOMMAVILLA, and F. TESSER, “Childit2—a new children read speech corpus.”
- [197] R. G. Leonard and G. Doddington, “Tidigits speech corpus,” *Texas Instruments, Inc*, 1993.
- [198] M. Gerosa, “Acoustic modeling for automatic recognition of children’s speech,” Ph.D. dissertation, Ph. D. thesis, University of Trento, 2006.

- [199] F. Burkhardt, M. Eckert, W. Johannsen, and J. Stegmann, “A database of age and gender annotated telephone speech,” in *Proceedings of the Seventh International Conference on Language Resources and Evaluation (LREC’10)*, 2010.
- [200] C. Cucchiarini, J. Driesen, H. Van hamme, and E. Sanders, “Recording speech of children, non-natives and elderly people for HLT applications: the JASMIN-CGN corpus.” in *Proceedings of the Sixth International Conference on Language Resources and Evaluation (LREC’08)*. Marrakech, Morocco: European Language Resources Association (ELRA), May 2008. [Online]. Available: [http://www.lrec-conf.org/proceedings/lrec2008/pdf/366\\_paper.pdf](http://www.lrec-conf.org/proceedings/lrec2008/pdf/366_paper.pdf)
- [201] L. Bell, J. Boye, J. Gustafson, M. Heldner, A. Lindström, and M. Wirén, “The swedish nice corpus—spoken dialogues between children and embodied characters in a computer game scenario,” in *Interspeech 2005-Eurospeech, 9th European Conference on Speech Communication and Technology, Lisbon, Portugal, September 4-8, 2005*. ISCA, 2005, pp. 2765–2768.
- [202] D. J. Iskra, B. Grosskopf, K. Marasek, H. van den Heuvel, F. Diehl, and A. Kiessling, “Speecon – speech databases for consumer devices: Database specification and validation,” in *LREC*, 2002.
- [203] R. Gretter, M. Matassoni, S. Bannò, and D. Falavigna, “Tlt-school: a corpus of non native children speech,” 2020.
- [204] H. Grisse mann and M. Linder, “Zürcher lesetest,” *Bern: Huber Verlag*, 2000.
- [205] S. Steidl, *Automatic classification of emotion related user states in spontaneous children’s speech*. Logos-Verlag Berlin, Germany, 2009.
- [206] L. Bell and J. Gustafson, “Child and adult speaker adaptation during error resolution in a publicly available spoken dialogue system,” in *Eighth European Conference on Speech Communication and Technology*. Citeseer, 2003.
- [207] R. Nisimura, A. Lee, H. Saruwatari, and K. Shikano, “Public speech-oriented guidance system with adult and child discrimination capability,” in *2004 IEEE International Conference on Acoustics, Speech, and Signal Processing*, vol. 1. IEEE, 2004, pp. I–433.
- [208] M. Rayner, N. Tsourakis, C. Baur, P. Bouillon, and J. Gerlach, “Call-slt: A spoken call system: based on grammar and speech recognition,” *Linguistic Issues in Language Technology*, vol. 10, 01 2014.
- [209] X. Huang, F. Alleva, M.-Y. Hwang, and R. Rosenfeld, “An overview of the sphinx-ii speech recognition system,” in *Proceedings of the Workshop on Human Language Technology*, ser. HLT ’93. USA: Association for Computational Linguistics, 1993, p. 81–86. [Online]. Available: <https://doi.org/10.3115/1075671.1075690>

- [210] V. Bhardwaj, V. Kukreja, Y. Belkhier, M. Bajaj, S. G. .B, A. Rehman, H. Hamam, and M. Othman, "Automatic speech recognition (asr) system for children's: A systematic literature review," *Applied Sciences*, 04 2022.
- [211] C. F. Carvalho and A. Abad, "Tribus: An end-to-end automatic speech recognition system for european portuguese," *IberSPEECH 2021*, 2021.
- [212] J. P. Neto, C. A. Martins, H. Meinedo, and L. B. Almeida, "The design of a large vocabulary speech corpus for portuguese," in *Fifth European Conference on Speech Communication and Technology*, 1997.
- [213] K. Paliwal, "Spectral subband centroid features for speech recognition," in *ICASSP*, vol. 2, 1998, pp. 617–620 vol.2.
- [214] C. Lüscher, E. Beck, K. Irie, M. Kitza, W. Michel, A. Zeyer, R. Schlüter, and H. Ney, "Rwth asr systems for librispeech: Hybrid vs attention-w/o data augmentation," *arXiv preprint arXiv:1905.03072*, 2019.
- [215] H. Soltau, H. Liao, and H. Sak, "Neural speech recognizer: Acoustic-to-word lstm model for large vocabulary speech recognition," *arXiv preprint arXiv:1610.09975*, 2016.
- [216] E. Battenberg, J. Chen, R. Child, A. Coates, Y. G. Y. Li, H. Liu, S. Satheesh, A. Sriram, and Z. Zhu, "Exploring neural transducers for end-to-end speech recognition," in *2017 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU)*. IEEE, 2017, pp. 206–213.
- [217] A. Dosovitskiy, L. Beyer, A. Kolesnikov, D. Weissenborn, X. Zhai, T. Unterthiner, M. Dehghani, M. Minderer, G. Heigold, S. Gelly *et al.*, "An image is worth 16x16 words: Transformers for image recognition at scale," *arXiv preprint arXiv:2010.11929*, 2020.
- [218] A. Bahrini, M. Khamoshifar, H. Abbasimehr, R. J. Riggs, M. Esmaili, R. M. Majdabadkohne, and M. Pasehvar, "Chatgpt: Applications, opportunities, and threats," in *2023 Systems and Information Engineering Design Symposium (SIEDS)*. IEEE, 2023, pp. 274–279.
- [219] A. Ramesh, M. Pavlov, G. Goh, S. Gray, C. Voss, A. Radford, M. Chen, and I. Sutskever, "Zero-shot text-to-image generation," in *International Conference on Machine Learning*. PMLR, 2021, pp. 8821–8831.
- [220] I. Bello, B. Zoph, A. Vaswani, J. Shlens, and Q. V. Le, "Attention augmented convolutional networks," in *Proceedings of the IEEE/CVF international conference on computer vision*, 2019, pp. 3286–3295.

- [221] B. Yang, L. Wang, D. Wong, L. S. Chao, and Z. Tu, “Convolutional self-attention networks,” *arXiv preprint arXiv:1904.03107*, 2019.
- [222] A. Gulati, J. Qin, C.-C. Chiu, N. Parmar, Y. Zhang, J. Yu, W. Han, S. Wang, Z. Zhang, Y. Wu *et al.*, “Conformer: Convolution-augmented transformer for speech recognition,” *arXiv preprint arXiv:2005.08100*, 2020.
- [223] Y. Lu, Z. Li, D. He, Z. Sun, B. Dong, T. Qin, L. Wang, and T.-Y. Liu, “Understanding and improving transformer from a multi-particle dynamic system point of view,” *arXiv preprint arXiv:1906.02762*, 2019.
- [224] Z. Wu, Z. Liu, J. Lin, Y. Lin, and S. Han, “Lite transformer with long-short range attention,” *arXiv preprint arXiv:2004.11886*, 2020.
- [225] Y. N. Dauphin, A. Fan, M. Auli, and D. Grangier, “Language modeling with gated convolutional networks,” in *International conference on machine learning*. PMLR, 2017, pp. 933–941.
- [226] O. Kovaleva, A. Romanov, A. Rogers, and A. Rumshisky, “Revealing the dark secrets of BERT,” in *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, K. Inui, J. Jiang, V. Ng, and X. Wan, Eds. Hong Kong, China: Association for Computational Linguistics, Nov. 2019, pp. 4365–4374. [Online]. Available: <https://aclanthology.org/D19-1445>
- [227] P. Michel, O. Levy, and G. Neubig, “Are sixteen heads really better than one?” *Advances in neural information processing systems*, vol. 32, 2019.
- [228] P. Ye, Y. Huang, C. Tu, M. Li, T. Chen, T. He, and W. Ouyang, “Partial fine-tuning: A successor to full fine-tuning for vision transformers,” 2023.
- [229] J. McCarley, R. Chakravarti, and A. Sil, “Structured pruning of a bert-based question answering model,” *arXiv preprint arXiv:1910.06360*, 2019.
- [230] V. Sanh, L. Debut, J. Chaumond, and T. Wolf, “Distilbert, a distilled version of bert: smaller, faster, cheaper and lighter,” *arXiv preprint arXiv:1910.01108*, 2019.
- [231] W. Zheng, A. Xiao, G. Keren, D. Le, F. Zhang, C. Fuegen, O. Kalinli, Y. Saraf, and A. Mohamed, “Scaling ASR Improves Zero and Few Shot Learning,” in *Proc. Interspeech 2022*, 2022, pp. 5135–5139.
- [232] Z. Shen, Z. Liu, J. Qin, M. Savvides, and K.-T. Cheng, “Partial is better than all: revisiting fine-tuning strategy for few-shot learning,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 35, no. 11, 2021, pp. 9594–9602.

- [233] Y. Wang, A. Boumadane, and A. Heba, “A fine-tuned wav2vec 2.0/hubert benchmark for speech emotion recognition, speaker verification and spoken language understanding,” *arXiv preprint arXiv:2111.02735*, 2021.
- [234] J. Frankle and M. Carbin, “The lottery ticket hypothesis: Finding sparse, trainable neural networks,” *arXiv preprint arXiv:1803.03635*, 2018.
- [235] S. Gandhi, P. von Platen, and A. M. Rush, “Distil-whisper: Robust knowledge distillation via large-scale pseudo labelling,” 2023.
- [236] H.-J. Chang, S. wen Yang, and H. yi Lee, “Distilhubert: Speech representation learning by layer-wise distillation of hidden-unit bert,” 2022.
- [237] Y. Peng, Y. Sudo, S. Muhammad, and S. Watanabe, “DPHuBERT: Joint Distillation and Pruning of Self-Supervised Speech Models,” in *Proc. INTERSPEECH 2023*, 2023, pp. 62–66.
- [238] M. Ravanelli, T. Parcollet, P. Plantinga, A. Rouhe, S. Cornell, L. Lugosch, C. Subakan, N. Dawalatabad, A. Heba, J. Zhong, J.-C. Chou, S.-L. Yeh, S.-W. Fu, C.-F. Liao, E. Rastorgueva, F. Grondin, W. Aris, H. Na, Y. Gao, R. D. Mori, and Y. Bengio, “SpeechBrain: A general-purpose speech toolkit,” 2021, arXiv:2106.04624.
- [239] J. Kaplan, S. McCandlish, T. J. Henighan, T. B. Brown, B. Chess, R. Child, S. Gray, A. Radford, J. Wu, and D. Amodei, “Scaling laws for neural language models,” *ArXiv*, vol. abs/2001.08361, 2020. [Online]. Available: <https://api.semanticscholar.org/CorpusID:210861095>
- [240] N. Houlsby, A. Giurghi, S. Jastrzebski, B. Morrone, Q. De Laroussilhe, A. Gesmundo, M. Attariyan, and S. Gelly, “Parameter-efficient transfer learning for nlp,” in *International Conference on Machine Learning*. PMLR, 2019, pp. 2790–2799.
- [241] J. Pfeiffer, I. Vulić, I. Gurevych, and S. Ruder, “MAD-X: An Adapter-Based Framework for Multi-Task Cross-Lingual Transfer,” in *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. Online: Association for Computational Linguistics, Nov. 2020, pp. 7654–7673.
- [242] A. Rücklé, G. Geigle, M. Glockner, T. Beck, J. Pfeiffer, N. Reimers, and I. Gurevych, “AdapterDrop: On the efficiency of adapters in transformers,” in *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, M.-F. Moens, X. Huang, L. Specia, and S. W.-t. Yih, Eds. Online and Punta Cana, Dominican Republic: Association for Computational Linguistics, Nov. 2021, pp. 7930–7946. [Online]. Available: <https://aclanthology.org/2021.emnlp-main.626>

- [243] U. Cappellazzo, D. Falavigna, A. Brutti, and M. Ravanelli, “Parameter-efficient transfer learning of audio spectrogram transformers,” *arXiv preprint arXiv:2312.03694*, 2023.
- [244] N. Chen, I. Shafran, Y. Zhang, C.-C. Chiu, H. Soltau, J. Qin, and Y. Wu, “Efficient adapters for giant speech models,” *arXiv preprint arXiv:2306.08131*, 2023.
- [245] S. V. Eeekt and H. Van Hamme, “Using adapters to overcome catastrophic forgetting in end-to-end automatic speech recognition,” in *ICASSP 2023 - 2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2023, pp. 1–5.
- [246] A. Kannan, A. Datta, T. N. Sainath, E. Weinstein, B. Ramabhadran, Y. Wu, A. Bapna, Z. Chen, and S. Lee, “Large-scale multilingual speech recognition with a streaming end-to-end model,” *arXiv preprint arXiv:1909.05330*, 2019.
- [247] W. Hou, H. Zhu, Y. Wang, J. Wang, T. Qin, R. Xu, and T. Shinozaki, “Exploiting adapters for cross-lingual low-resource speech recognition,” *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 30, pp. 317–329, 2021.
- [248] A. Kulkarni, A. Kulkarni, M. Couceiro, and H. Aldarmaki, “Adapting the adapters for code-switching in multilingual asr,” *arXiv preprint arXiv:2310.07423*, 2023.
- [249] B. Thomas, S. Kessler, and S. Karout, “Efficient adapter transfer of self-supervised speech models for automatic speech recognition,” in *ICASSP 2022-2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2022, pp. 7102–7106.
- [250] K. Tomanek, V. Zayats, D. Padfield, K. Vaillancourt, and F. Biadsy, “Residual adapters for parameter-efficient asr adaptation to atypical and accented speech,” *arXiv preprint arXiv:2109.06952*, 2021.
- [251] J. He, C. Zhou, X. Ma, T. Berg-Kirkpatrick, and G. Neubig, “Towards a unified view of parameter-efficient transfer learning,” in *International Conference on Learning Representations*, 2022. [Online]. Available: <https://openreview.net/forum?id=0RDcd5Axok>
- [252] D. Snyder, D. Garcia-Romero, G. Sell, D. Povey, and S. Khudanpur, “X-vectors: Robust dnn embeddings for speaker recognition,” in *2018 IEEE international conference on acoustics, speech and signal processing (ICASSP)*. IEEE, 2018, pp. 5329–5333.
- [253] X. Glorot and Y. Bengio, “Understanding the difficulty of training deep feedforward neural networks,” in *Proceedings of the thirteenth international conference on artificial intelligence and statistics*. JMLR Workshop and Conference Proceedings, 2010, pp. 249–256.



- [254] E. Ben Zaken, Y. Goldberg, and S. Ravfogel, “BitFit: Simple parameter-efficient fine-tuning for transformer-based masked language-models,” in *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, S. Muresan, P. Nakov, and A. Villavicencio, Eds. Dublin, Ireland: Association for Computational Linguistics, May 2022, pp. 1–9. [Online]. Available: <https://aclanthology.org/2022.acl-short.1>
- [255] D. Lian, D. Zhou, J. Feng, and X. Wang, “Scaling & shifting your features: A new baseline for efficient model tuning,” *Advances in Neural Information Processing Systems*, vol. 35, pp. 109–123, 2022.
- [256] Y. Wu and K. He, “Group normalization,” in *Proceedings of the European conference on computer vision (ECCV)*, 2018, pp. 3–19.
- [257] X. Huang and S. Belongie, “Arbitrary style transfer in real-time with adaptive instance normalization,” in *Proceedings of the IEEE international conference on computer vision*, 2017, pp. 1501–1510.
- [258] B. Sun, J. Feng, and K. Saenko, “Return of frustratingly easy domain adaptation,” in *Proceedings of the AAAI conference on artificial intelligence*, vol. 30, no. 1, 2016.
- [259] C.-L. Fu, Z.-C. Chen, Y.-R. Lee, and H.-y. Lee, “AdapterBias: Parameter-efficient token-dependent representation shift for adapters in NLP tasks,” in *Findings of the Association for Computational Linguistics: NAACL 2022*, M. Carpuat, M.-C. de Marneffe, and I. V. Meza Ruiz, Eds. Seattle, United States: Association for Computational Linguistics, Jul. 2022, pp. 2608–2621. [Online]. Available: <https://aclanthology.org/2022.findings-naacl.199>
- [260] A. T. Liu, S.-W. Li, and H.-y. Lee, “Tera: Self-supervised learning of transformer encoder representation for speech,” *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 29, pp. 2351–2366, 2021.
- [261] P.-H. Chi, P.-H. Chung, T.-H. Wu, C.-C. Hsieh, Y.-H. Chen, S.-W. Li, and H.-y. Lee, “Audio albert: A lite bert for self-supervised learning of audio representation,” 2020. [Online]. Available: <https://arxiv.org/abs/2005.08575>
- [262] T.-Y. Hu, M. Armandpour, A. Shrivastava, J.-H. R. Chang, H. Koppula, and O. Tuzel, “Synt++: Utilizing imperfect synthetic data to improve speech recognition,” in *ICASSP 2022-2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2022, pp. 7682–7686.
- [263] J. Philip, A. Berard, M. Gallé, and L. Besacier, “Monolingual adapters for zero-shot neural machine translation,” in *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2020, pp. 4465–4470.

- [264] J. Pfeiffer, A. Kamath, A. Rücklé, K. Cho, and I. Gurevych, “Adapterfusion: Non-destructive task composition for transfer learning,” *arXiv preprint arXiv:2005.00247*, 2020.
- [265] X. Gong, Y. Lu, Z. Zhou, and Y. Qian, “Layer-wise fast adaptation for end-to-end multi-accent speech recognition,” *arXiv preprint arXiv:2204.09883*, 2022.
- [266] A. Van Den Oord, O. Vinyals *et al.*, “Neural discrete representation learning,” *Advances in neural information processing systems*, vol. 30, 2017.
- [267] E. Cooper, C.-I. Lai, Y. Yasuda, F. Fang, X. Wang, N. Chen, and J. Yamagishi, “Zero-shot multi-speaker text-to-speech with state-of-the-art neural speaker embeddings,” in *ICASSP 2020-2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2020, pp. 6184–6188.
- [268] I. Goodfellow, J. Pouget-Abadie, M. Mirza, B. Xu, D. Warde-Farley, S. Ozair, A. Courville, and Y. Bengio, “Generative adversarial nets,” *Advances in neural information processing systems*, vol. 27, 2014.
- [269] Y. Hauptman, R. Aloni-Lavi, I. Lapidot, T. Gurevich, Y. Manor, S. Naor, N. Diamant, and I. Opher, “Identifying distinctive acoustic and spectral features in parkinson’s disease.” in *Interspeech*, 2019, pp. 2498–2502.
- [270] M. C. Botelho, I. Trancoso, A. Abad, and T. Paiva, “Speech as a biomarker for obstructive sleep apnea detection,” in *ICASSP 2019-2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2019, pp. 5851–5855.
- [271] C. Botelho, F. Teixeira, T. Rolland, A. Abad, and I. Trancoso, “Pathological speech detection using x-vector embeddings,” *arXiv preprint arXiv:2003.00864*, 2020.
- [272] A. Pompili, T. Rolland, and A. Abad, “The inesc-id multi-modal system for the adress 2020 challenge,” *arXiv preprint arXiv:2005.14646*, 2020.

