VELES HACK

HYPER-AI · CHALLENGE 1

Hyperion Agent

The chat assistant of the HyperAI IDE that answers from the docs, acts on the workspace and asks before it changes anything.

Team Solo Bolo • Veles Hack 2026

Funded by the European Union

HYPER-AI CoGNETs ENACT O-CEI

02 · CODE & IMAGE

GitHub repo

REPOSITORY

github.com/User-Paolo/Hyperion-Agent

Setup, architecture and test results are in the README

DOCKER IMAGE

paolo189/hyperion

v1.0 latest

RUN IT

```
$ docker run -p 8000:8000 \
  paolo189/hyperion:latest
```

POST /chat → port 8000

The assistant ships as one Docker image that serves the IDE chat endpoint.

Funded by the European Union

Summary

Hyperion answers questions about HYPER-AI and turns plain language into IDE actions. Built for **Llama 3.1 8B** as small, strict model calls, with code enforcing everything that must never go wrong.

01
Chat
Remembers the conversation across turns

02
Router
Labels the request and declines off-topic ones

03a
Answer
From HYPER-AI project and IDE docs, naming its sources

03b
Act
Writes app profiles from valid templates, checked by the IDE validator


04
Confirm
Asks before deleting or overwriting files


`Docker image / POST /chat · port 8000 / HyperAI IDE`


Funded by the European Union


04 · LIVE DEMO


In the IDE

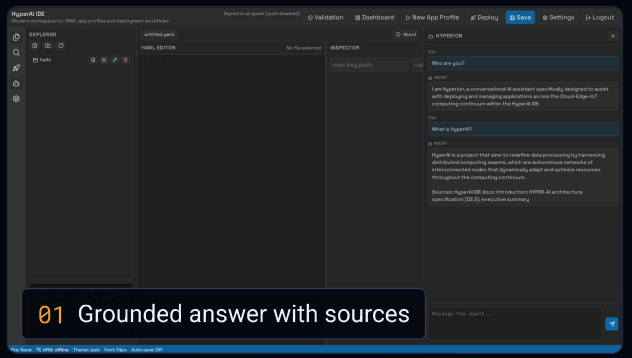


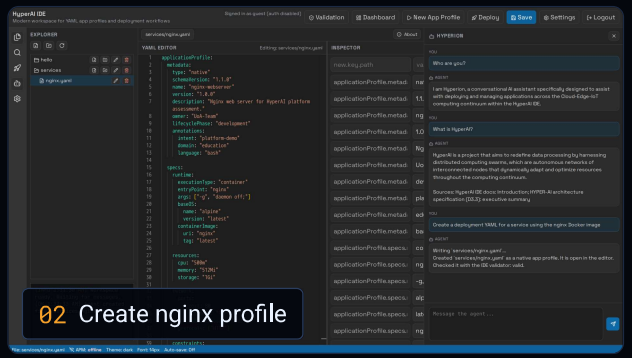

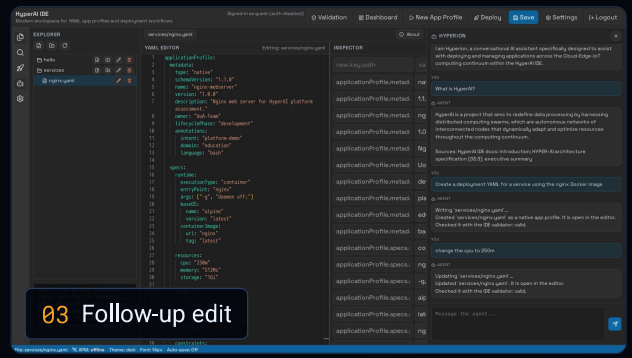

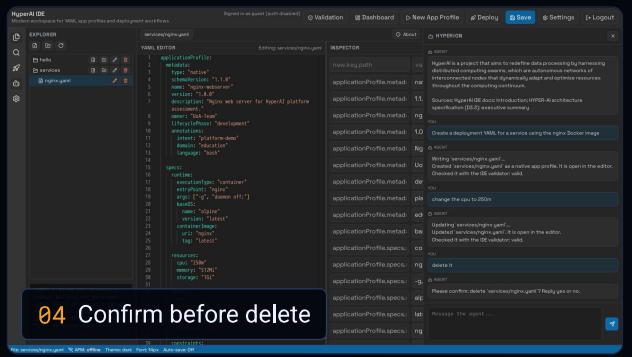

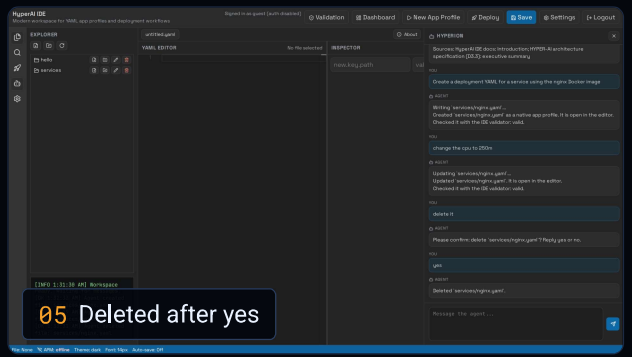

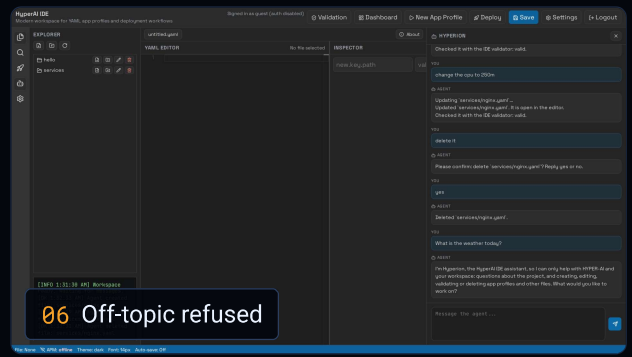

Funded by the European Union

05 · SAME SESSION, TURN BY TURN

One conversation

VELES HACK

01 Grounded answer with sources

YOU

What is HyperAI?

AGENT

HyperAI is a project that aims to redefine data processing by harnessing distributed computing swarms, which are autonomous networks of interconnected nodes that dynamically adapt and optimize resources throughout the computing continuum.

Sources: HyperAI IDE docs: Introduction; HYPER-AI architecture specification (D3.3): executive summary

02 Create nginx profile

YOU

Create a deployment YAML for a service using the nginx Docker image

AGENT

Writing `services/nginx.yaml`...
Created `services/nginx.yaml` as a native app profile. It is open in the editor.
Checked it with the IDE validator: valid.

03 Follow-up edit

YOU

change the cpu to 250m

AGENT

Updating `services/nginx.yaml`...
Updated `services/nginx.yaml`. It is open in the editor.
Checked it with the IDE validator: valid.

04 Confirm before delete

YOU

delete it

AGENT

Please confirm: delete `services/nginx.yaml`? Reply yes or no.

05 Deleted after yes

YOU

yes

AGENT

Deleted `services/nginx.yaml`.

06 Off-topic refused

YOU

What is the weather today?

AGENT

I'm Hyperion, the HyperAI IDE assistant, so I can only help with HYPER-AI and your workspace: questions about the project, and creating, editing, validating or deleting app profiles and other files. What would you like to work on?

Funded by the European Union

06 · MEASURED

Highlights

VELES HACK

37/37
end-to-end checks pass against the real IDE backend

57/57
test messages labelled correctly by the router

21/22
questions get the right document first (hybrid retrieval, 12 docs)

20/20
answers contain the key facts

- **Validated output**

Every created or edited profile is checked by the IDE validator and fixed automatically. A broken file went from 3 errors to valid in two tests.

- **Guardrails in code**

Role change and injection attempts, paths outside the workspace and files the user never mentioned are all refused.

- **Human in the loop**

Deletes and overwrites wait for an explicit yes, which is read in code without any model call.

Funded by the European Union