Test Run Report




Test Run Overview

Started 07 Mar 2022, 14:16:24 Ended 07 Mar 2022, 14:19:34

Duration (mm:ss) 03:10.637

Test Results Summary

Passed 1 Failed 0 Skipped 0

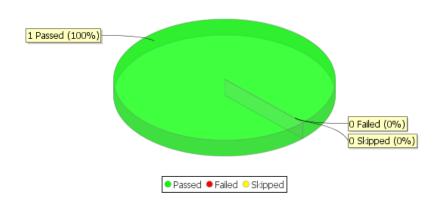

successful

successful

successful

Test Case Summary



Add New Contract.testcase

Summary

Started 07 Mar 2022, 14:16:24 Ended 07 Mar 2022, 14:19:30

Duration (mm:ss) 03:06.172
Outcome successful

Output

Salesforce Connect: Admin (Test)

0 14:16:24(00:00.025)

- (i) Connecting to Salesforce as Admin
- Successfully connected to Salesforce as Admin
- On SF Contact Home screen

0 14:16:27(00:02.944)

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&action=ObjectHome
- (i) Opening Chrome webdriver instance to https://test.salesforce.com/
- ① Successfully opened Chrome webdriver to https://test.salesforce.com/
- (1) Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Contact, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/003/list?filterName=Recent, Current URL: chrome://new-tab-page/
- (i) Opening Salesforce user home page
- Successfully opened user home page
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- Click the New Contact button

0 14:16:50(00:26.631)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=NewContact&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26action%3DNewContact, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=NewContact&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26action%3DNewContact
- 1 Interaction: ui:interaction?name=action
- ⑤ Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/list?filterName=Recent
- i Interaction: ui:interaction?name=action
- ① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]// div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'forceRelatedListDesktop')or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]//ul[contains(@class, 'oneActionsRibbon')] | // div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '602:0')]
- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (9a41c9bf9b6a34bfd0fdf9d9000fd2d0)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]//ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '602:0')]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]
- Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- (i) Closing Page context. Name: screen, data: null, frame: null

- Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=16466590128531442&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent
- Going to update browser window handles.
- Successfully updated browser window handles.

On SF Contact Record Type selection screen

0 14:16:56(00:32.244)

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&action=recordTypeNew
- (i) Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Contact, RelatedList: null, Action: recordTypeNew, Page URL: /lightning/o/003/home, Current URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new
- (i) Opening Salesforce user home page
- Successfully opened user home page
- (i) Clicking the Record Type selection Button
- ① Find action link element using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'naveWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]/div[contains(@class, 'forceListViewManager')]//ul[contains(@class, 'oneActionsRibbon')] | // div[contains(@class, 'roreActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@title, 'New')]
- ① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]
- (i) Hover>Clicking WebElement. WebElement [tag: h2, text: New Contact]
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

Click the Continue button

0 14:17:07(00:43.277)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=save&path=selectRecordType, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=save&path=selectRecordType
- i Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&novigationLocation=LIST_VIEW&uid=164665902473976451&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent
- 1 Interaction: ui:interaction?name=action
- ① Find elements using xpath: ((//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset')) and contains(@class, 'wsTabset') and not(contains(@class, 'navexWorkspace')) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and ancestor::div[contains(@class, 'active') and contains(@class, 'navexWorkspace') or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))]// div[contains(@class, 'modal-footer') or contains(@class, 'modal-footer') or contains(@class, 'modal-footer') or contains(@class, 'modal-footer'))][last()]//button)[last()]/
- (1) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (9a41c9bf9b6a34bfd0fdf9d9000fd2d0)] -> xpath: ((//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))]] and ancestor::div[contains(@class, 'tabContent') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))])//div[contains(@class, 'modal-footer') or contains(@class, 'modal_footer') or contains(@class, 'modal_footer') or contains(@class, 'modal_footer') or contains(@class, 'modal_footer') or contains(@class, 'modal_footer'))]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Next]
- ① Doing after wait. waitUrl: default
- End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

- (i) All Sub-Test Steps were successful.
- (1) Closing Page context. Name: screen, data: null, frame: null
- i Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665902805930422&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

On SF Contact (Employee) New screen

0 14:17:11(00:47.264)

- 1 Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&noOverride=true&action=New&recordType=Employee
- (i) Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Contact, RelatedList: null, Action: New, Page URL: /lightning/o/003/list, Current URL: https://provar-trial-org-training.lightning.force.com/lightning/o/Contact/new
- (i) Opening Salesforce user home page
- (i) Successfully opened user home page
- (1) Clicking the New Button
- ① Find action link element using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//div[contains(@class, 'forceListViewManager')]//ul[contains(@class, 'oneActionsRibbon')] | // div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '599:0')]
- ① Clicking WebElement. WebElement [tag: a, text: New, href: javascript:void(0);]
- (i) Hover>Clicking WebElement. WebElement [tag: h2, text: New Contact]
- ① Clicking WebElement. WebElement [tag: input, text: 0121t000000kEPcAAM]
- Clicking WebElement. WebElement [tag: button, text: Next]
- 1 Hover>Clicking WebElement. WebElement [tag: h2, text: New Contact: Employee]
- Going to update browser window handles.
- Successfully updated browser window handles.
- Set the Salutation picklist to Prof.

0 14:17:24(01:00.433)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Salutation&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26field%3DSalutation, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Salutation&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DSalutation
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665904352422534&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- (i) Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])/[[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[[celf::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[[self::fieldset and contains(@class, 'uilnput--compound')) or (self::lightning-input-name and contains(@class, 'slds-form-compound'))]/*[[self::span and contains(@class, 'uiPicklistLabel') and .='Name' or . = 'Salutation') or (self::lightning-picklist and contains(@data-field, 'salutation'))]/ancestor::div[1]
- 1 Find field using relative xpath: .//*[self::a or self::input or self::button[contains(@class, 'slds-combobox_input')]]
- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@dbb466e9 -> unknown locator]] -> xpath: ://*[self::a or self::input or self::button[contains(@class, 'slds-combobox_input')]]]
- ① Got webElement. tagName: BUTTON, id: combobox-button-156, type: button, class: slds-combobox_input slds-input_faux slds-combobox_input-value
- ① Typing value. tagName: BUTTON, type: button, value: Prof., blur: false

- ① Clicking WebElement. WebElement [tag: button, text: --None--]
- ① Clicking WebElement. WebElement [tag: div, text: --None-- --None-- Mr. Ms. Mrs. Dr. Prof.]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]
- i Doing after wait. waitUrl: default
- End of <default> wait.
- Going to update browser window handles.
- i Successfully updated browser window handles.

Set the Last Name field to Kasymbekov

0 14:17:27(01:03.657)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=LastName&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26field%3DLastName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=LastName&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLastName
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665904352422534&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- 1 Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide'))) or (self::section and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Last Name'] or .//text() = 'Last Name')]/ancestor::div[1]
- i) Find field using relative xpath: .//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- 1 Doing before wait. waitUrl: default
- End of <default> wait.
- 1 Found element: [[[org.openqa.selenium.remote.RemoteWebElement@dbb466ee -> unknown locator]] -> xpath: .//input
- 1 Got webElement. tagName: INPUT, id: input-160, type: text, class: slds-input
- ① Typing value. tagName: INPUT, type: text, value: Kasymbekov, blur: false
- Doing after wait. waitUrl: default
- End of <default> wait.
- Going to update browser window handles.
- (i) Successfully updated browser window handles.

Set the Phone field to 6158675309

0 14:17:30(01:06.603)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Phone&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field %3DPhone, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Phone&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DPhone
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665904352422534&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- ① Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Phone'] or .//text() = 'Phone')]/ ancestor::div11
- i Find field using relative xpath: .//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default

- 1 End of <default> wait.
- ⑤ Found element: [[[org.openqa.selenium.remote.RemoteWebElement@dbb46706 -> unknown locator]] -> xpath: .//input]
- 1 Got webElement. tagName: INPUT, id: input-149, type: text, class: slds-input
- 1 Typing value. tagName: INPUT, type: text, value: 6158675309, blur: false
- Doing after wait. waitUrl: default
- End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

Set the Birthdate field to 2000-01-01

0 14:17:33(01:09.346)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Birthdate&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26field%3DBirthdate, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=Birthdate&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DBirthdate
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665904352422534&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- i Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])/[[self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))]/[3]/*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))]/[3]/*[(self::records-record-layout-section) or (ortains(@class, 'forcePageBlockSection '))]/[3]/*[(self::records-record-layout-section) or contains(@class, 'forcePageBlockSection '))]/[3]/*[(self::records-record-layout-section) or contains(@class, 'forcePageBlockSection '))]/[3]/*[(self::records-record-layout-section) or ((self::dels, 'iorcePageBlockSection '))]/[3]/*[(self::records-record-layout-section) or (self::dels, 'iorcePageBlockSection ')]/[3]/*[(self::records-record-layout-section) or (self::dels, 'iorcePageBlockSection ')]/[3]/*[(self::records-record-layout-section) or (self::dels, 'iorcePageBlockSection ')]/[3]/*[(self::records-record-layout-section) or (self::dels, 'iorcePageBlockSection ')]/[3]/*[3]/*[3]/[3]/[3]/[3]/[3]/[3]/[3]/[3]/[3]/[
- i Find field using relative xpath: .//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- i End of <default> wait.
- 1 Found element: [[[org.openqa.selenium.remote.RemoteWebElement@dbb46708 -> unknown locator]] -> xpath: .//input]
- ① Typing value. Element: [[[org.openqa.selenium.remote.RemoteWebElement@dbb46708 -> unknown locator]] -> xpath: .//input], value: 1/1/2000, blur: false
- ① Clicking WebElement. WebElement [tag: td, text: 1]
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

Set the Title field to Senior Consultant

0 14:17:36(01:11.994)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Title&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field %3DTitle, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Title&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DTitle
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665904352422534&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- 1 Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])/[self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Title'] or .//text() = 'Title')]/
 ancestor::div[1]
- Find field using relative xpath: .//input

- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default> wait.
- 1 Found element: [[[org.openqa.selenium.remote.RemoteWebElement@dbb4670d -> unknown locator]] -> xpath: .//input
- (1) Got webElement. tagName: INPUT, id: input-171, type: text, class: slds-input
- 1 Typing value. tagName: INPUT, type: text, value: Senior Consultant, blur: false
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.

Set the Lead Source picklist to Web

14:17:39(01:14.875)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26field%3DLeadSource, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665904352422534&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- i Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][3]//*[((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Lead Source'] or .//text() = 'Lead Source'] (**Identification or contains(@class, 'test-id_field-label-contains() = 'Lead Source'] (**Identification or contains() = 'Lead Source'] (**Identificati
- ⑤ Find field using relative xpath: //*[self::a or self::input or self::button[contains(@class, 'slds-combobox_input')]]
- (1) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@dbb46724 -> unknown locator]] -> xpath: ://*[self::a or self::input or self::button[contains(@class, 'slds-combobox_input')]]]
- ① Got webElement. tagName: BUTTON, id: combobox-button-205, type: button, class: slds-combobox_input slds-input_faux slds-combobox_input-value
- ① Typing value. tagName: BUTTON, type: button, value: Web, blur: false
- ① Clicking WebElement. WebElement [tag: button, text: --None--]
- ① Clicking WebElement. WebElement [tag: div, text: --None-- --None-- Web Other Phone Inquiry]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]
- i Doing after wait. waitUrl: default
- End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

Lookup the Account Name reference

0 14:17:41(01:17.740)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=AccountId&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26field%3DAccountId, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=AccountId&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DAccountId
- 1 Interaction: ui:interaction?name=sfLookup
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665904352422534&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- Interaction: ui:interaction?name=sfLookup

- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])[[last()]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Account Name'] or ./text() = 'Account Name']/ancestor::div[1]
- (i) Find field using relative xpath: .//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- End of <default> wait.
- ⑤ Found element: [[[org.openqa.selenium.remote.RemoteWebElement@dbb46728 -> unknown locator]] -> xpath: .//input]
- 1 Hover>Clicking WebElement. WebElement [tag: input]
- Waiting for lookup dropdown list to appear
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
- i Successfully updated browser window handles.

On SF Account Lookup screen

0 14:17:45(01:21.114)

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?lookup=Account
- (i) Opening Page context. Name: screen, data: null, frame: null
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

Set the Search text to Test

0 14:17:45(01:21.355)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SearchName&path=searchFrame, before wait: null, after wait: null, auto retry: default
- ① Locator: ui:locator?name=SearchName&path=searchFrame
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665904352422534&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- Doing before wait. waitUrl: default
- 1 End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (9a41c9bf9b6a34bfd0fdf9d9000fd2d0)] -> xpath: (//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal'))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'coneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))] | //div[contains(@class, 'active') and (contains(@class, 'hasActiveSubtab')])))] | //div[contains(@class, 'active') and (contains(@class, 'oneContent')) or contains(@class, 'main-content'))] | //div[contains(@class, 'oneUtilityBarContainer')]//div[contains(@class, 'slds-is-open') and contains(@class, 'slds-docked_container') and contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])[[last()] | //*[(self::form or self::div) and contains(@class, 'forceDetailPanel') and contains(@class, 'inlineEditEnabled')])//*[self::div[contains(@class, 'forceSearchInputLookupDesktop')] or self::lightning-lookup-desktop]//input[@aria-expanded='true' or contains(@aria-activedescendant, 'input')]]
- ① Clicking WebElement. WebElement [tag: lightning-base-combobox-item, text: Search Show All Results for "Test"]
- i Doing after wait. waitUrl: default
- End of <default> wait.
- Going to update browser window handles.
- (i) Successfully updated browser window handles.

Click the Go! button

0 14:17:52(01:28.664)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=go&path=searchFrame, before wait: null, after wait: null, auto retry: default
- ① Locator: ui:locator?name=qo&path=searchFrame
- 1 Interaction: ui:interaction?name=action

- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665904352422534&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- i Doing before wait. waitUrl: default
- End of <default> wait.
- 1 Found element: com.provar.core.model.ui.java.NullWebElement@2a345494
- Doing after wait. waitUrl: default
- End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

Click the Account Name button

0 14:17:54(01:30.346)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable %2FresultsRow&rowLocator=Name+%3D+%27Test_UK_KR3J727FGX%27, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=Name+%3D+%27Test_UK_KR3J727FGX%27
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665904352422534&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- 1 Interaction: ui:interaction?name=action
- (i) Populating webelement cells into the row Row Count: 0

Populated the row elements.

① Applying row locator to rows. Row Count: 13, Row Locator: {Name = "Test_UK_KR3J727FGX"}

The row locator matched 1 row.

- Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@dbb46745 -> unknown locator]] -> xpath: td[1]/span|td[1]//a|td[1] [not(*)]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Test_UK_KR3J727FGX, href: https://provar-trial-org-training.lightning.force.com/lightning/r/0011X00000rJUQfQAO/view]
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (i) Closing Page context. Name: screen, data: null, frame: null
- 1 Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665904352422534&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665904352422534&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- (1) Going to update browser window handles.
- Successfully updated browser window handles.

Click the Save button

0 14:17:59(01:35.417)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=save&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26action %3Dsave, before wait: default, after wait: default, auto retry: default
- ⑤ Locator: ui:locator?name=save&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26action%3Dsave
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665904352422534&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM

- ① Interaction: ui:interaction?name=action
- ① Find action link element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel]//runtime_platform_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']//*[self::a or self::button]
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (9a41c9bf9b6a34bfd0fdf9d9000fd2d0)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])[[last()]//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]//runtime_platform_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']//*[self::a or self::button]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW23fQAC/view
- 1 Injecting script to get created object ID from aura component
- Storing created Salesforce Object ID. Result Name: contactId, created ID: 0031X00000nW23fQAC, location: https://provar-trial-org-training.lightning.force.com/lightning/r/Contact/0031X00000nW23fQAC/view
- 1 Logging Salesforce Object Id for clean up. Object Name: Contact, id: 0031X00000nW23fQAC
- (i) Closing Page context. Name: screen, data: null, frame: null
- (1) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW23fQAC/view
- Going to update browser window handles.
- Successfully updated browser window handles.

On SF Contact (Employee) View screen

0 14:18:04(01:40.495)

- 1 Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&noOverride=true&action=View&recordType=Employee
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Contact, RelatedList: null, Action: View, Page URL: /lightning/r/0031X00000nW0NdQAK/view, Current URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW23fQAC/view
- Opening Salesforce user home page
- Successfully opened user home page
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- (1) Going to update browser window handles.
- Successfully updated browser window handles.

Activate inline edit the Lead Source picklist

0 14:18:18(01:53.791)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26field%3DLeadSource, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource
- i Interaction: ui:interaction?name=sflleActivate
- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- 1 Interaction: ui:interaction?name=sflleActivate
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'active') and (contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'active') and (contains(@class, 'active') active') and (contains(@class, 'active') active (

'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forceDetailPanel') or contains(@class, 'test-id_section ')))][3]//div[(contains(@class, 'tabelCol') or contains(@class, 'forceDetailPanel'))] and (span/text()[normalize-space()='Lead Source' or (.) ='Lead Source'))]/following-sibling::div[1]/*[(self::div and contains(@class, 'dataCol'))) or (self::span and contains(@class, 'test-id_field-value'))]

- (1) Waiting for element to be present. Timeout(seconds): 10
- Finding field elements using relativePath: .//lightning-formatted-text
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[[[ChromeDriver: chrome on XP (9a41c9bf9b6a34bfd0fdf9d9000fd2d0)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'naeWorkspace') or contains(@class, 'naeActiveSubtab')]]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset')) and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))] and ancestor::div[contains(@class, 'wsTabset')]] and ancestor::div[contains(@class, 'wsTabset')]]]]]/*
 [contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]]))]]/
 [contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self:::records-record-layout-section) or (self::div and (contains(@class, 'forceDageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]]]]//
 [contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Lead Source' or (.) = 'Lead Source')]//following-sibling::div[1]//

 *[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]]] -> xpath: .//lightning-formatted-text]
- Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.
- Set the Lead Source picklist to Other

0 14:18:23(01:58.868)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26field%3DLeadSource, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- 1 Interaction: ui:interaction?name=set
- (i) Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'naveXWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabsarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id_section slds-section ')))]][3]//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'highting-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or .//text() = 'Lead Source')/ancestor::div[1]
- ⑤ Find field using relative xpath: .//*[self::a or self::input or self::button[contains(@class, 'slds-combobox_input')]]
- ① Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@71f8b1cd -> unknown locator]] -> xpath: .//*[self::a or self::input or self::button[contains(@class, 'slds-combobox_input')]]]
- ① Got webElement. tagName: BUTTON, id: combobox-button-427, type: button, class: slds-combobox__input slds-input_faux slds-combobox__input-value
- 1 Typing value. tagName: BUTTON, type: button, value: Other, blur: false
- (i) Clicking WebElement. WebElement [tag: button, text: Other]
- ① Clicking WebElement. WebElement [tag: div, text: Other --None-- Web Other Phone Inquiry]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]

- i Doing after wait. waitUrl: default
- End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

Click the Save button

0 14:18:29(02:04.816)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26action%3DSaveEdit, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit
- 1 Interaction: ui:interaction?name=action
- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- ① Interaction: ui:interaction?name=action
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Find action link element using xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'naveXWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabSet') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')/ ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_|wcdetailpanel]//runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']//*[self::a or self::button]
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (9a41c9bf9b6a34bfd0fdf9d9000fd2d0)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'neworkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'navexWorkspace')) and contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))]// div[(contains(@class, 'footer') and contains(@class, 'active') or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_|wcdetailpanel]//runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']//*[self::a or self::button]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- 1 Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.

Activate inline edit the Mobile field

0 14:18:33(02:09.381)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DMobilePhone
- 1 Interaction: ui:interaction?name=sflleActivate
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- (i) Interaction: ui:interaction?name=sflleActivate
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'navexWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//*[contains(@class, 'navexWorkspace')) or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id_section ')))])[1]// div[(contains(@class, 'labelCol') or contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id_field-value'))]
- Waiting for element to be present. Timeout(seconds): 10

- (i) Finding field elements using relativePath: .//lightning-formatted-phone
- (i) Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[[[ChromeDriver: chrome on XP (9a41c9bf9b6a34bfd0fdf9d9000fd2d0)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'naeNorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))] and ancestor::div[contains(@class, 'wsTabset')] and contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forceDageBlockSectionView') or contains(@class, 'test-id__section slds-section '))))][1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Mobile' or (.) ='Mobile')])/*[following-sibling::div[1]//*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]]] -> xpath: .//lightning-formatted-phone]
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.

Set the Mobile field to +420777123456

0 14:18:38(02:14.467)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DMobilePhone
- Interaction: ui:interaction?name=set
- ⑤ Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- i Interaction: ui:interaction?name=set
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//*[contains(@class, 'navexWorkspace')) and (contains(@class, 'hasPinnedRegionTemplate') and (contains(@class, 'hasActiveSubtab')])))]//*[contains(@class, 'navexWorkspace')) and (contains(@class, 'horceDetailPanel') or contains(@class, 'detail-panel-root'))]//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id_section slds-section ')))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'horcePageBlockSectionView') or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Mobile'] or .//text() = 'Mobile')/ ancestor::div[1]
- i Find field using relative xpath: .//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- End of <default> wait.
- ⑤ Found element: [[[org.openqa.selenium.remote.RemoteWebElement@71f8b1ec -> unknown locator]] -> xpath: .//input]
- 1 Got webElement. tagName: INPUT, id: input-542, type: text, class: slds-input
- ① Typing value. tagName: INPUT, type: text, value: +420777123456, blur: false
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

Click the Save button

0 14:18:44(02:19.997)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26action%3DSaveEdit, before wait: default, after wait: default, auto retry: default
- $\textbf{\textcircled{1}} Locator: ui:locator?name=SaveEdit\&binding=sf\%3Aui\%3Abinding\%3Aobject\%3Fobject\%3DContact\%26action\%3DSaveEditModels (a) and (b) and (c) are also action (b) and (c) are also action (c) are also action (c) and (c) are also action (c) are also action (c) and (c) are also action (c) are also action (c) and (c) are also action (c) and (c) are also action (c) are also action (c) are also action (c) and (c) are also action (c) are also action (c) are also action (c) are also action (c) and (c) are also action (c) are also action (c) are also action (c) are also action (c) and (c) are also action (c) action (c) action (c) are also action (c) action (c) are also action (c) actio$
- 1 Interaction: ui:interaction?name=action
- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view

- ① Interaction: ui:interaction?name=action
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Find action link element using xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')/ ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_|wcdetailpanel]//runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']//*[self::a or self::button]
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- End of <:default&at: wait.
- ① Found element: [[ChromeDriver: chrome on XP (9a41c9bf9b6a34bfd0fdf9d9000fd2d0)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'naveXworkspace')) and not(contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))]) and ancestor::div[contains(@class, 'active')) and (contains(@class, 'oneWorkspace')) or contains(@class, 'naveXWorkspace')) and contains(@class, 'naveXWorkspace')) and contains(@class, 'hasPctiveSubtab')]))))]// div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_|wcdetailpanel]//runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']/*[self::a or self::button]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- ① Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- (1) Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

On SF Contact (Employee) View screen

0 14:18:50(02:26.728)

- ⑤ Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&noOverride=true&action=View&recordType=Employee
- (1) Opening Page context. Name: screen, data: null, frame: null
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- Going to update browser window handles.
- Successfully updated browser window handles.

Activate inline edit the Name field

0 14:18:53(02:29.386)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field %3DName. before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DName
- 1 Interaction: ui:interaction?name=sflleActivate
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- 1 Interaction: ui:interaction?name=sflleActivate
- (i) Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ⚠ Failed to resolve required duplicate field label. Field API name: Name, field label: Name
- ① Finding field placehoder using xpath: ((//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset') and 'wsTabset') and 'wsTabset') and 'wsTabset') and 'wsTabset') a

'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id_section slds-section '))]])[1]// div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Name' or (.) ='Name'])]/following-sibling::div[1]//*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id_field-value'))])[1]

- (i) Waiting for element to be present. Timeout(seconds): 10
- ⑤ Finding field elements using relativePath: .//*[self::lightning-formatted-name or self::lightning-formatted-text]
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[[[ChromeDriver: chrome on XP (9a41c9bf9b6a34bfd0fdf9d9000fd2d0)] -> xpath: ((//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section))))]/[1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Name' or (.) ='Name']))/following-sibling::div[1]//*[self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value')))]/[1]]] -> xpath: //*[self::lightning-formatted-name or self::lightning-formatted-text]]
- ① Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

Set the Last Name field to Kasymbekov

0 14:18:58(02:34.189)

0 14:19:04(02:39.812)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=LastName&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26field%3DLastName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=LastName&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLastName
- Interaction: ui:interaction?name=set
- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- ① Interaction: ui:interaction?name=set
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//*[contains(@class, 'navexWorkspace')) and (contains(@class, 'hasPactiveSubtab')]))]//*[contains(@class, 'navexWorkspace')) and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id_section ')))]]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'test-id_field-label-container')) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Last Name'] or .//text() = 'Last Name')//ancestor::div[1]
- (i) Find field using relative xpath: .//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default> wait.
- ⑤ Found element: [[[org.openqa.selenium.remote.RemoteWebElement@71f8b1f1 -> unknown locator]] -> xpath: .//input]
- ① Got webElement. tagName: INPUT, id: input-681, type: text, class: slds-input
- ① Typing value. tagName: INPUT, type: text, value: Kasymbekov, blur: false
- 1 Doing after wait, waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- Click the Save button

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26action%3DSaveEdit, before wait: default, after wait: default, auto retry: default
- 🛈 Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit
- i Interaction: ui:interaction?name=action
- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- 1 Interaction: ui:interaction?name=action
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Find action link element using xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabSet') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]//runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='SaveEdit' or @apiname='SaveEdit' or self::button]
- ① Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (9a41c9bf9b6a34bfd0fdf9d9000fd2d0)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'neworkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabSet') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))]// div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_|wcdetailpanel]//runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']//*[self::a or self::button]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

Activate inline edit the Name field

0 14:19:08(02:44.458)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field %3DName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DName
- 1 Interaction: ui:interaction?name=sflleActivate
- ① Switched focus to main window. URL: https://provar-trial-org-training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- i Interaction: ui:interaction?name=sflleActivate
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ⚠ Failed to resolve required duplicate field label. Field API name: Name, field label: Name
- ① Finding field placehoder using xpath: ((//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forceDetailPanel') or contains(@class, 'test-id_section slds-section ')))]]/[1]// div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()="Name" or (.) = 'Name")])/following-sibling::div[1]//*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id_field-value'))])[1]
- (i) Waiting for element to be present. Timeout(seconds): 10
- ① Finding field elements using relativePath: .//*[self::lightning-formatted-name or self::lightning-formatted-text]
- (1) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- End of <default> wait.

- ① Found element: [[[[ChromeDriver: chrome on XP (9a41c9bf9b6a34bfd0fdf9d9000fd2d0)] -> xpath: ((//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[[self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]]/1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Name' or (.) ='Name'])]/following-sibling::div[1]//*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]]/[1]] -> xpath: //*[self::lightning-formatted-name or self::lightning-formatted-text]]
- Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.
- UI Assert © 14:19:13(02:49.229)
 - (i) Start of UiAssert. Connection: Admin
 - Resolving field LastName
 - ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
 - Activating detailTab tab
 - ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
 - ⑤ Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]/*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id_section slds-section ')))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hilde '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Last Name'] or .//text() = 'Last Name') |//ancestor::div[1]
 - i Find field using relative xpath: .//input
 - (i) Waiting for element to be present. Timeout(seconds): 10
 - Doing before wait. waitUrl: default
 - End of <default> wait.
 - ⑤ Found element: [[[org.openqa.selenium.remote.RemoteWebElement@71f8b20b -> unknown locator]] -> xpath: .//input]
 - (i) Asserting field attributes: LastName
 - ① Asserting Attribute: value to PrimitiveValueImpl [value: Kasymbekov, valueId=0, createdUpdateSeq=-1, updatedUpdateSeq=-1]
 - Assertion successful.Kasymbekov EqualTo Kasymbekov
 - (i) Object read successfully. Result Name: Values
 - (i) Going to update browser window handles.
 - Successfully updated browser window handles.

Set the Last Name field to Sabirov

0 14:19:18(02:54.082)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=LastName&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26field%3DLastName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=LastName&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLastName
- i Interaction: ui:interaction?name=set
- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- 1 Interaction: ui:interaction?name=set
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace')) or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate')

and contains(@class, 'hasActiveSubtab')])))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id_section slds-section ')))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Last Name'] or .//text() = 'Last Name')/ancestor::div11

- (i) Find field using relative xpath: .//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- 1 Doing before wait. waitUrl: default
- i End of <default> wait.
- ⑤ Found element: [[[org.openqa.selenium.remote.RemoteWebElement@71f8b20b -> unknown locator]] -> xpath: .//input]
- 1 Got webElement. tagName: INPUT, id: input-823, type: text, class: slds-input
- ① Typing value. tagName: INPUT, type: text, value: Sabirov, blur: false
- i Doing after wait. waitUrl: default
- End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.

Click the Save button
0 14:19:23(02:59.499)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact %26action%3DSaveEdit, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit
- 1 Interaction: ui:interaction?name=action
- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- i Interaction: ui:interaction?name=action
- Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Find action link element using xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')/ ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_|wcdetailpanel]//runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']//*[self::a or self::button]
- (1) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (9a41c9bf9b6a34bfd0fdf9d9000fd2d0)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'naveXworkspace')) and not(contains(@class, 'hasPrinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))] and ancestor::div[contains(@class, 'active')) and (contains(@class, 'oneWorkspace')) or contains(@class, 'naveXWorkspace')) and contains(@class, 'naveXWorkspace')) and contains(@class, 'hasPctiveSubtab')])))]// div[(contains(@class, 'footer')) and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_|wcdetailpanel|//runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']//*[self::a or self::button]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- Main window reselected, Window: main
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view

- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- 1 Handling managed resource. Name: Admin
- ① Salesforce Connection handled successfully. Name: Admin