

Test Run Report




Test Run Overview

Started	07 Mar 2022, 12:11:19
Ended	07 Mar 2022, 13:05:20
Duration (mm:ss)	54:00.432

Test Results Summary

Passed	0
Failed	1
Skipped	0

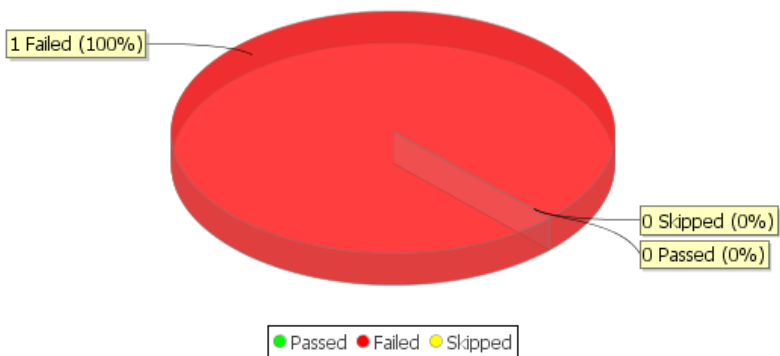

Test Case Summary

- tests
 - Day1
 - Add New Contract.testcase
 - One or more Sub-Test Steps failed.
 - One or more Sub-Test Steps failed.
 - One or more Sub-Test Steps failed.

- failed
- failed
- failed

Add New Contract.testcase

Summary

Started 07 Mar 2022, 12:11:19
Ended 07 Mar 2022, 13:05:15
Duration (mm:ss) 53:55.504
Outcome ● failed

Output

- **Salesforce Connect: Admin (Test)** ⌚ 12:11:19(00:00.073)
 - ① Connecting to Salesforce as Admin
 - ① Successfully connected to Salesforce as Admin
 - ① Opening Chrome webdriver instance to https://test.salesforce.com/
 - ① Successfully opened Chrome webdriver to https://test.salesforce.com/
 - ① Opening Salesforce user home page
 - ① Successfully opened user home page
 - ① Going to update browser window handles.
 - ① Successfully updated browser window handles.
 - ① Pausing at end of Test Case
 - ① Loading test case. File: C:\Users\lazat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase
- **On SF Contact Home screen** ⌚ 12:11:55(00:35.367)
 - ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&action=ObjectHome
 - ① Opening Page context. Name: screen, data: null, frame: null
 - ① Opening Salesforce page. Object: Contact, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/003/list?filterName=Recent, Current URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/list
 - ① Opening Salesforce user home page
 - ① Successfully opened user home page
 - ① Going to update browser window handles.
 - ① Successfully updated browser window handles.
- **Click the New Contact button** ⌚ 12:12:03(00:44.082)
 - ① Start of Interact. Connection: Admin, Locator: ui:locator?name=NewContact&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DNewContact, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=NewContact&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DNewContact
 - ① Interaction: ui:interaction?name=action
 - ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/list?filterName=Recent
 - ① Interaction: ui:interaction?name=action
 - ① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]//ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '604:0')]
 - ① Waiting for element to be present. Timeout(seconds): 10
 - ① Doing before wait. waitUrl: default
 - ① End of <default> wait.
 - ① Found element: [[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]//ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '604:0')]
 - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]

- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① Pausing for Pause (after executing last child)
- ① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=16466515253806985&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● On SF Contact Record Type selection screen ⌚ 12:12:40(01:20.495)

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&action=recordTypeNew
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Hover>Clicking WebElement. WebElement [tag: h2, text: New Contact]
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● Click the Continue button ⌚ 12:12:46(01:26.323)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=save&path=selectRecordType, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=save&path=selectRecordType
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=16466515253806985&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=action
- ① Find elements using xpath: (//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden')) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[contains(@class, 'modal-footer') or contains(@class, 'modal__footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')])[last()]/button)[last()])
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: (//*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden')) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[contains(@class, 'modal-footer') or contains(@class, 'modal__footer') or contains(@class, 'inlineFooter') or contains(@class, 'multiEditFooterContainer')])[last()]/button)[last()])
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Next]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① Pausing for Pause (after executing last child)

① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665156682873745&backgroundContext=%2Fflightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM

① Going to update browser window handles.

① Successfully updated browser window handles.

● On SF Contact (Employee) New screen

⌚ 12:13:03(01:43.436)

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&noOverride=true&action=New&recordType=Employee

① Opening Page context. Name: screen, data: null, frame: null

① Hover>Clicking WebElement. WebElement [tag: h2, text: New Contact: Employee]

① Going to update browser window handles.

① Successfully updated browser window handles.

● Set the Salutation picklist to Prof.

⌚ 12:13:10(01:50.328)

① Start of Interact. Connection: Admin, Locator: ui:locator?name=Salutation&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DSalutation, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Salutation&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DSalutation

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665156682873745&backgroundContext=%2Fflightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::records-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[self::fieldset and contains(@class, 'uiInput-compound') or (self::lightning-input-name and contains(@class, 'slds-form-compound'))]/*[self::span and contains(@class, 'uiPicklistLabel') and .='Name' or .='Salutation') or (self::lightning-picklist and contains(@data-field, 'salutation'))]/ancestor::div[1]

① Find field using relative xpath: ../../*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f5a52209 -> unknown locator]] -> xpath: ../../*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]]

① Got webElement. tagName: BUTTON, id: combobox-button-156, type: button, class: slds-combobox__input slds-input_faux slds-combobox__input-value

① Typing value. tagName: BUTTON, type: button, value: Prof., blur: false

① Clicking WebElement. WebElement [tag: button, text: Prof.]

① Clicking WebElement. WebElement [tag: div, text: Prof. --None-- Mr. Ms. Mrs. Dr. Prof.]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① Pausing for Pause (after executing last child)

① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

● Set the Last Name field to Kasymbekov

⌚ 12:13:44(02:24.901)

① Start of Interact. Connection: Admin, Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DLastName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DLastName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665156682873745&backgroundContext=%2Fflightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::records-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Last Name'] or .//text() = 'Last Name')]/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@f5a5220e -> unknown locator]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: input-160, type: text, class: slds-input

① Typing value. tagName: INPUT, type: text, value: Kasymbekov, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① Pausing for Pause (after executing last child)

① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

● Set the Phone field to 6158675309

⌚ 12:14:17(02:57.944)

① Start of Interact. Connection: Admin, Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DPhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Phone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DPhone

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665156682873745&backgroundContext=%2Fflightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM

① Interaction: ui:interaction?name=set

① Finding field placeholder using xpath: `//div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::records-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Phone'] or .//text() = 'Phone')]/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@f5a52226 -> unknown locator]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: input-149, type: text, class: slds-input

① Typing value. tagName: INPUT, type: text, value: 6158675309, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

ⓘ Pausing for Pause (after executing last child)

ⓘ Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

● Set the Birthdate field to 2000-01-01

⌚ 12:15:07(03:47.940)

ⓘ Start of Interact. Connection: Admin, Locator: ui:locator?name=Birthdate&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DBirthdate, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=Birthdate&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DBirthdate

ⓘ Interaction: ui:interaction?name=set

ⓘ Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665156682873745&backgroundContext=%2Fflightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM

ⓘ Interaction: ui:interaction?name=set

ⓘ Finding field placeholder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::records-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Birthdate'] or ./text() = 'Birthdate'))/ancestor::div[1]

ⓘ Find field using relative xpath: ../input

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f5a52228 -> unknown locator]] -> xpath: ../input]

ⓘ Typing value. Element: [[[org.openqa.selenium.remote.RemoteWebElement@f5a52228 -> unknown locator]] -> xpath: ../input], value: 1/1/2000, blur: false

ⓘ Clicking WebElement. WebElement [tag: td, text: 1]

ⓘ Doing after wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Going to update browser window handles.

ⓘ Successfully updated browser window handles.

ⓘ Pausing for Pause (after executing last child)

ⓘ Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

● Set the Title field to Senior Consultant

⌚ 12:15:34(04:14.429)

ⓘ Start of Interact. Connection: Admin, Locator: ui:locator?name=Title&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DTitle, before wait: default, after wait: default, auto retry: default

ⓘ Locator: ui:locator?name=Title&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DTitle

ⓘ Interaction: ui:interaction?name=set

ⓘ Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665156682873745&backgroundContext=%2Fflightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM

ⓘ Interaction: ui:interaction?name=set

ⓘ Finding field placeholder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::records-record-layout-section or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Title'] or ./text() = 'Title'))/ancestor::div[1]

ⓘ Find field using relative xpath: ../input

ⓘ Waiting for element to be present. Timeout(seconds): 10

ⓘ Doing before wait. waitUrl: default

ⓘ End of <default> wait.

ⓘ Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f5a5222d -> unknown locator]] -> xpath: ../input]

- ① Got webElement. tagName: INPUT, id: input-171, type: text, class: slds-input
- ① Typing value. tagName: INPUT, type: text, value: Senior Consultant, blur: false
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① Pausing for Pause (after executing last child)
- ① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

● Set the Lead Source picklist to Web

⌚ 12:16:04(04:44.849)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665156682873745&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- ① Interaction: ui:interaction?name=set
- ① Finding field placeholder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[self::records-record-layout-section or (self::section or self::div) and contains(@class, 'forcePageBlockSection ')]/[3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Lead Source'] or .//text()='Lead Source'))/ancestor::div[1]
- ① Find field using relative xpath: ../../*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f5a5222f -> unknown locator]] -> xpath: ../../*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]]
- ① Got webElement. tagName: BUTTON, id: combobox-button-205, type: button, class: slds-combobox__input slds-input_faux slds-combobox__input-value
- ① Typing value. tagName: BUTTON, type: button, value: Web, blur: false
- ① Clicking WebElement. WebElement [tag: button, text: Web]
- ① Clicking WebElement. WebElement [tag: div, text: Web --None-- Web Other Phone Inquiry]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① Pausing for Pause (after executing last child)
- ① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

● Lookup the Account Name reference

⌚ 12:16:23(05:03.215)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=AccountId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DAccountId, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=AccountId&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DAccountId
- ① Interaction: ui:interaction?name=sfLookup
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665156682873745&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM
- ① Interaction: ui:interaction?name=sfLookup

① Finding field placeholder using xpath: `//div[contains(@class, 'open')] and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])[last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[((self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection')))]/[1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide')))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')))] or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Account Name'] or ./text()='Account Name')/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@f5a52248 -> unknown locator]] -> xpath: ./input]`

① Hover>Clicking WebElement. WebElement [tag: input, text: Test]

① Waiting for lookup dropdown list to appear

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

● On SF Account Lookup screen

🕒 12:16:26(05:06.474)

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?lookup=Account

① Opening Page context. Name: screen, data: null, frame: null

① Going to update browser window handles.

① Successfully updated browser window handles.

● Set the Search text to Test

🕒 12:16:26(05:06.720)

① Start of Interact. Connection: Admin, Locator: ui:locator?name=SearchName&path=searchFrame, before wait: null, after wait: null, auto retry: default

① Locator: ui:locator?name=SearchName&path=searchFrame

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: `https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665156682873745&backgroundContext=%2Flightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM`

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: /*[contains(@class, 'active') and ((contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')))) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))] | //div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))] | //div[contains(@class, 'oneUtilityBarContainer')]/div[contains(@class, 'slds-docked_container') and contains(@class, 'forceDockingPanel DOCKED')]/div[contains(@class, 'slds-is-open') and contains(@class, 'slds-docked-composer')] | //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])[last()]] | /*[(self::form or self::div) and contains(@class, 'forceDetailPanel') and contains(@class, 'inlineEditEnabled')]/*[self::div[contains(@class, 'forceSearchInputLookupDesktop')] or self::lightning-lookup-desktop]/input[@aria-expanded='true' or contains(@aria-activedescendant, 'input')]]`

① Clicking WebElement. WebElement [tag: lightning-base-combobox-item, text: Search Show All Results for "Test"]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

● Click the Go! button

🕒 12:16:33(05:13.854)

① Start of Interact. Connection: Admin, Locator: ui:locator?name=go&path=searchFrame, before wait: null, after wait: null, auto retry: default

① Locator: ui:locator?name=go&path=searchFrame

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665156682873745&backgroundContext=%2Fflightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: com.provar.core.model.ui.java.NullWebElement@5e0fa6cd

① Doing after wait. waitUrl: default

① End of <default>; wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① Pausing for Pause (after executing last child)

① Loading test case. File: C:\Users\azat.usbakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

● Click the Account Name button

⌚ 12:16:49(05:29.567)

① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=Name+%3D+%27Test_UK_KR3J727FGX%27, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Name&path=resultsFrame%2FresultsTable%2FresultsRow&rowLocator=Name+%3D+%27Test_UK_KR3J727FGX%27

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665156682873745&backgroundContext=%2Fflightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM

① Interaction: ui:interaction?name=action

① Populating webelement cells into the row Row Count: 0

Populated the row elements.

① Applying row locator to rows. Row Count: 13, Row Locator: {Name = "Test_UK_KR3J727FGX"}

The row locator matched 1 row.

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f5a52264 -> unknown locator]] -> xpath: td[1]/span[td[1]]/a[td[1][not(*)]]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Test_UK_KR3J727FGX, href: <https://provar-trial-org--training.lightning.force.com/lightning/r/0011X00000rJUQfQAO/view>]

① Doing after wait. waitUrl: default

① End of <default>; wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① Pausing for Pause (after executing last child)

① Loading test case. File: C:\Users\azat.usbakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

① All Sub-Test Steps were successful.

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665156682873745&backgroundContext=%2Fflightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665156682873745&backgroundContext=%2Fflightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM

① Going to update browser window handles.

① Successfully updated browser window handles.

● Click the Save button

⌚ 12:17:02(05:42.233)

① Start of Interact. Connection: Admin, Locator: ui:locator?name=save&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26action%3Dsave, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=save&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3Dsave

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Contact/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=164665156682873745&backgroundContext=%2Fflightning%2Fo%2FContact%2Flist%3FfilterName%3DRecent&recordTypeId=0121t000000kEPcAAM

① Interaction: ui:interaction?name=action

① Find action link element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]//runtime_platform_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']/*[self::a or self::button]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]//runtime_platform_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']/*[self::a or self::button]]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① Pausing for Pause (after executing last child)

① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

① All Sub-Test Steps were successful.

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view

① Injecting script to get created object ID from aura component

⚠ Some toast message(s) are still open and might cause inconsistent issues in execution.

① Fetching created Id from URL

📋 Storing created Salesforce Object ID. Result Name: contactId, created ID: 0031X00000nW0NdQAK, location: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view

① Logging Salesforce Object Id for clean up. Object Name: Contact, id: 0031X00000nW0NdQAK

① Closing Page context. Name: screen, data: null, frame: null

① Main window reselected. Window: main

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view

① Going to update browser window handles.

① Successfully updated browser window handles.

● On SF Contact (Employee) View screen

🕒 12:18:31(07:11.606)

① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&noOverride=true&action=View&recordType=Employee

① Opening Page context. Name: screen, data: null, frame: null

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Going to update browser window handles.

① Successfully updated browser window handles.

● Activate inline edit the Lead Source picklist

🕒 12:24:05(12:46.093)

① Start of Interact. Connection: Admin, Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource

① Interaction: ui:interaction?name=sfIleActivate

① Switched focus to main window. URL: <https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view>

① Interaction: ui:interaction?name=sfIleActivate

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Finding field placeholder using xpath: `((contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))])))]/[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]/3//*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container') or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (/text()[normalize-space()='Lead Source'] or ./text() = 'Lead Source')]/ancestor::div[1]`

① Find field using relative xpath: `./*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@f5a522a9 -> unknown locator]] -> xpath: ./*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]`

① Inline Edit already activated

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① Pausing for Pause (after executing last child)

① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

① Start of Interact. Connection: Admin, Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource

① Interaction: ui:interaction?name=sfIleActivate

① Switched focus to main window. URL: <https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view>

① Interaction: ui:interaction?name=sfIleActivate

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Finding field placeholder using xpath: `((contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))])))]/[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]/3//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Lead Source'] or (.) = 'Lead Source')]/following-sibling::div[1]/*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]`

① Waiting for element to be present. Timeout(seconds): 10

① Finding field elements using relativePath: `./lightning-formatted-text`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: ((contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))])))]/[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/[(self::records-record-layout-section) or (self::div and contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]/3//div[(contains(@class, 'labelCol') and`

or contains(@class,'field-label-container')) and (span/text()[normalize-space()='Lead Source' or (.) ='Lead Source']))/following-sibling::div[1//
*[(self::div and contains(@class,'dataCol')) or (self::span and contains(@class,'test-id__field-value'))]] -> xpath: ./lightning-formatted-text]

① Doing after wait. waitUrl: default

① End of <default>; wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

● Set the Lead Source picklist to Other

④ 12:24:18(12:58.867)

① Start of Interact. Connection: Admin, Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view

① Interaction: ui:interaction?name=set

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))])//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]])[3]//*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Lead Source'] or ./text() = 'Lead Source'))/ancestor::div[1]

① Find field using relative xpath: .//*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default>; wait.

① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f5a522a9 -> unknown locator]] -> xpath: .//*[self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]]

① Got webElement. tagName: BUTTON, id: combobox-button-871, type: button, class: slds-combobox__input slds-input_faux slds-combobox__input-value

① Typing value. tagName: BUTTON, type: button, value: Other, blur: false

① Clicking WebElement. WebElement [tag: button, text: Other]

① Clicking WebElement. WebElement [tag: div, text: Other --None-- Web Other Phone Inquiry]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]

① Doing after wait. waitUrl: default

① End of <default>; wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① Pausing for Pause (after executing last child)

① Loading test case. File: C:\Users\lazar.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

① Start of Interact. Connection: Admin, Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DContact%26field%3DLeadSource

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view

① Interaction: ui:interaction?name=set

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Finding field placeholder using xpath: `//*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))][3]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Lead Source'] or ./text() = 'Lead Source')]/ancestor::div[1]`

① Find field using relative xpath: `//*[@self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@1ebd7130 -> unknown locator]] -> xpath: //*[@self::a or self::input or self::button[contains(@class, 'slds-combobox__input')]]`

① Got webElement. tagName: BUTTON, id: combobox-button-410, type: button, class: slds-combobox__input slds-input_faux slds-combobox__input-value

① Typing value. tagName: BUTTON, type: button, value: Other, blur: false

① Clicking WebElement. WebElement [tag: button, text: Other]

① Clicking WebElement. WebElement [tag: div, text: Other --None-- Web Other Phone Inquiry]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

● Click the Save button

① 12:25:53(14:33.553)

① Start of Interact. Connection: Admin, Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DContact%26action%3DSaveEdit, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DContact%26action%3DSaveEdit

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: <https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view>

① Interaction: ui:interaction?name=action

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Find action link element using xpath: `//*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']/*[self::a or self::button]`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: //*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']/*[self::a or self::button]`

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: default

- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① Pausing for Pause (after executing last child)
- ① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase
- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X0000nW0NdQAK/view
- ① Interaction: ui:interaction?name=action
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Find action link element using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']//*[self::a or self::button]`
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: `[[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']//*[self::a or self::button]`
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● Activate inline edit the Mobile field 🕒 12:29:58(18:38.443)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DMobilePhone
- ① Interaction: ui:interaction?name=sfIleActivate
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X0000nW0NdQAK/view
- ① Interaction: ui:interaction?name=sfIleActivate
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[(contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*((self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section'))))][1]/div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Mobile' or (.) ='Mobile'])]/following-sibling::div[1]/*((self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]`
- ① Waiting for element to be present. Timeout(seconds): 10

① Finding field elements using relativePath: ../lightning-formatted-phone

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]]/ *[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]][1]/div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Mobile' or (.) ='Mobile'])/following-sibling::div[1]]/*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]] -> xpath: ../lightning-formatted-phone]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① Pausing for Pause (after executing last child)

① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

① Start of Interact. Connection: Admin, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DMobilePhone

① Interaction: ui:interaction?name=sfIleActivate

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X0000nW0NdQAK/view

① Interaction: ui:interaction?name=sfIleActivate

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Finding field placeholder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]]/ *[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]][1]/div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Mobile' or (.) ='Mobile'])/following-sibling::div[1]]/*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]

① Waiting for element to be present. Timeout(seconds): 10

① Finding field elements using relativePath: ../lightning-formatted-phone

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]]/ *[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]][1]/div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Mobile' or (.) ='Mobile'])/following-sibling::div[1]]/*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]] -> xpath: ../lightning-formatted-phone]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

● Set the Mobile field to +420777123456

⌚ 12:30:28(19:08.199)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DMobilePhone
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- ① Interaction: ui:interaction?name=set
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*((self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section '))))[1]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Mobile'] or ./text()='Mobile')]/ancestor::div[1]`
- ① Find field using relative xpath: `../input`
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@f5a522e6 -> unknown locator]] -> xpath: ../input]`
- ① Got webElement. tagName: INPUT, id: input-986, type: text, class: slds-input
- ① Typing value. tagName: INPUT, type: text, value: +420777123456, blur: false
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① Pausing for Pause (after executing last child)
- ① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase
- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DMobilePhone, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=MobilePhone&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DMobilePhone
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- ① Interaction: ui:interaction?name=set
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placeholder using xpath: `//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]//*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*((self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section '))))[1]/*((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Mobile'] or ./text()='Mobile')]/ancestor::div[1]`
- ① Find field using relative xpath: `../input`
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default

- ① End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@1ebd714f -> unknown locator]] -> xpath: ./input]
- ① Got webElement. tagName: INPUT, id: input-525, type: text, class: slds-input
- ① Typing value. tagName: INPUT, type: text, value: +420777123456, blur: false
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● Click the Save button

⌚ 12:30:43(19:23.162)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- ① Interaction: ui:interaction?name=action
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Find action link element using xpath: /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']/*[self::a or self::button]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']/*[self::a or self::button]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① Pausing for Pause (after executing last child)
- ① Loading test case. File: C:\Users\lazar.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase
- ① Loading test case. File: C:\Users\lazar.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase
- ① Loading test case. File: C:\Users\lazar.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase
- ① Loading test case. File: C:\Users\lazar.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase
- ① Loading test case. File: C:\Users\lazar.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase
- ① Loading test case. File: C:\Users\lazar.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase
- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit
- ① Interaction: ui:interaction?name=action

- ① Switched focus to main window. URL: <https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view>
- ① Interaction: ui:interaction?name=action
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Find action link element using xpath: `//*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']/*[self::a or self::button]`
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: `//*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']/*[self::a or self::button]`
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- One or more Sub-Test Steps failed.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: <https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view>
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① Pausing for Pause On Error (after executing last child)
- ① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase
- ① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase
- ① Pausing for Step To
- ① Pausing for Pause On Error
- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&noOverride=true&action=View&recordType=Employee
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Contact, RelatedList: null, Action: View, Page URL: </lightning/r/0031X00000nW0NdQAK/view>, Current URL: <https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view>
- ① Opening Salesforce user home page
- ① Successfully opened user home page
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main

- ① Switched focus to main window. URL: <https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view>
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● On SF Contact (Employee) View screen

⌚ 12:54:54(43:34.818)

- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&noOverride=true&action=View&recordType=Employee
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Contact, RelatedList: null, Action: View, Page URL: /lightning/r/0031X00000nW0NdQAK/view, Current URL: <https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view>
- ① Opening Salesforce user home page
- ① Successfully opened user home page
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: <https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view>
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① Pausing for Step To
- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&noOverride=true&action=View&recordType=Employee
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● Activate inline edit the Name field

⌚ 12:55:36(44:16.349)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Name&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DName
- ① Interaction: ui:interaction?name=sfIleActivate
- ① Switched focus to main window. URL: <https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view>
- ① Interaction: ui:interaction?name=sfIleActivate
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ⚠ Failed to resolve required duplicate field label. Field API name: Name, field label: Name
- ① Finding field placeholder using xpath: (((/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))])))/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section'))])[1//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Name' or (.) = 'Name'])]/following-sibling::div[1]/*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))])[1]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Finding field elements using relativePath: ../../self::lightning-formatted-name or self::lightning-formatted-text]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: (((/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))])))]/([contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')])/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]][1]/div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Name' or (.)='Name'])]/following-sibling::div[1]/*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))])[1]] -> xpath: ./*[self::lightning-formatted-name or self::lightning-formatted-text]]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① Pausing for Pause (after executing last child)

① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

① Pausing for Pause On Error

① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

① Pausing for Pause On Error

① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DContact%26field%3DName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Name&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DContact%26field%3DName

① Interaction: ui:interaction?name=sfIleActivate

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X0000nW0NdQAK/view

① Interaction: ui:interaction?name=sfIleActivate

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

⚠ Failed to resolve required duplicate field label. Field API name: Name, field label: Name

① Finding field placeholder using xpath: (((/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))])))]/([contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')])/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]][1]/div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Name' or (.)='Name'])]/following-sibling::div[1]/*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))])[1]]

① Waiting for element to be present. Timeout(seconds): 10

① Finding field elements using relativePath: ./*[self::lightning-formatted-name or self::lightning-formatted-text]]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: (((/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))])))]/([contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')])/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]][1]/div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Name' or (.)='Name'])]/following-sibling::div[1]/*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))])[1]] -> xpath: ./*[self::lightning-formatted-name or self::lightning-formatted-text]]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

● Set the Last Name field to Kasymbekov

12:55:53(44:34.012)

① Start of Interact. Connection: Admin, Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DLastName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DLastName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view

① Interaction: ui:interaction?name=set

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Finding field placeholder using xpath: `//*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')]/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@7468dd99 -> unknown locator]] -> xpath: ./input]`

① Got webElement. tagName: INPUT, id: input-397, type: text, class: slds-input

① Typing value. tagName: INPUT, type: text, value: Kasymbekov, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① Pausing for Pause (after executing last child)

① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

① Start of Interact. Connection: Admin, Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DLastName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DLastName

① Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view

① Interaction: ui:interaction?name=set

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Finding field placeholder using xpath: `//*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))][1]/*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name')]/ancestor::div[1]`

① Find field using relative xpath: `./input`

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

- ① End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@720f4451 -> unknown locator]] -> xpath: ./input]
- ① Got webElement. tagName: INPUT, id: input-386, type: text, class: slds-input
- ① Typing value. tagName: INPUT, type: text, value: Kasymbekov, blur: false
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.

● Click the Save button

⌚ 12:56:06(44:46.843)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- ① Interaction: ui:interaction?name=action
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Find action link element using xpath: /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[contains(@class, 'footer') and contains(@class, 'active')] or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname=SaveEdit or @apiname=Save]/*[self::a or self::button]
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[contains(@class, 'footer') and contains(@class, 'active')] or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname=SaveEdit or @apiname=Save]/*[self::a or self::button]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- ① Doing after wait. waitUrl: default
- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① Pausing for Pause (after executing last child)
- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit
- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- ① Interaction: ui:interaction?name=action
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Find action link element using xpath: /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[contains(@class, 'footer') and contains(@class, 'active')] or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname=SaveEdit or @apiname=Save]/*[self::a or self::button]

'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']/*[self::a or self::button]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: /*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']/*[self::a or self::button]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① Pausing at end of Test Case

① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

● Activate inline edit the Name field

⌚ 13:03:12(51:52.712)

① Start of Interact. Connection: Admin, Locator: ui:locator?name=Name&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DContact%26field%3DName, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=Name&binding=sf%3Aui%3AAbinding%3AObject%3Fobject%3DContact%26field%3DName

① Interaction: ui:interaction?name=sfllActivate

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X0000nW0NdQAK/view

① Interaction: ui:interaction?name=sfllActivate

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

⚠ Failed to resolve required duplicate field label. Field API name: Name, field label: Name

① Finding field placeholder using xpath: (((/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))///*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[self::records-record-layout-section] or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]/[1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Name' or (.) = 'Name'])/following-sibling::div[1]/*[self::div and contains(@class, 'dataCol')] or (self::span and contains(@class, 'test-id__field-value'))])[1]

① Waiting for element to be present. Timeout(seconds): 10

① Finding field elements using relativePath: /*[self::lightning-formatted-name or self::lightning-formatted-text]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: (((/*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))///*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[self::records-record-layout-section] or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]/[1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Name' or (.) = 'Name'])/following-sibling::div[1]/*[self::div and contains(@class, 'dataCol')] or (self::span and contains(@class, 'test-id__field-value'))])[1]] -> xpath: /*[self::lightning-formatted-name or self::lightning-formatted-text]

① Doing after wait. waitUrl: default

- ① End of <default> wait.
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① Pausing for Pause (after executing last child)
- ① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

● UI Assert

① 13:03:35(52:15.899)

- ① Start of UiAssert. Connection: Admin
- ① Resolving field LastName
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placeholder using xpath: `//*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]/1][*(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Last Name'] or ./text()='Last Name')]/ancestor::div[1]`
- ① Find field using relative xpath: `./input`
- ① Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- ① End of <default> wait.
- ① Found element: `[[[org.openqa.selenium.remote.RemoteWebElement@720f446c -> unknown locator]] -> xpath: ./input]`
- ① Asserting field attributes: LastName
- ① Asserting Attribute: value to PrimitiveValueImpl [value: Kasymbekov, valueId=0, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ✓ Assertion successful.Kasymbekov EqualTo Kasymbekov
- ① Object read successfully. Result Name: Values
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① Pausing for Pause (after executing last child)
- ① Loading test case. File: C:\Users\azat.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

● Set the Last Name field to Sabirov

① 13:04:20(53:00.707)

- ① Start of Interact. Connection: Admin, Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DLastName, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=LastName&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26field%3DLastName
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view
- ① Interaction: ui:interaction?name=set
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placeholder using xpath: `//*[@contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/*[contains(@class, 'footer-visible') and (contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root'))]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView') or contains(@class, 'test-id__section slds-section ')))]/1][*(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element__label')) and not(contains(@class, 'hide ')) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element__label')) or (self::div and contains(@class, 'test-id__field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Last Name'] or ./text()='Last Name')]/ancestor::div[1]`

and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (./text()[normalize-space()='Last Name'] or ./text() = 'Last Name'))/ancestor::div[1]

① Find field using relative xpath: ./input

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@720f446c -> unknown locator]] -> xpath: ./input]

① Got webElement. tagName: INPUT, id: input-527, type: text, class: slds-input

① Typing value. tagName: INPUT, type: text, value: Sabirov, blur: false

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① Pausing for Pause (after executing last child)

① Loading test case. File: C:\Users\lazar.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

● Click the Save button

🕒 13:04:28(53:08.686)

① Start of Interact. Connection: Admin, Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit, before wait: default, after wait: default, auto retry: default

① Locator: ui:locator?name=SaveEdit&binding=sf%3Aui%3AAbinding%3Aobject%3Fobject%3DContact%26action%3DSaveEdit

① Interaction: ui:interaction?name=action

① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view

① Interaction: ui:interaction?name=action

① Activating detailTab tab

① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]

① Find action link element using xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']/*[self::a or self::button]

① Waiting for element to be present. Timeout(seconds): 10

① Doing before wait. waitUrl: default

① End of <default> wait.

① Found element: [[ChromeDriver: chrome on XP (617ef96570110570235e69759258c287)] -> xpath: //*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='SaveEdit' or @apiname='Save']/*[self::a or self::button]]

① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]

① Doing after wait. waitUrl: default

① End of <default> wait.

① Going to update browser window handles.

① Successfully updated browser window handles.

① Pausing for Pause (after executing last child)

① Loading test case. File: C:\Users\lazar.usubakunov\Provar\Workspace1\TrainingProject\tests\Day1\Add New Contract.testcase

● One or more Sub-Test Steps failed.

① Closing Page context. Name: screen, data: null, frame: null

- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: <https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view>
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① Start of With Screen. Connection Name: Admin, target: sf:ui:target?object=Contact&noOverride=true&action=View&recordType=Employee
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Contact, RelatedList: null, Action: View, Page URL: </lightning/r/0031X00000nW0NdQAK/view>, Current URL: <https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view>
- ① Opening Salesforce user home page
- ① Successfully opened user home page
- ① Activating detailTab tab
- ① Hover>Clicking WebElement. WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- One or more Sub-Test Steps failed.
- ① Closing Page context. Name: screen, data: null, frame: null
- ① Main window reselected. Window: main
- ① Switched focus to main window. URL: <https://provar-trial-org--training.lightning.force.com/lightning/r/Contact/0031X00000nW0NdQAK/view>
- ① Going to update browser window handles.
- ① Successfully updated browser window handles.
- ① Pausing for Pause On Error (after executing last child)
- ① Handling managed resource. Name: Admin
- ① Salesforce Connection handled successfully. Name: Admin