

EAU: 150,000

Author GAMBREL STEVEN - steven.gambrel@fcagroup.com
Supervisor WARD KEVIN - kevin.ward@fcagroup.com

Author Department FCA US -- FASTENERS - 5850
Supervisor department FCA US -- FASTENERS - 5850

 FIAT CHRYSLER AUTOMOBILES	PAN HEAD SCREWS WITH HEADER POINT AND 6 LOBED DRIVE	SP-A0407
		Standard Parts
		Page: 1/7
		Date: 29-JAN-2020
ASF CONTROLLED WHEN RED 107 10/21/2020 A REGIONAL DOCUMENT		
Change level	Date	Description of change
-	23-JUN-2017	Initial release
A	29-JAN-2020	ADDED NEW PART NUMBER - UPDATE REF STANDARDS AND TEMPLATE
ANY PRINTED COPY IS TO BE DEEMED AS UNCHECKED; THEREFORE THE UPDATED COPY MUST BE CHECKED IN THE APPROPRIATE WEB SITE CONFIDENTIAL THIS DOCUMENT MUST NOT BE REPRODUCED OR CIRCULATED TO THIRD PARTIES WITHOUT PRIOR WRITTEN CONSENT BY THE RELEVANT FCA COMPANY. IN CASE OF DISPUTE, THE ONLY VALID REFERENCE IS THE ENGLISH EDITION		

ASF
CONTROLLED
WHEN RED

2007
10/21/2020
A

FCA

FLAT-HEAD SCREWS

SP-A0407

Page: 2/7

Change Level: A

PAN HEAD SCREWS WITH HEADER POINT AND 6 LOBED DRIVE

TABLE OF CONTENTS

1 GENERAL	3
1.2 Coverage of this Standard	3
1.3 Limitations on Usage	3
2 REFERENCES	3
3 DEFINITIONS/ABBREVIATIONS/ACRONYMS/SYMBOLS	4
4 CORRELATION TO OTHER STANDARDS	4
5 REGULATED SUBSTANCES & RECIPIABILITY	4
6 GEOMETRY	4
7 TABLE OF PART NUMBERS	5
8 GENERAL SPECIFICATION	6
9 MATERIALS, FINISH AND SURFACE COATING	6
10 SPECIAL QUALITY REQUIREMENTS	7
11 APPROVED SOURCE LIST	7

on May 14, 2020 04:22 PM (UTC+1) - user: 10756SG
steven.gambrel@fcagroup.com

ASF
CONTROLLED
WHEN RED

307
10/21/2020

FCA

1001 - 485118-52101400 - 5

SP-A0407

Page: 3/7

Change Level: A

1 GENERAL

The Pan head screws covered by this standard is for general high volume usage with pre-threaded nuts spanning over normal clearance holes or slots.

All parts in this standard are released as Change (PCL) A. The document change control follows normal corporate change increments.

1.2 Coverage of this Standard

Standard Parts shall be identified by the category code: 080.020 (Screw/Pan Head)

1.3 Limitations on Usage

Not applicable.

2 REFERENCES

Table 1 - References

Document Number	Shield/Designator (if applicable)	Document Title	downloadable for suppliers from beSTandard
01307		STEEL BOLTS AND NUTS - REPRESENTATION, DESIGNATION AND MARKING FOR THREADS, SCREWS AND NUTS	Y
ISO 261		ISO GENERAL PURPOSE METRIC SCREW THREADS - GENERAL PLAN	N
ISO 4759		TOLERANCES FOR FASTENERS	N
ISO 8992		FASTENERS GENERAL REQUIREMENTS FOR BOLTS, SCREWS, STUDS AND NUTS	N
ISO 965		ISO GENERAL PURPOSE METRIC SCREW THREADS - TOLERANCES	N
MS.50077	<S>	EXTERNALLY THREADED FASTENERS FOR NORMAL USE (HARMONIZED 2 IN 1)	Y
PF.90348	<S>	INSPECTION OF THREADED FASTENERS FOR NORMAL USE AND SPECIAL USE AND SURFACE DISCONTINUITIES ON THREADED FASTENERS	Y
PS.20001		"TORX" - 6-LOBE INTERNAL RECESS - INSPECTION PRACTICE	Y
PS.50031		ZINC NICKEL ALLOY ELECTRODEPOSITED COATINGS	Y
PS-11036		CORROSION RESISTANT COATING FOR FASTENERS - ZINC-RICH / ALUMINUM-RICH - NON-ELECTROLYTIC	Y
PS-7099		GENERAL SPECIFICATIONS - FASTENERS AND FITTINGS	Y

ASF
CONTROLLED
WHEN RED

487
10/21/2020
J

FCA

ITALIA - 40518 RAVENNA - 40138

SP-A0407

Page: 4/7

Change Level: A

3 DEFINITIONS/ABBREVIATIONS/ACRONYMS/SYMBOLS

SP	STANDARD PARTS
CATEGORY	NUMERICAL CODE THAT PRE DEFINES A NOUN NAME OF A FASTENER
CODE	TYPE
ISO	INTERNATIONAL STANDARDS ORGANIZATION
FCA	FIAT CHRYSLER AUTOMOBILES

4 CORRELATION TO OTHER STANDARDS

Not applicable.

5 REGULATED SUBSTANCES & RECIBLABILITY

Not applicable.

6 GEOMETRY

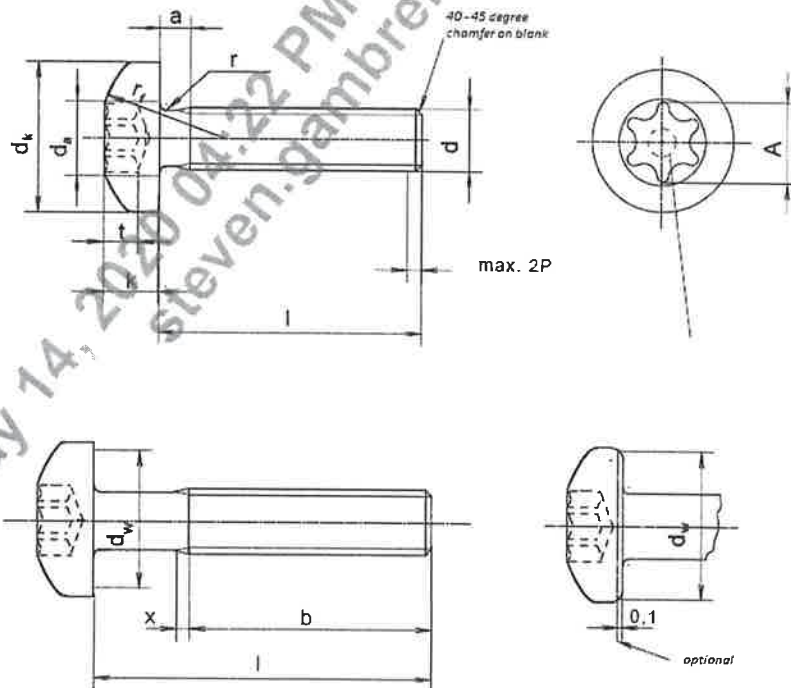


Figure 1 - Pan Head screws

Table 2 - Pan head screw dimensions

Thread dia		M4	M5	M6	M8	M10
p ¹		0.7	0.8	1.00	1.25	1.5
a	Max	1.4	1.6	2	2.5	3
b		30	40	50	65	80
d _a	Max	4.7	5.7	6.8	9.2	11.2
d _k	Max	8	9.5	12	16	20
	min	7.64	9.14	11.57	15.57	19.48
k	Max	3.1	3.7	4.6	6.7	7.5
	Min	2.92	3.52	4.3	6.7	7.14
r	min	0.2	0.2	0.25	0.4	0.4
r _f	approx	6.5	8	10	13	16
x	Max	1.75	2	2.5	3.2	3.8
d _w	min	7.24	8.74	11.07	14.07	18.98
Drive Size		T10	T25	T40	T45	T50
A	Ref	3.95	4.5	5.6	7.95	8.95
t	Max	1.66	1.91	2.42	3.18	4.02
	min	1.27	1.52	2.02	2.79	3.62

7 TABLE OF PART NUMBERS

Table 3 - Part Numbers and Sizes

Nominal Size	Pitch	Length	Finish	Strength (Property class)	Part Numbers
M5	0.8	8	PS-11036	8.8	06104134AA
M5	0.8	10	PS-11036	8.8	06104135AA
M5	0.8	16	PS-11036	8.8	06104136AA
M5	0.8	25	PS-11036	8.8	06104137AA
M5	0.8	30	PS-11036	8.8	06104138AA
M5	0.8	35	PS-11036	8.8	06104139AA
M6	1.00	10	PS-11036	8.8	06104140AA
M6	1.00	12	PS-11036	8.8	06104141AA
M6	1.00	16	PS-11036	8.8	06104142AA
M6	1.00	16	PS.50031 C8 CLEAR ST	8.8	06102622AA
M6	1.00	20	PS-11036	8.8	06104143AA
M6	1.00	25	PS-11036	8.8	06104144AA
M6	1.00	30	PS-11036	8.8	06104145AA
M6	1.00	35	PS-11036	8.8	06104146AA
M6	1.00	40	PS-11036	8.8	06104147AA
M6	1.00	45	PS-11036	8.8	06104148AA
M6	1.00	50	PS-11036	8.8	06104149AA
M6	1.00	55	PS-11036	8.8	06105183AA
M6	1.00	60	PS-11036	8.8	06104150AA
M6	1.00	65	PS-11036	8.8	06104151AA
M8	1.25	12	PS-11036	8.8	06104152AA

687
10/21/2020

ASF
CONTROLLED
WHEN RED
SP-A0407



Page: 6/7

Change Level: A

Table 3 - Part Numbers and Sizes

Nominal Size	Pitch	Length	Finish	Strength (Property class)	Part Numbers
M8	1.25	16	PS-11036	8.8	06104153AA
M8	1.25	20	PS-11036	8.8	06104154AA
M8	1.25	25	PS-11036	8.8	06104155AA
M8	1.25	30	PS-11036	8.8	06104156AA
M8	1.25	35	PS-11036	8.8	06104157AA
M8	1.25	40	PS-11036	8.8	06104158AA
M8	1.25	50	PS-11036	8.8	06104159AA
M8	1.25	55	PS-11036	8.8	06104160AA
M8	1.25	60	PS-11036	8.8	06104161AA
M8	1.25	65	PS-11036	8.8	06104162AA
M8	1.25	70	PS-11036	8.8	06104163AA
M8	1.25	80	PS-11036	8.8	06104164AA
M10	1.50	20	PS-11036	10.9	06104165AA
M10	1.50	30	PS-11036	10.9	06104166AA
M10	1.50	40	PS-11036	10.9	06104167AA
M10	1.50	50	PS-11036	10.9	06104168AA
M10	1.50	60	PS-11036	10.9	06104169AA
M10	1.50	100	PS-11036	10.9	06104170AA

Application: The pan head screws covered by this standard are for general high volume usage with pre-threaded nuts spanning over normal clearance holes and slots.

8 GENERAL SPECIFICATION

- A. **Unspecified dimensions:** For detail pertaining to dimensions or unspecified specification, screws shall conform to the specification shown in ISO 8992, ISO 261, ISO 965 and ISO 4759-1, unless otherwise noted. In addition, specification PS-7099 shall also apply unless specified otherwise.
- B. **Threads:** ISO Metric Screw Threads tolerance class 6g.
- C. **Defects:** Pan head screws must be free from all defects which might affect their serviceability and conform to specification PF.90348
- D. **Identification:** 01307
- E. **Material:** Steel – MS.50077 (8.8 and 10.9 property classes) as noted in part number tables.
- F. **Torx/6 lobed recess:** Torx penetration socket engagement shall conform to inspection and specifications in PS.20001.

9 MATERIALS, FINISH AND SURFACE COATING

Screws: Material specification shall be as designated and according to specification Steel MS.50077<S> (for property class 8.8 and 10.9 as noted)

Finish: Parts made from this standard shall be coated as per specification.
PS-11036 – Aluminum Rich dip spin coating

ASF
CONTROLLED
WHEN RED

787
10/21/2020

FCA

FLAT FLOWMASTER 602 COMBUSTIBLE

SP-A0407

Page: 777

Change Level: A

PS.50031 - ZINC NICKEL ALLOY ELECTRODEPOSITED COATINGS

10 SPECIAL QUALITY REQUIREMENTS

Not applicable.

11 APPROVED SOURCE LIST

Not applicable.

on May 14, 2020 04:22 PM (UTC+1) - user: T0756SG
steven.gambrel@fcagroup.com