Mein erstes knitR-Dokument

Uwe Ziegenhagen

7. August 2023

```
1+1+1+1

## [1] 4

a=pi


3.1415927

## [1] 4
```

```
set.seed(7854) # for reproducibility
x = cumsum(rnorm(100))
mean(x) # mean of x

## [1] -2.06221

plot(x, type = 'l') # Brownian motion
```

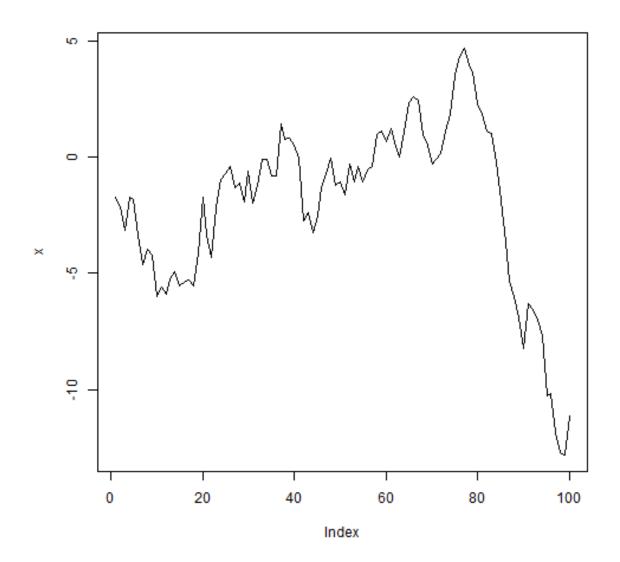

```
set.seed(2345) # for reproducibility
x = cumsum(rnorm(100))
mean(x) # mean of x

## [1] 0.3573929

## [1] -1.939758
plot(x, type = 'l') # Brownian motion
```

